


Hands_ON_2

Task 1:

Insert two additional students of your own choosing into the students table.

```
-- hands on 2
-- Insert two additional students of your own choosing into the students table.
insert into students (first_name,last_name,email,date_of_birth,department_id,enrollment_year)values('Sadhana', 'Shree', 'sadhana.shree@college.
('Neha', 'Gupta', 'neha.gupta@college.edu', '2004-02-10', 2, 2023);
```

Update the grade of student_id = 5 for course_id = 1 from 'C' to 'B'

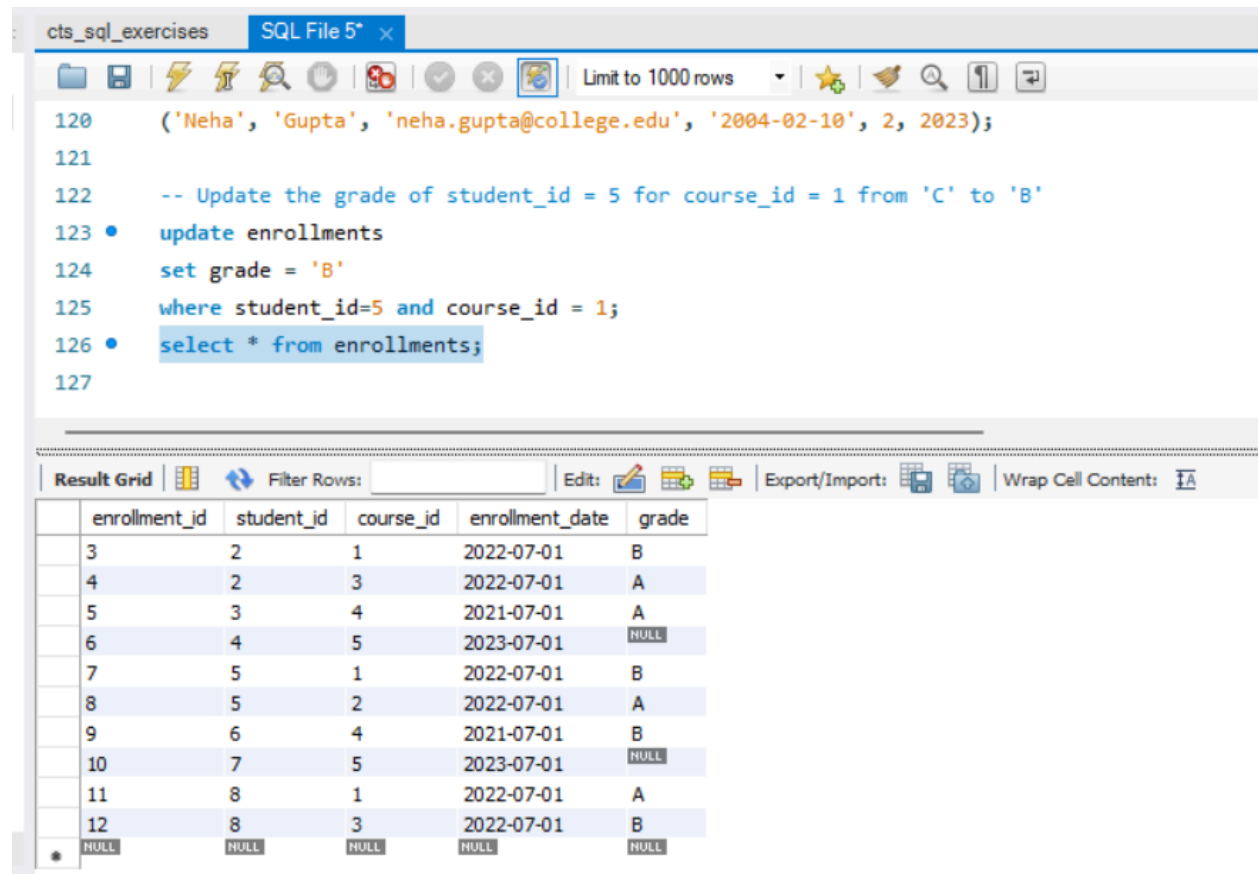

The screenshot shows a SQL IDE window titled 'cts_sql_exercises' with a tab for 'SQL File 5'. The SQL script contains the following lines:

```
120 ('Neha', 'Gupta', 'neha.gupta@college.edu', '2004-02-10', 2, 2023);
121
122 -- Update the grade of student_id = 5 for course_id = 1 from 'C' to 'B'
123 • update enrollments
124   set grade = 'B'
125   where student_id=5 and course_id = 1;
126 • select * from enrollments;
127
```

Below the script, the 'Result Grid' shows the output of the SQL query. The table has 6 columns: enrollment_id, student_id, course_id, enrollment_date, and grade. The data is as follows:

enrollment_id	student_id	course_id	enrollment_date	grade
3	2	1	2022-07-01	B
4	2	3	2022-07-01	A
5	3	4	2021-07-01	A
6	4	5	2023-07-01	NULL
7	5	1	2022-07-01	B
8	5	2	2022-07-01	A
9	6	4	2021-07-01	B
10	7	5	2023-07-01	NULL
11	8	1	2022-07-01	A
12	8	3	2022-07-01	B
NULL	NULL	NULL	NULL	NULL

Delete enrollments where grade IS NULL (students who never received a grade)

```

127
128 -- Delete enrollments where grade IS NULL (students who never received a grade)
129 • SET SQL_SAFE_UPDATES = 0;
130 • delete from enrollments
131 where grade is null;
132 • select * from enrollments;

```

enrollment_id	student_id	course_id	enrollment_date	grade
1	1	1	2022-07-01	A
2	1	2	2022-07-01	B
3	2	1	2022-07-01	B
4	2	3	2022-07-01	A
5	3	4	2021-07-01	A
7	5	1	2022-07-01	B
8	5	2	2022-07-01	A
9	6	4	2021-07-01	B
11	8	1	2022-07-01	A
12	8	3	2022-07-01	B
NULL	NULL	NULL	NULL	NULL

enrollments 11 x

Output

Action Output

#	Time	Action	Message
✓ 36	09:12:04	SET SQL_SAFE_UPDATES = 0	0 row(s) affected
✓ 37	09:12:10	delete from enrollments where grade is null	2 row(s) affected
✓ 38	09:12:23	SET SQL_SAFE_UPDATES = 0	0 row(s) affected
✓ 39	09:12:23	delete from enrollments where grade is null	0 row(s) affected
✓ 40	09:12:23	select * from enrollments LIMIT 0, 1000	10 row(s) returned

Verify row counts using SELECT COUNT(*) after each operation

```

119 • insert into students (first_name,last_name,email,date_of_birth,department_id,enrollment_year)values('Sadhana', 'Shree', 'sadhana.shree@colleg
120 ('Neha', 'Gupta', 'neha.gupta@college.edu', '2004-02-10', 2, 2023);
121 • select count(*)
122 from students;
123 -- Update the grade of student_id = 5 for course_id = 1 from 'C' to 'B'
124 • update enrollments
125 set grade = 'B'
126 where student_id=5 and course_id = 1;
127 • select * from enrollments;

```

count(*)
10

```

123 -- Update the grade of student_id = 5 for course_id = 1 from 'C' to 'B'
124 • update enrollments
125   set grade = 'B'
126   where student_id=5 and course_id = 1;
127 • select * from enrollments;
128 • select count(*)
129   from enrollments;
130 -- Delete enrollments where grade IS NULL (students who never received a grade)
131 • SET SQL_SAFE_UPDATES = 0;
132 • delete from enrollments
133   where grade is null;
134 • select * from enrollments;
135 • select count(*) from enrollments;

```

Result Grid	Filter Rows:	Export:	Wrap Cell Content:
count(*)			
10			

```

131
132 -- Delete enrollments where grade IS NULL (students who never received a grade)
133 • SET SQL_SAFE_UPDATES = 0;
134 • delete from enrollments
135   where grade is null;
136 • select * from enrollments;
137 • select count(*) from enrollments;
138 -- Verify row counts using SELECT COUNT(*) after each operation

```

Result Grid	Filter Rows:	Export:	Wrap Cell Content:
count(*)			
10			

Task 2

Task 3(hands_on2)

Task 4