
PROJECT DESIGN PHASE-II
Data Flow Diagram & User Stories

Project Name	Script-Controlled ACL – Restrict Record Access Based on Field Value
Team ID	**SWTID-2026-7991**
Date	**03/09/26**
Maximum Marks	**4**

Data Flow Diagram:

This DFD represents the information flow in the ServiceNow ACL lab: an administrator creates users, roles, the Institution Details table and ACL rules; users access records; the ACL engine evaluates roles and the Branch value; the system allows or denies the requested operation.

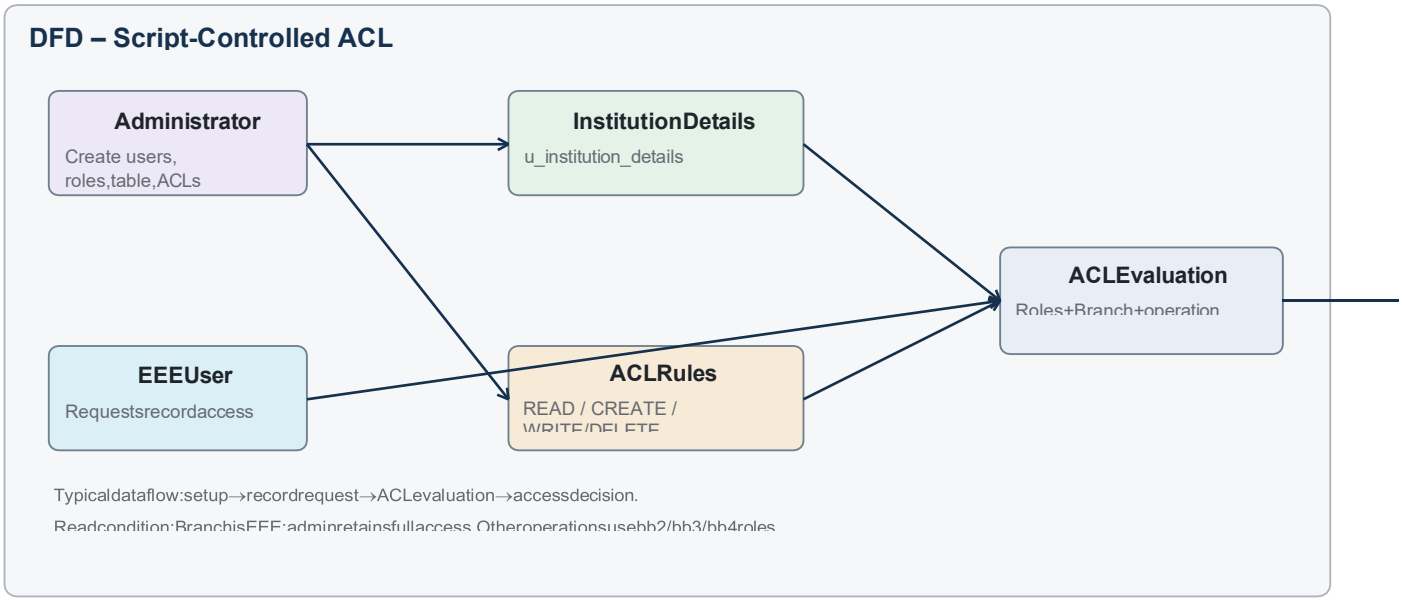

Lab flow

1. Create EEE User and roles bb1–bb4 → 2. Create u_institution_details → 3. Configure ACLs → 4. Impersonate users → 5. Verify access behavior

User Stories

User stories derived directly from the supplied Script-Controlled ACL lab content.

User Type	Functional Requirement (Epic)	User Story Number	User Story / Task	Acceptance criteria	Priority	Release
Administrator	User & Role Setup	**USN-1**	As an administrator, I can create the EEE test user and assign roles bb1, bb2, bb3 and bb4.	EEE User is created and the required roles are assigned.	High	Phase-II
Administrator	Table Creation	**USN-2**	As an administrator, I can create the Institution Details table named u_institution_details with the required fields.	Table exists with roll number, student name, faculty name, branch, email, phone and description fields.	High	Phase-II
Administrator	Read ACL	**USN-3**	As an administrator, I can configure a record READ ACL for u_institution_details using bb1 and the condition Branch is EEE.	ACL is active, Advanced is enabled, bb1 is required, and the Branch condition is EEE.	High	Phase-II
EEE User	Read Access	**USN-4**	As an EEE user with bb1, I can view EEE branch records.	EEE user can view EEE records; users without the role cannot view records; Admin can view all branches.	High	Phase-II
Administrator	Create ACL	**USN-5**	As an administrator, I can configure a CREATE ACL using bb2.	A user with bb1 and bb2 can create records and sees the New button.	High	Phase-II
EEE User	Create Access	**USN-6**	As an EEE user with bb1 and bb2, I can create records after passing the required ACL checks.	New record creation is available to the user with the required roles.	High	Phase-II
Administrator	Write ACL	**USN-7**	As an administrator, I can configure a WRITE ACL using bb3.	A user with bb1, bb2 and bb3 can view and edit EEE branch records.	High	Phase-II
EEE User	Write Access	**USN-8**	As an EEE user with bb1, bb2 and bb3, I can edit EEE branch records.	The user can view and edit the permitted EEE records.	High	Phase-II
Administrator	Delete ACL	**USN-9**	As an administrator, I can configure a DELETE ACL using bb4.	A user with bb1, bb2, bb3 and bb4 can delete permitted EEE branch records.	High	Phase-II
EEE User	Full EEE CRUD	**USN-10**	As an EEE user with bb1, bb2, bb3 and bb4, I can view, create, edit and delete EEE branch records.	All four operations work according to the configured ACLs.	High	Phase-II
Administrator	Verification	**USN-11**	As an administrator, I can impersonate users and verify the configured ACL behavior.	Read, create, write and delete permissions are tested and match the configured roles and conditions.	High	Phase-II
Administrator	Security Outcome	**USN-12**	As an administrator, I can use ACLs to protect sensitive records from unauthorized access and changes.	Record-level security is enforced across viewing, modification, creation and deletion.	High	Phase-II

Outcome from the supplied lab: script-controlled READ, WRITE, CREATE and DELETE ACLs Teenrfhoprdaeteresctourdct-ulerveeflosIleocwusrithy.e uploaded Project Design Phase-II reference.