


Sample prompt for playwright/typescript integration:

Ask mode:


Read my entire workspace and confirm me what are the files will be impacted if I want to add playwright typescript same like implemented for Selenium Java

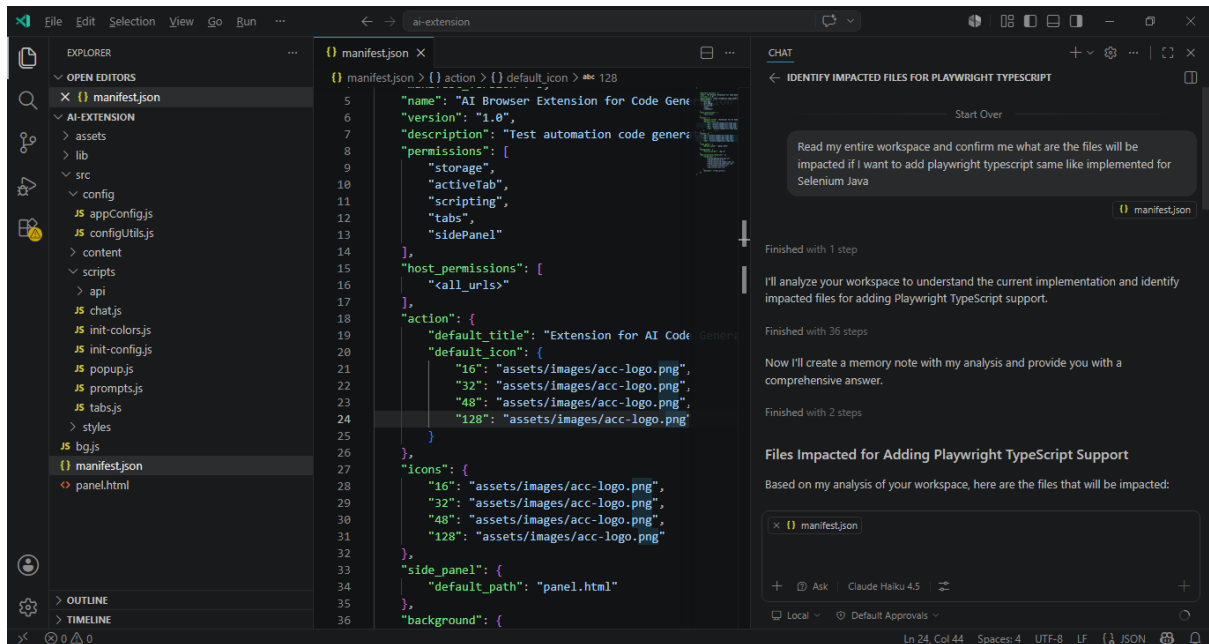

Prompt for agent mode:

Read the Entire workspace and understand how I implemented the selenium Java

I want to add the playwright typescript

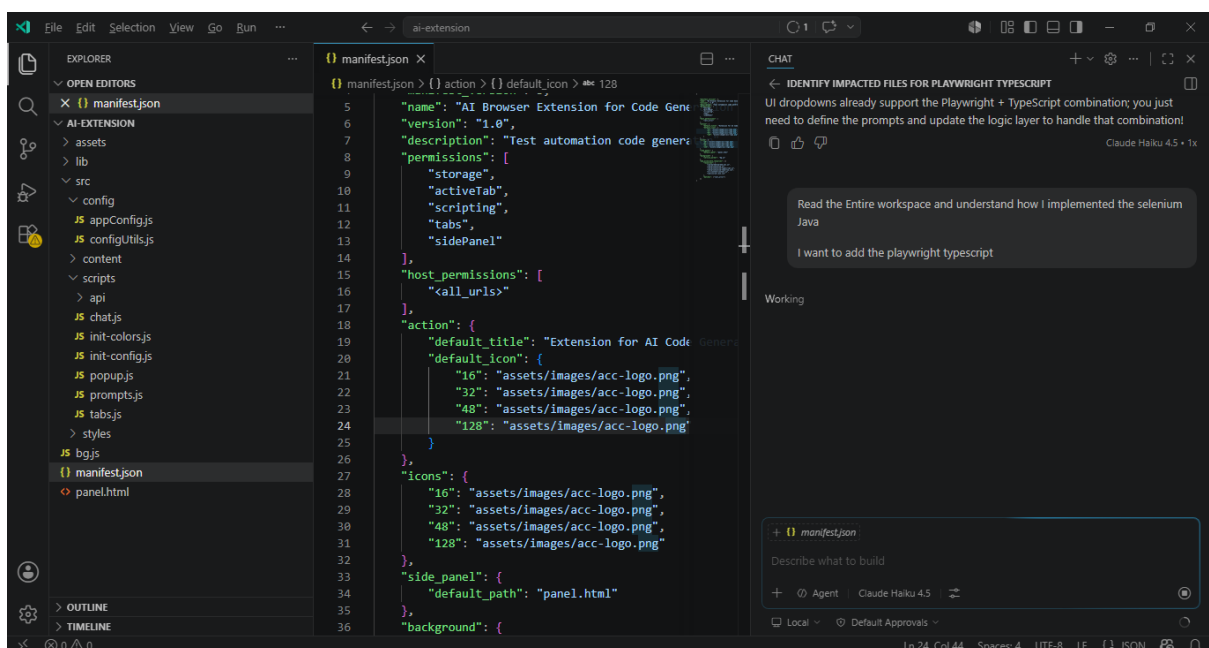


Go to **prompts.js** and add new prompt templates for Playwright TypeScript

Take selenium Java as reference


PLAYWRIGHT_TYPESCRIPT_PAGE_ONLY

PLAYWRIGHT_TYPESCRIPT_WITH_CUCUMBER


CUCUMBER_WITH_PLAYWRIGHT_TYPESCRIPT_STEPS

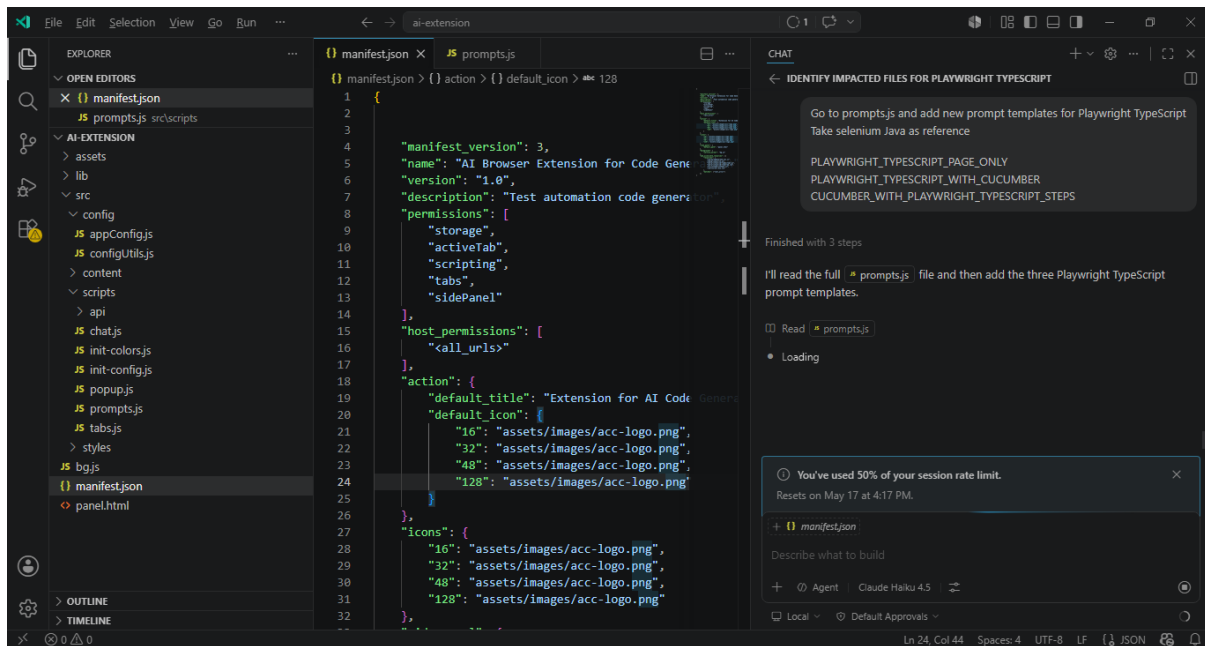


Go to **chat.js** and Update `getPromptKeys()` method to handle Playwright/TypeScript combinations

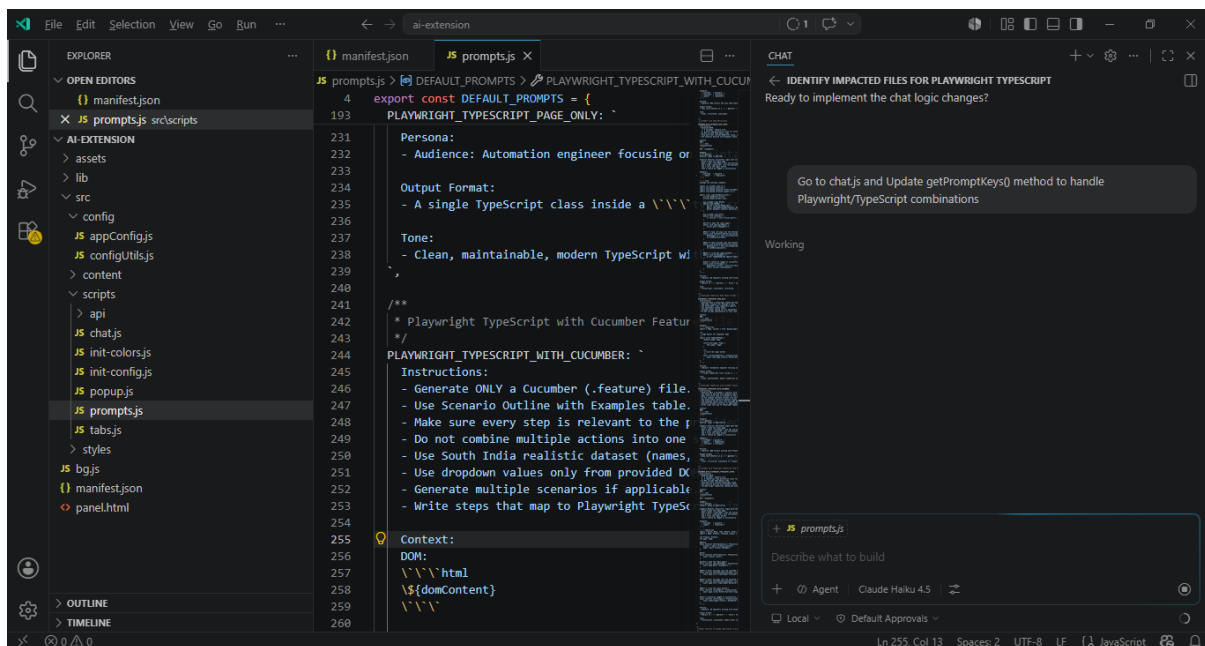

Go to **panel.html** and Add the logics to handle playwright typescript same like selenium Java

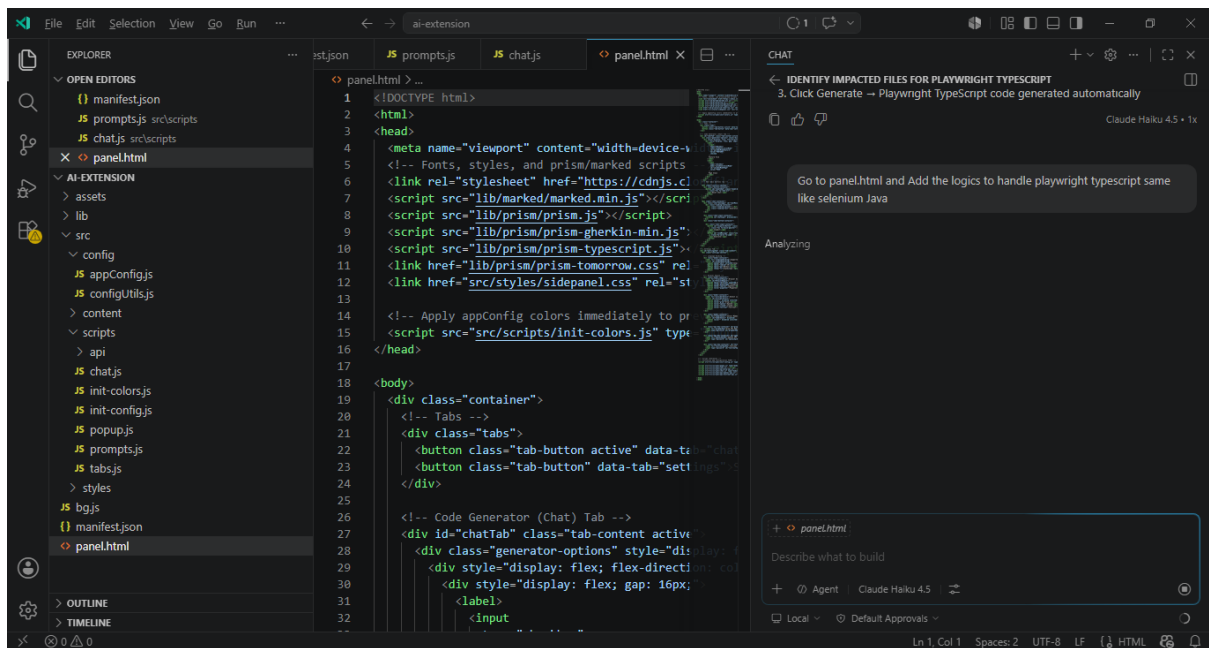

Close browser extension and reload again

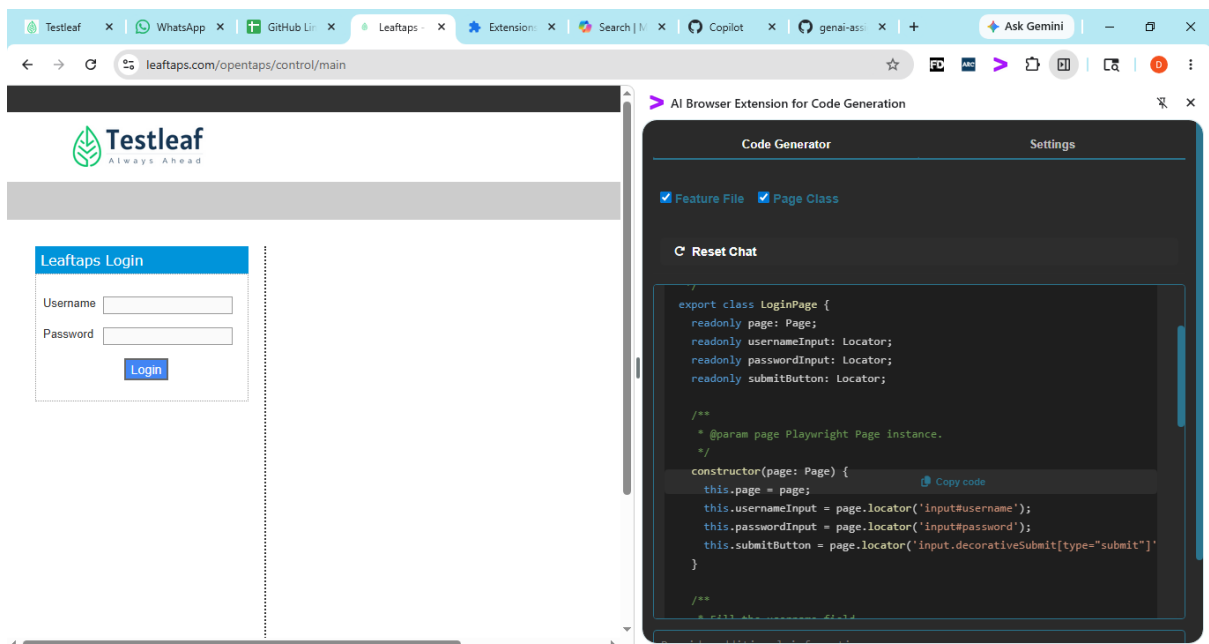

Code Generated

```
import { Page, Locator } from '@playwright/test';

/**
 * Page Object representing the login form.
 */
export class LoginPage {
  readonly page: Page;
  readonly usernameInput: Locator;
  readonly passwordInput: Locator;
  readonly submitButton: Locator;

  /**
   * @param page Playwright Page instance.
   */
  constructor(page: Page) {
    this.page = page;
    this.usernameInput = page.locator('input#username');
    this.passwordInput = page.locator('input#password');
    this.submitButton = page.locator('input.decorativeSubmit[type="submit"]');
  }

  /**
   * Fill the username field.
   * @param username The username to type.
   */
  async setUsername(username: string): Promise<void> {
    await this.usernameInput.fill(username);
  }
}
```

```
}
```

```
/**
```

```
 * Fill the password field.
```

```
 * @param password The password to type.
```

```
 */
```

```
async setPassword(password: string): Promise<void> {
```

```
    await this.passwordInput.fill(password);
```

```
}
```

```
/**
```

```
 * Click the login (submit) button.
```

```
 */
```

```
async clickLogin(): Promise<void> {
```

```
    await this.submitButton.click();
```

```
}
```

```
/**
```

```
 * Perform a full login action by entering credentials and submitting the form.
```

```
 * @param username The username to use.
```

```
 * @param password The password to use.
```

```
 */
```

```
async login(username: string, password: string): Promise<void> {
```

```
    await this.setUsername(username);
```

```
    await this.setPassword(password);
```

```
    await this.clickLogin();
```

```
}
```

```
}
```