jobid: 11563083	uid: 76535	nprocs: 512	runtime: 19 seconds

I/O performance *estimate* (at the MPI-IO layer): transferred 482458 MiB at 9500.20 MiB/s
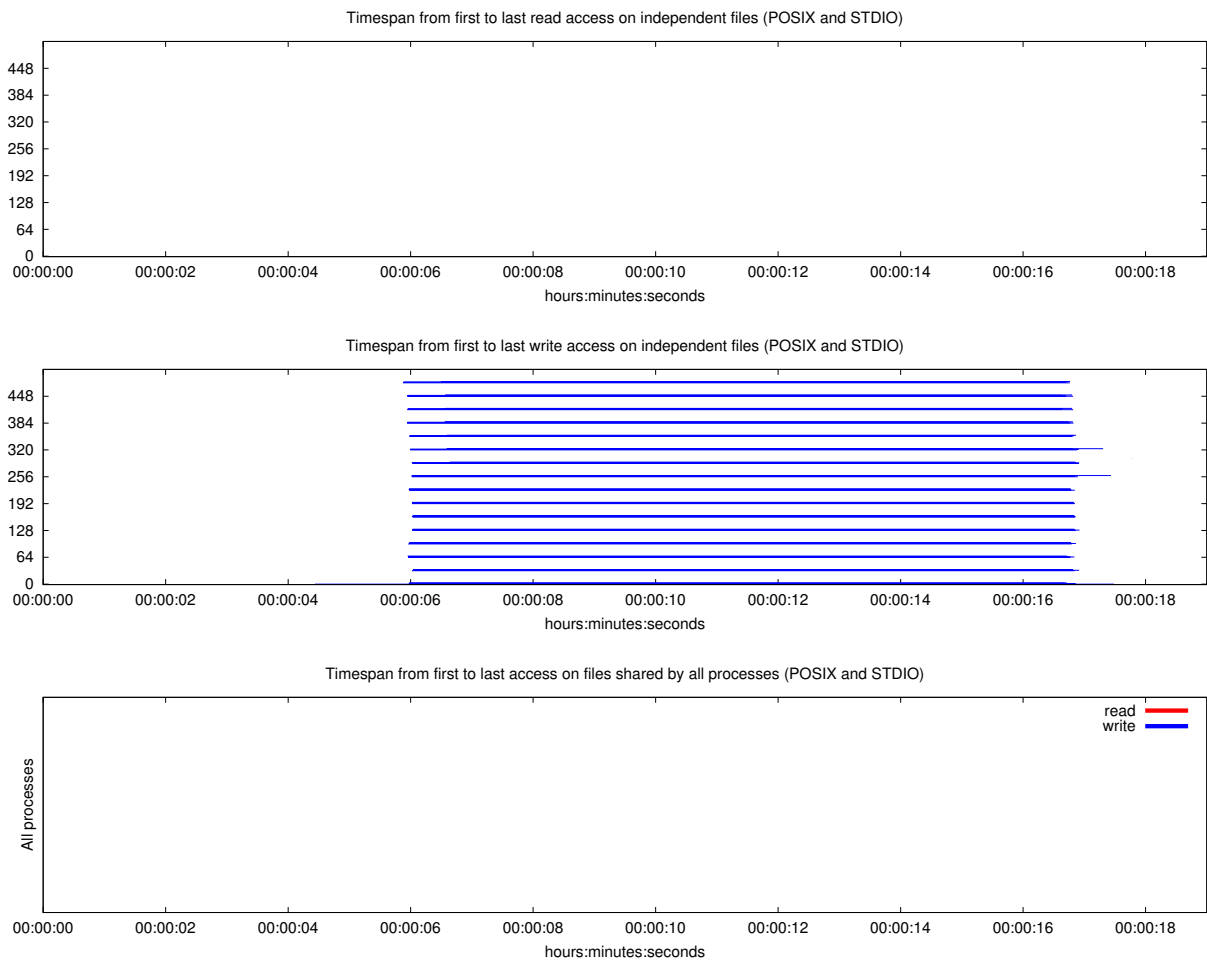I/O performance *estimate* (at the STDIO layer): transferred 0.5 MiB at 25.07 MiB/s

Average I/O cost per process

I/O Operation Counts

POSIX Access Sizes
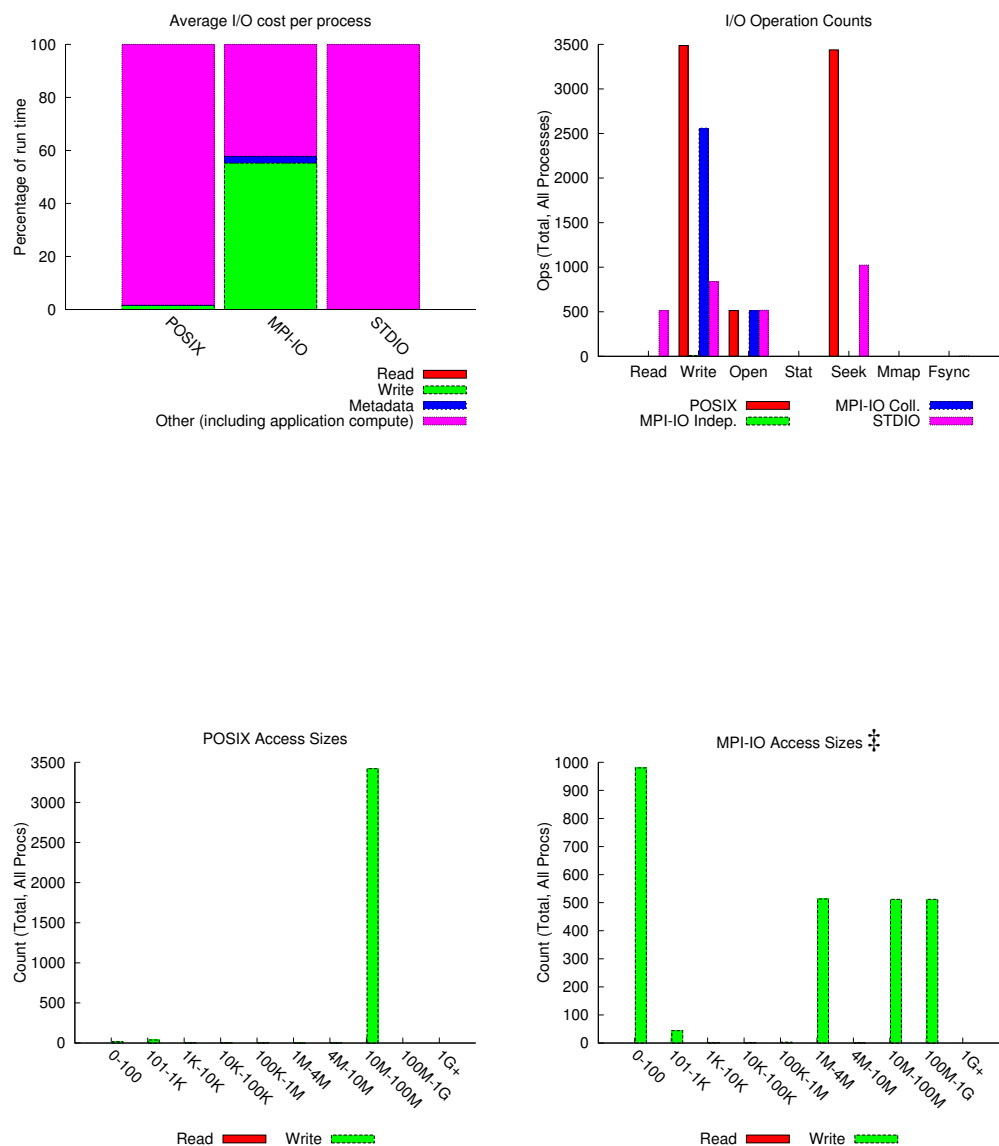
MPI-IO Access Sizes ‡

Most Common Access Sizes
(POSIX or MPI-IO)

	access size	count
POSIX	33554432	3416
	40	8
	272	7
	544	7
MPI-IO ‡	3773184	487
	12630528	28
	12355968	28
	13469568	27

‡ NOTE: MPI-IO accesses are given in terms of aggregate datatype size.

File Count Summary
(estimated by POSIX I/O access offsets)

type	number of files	avg. size	max size
total opened	6	3.8K	8.7K
read-only files	1	899	899
write-only files	5	4.4K	8.7K
read/write files	0	0	0
created files	5	4.4K	8.7K

Timespan from first to last read access on independent files (POSIX and STDIO)

Timespan from first to last write access on independent files (POSIX and STDIO)

Timespan from first to last access on files shared by all processes (POSIX and STDIO)

read
write

Average I/O per process (POSIX and STDIO)

	Cumulative time spent in I/O functions (seconds)	Amount of I/O (MB)
Independent reads	1.53125000000001e-06	0.000857353210449219
Independent writes	-0.511571865234375	213.711726430804
Independent metadata	0.00649695898437499	N/A
Shared reads	0	0
Shared writes	0	0
Shared metadata	0	N/A

Data Transfer Per Filesystem (POSIX and STDIO)

File System	Write		Read	
	MiB	Ratio	MiB	Ratio
/global/cscratch1	109420.40104	1.00000	0.43896	1.00000
UNKNOWN	0.00290	0.00000	0.00000	0.00000

POSIX I/O Pattern

sequential: An I/O op issued at an offset greater than where the previous I/O op ended.
consecutive: An I/O op issued at the offset immediately following the end of the previous I/O op.

Variance in Shared Files (POSIX and STDIO)

File	Processes	Fastest			Slowest			σ	
Suffix		Rank	Time	Bytes	Rank	Time	Bytes	Time	Bytes