jobid: 11246002	uid: 76535	nprocs: 512	runtime: 95 seconds

I/O performance *estimate* (at the MPI-IO layer): transferred 3343 MiB at 15751.62 MiB/s

Average I/O cost per process

I/O Operation Counts

POSIX Access Sizes
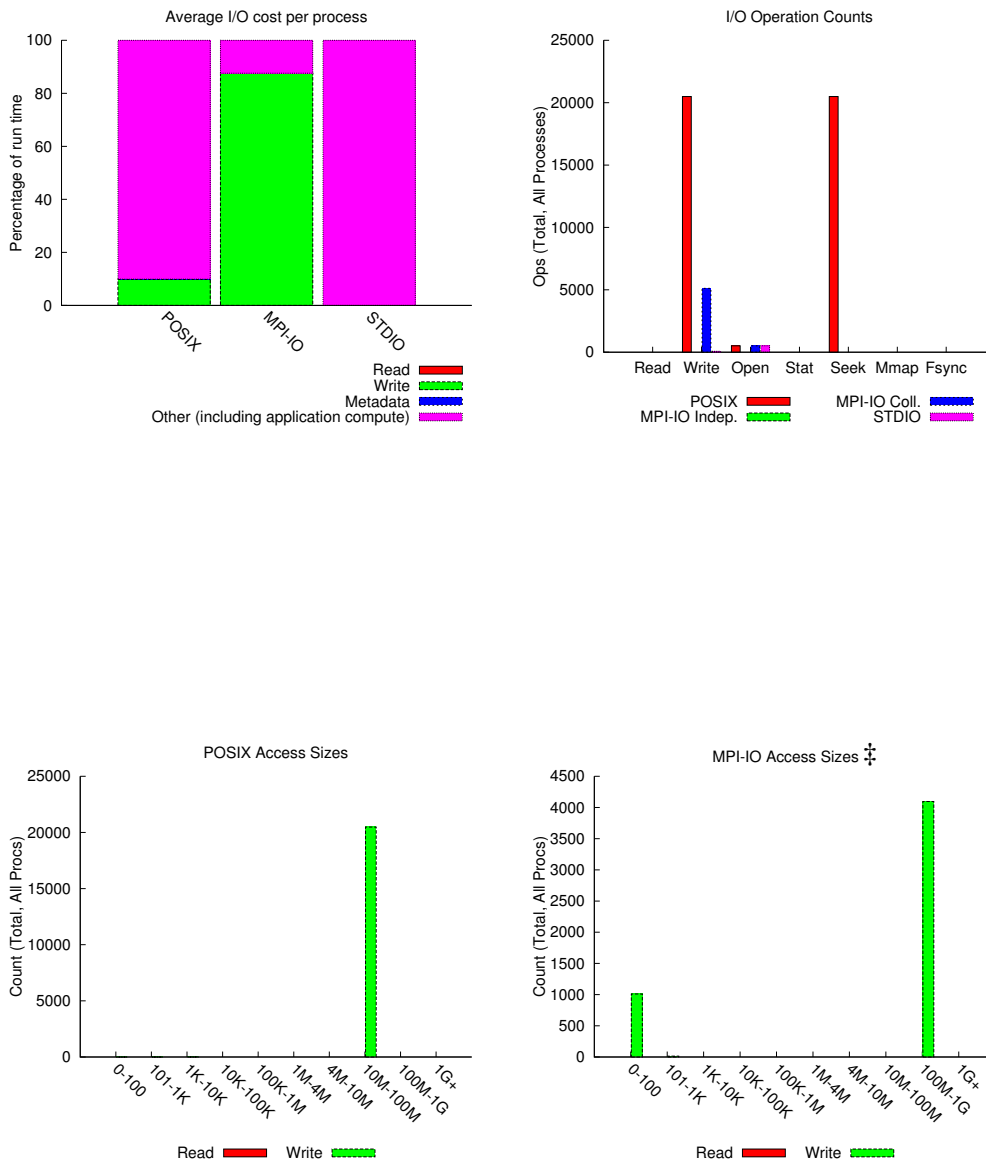
MPI-IO Access Sizes ‡

Most Common Access Sizes
(POSIX or MPI-IO)

	access size	count
POSIX	67108864	20472
	67104632	6
	4232	6
	2184	2
MPI-IO ‡	335544320	4096
	272	8
	544	2
	96	2

‡ NOTE: MPI-IO accesses are given in terms of aggregate datatype size.

File Count Summary
(estimated by POSIX I/O access offsets)

type	number of files	avg. size	max size
total opened	3	93	276
read-only files	0	0	0
write-only files	2	139	276
read/write files	0	0	0
created files	2	139	276

Timespan from first to last read access on independent files (POSIX and STDIO)

Timespan from first to last write access on independent files (POSIX and STDIO)

Timespan from first to last access on files shared by all processes (POSIX and STDIO)
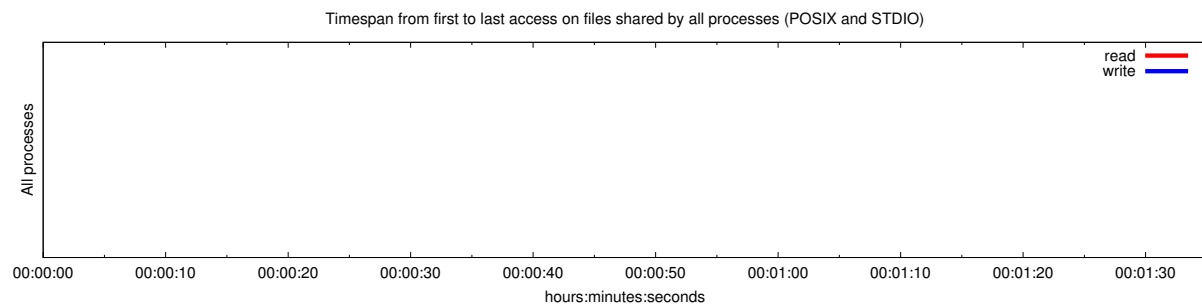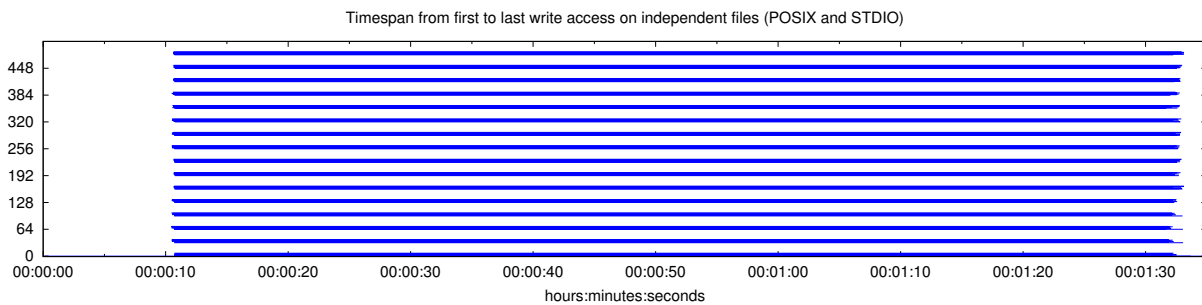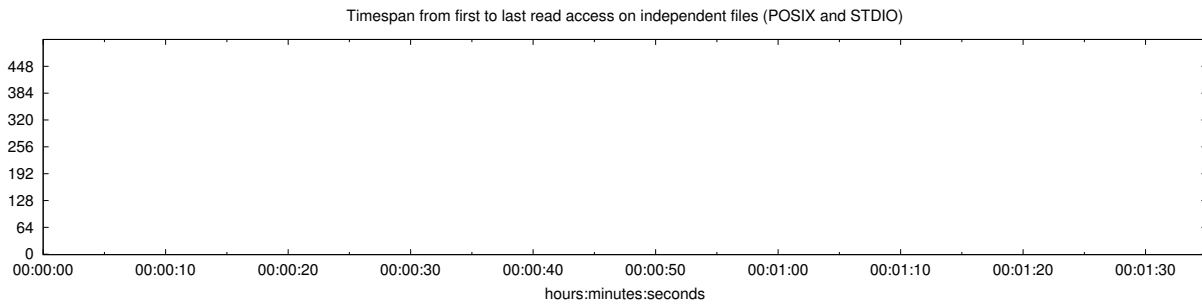
read
write

Average I/O per process (POSIX and STDIO)

	Cumulative time spent in I/O functions (seconds)	Amount of I/O (MB)
Independent reads	0	0
Independent writes	5.03018115039062	2560.00001463108
Independent metadata	0.00096722265625	N/A
Shared reads	0	0
Shared writes	0	0
Shared metadata	0	N/A

Data Transfer Per Filesystem (POSIX and STDIO)

File System	Write		Read	
	MiB	Ratio	MiB	Ratio
/global/cscratch1	1310720.00430	1.00000	0.00000	0.00000
UNKNOWN	0.00319	0.00000	0.00000	0.00000

POSIX I/O Pattern
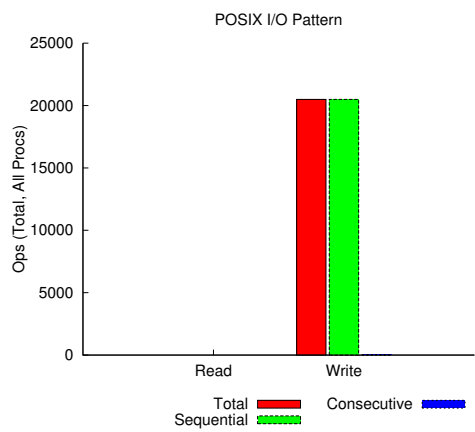
sequential: An I/O op issued at an offset greater than where the previous I/O op ended.
consecutive: An I/O op issued at the offset immediately following the end of the previous I/O op.

Variance in Shared Files (POSIX and STDIO)

File Suffix	Processes	Fastest			Slowest			σ	
		Rank	Time	Bytes	Rank	Time	Bytes	Time	Bytes