LAB-2

PES1UG24AM085

DHRITI KAMANI

Connection Type	Persistent Connections	Start Time (s) End Time (s)	Load Time (s)
Non-Persistent	0	141.684, 162.912	21.228
Persistent	2	8.408, 8.619	0.563
Persistent	4	7.705, 7.831	0.126
Persistent	6	6.87, 7.06	0.19
Persistent	8	2.08, 2.22	0.14
Persistent	10	1.60, 1.72	0.12

Non Persistent

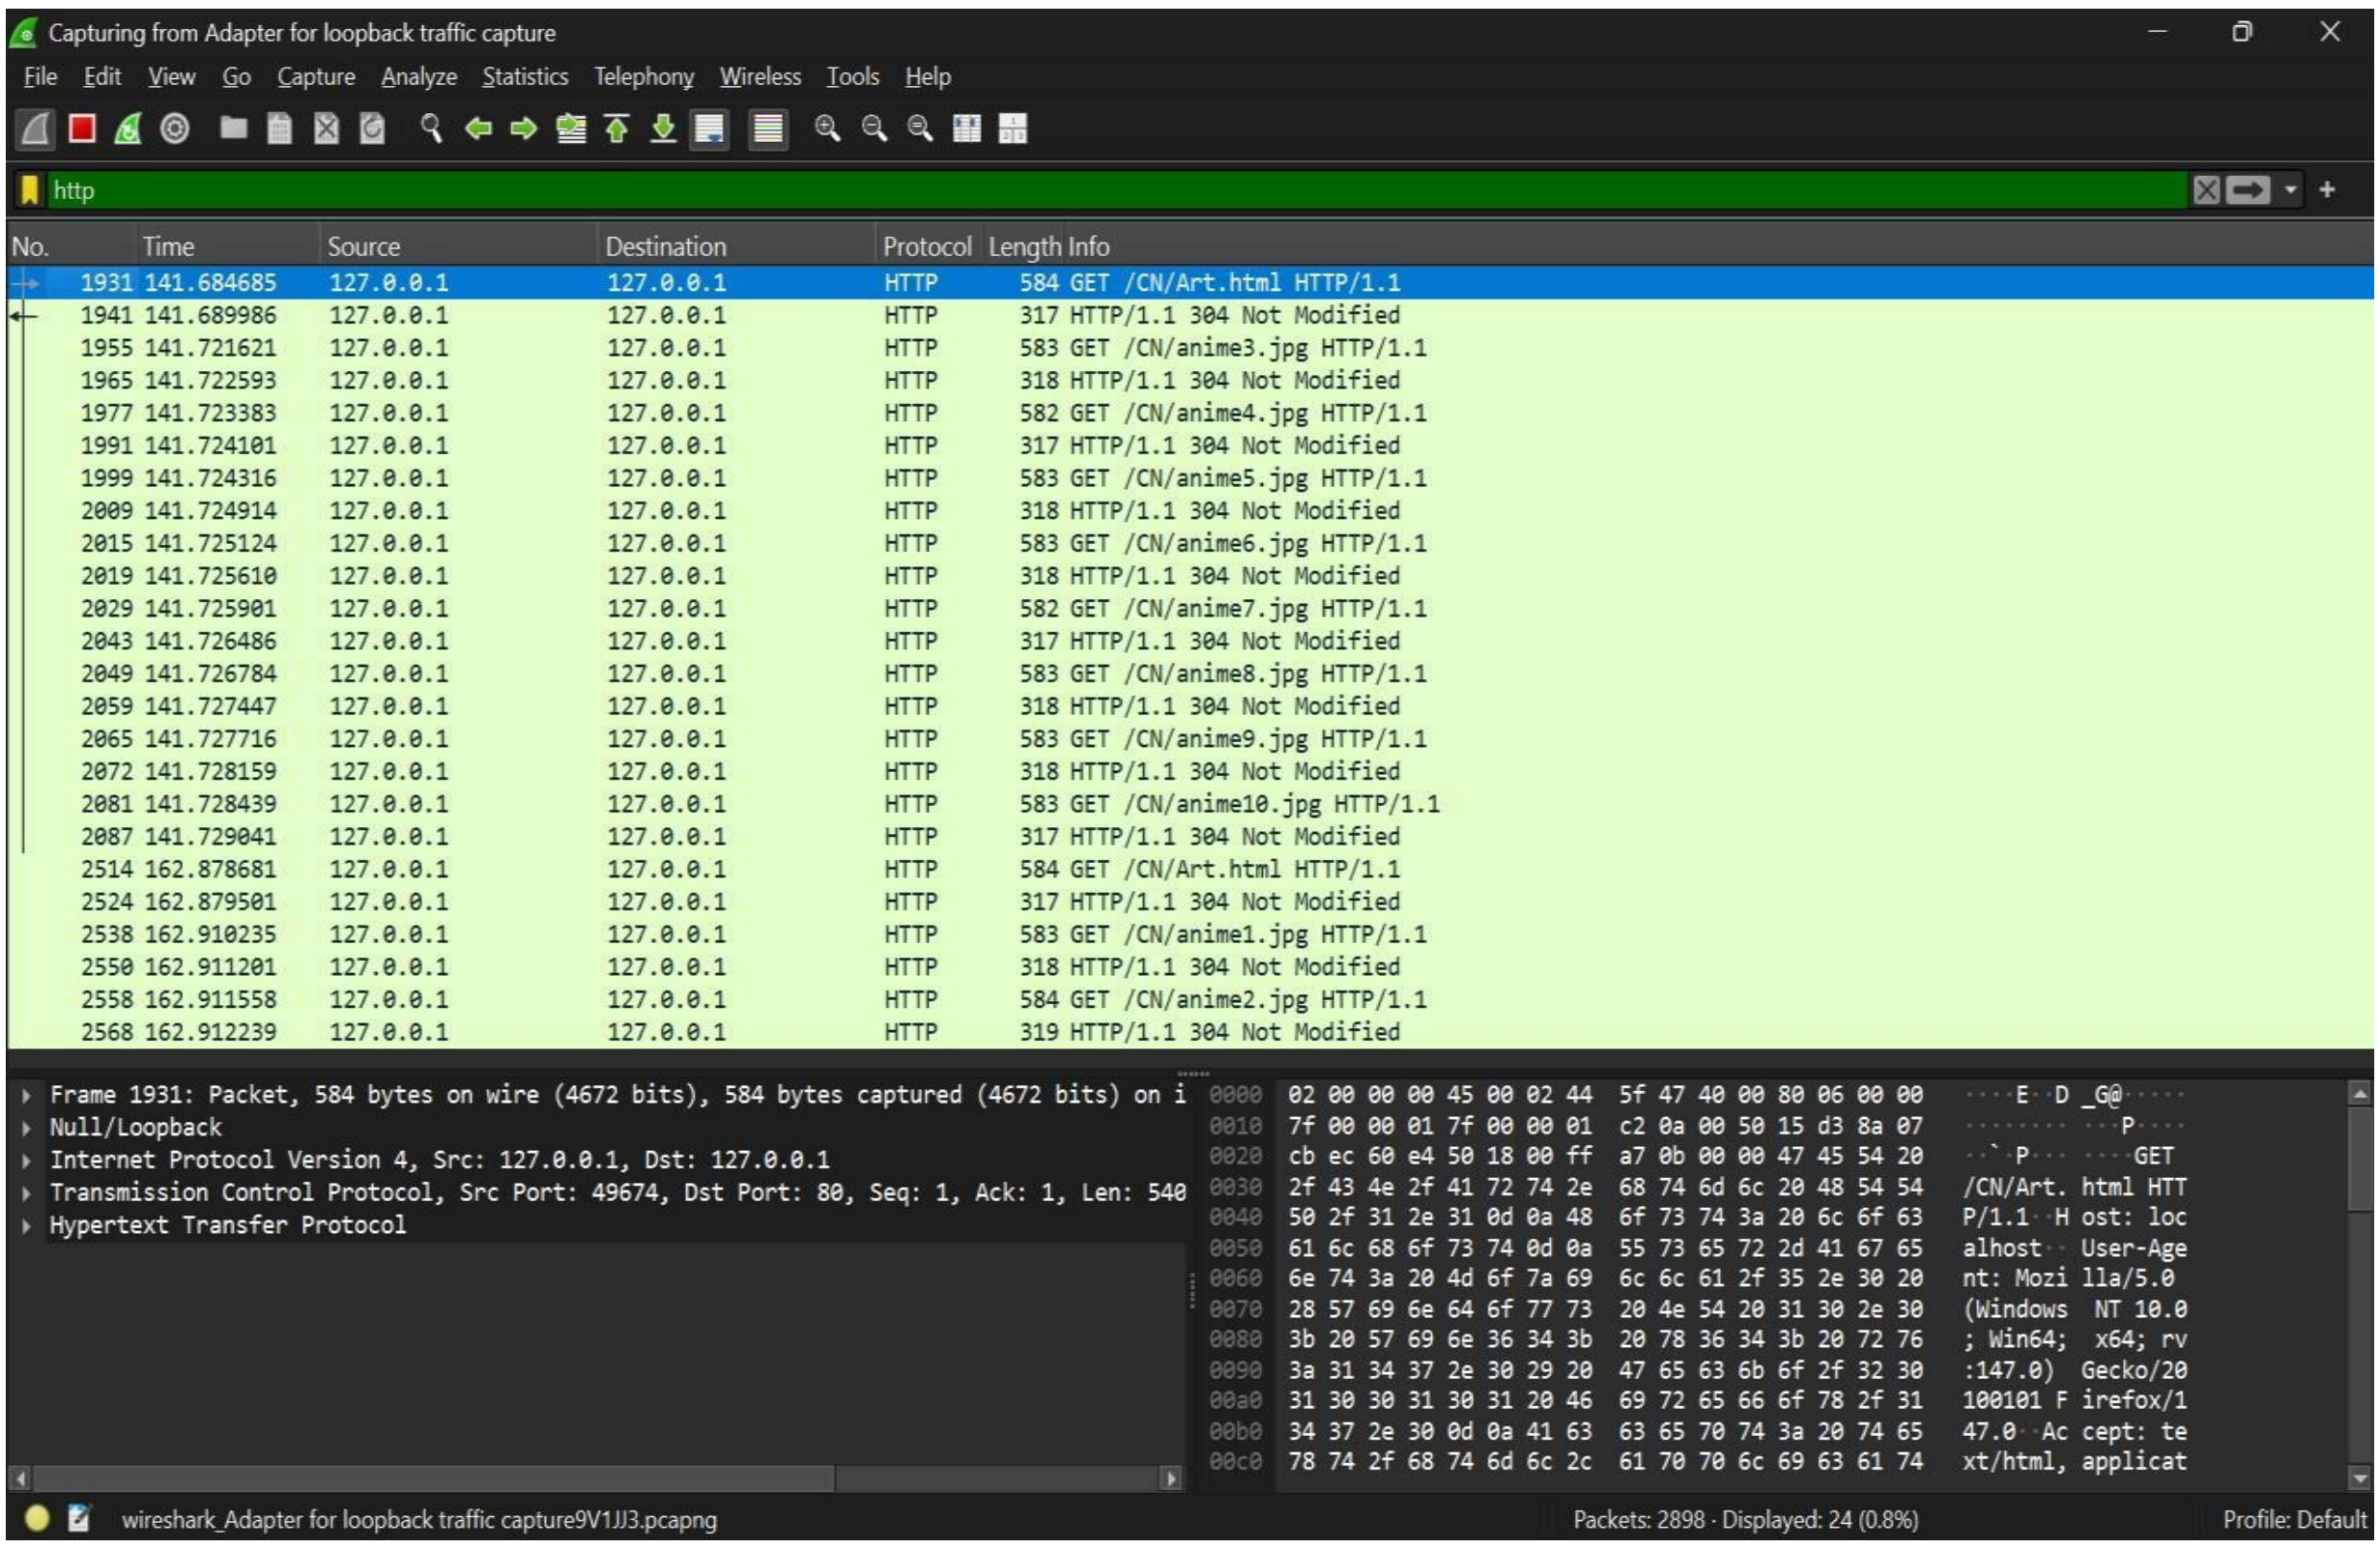

Persistent 2

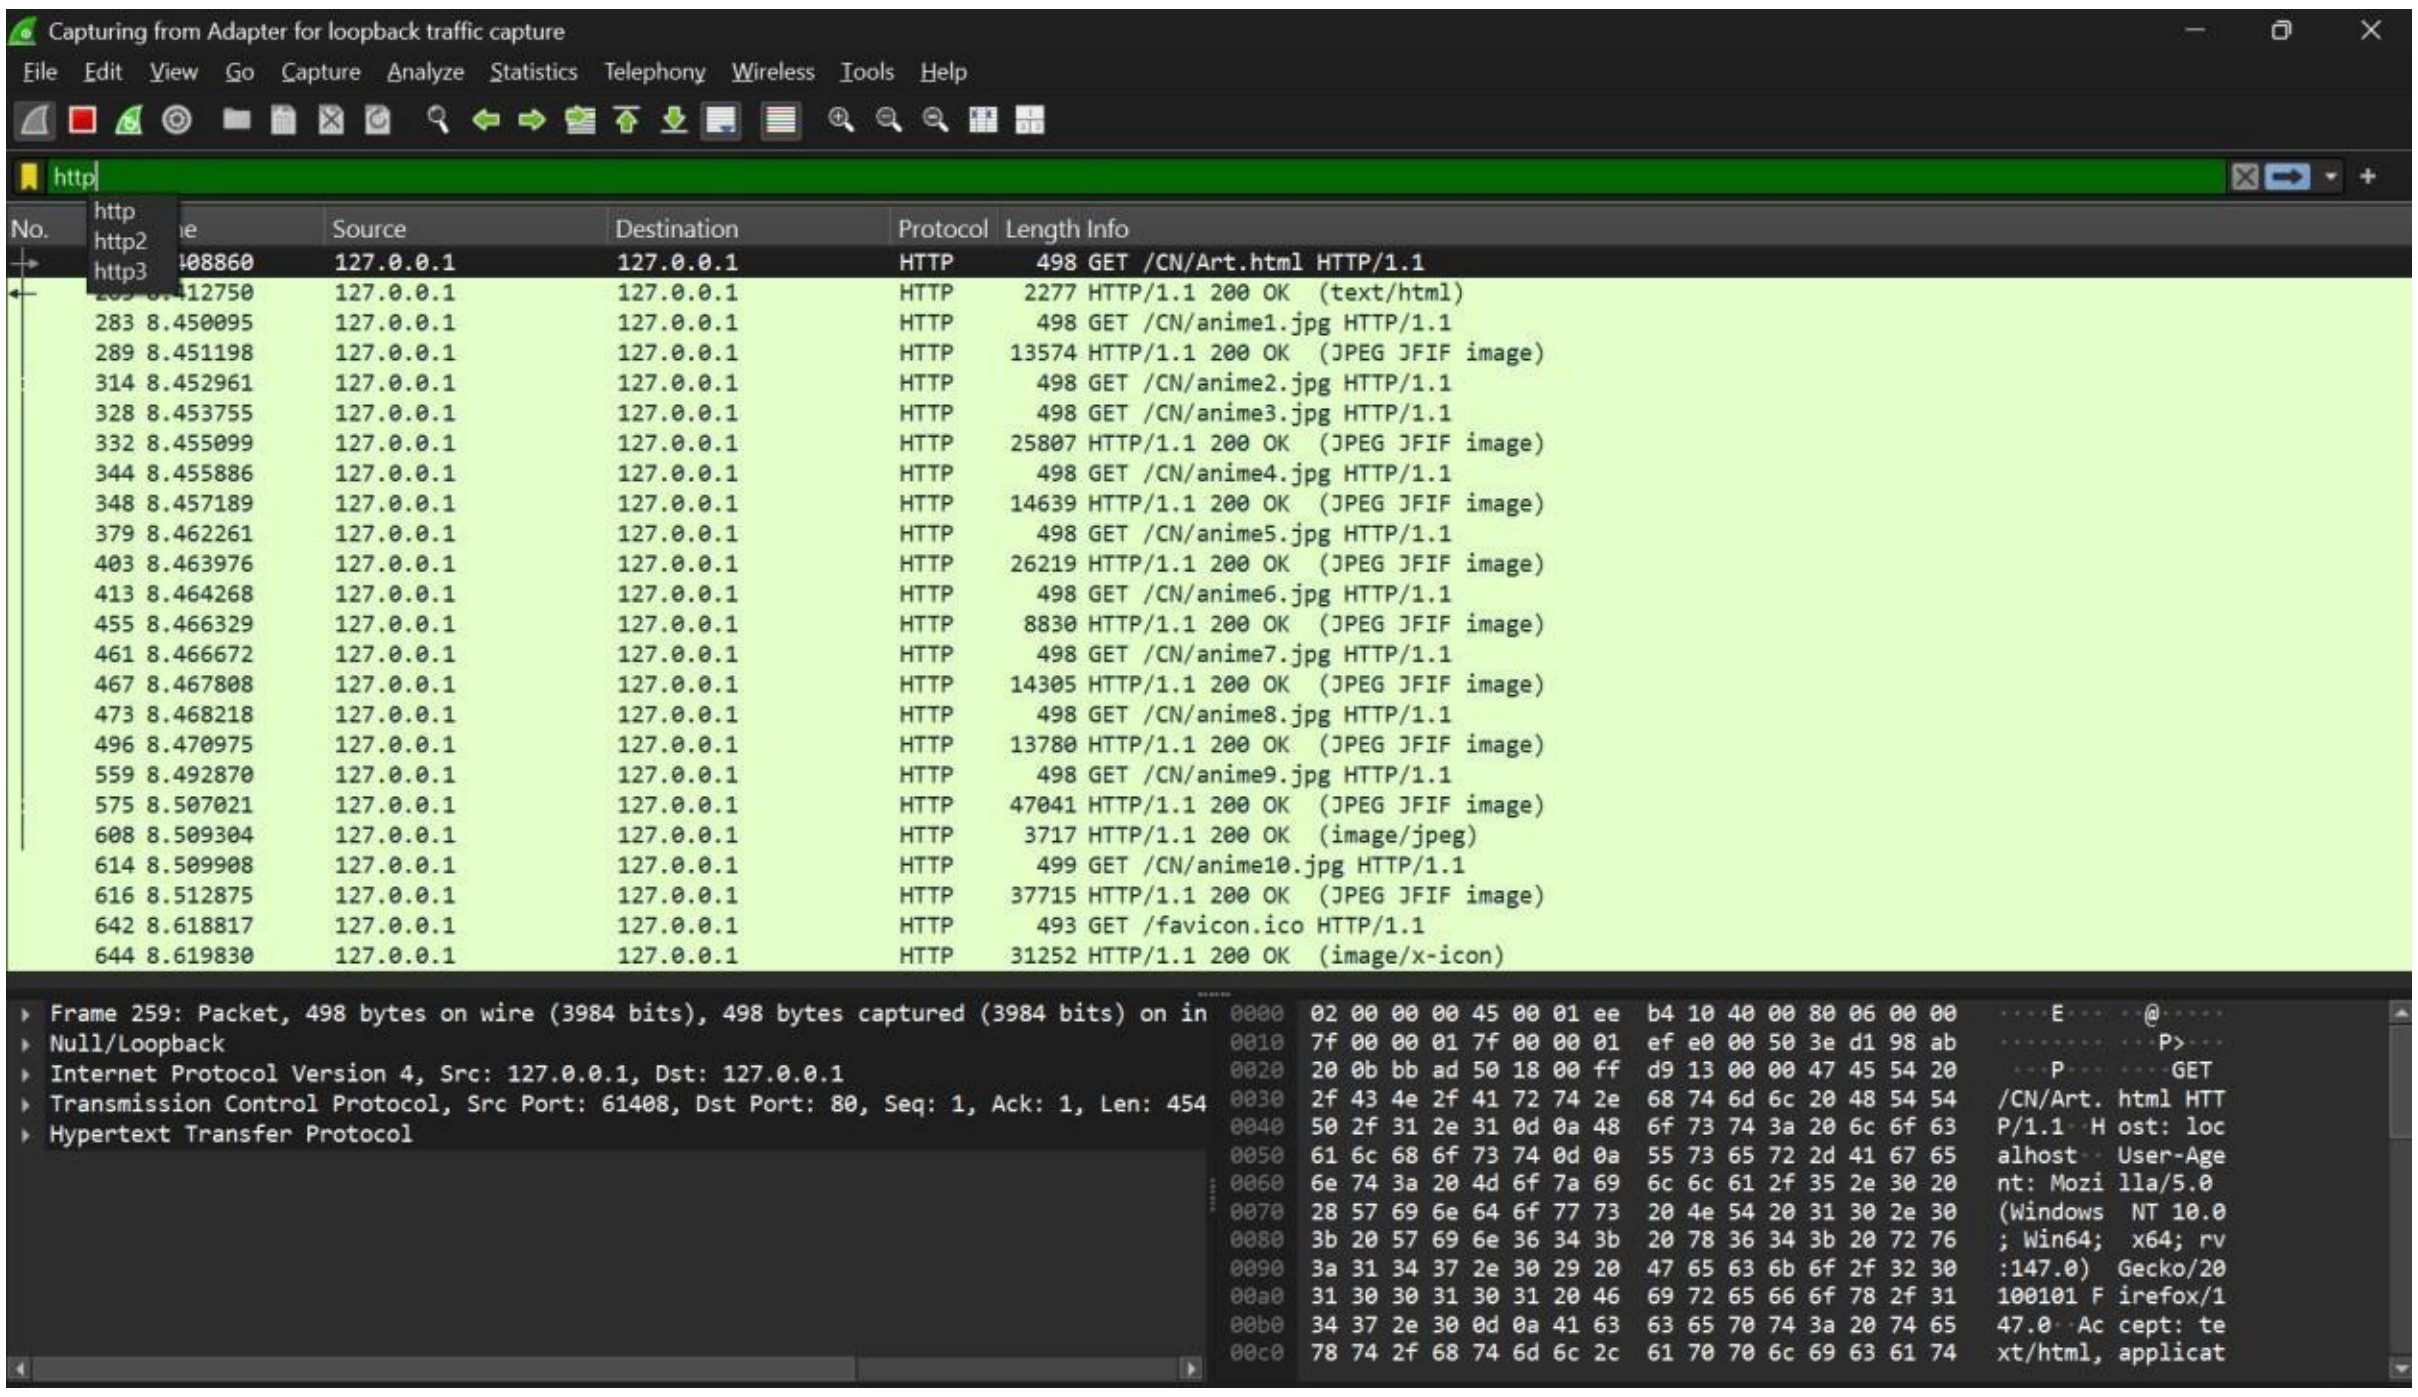

Persistent 4

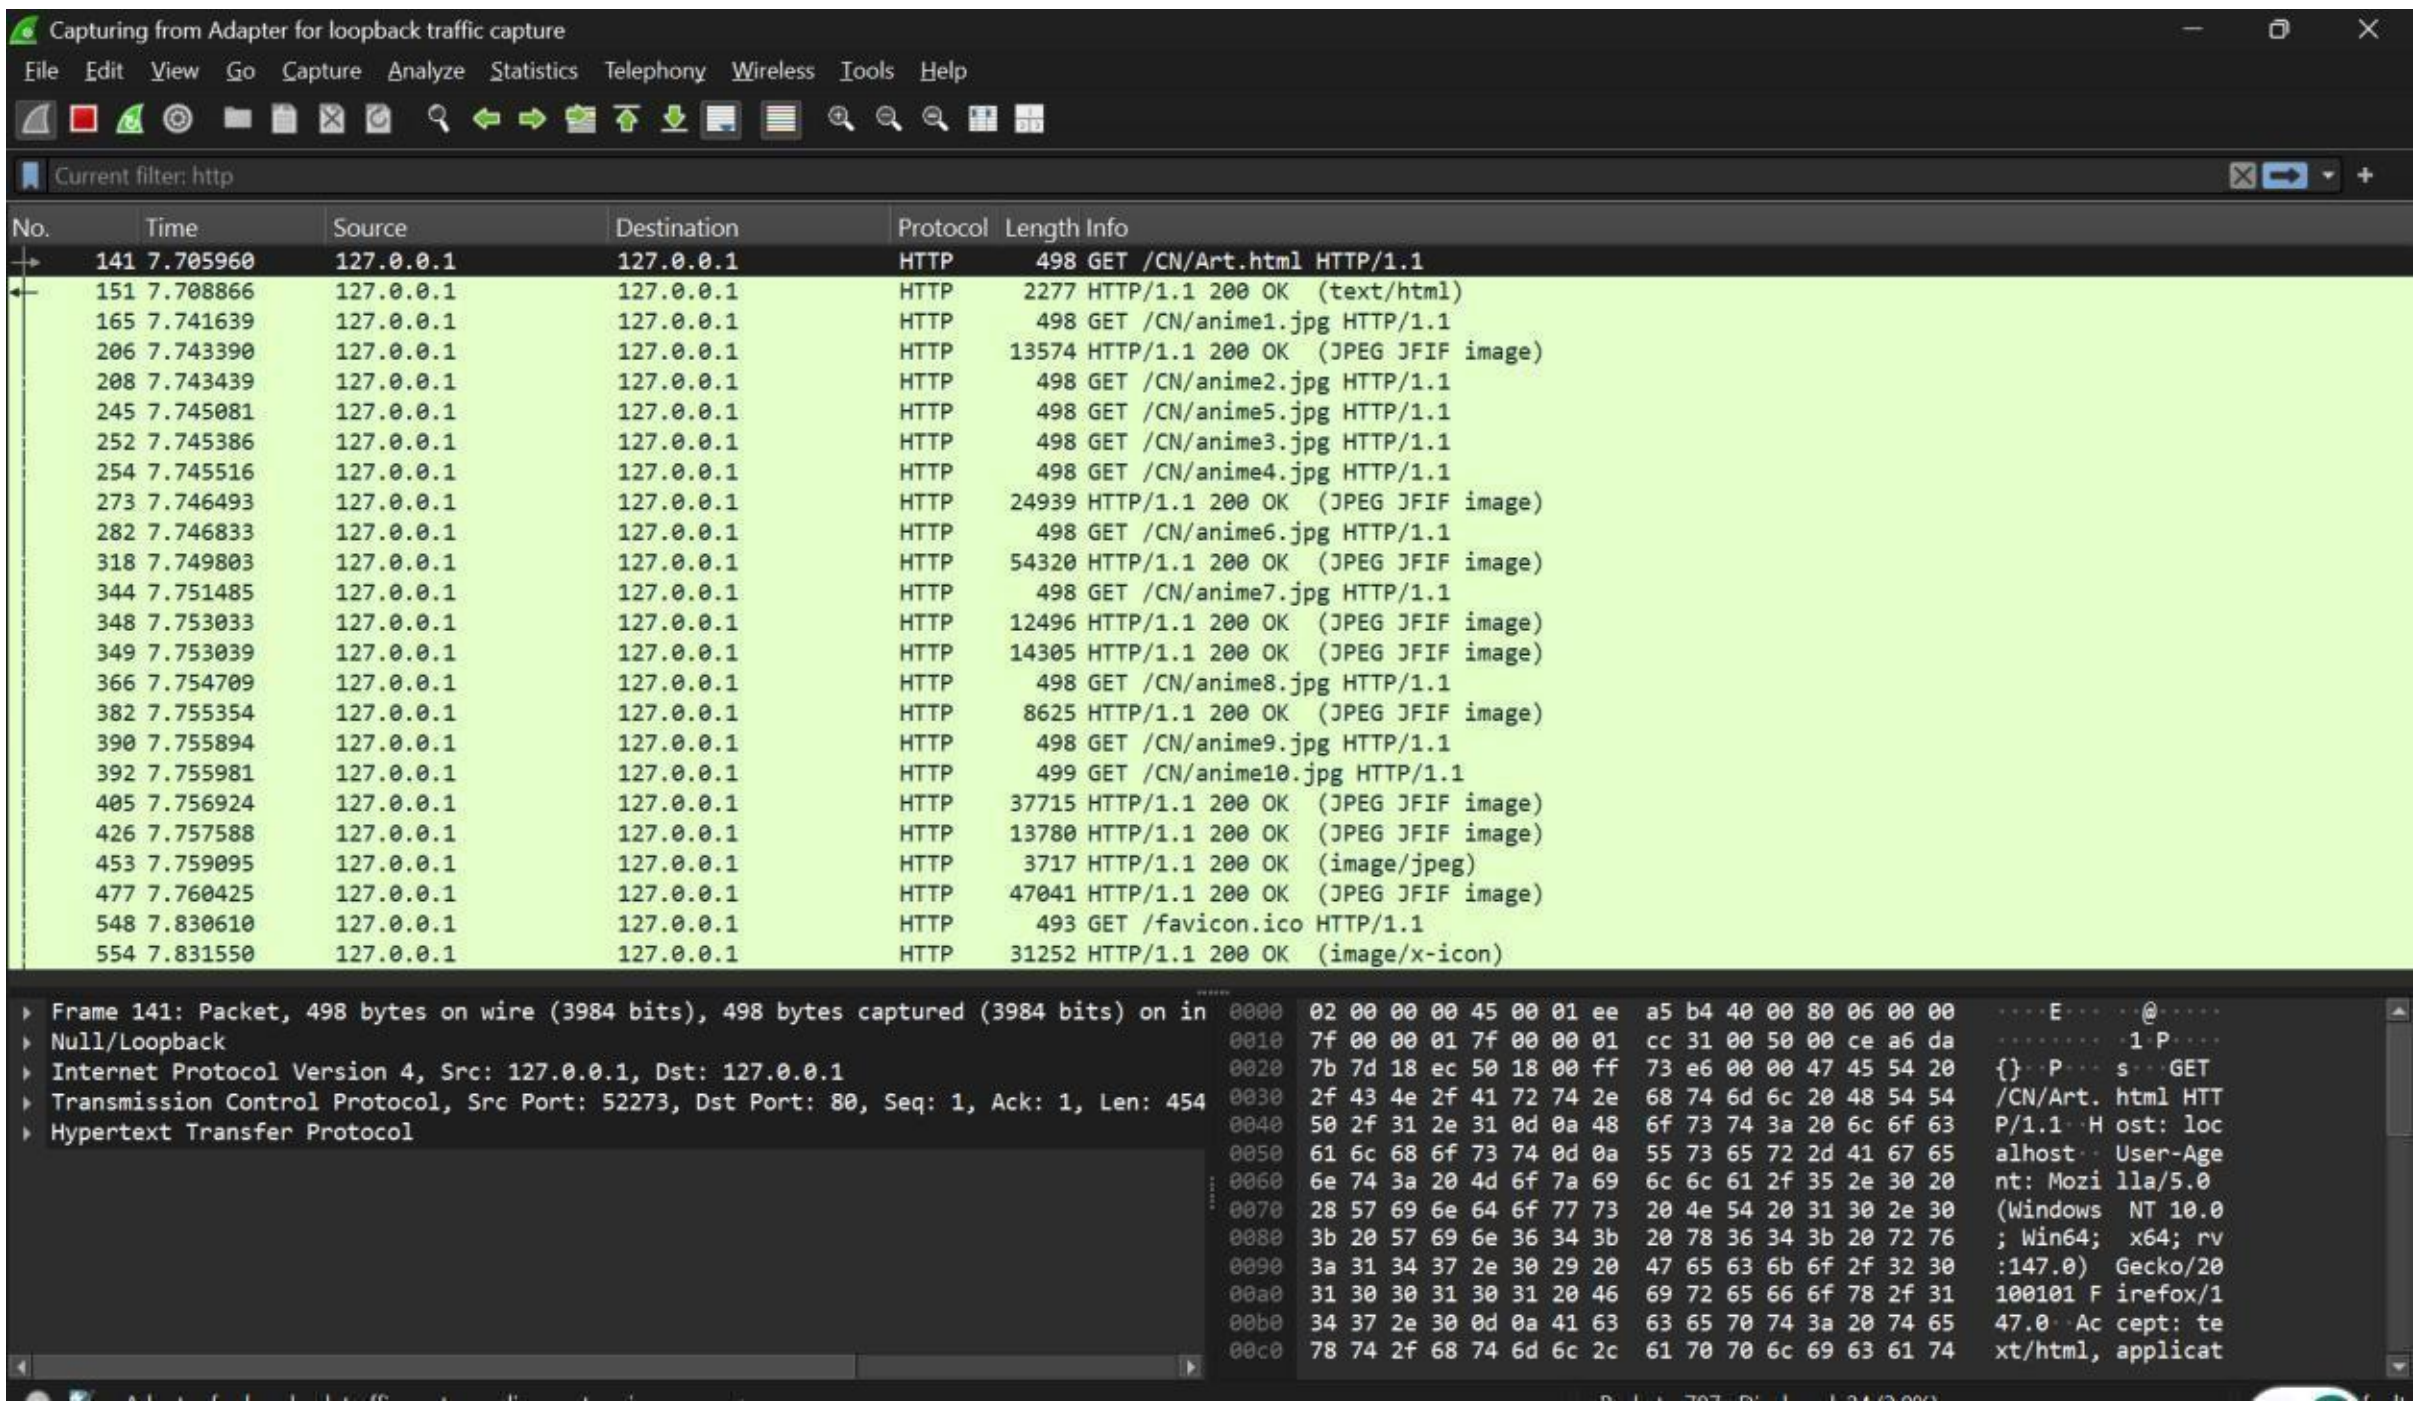

Persistent 6

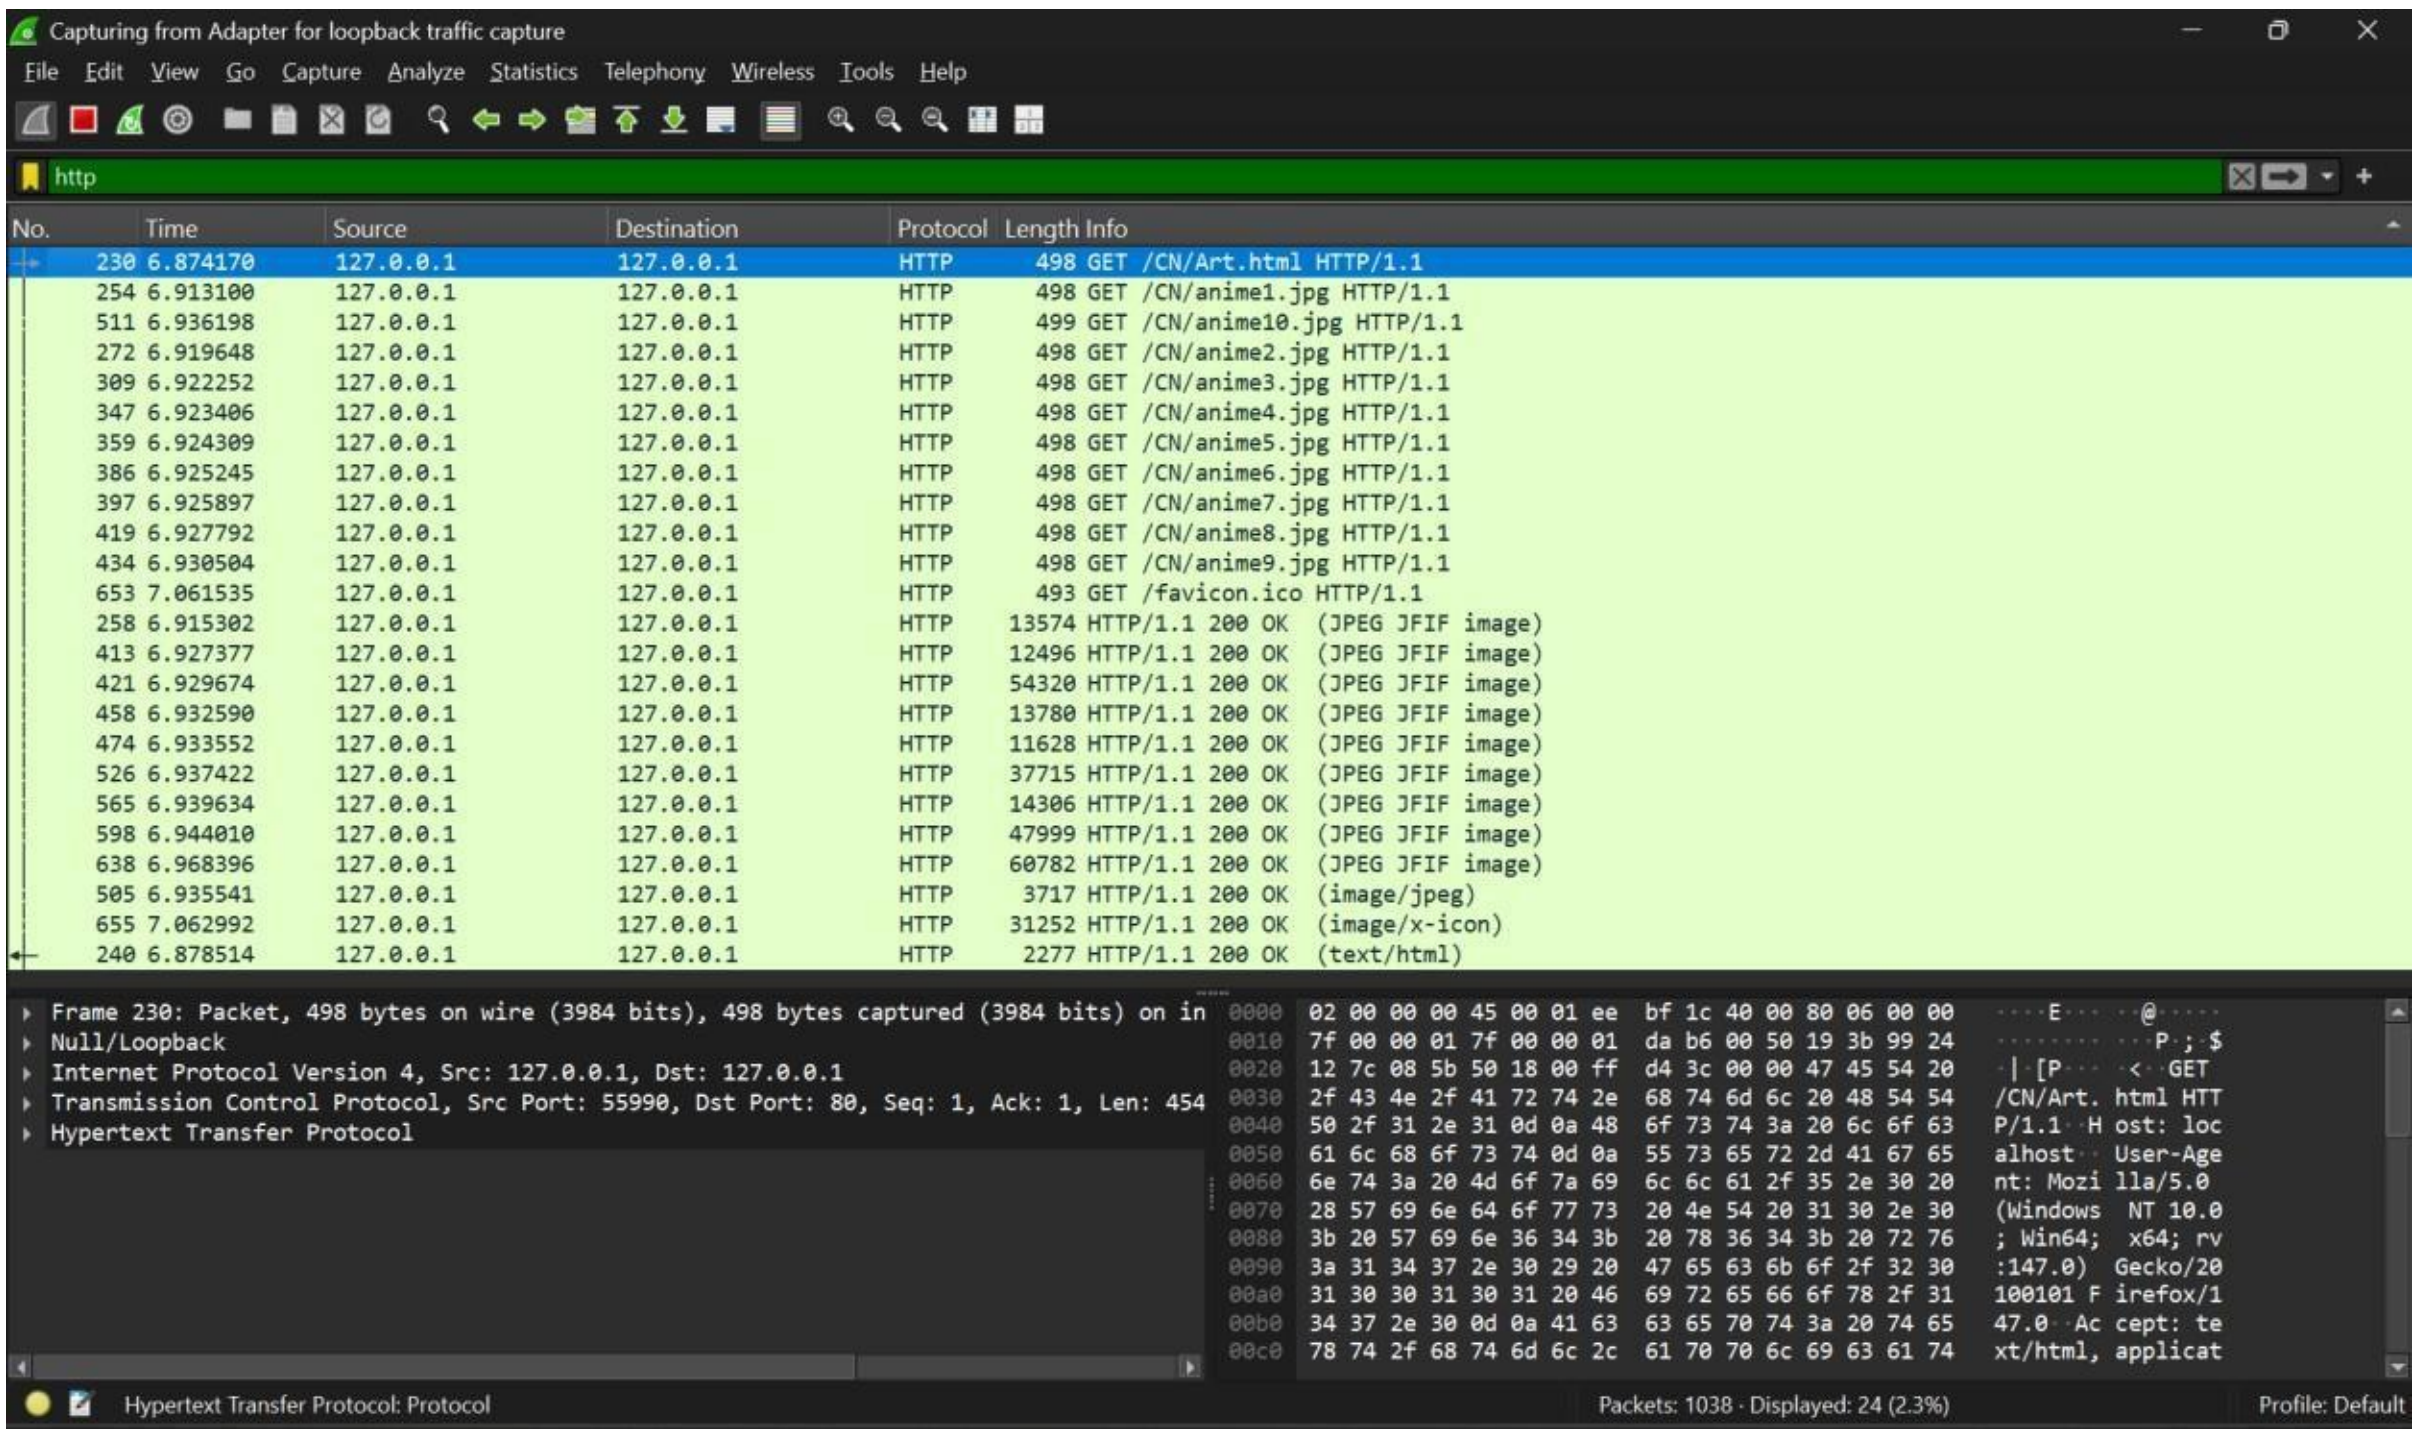

Persistent 8

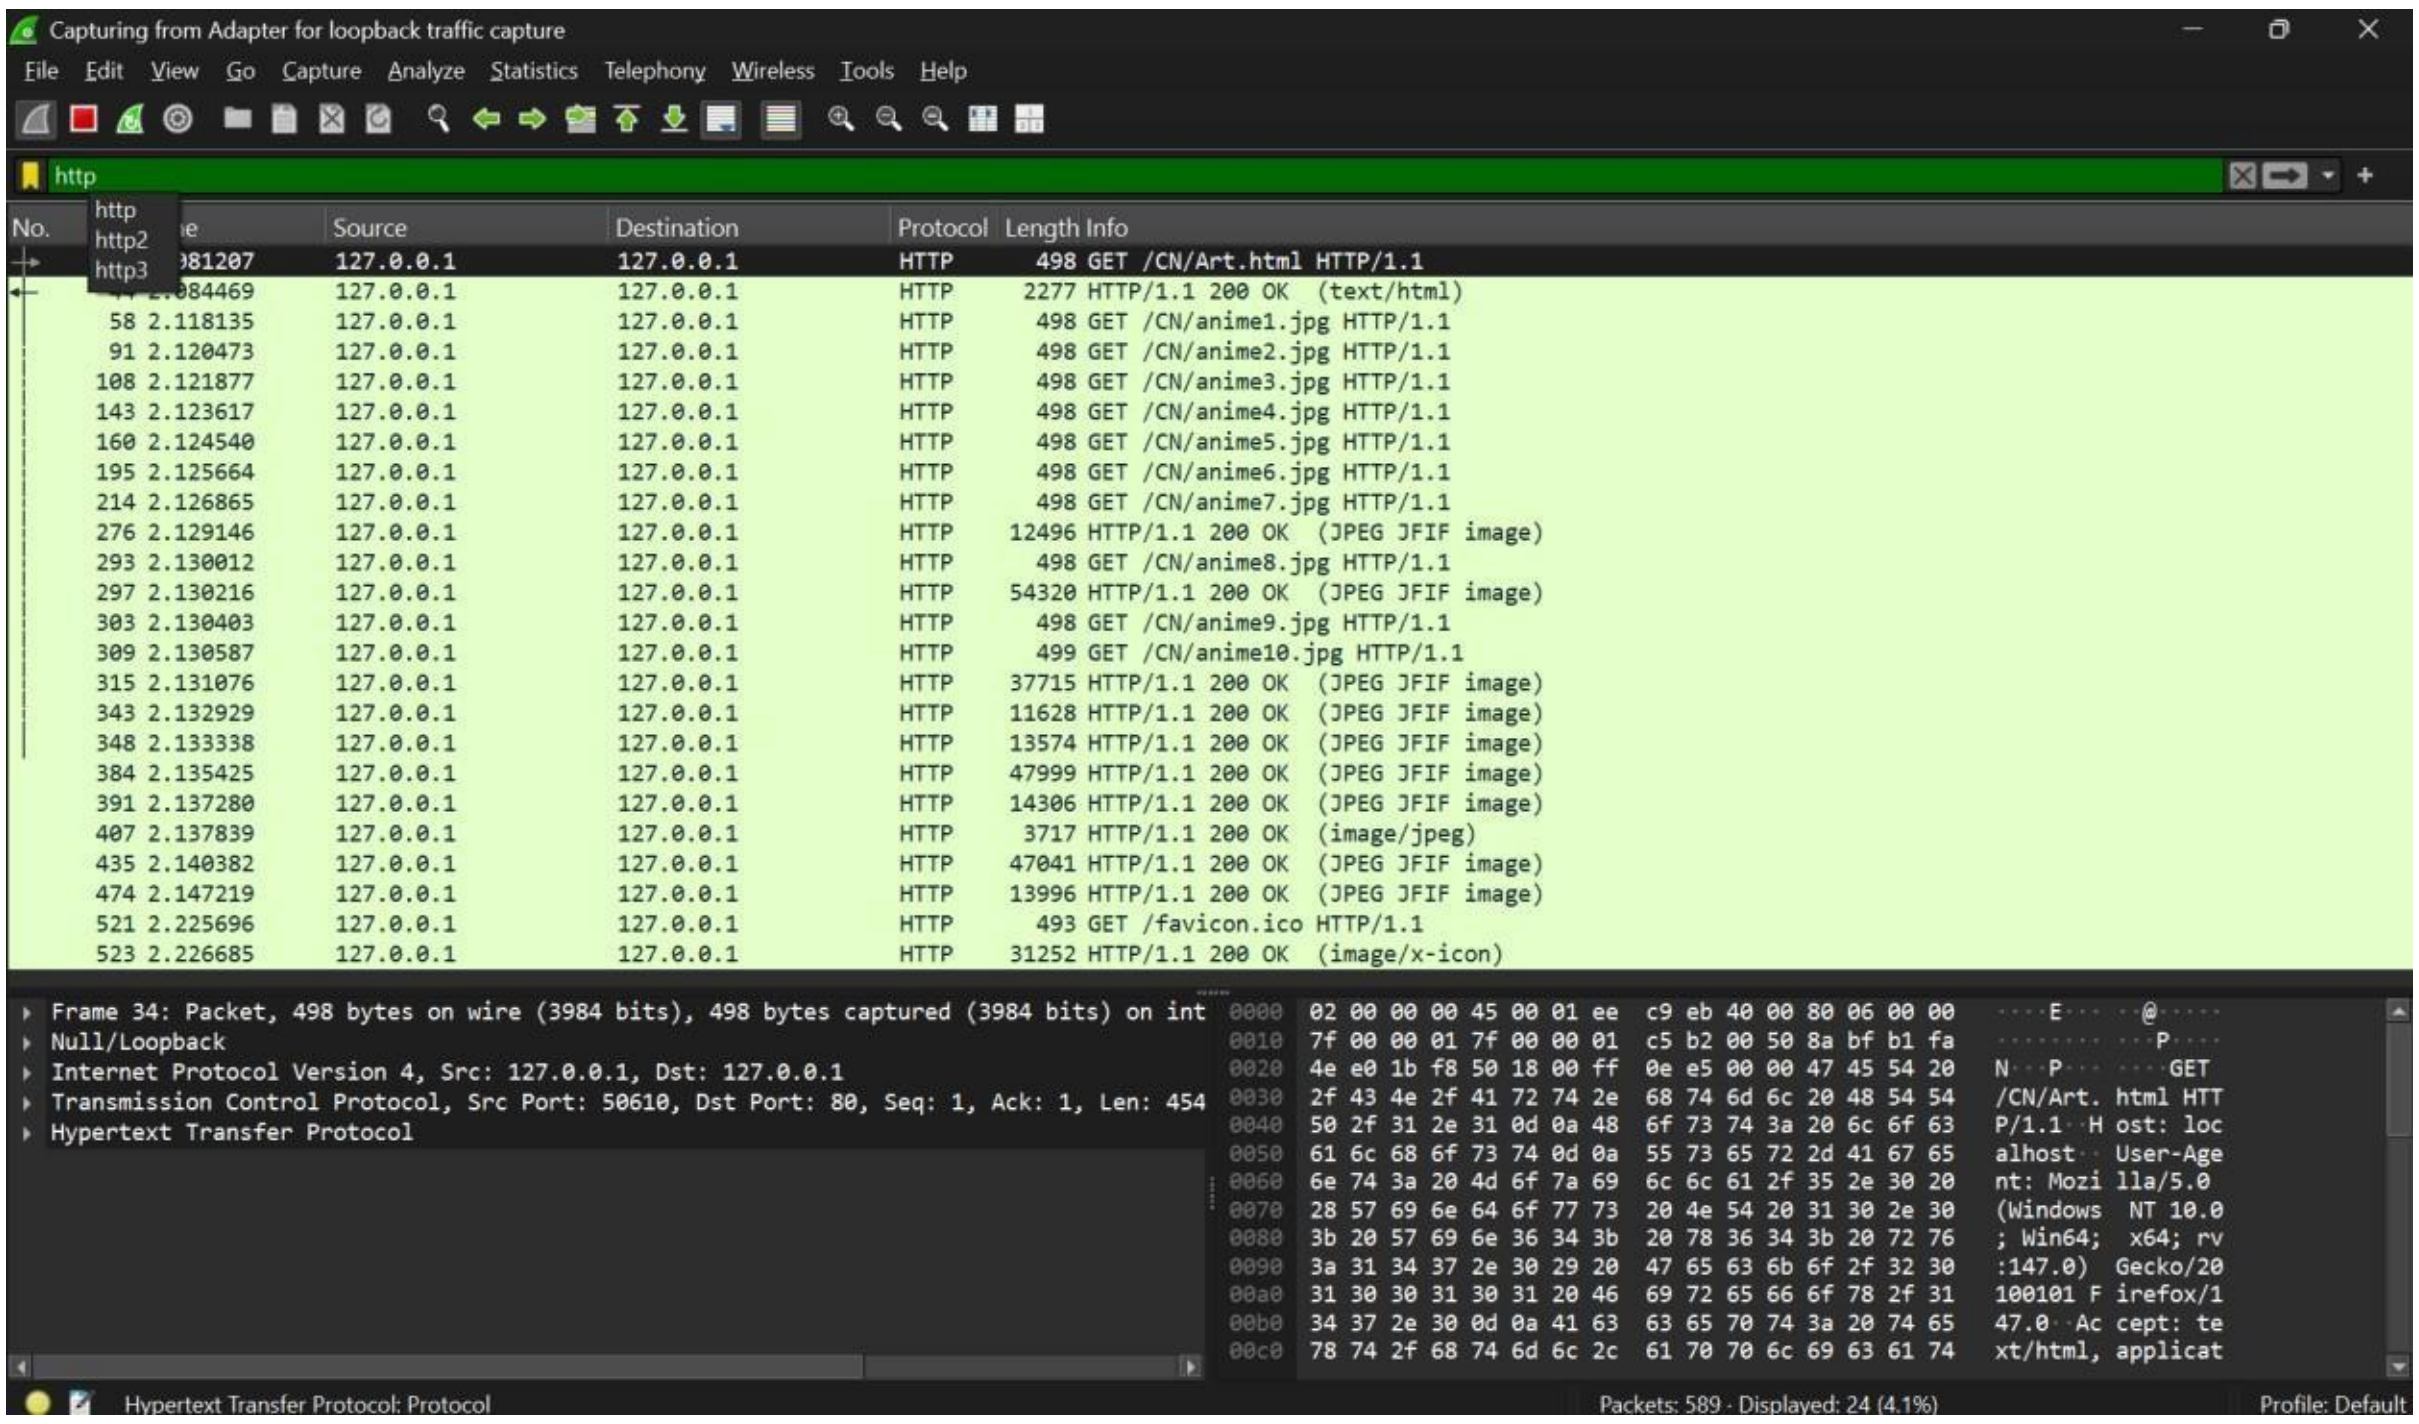

Persistent 10

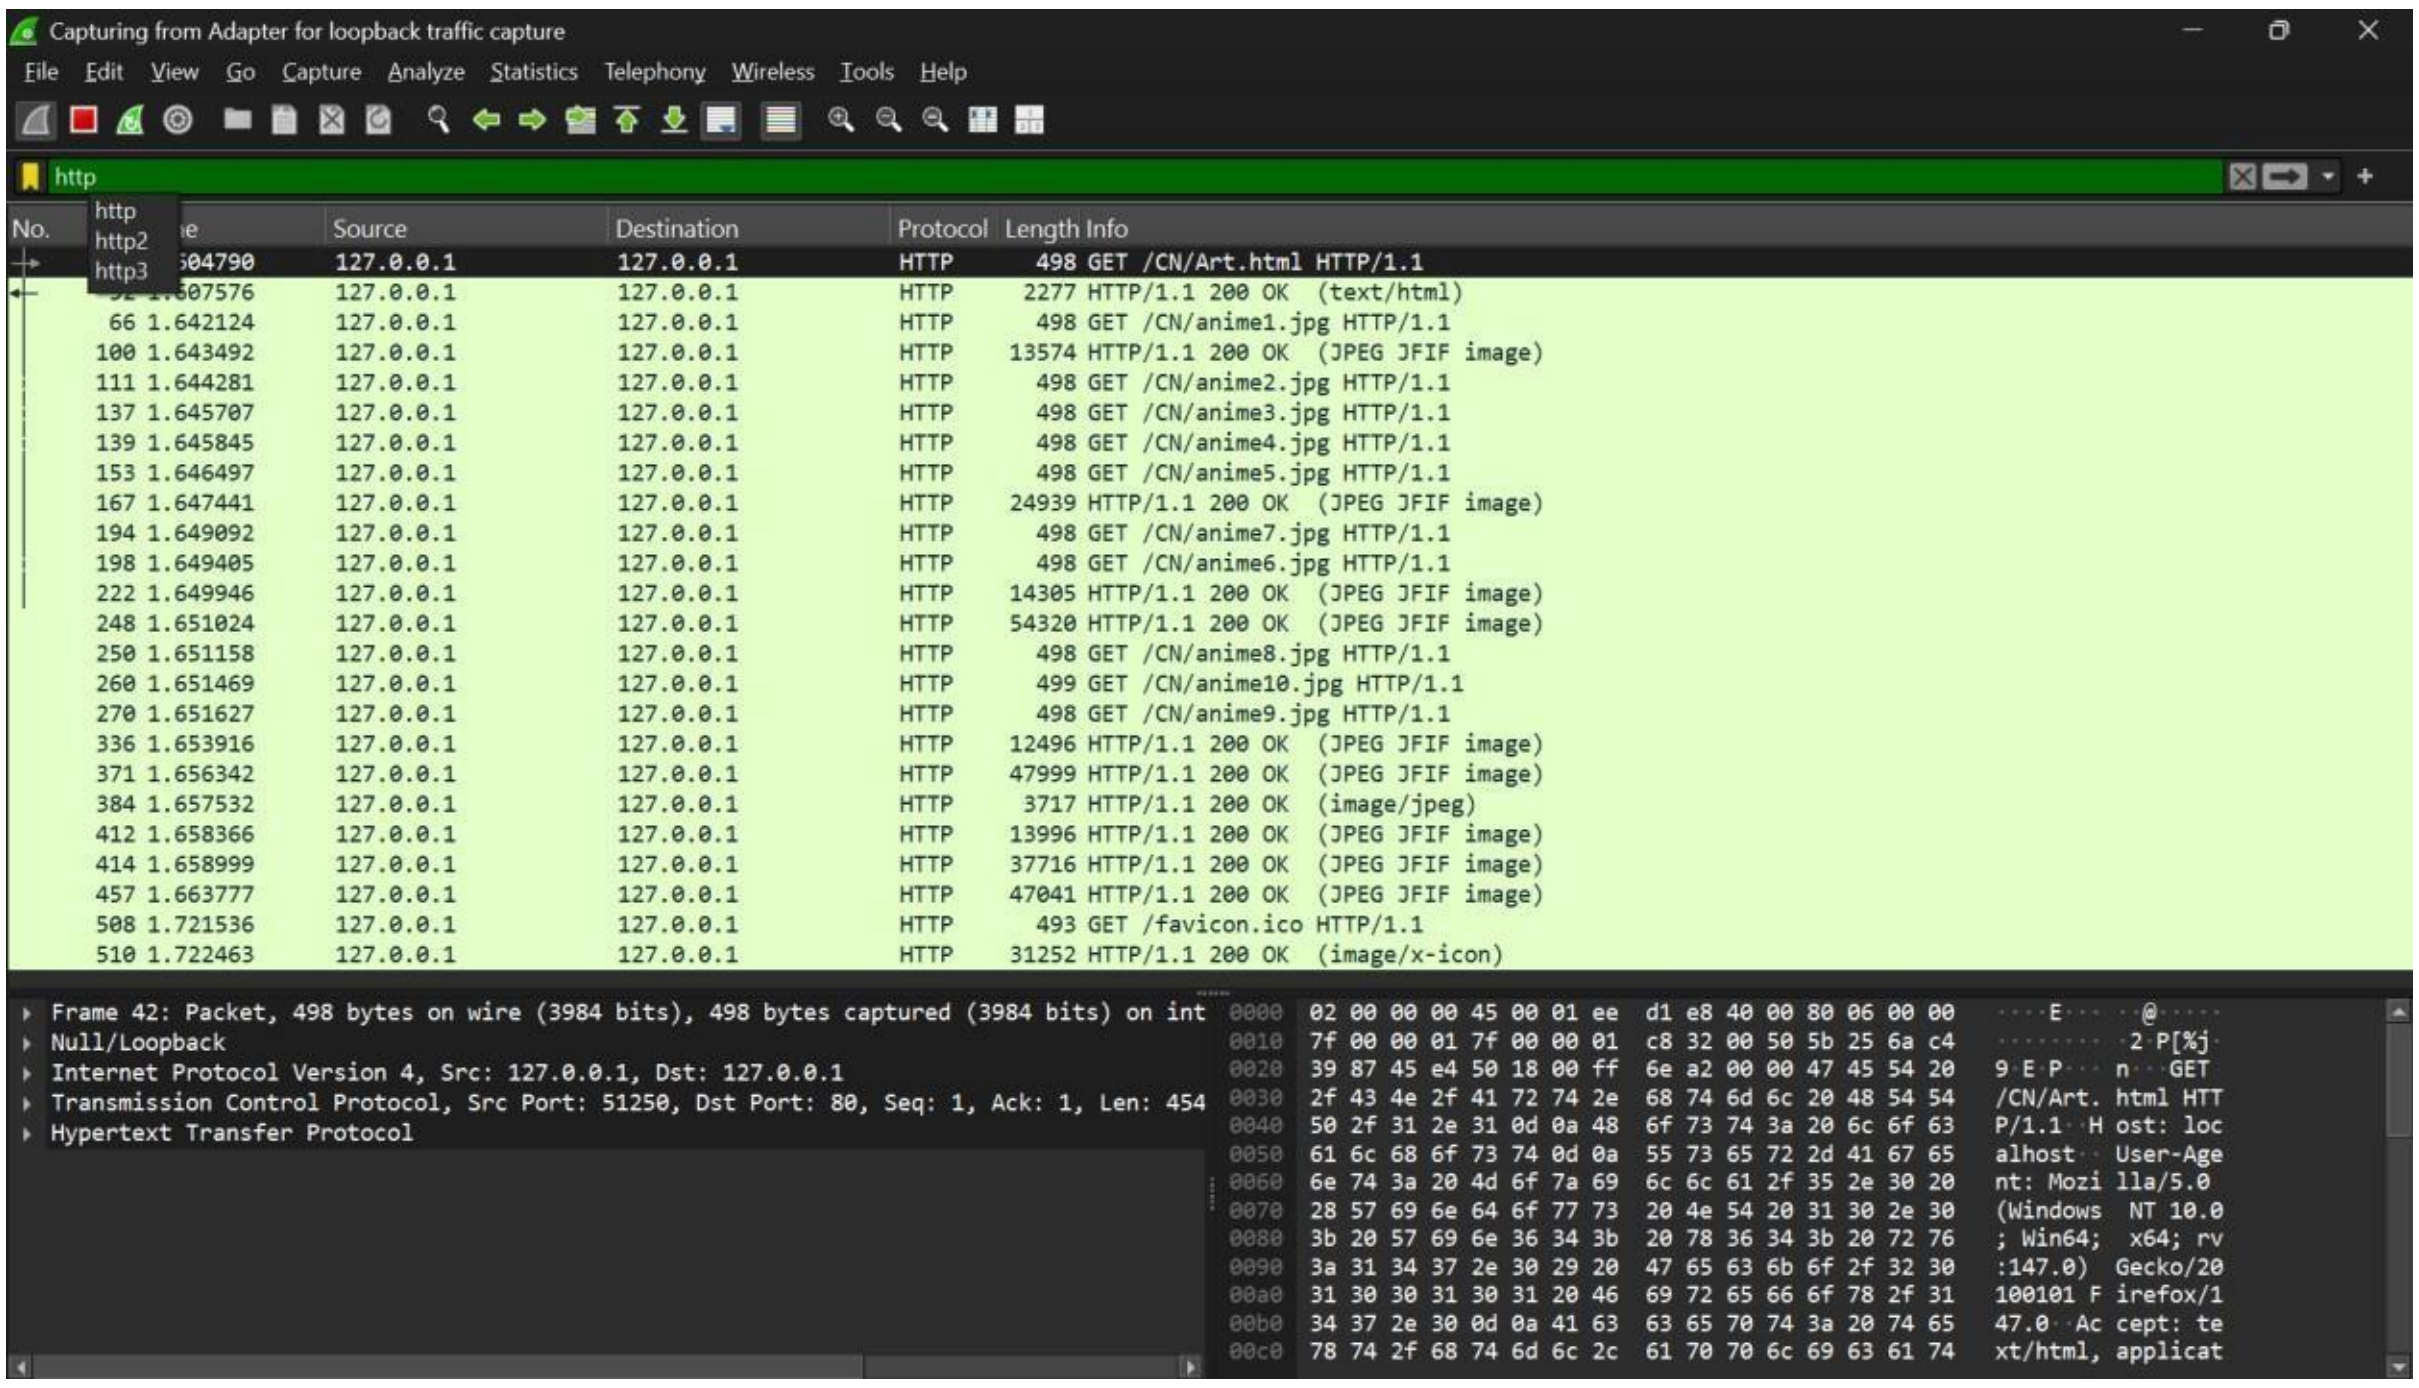

Graph

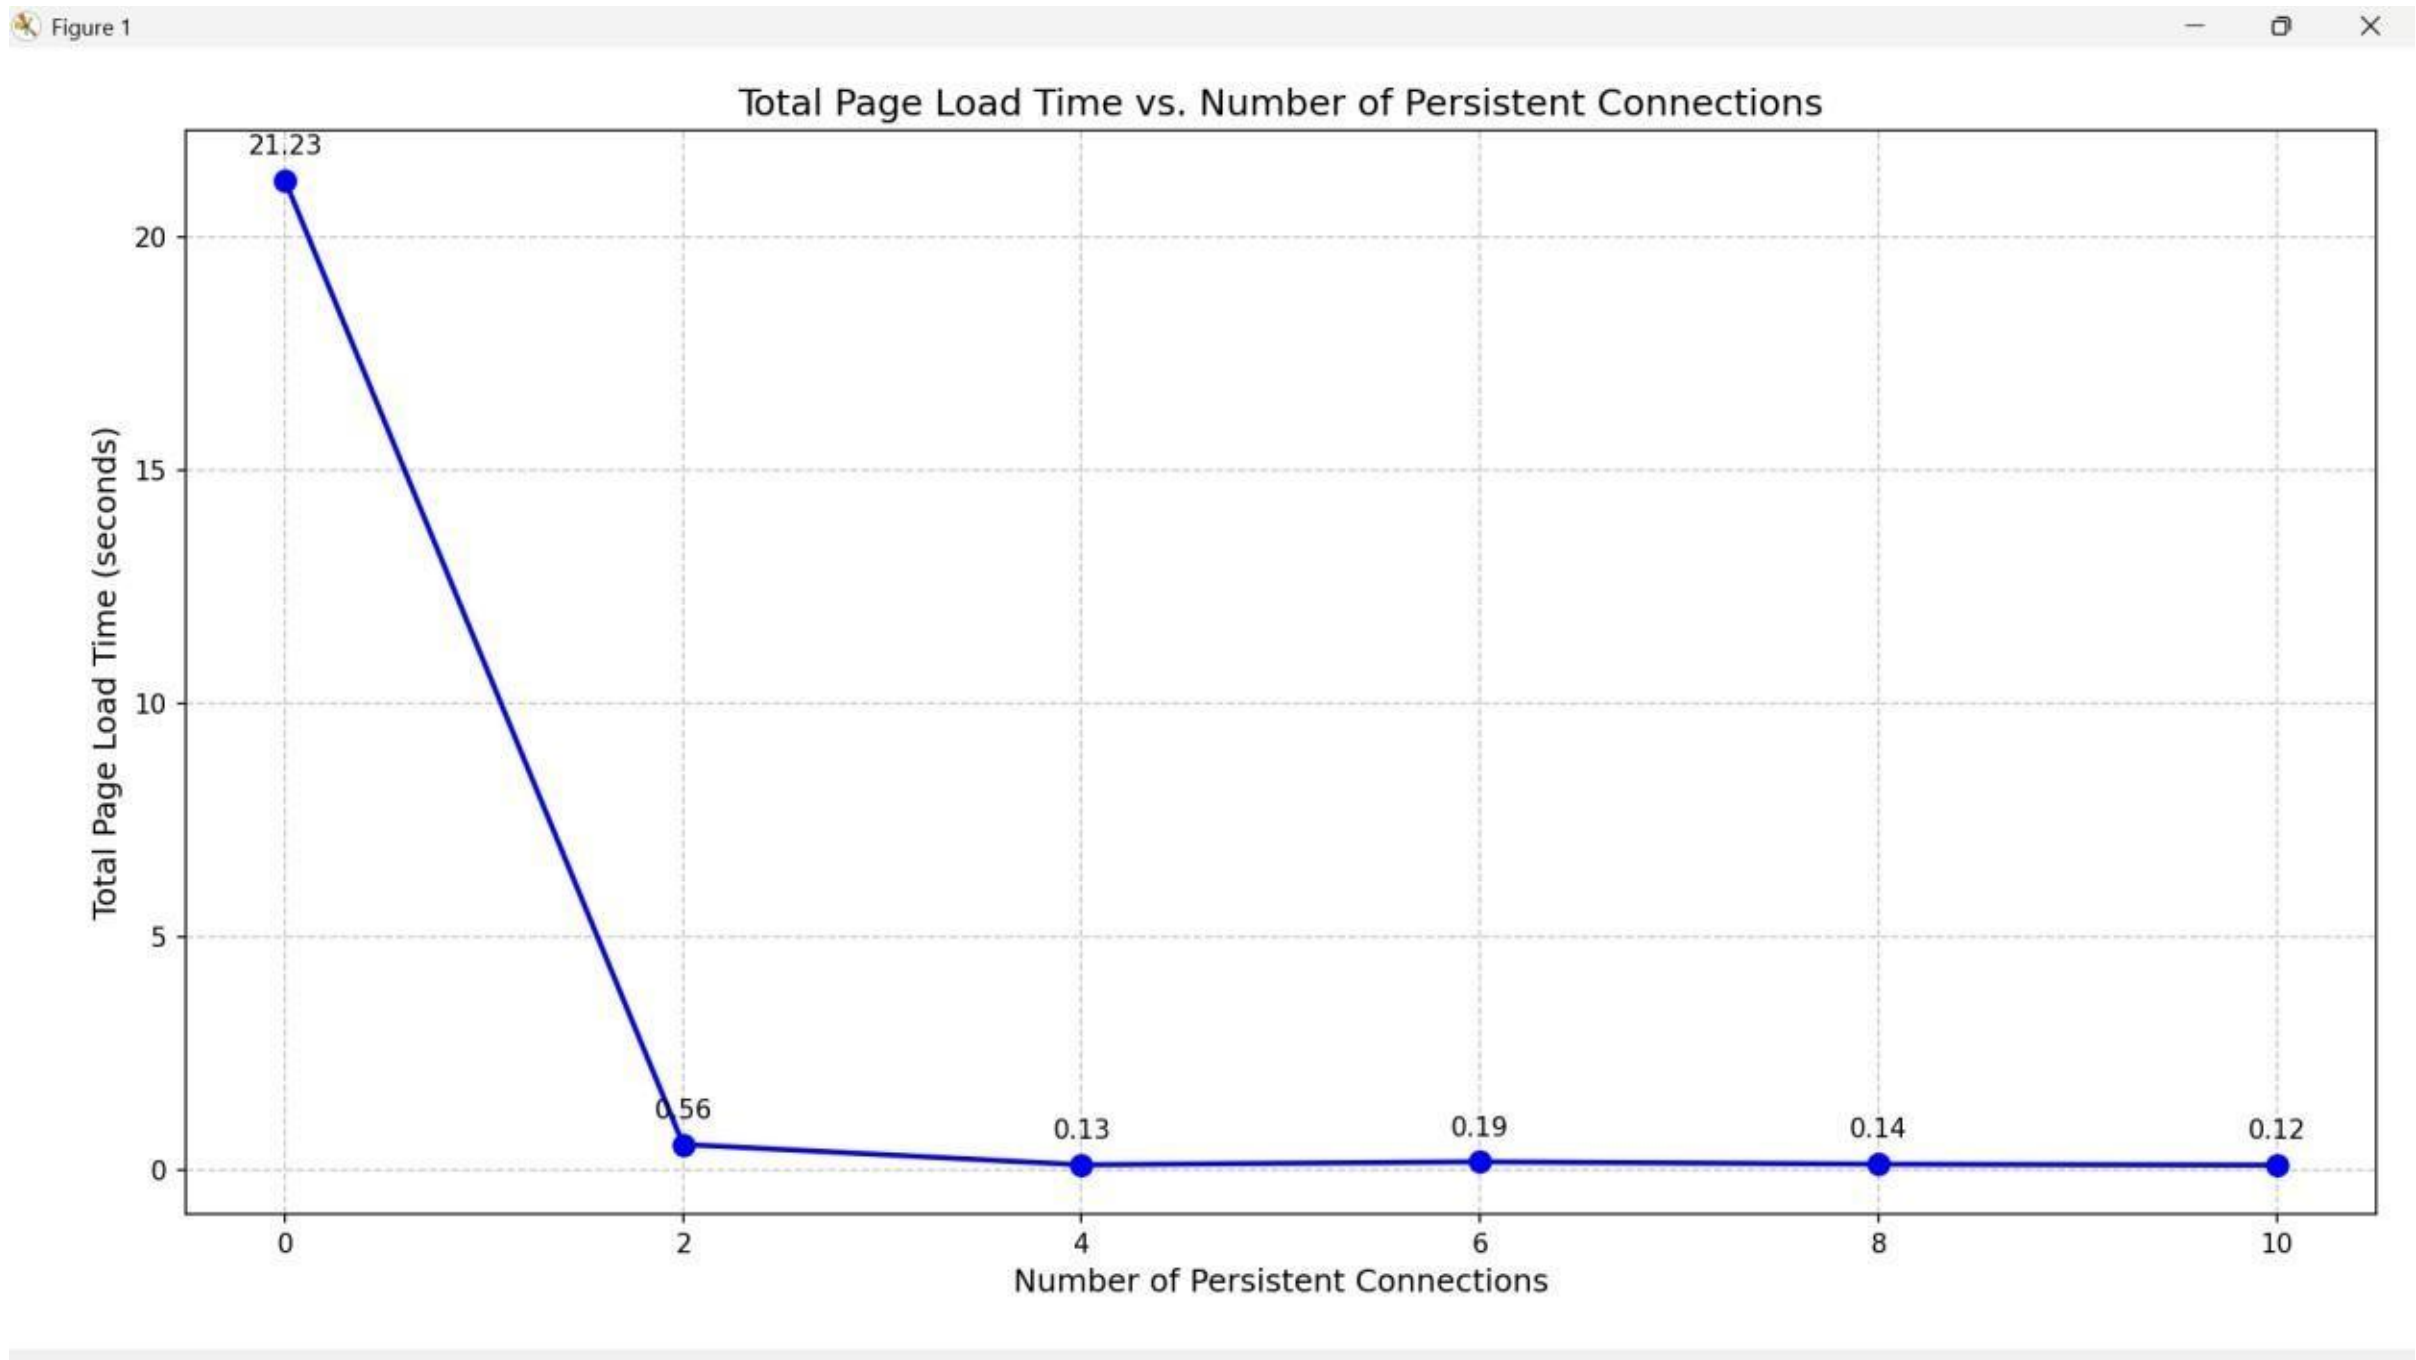

Summary

Persistent HTTP connections (KeepAlive On) greatly reduce page load time compared to nonpersistent connections by reusing the same TCP connection for multiple requests instead of opening a new one for every object. This avoids repeated TCP handshakes and connection setup overhead, which is especially noticeable with many embedded images. As the number of allowed persistent connections increases (from 2 to 10), load time decreases further because the browser can fetch more objects in parallel. Overall, persistent connections improve network efficiency by reducing total packets, latency, and resource usage on both client and server.