


OSSP PRACTICAL 3 AND 4 (14-08-2026)

PROGRAM 1

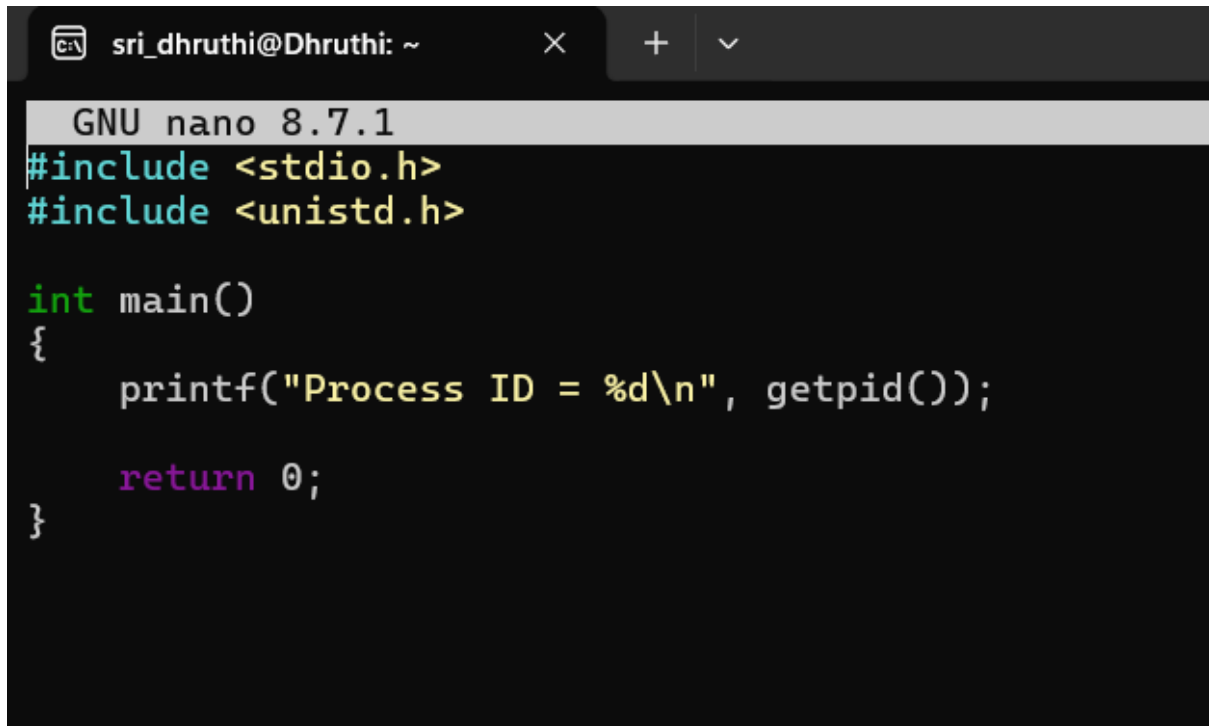


```
GNU nano 8.7.1
#include <stdio.h>
#include <unistd.h>

int main()
{
    printf("Process ID = %d\n", getpid());

    return 0;
}
```

OUTPUT

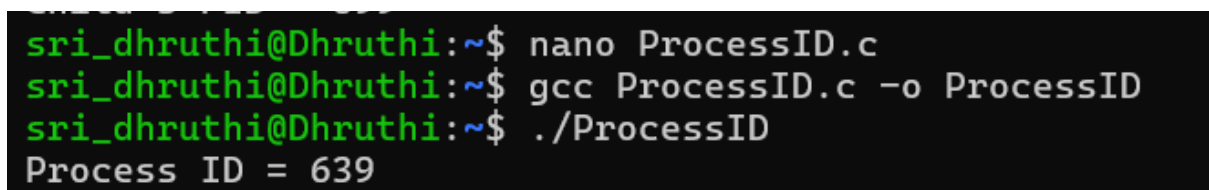

```
sri_dhruthi@Dhruthi:~$ nano ProcessID.c
sri_dhruthi@Dhruthi:~$ gcc ProcessID.c -o ProcessID
sri_dhruthi@Dhruthi:~$ ./ProcessID
Process ID = 639
```

PROGRAM 2

```
sri_dhruthi@Dhruthi: ~  
GNU nano 8.7.1  
#include <stdio.h>  
#include <unistd.h>  
  
int main()  
{  
    pid_t pid = fork();  
  
    if (pid == 0)  
    {  
        printf("Child Process\n");  
        printf("PID = %d\n", getpid());  
    }  
    else  
    {  
        printf("Parent Process\n");  
        printf("PID = %d\n", getpid());  
    }  
  
    return 0;  
}
```

OUTPUT

```
sri_dhruthi@Dhruthi:~$ nano ParentChild.c  
sri_dhruthi@Dhruthi:~$ gcc ParentChild.c -o ParentChild  
sri_dhruthi@Dhruthi:~$ ./ParentChild  
Parent Process  
PID = 512  
Child Process  
PID = 513
```

PROGRAM 3

```
sri_dhruthi@Dhruthi: ~  
GNU nano 8.7.1  
#include <stdio.h>  
#include <unistd.h>  
#include <sys/wait.h>  
  
int main()  
{  
    pid_t pid = fork();  
  
    if (pid == 0)  
    {  
        printf("Child Process Executing...\n");  
        sleep(3);  
        printf("Child Finished\n");  
    }  
    else  
    {  
        wait(NULL);  
        printf("Parent Process Continues\n");  
    }  
  
    return 0;  
}
```

OUTPUT

```
sri_dhruthi@Dhruthi:~$ nano ParentWait.c  
sri_dhruthi@Dhruthi:~$ gcc ParentWait.c -o ParentWait  
sri_dhruthi@Dhruthi:~$ ./ParentWait  
Child Process Executing...  
Child Finished  
Parent Process Continues
```

PROGRAM 4

```
sri_dhruthi@Dhruthi: ~  
GNU nano 8.7.1  
#include <stdio.h>  
#include <unistd.h>  
  
int main()  
{  
    for (int i = 1; i <= 3; i++)  
    {  
        if (fork() == 0)  
        {  
            printf("Child %d PID = %d\n", i, getpid());  
            return 0;  
        }  
    }  
    return 0;  
}
```

OUTPUT

```
sri_dhruthi@Dhruthi:~$ nano MultipleChildProcess.c  
sri_dhruthi@Dhruthi:~$ gcc MultipleChildProcess.c -o MultipleChildProcess  
sri_dhruthi@Dhruthi:~$ ./MultipleChildProcess  
Child 1 PID = 597  
Child 2 PID = 598  
Child 3 PID = 599
```

PROGRAM 5

```
GNU nano 8.7.1
#include <stdio.h>
#include <unistd.h>

int main()
{
    printf("Before execlp()\n");

    execlp("ls", "ls", "-l", NULL);

    printf("This will not execute.\n");

    return 0;
}
```

OUTPUT

```
sri_dhruthi@Dhruthi:~$ nano ExecExample.c
sri_dhruthi@Dhruthi:~$ gcc ExecExample.c -o ExecExample
sri_dhruthi@Dhruthi:~$ ./ExecExample
Before execvp()
total 396
```