


Task : 2

Tasks

1.

Open your Linux terminal and use the `pwd`, `ls`, and `cd` commands to navigate to your Downloads folder and list all files inside it.

>

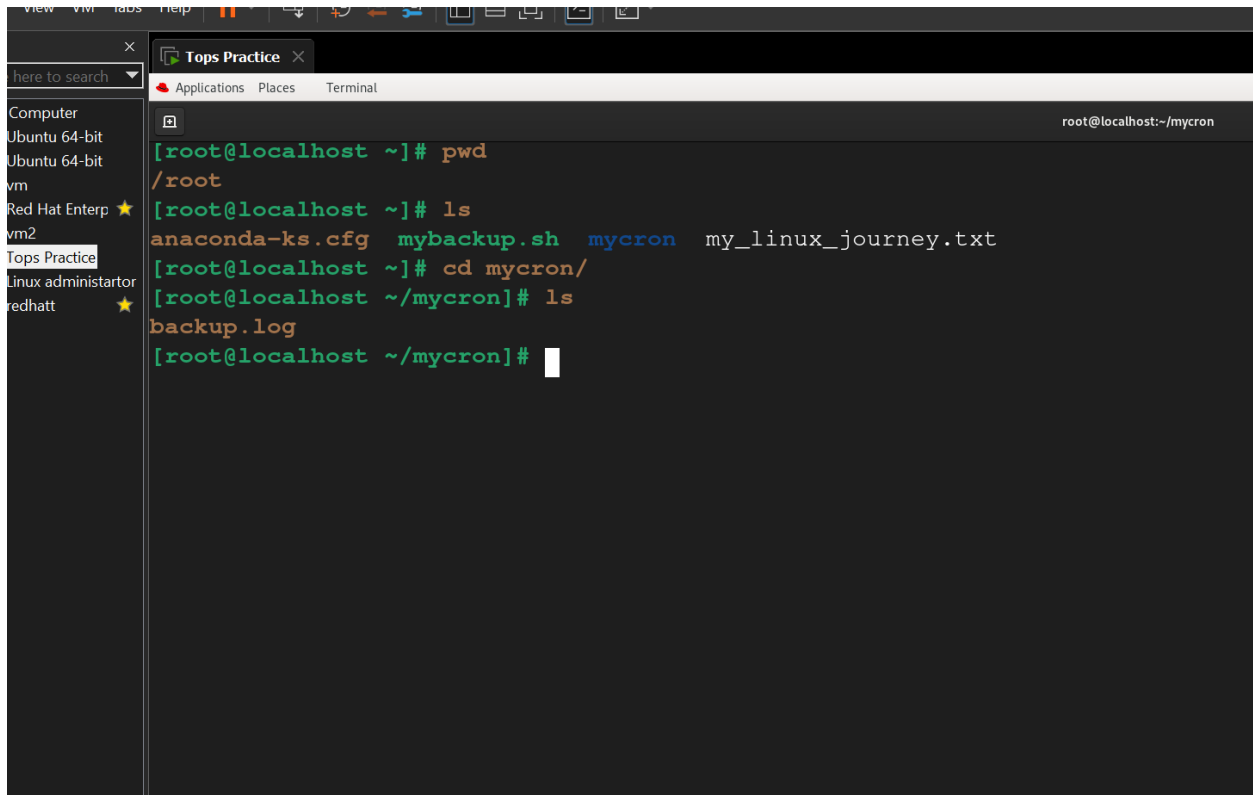

The screenshot shows a Linux terminal window titled "Tops Practice". The terminal output is as follows:


```
[root@localhost ~]# pwd
/root
[root@localhost ~]# ls
anaconda-ks.cfg  mybackup.sh  mycron  my_linux_journey.txt
[root@localhost ~]# cd mycron/
[root@localhost ~/mycron]# ls
backup.log
[root@localhost ~/mycron]#
```

The terminal window has a sidebar on the left with a search bar and a list of applications including "Computer", "Ubuntu 64-bit", "vm", "Red Hat Enterprise Linux 7", "Tops Practice", "Linux administrator", and "redhat". The top bar shows "Applications", "Places", and "Terminal".

2.

Create a new directory called 'music_playlist' inside your home directory using the `mkdir` command, then use the `touch` command to create three empty files named `song1.mp3`, `song2.mp3`, and `song3.mp3` inside it.


>

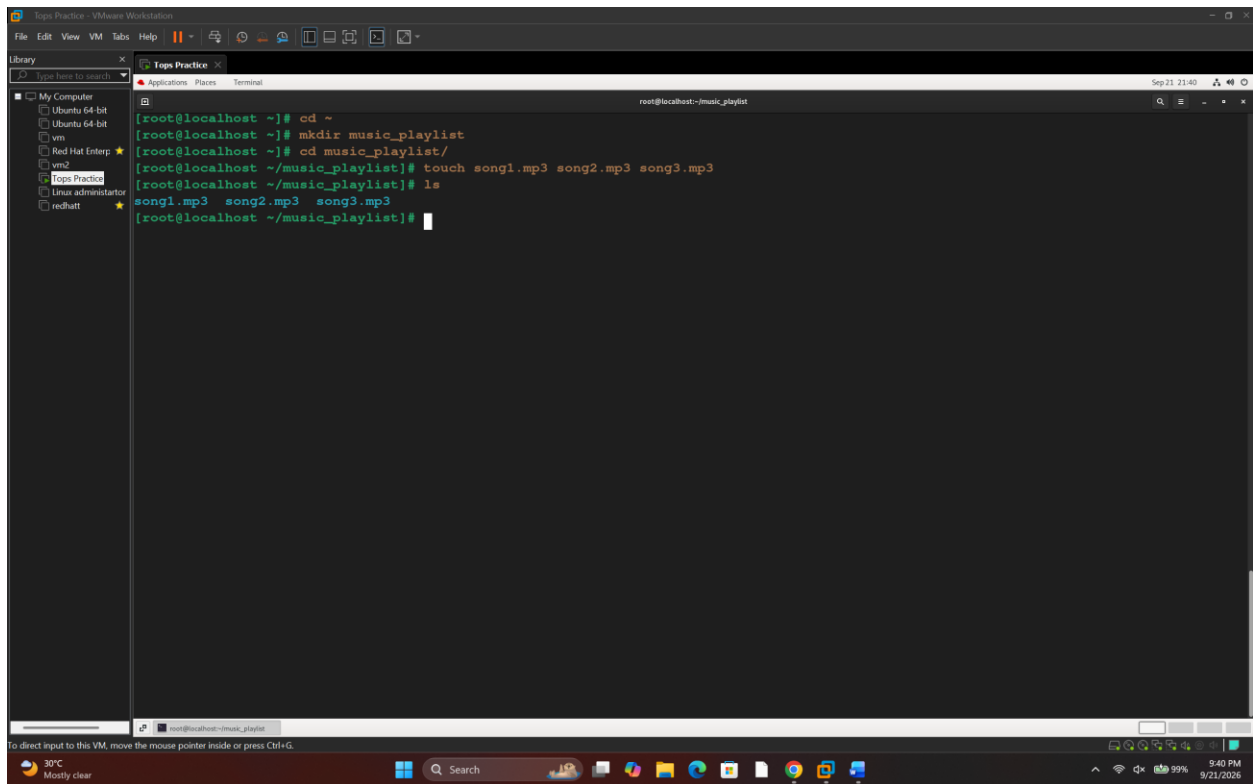

3.

Use the `cp` command to copy all files from your 'music_playlist' directory to a new directory called 'backup_playlist', then use the `ls` command to verify the files were copied.

>

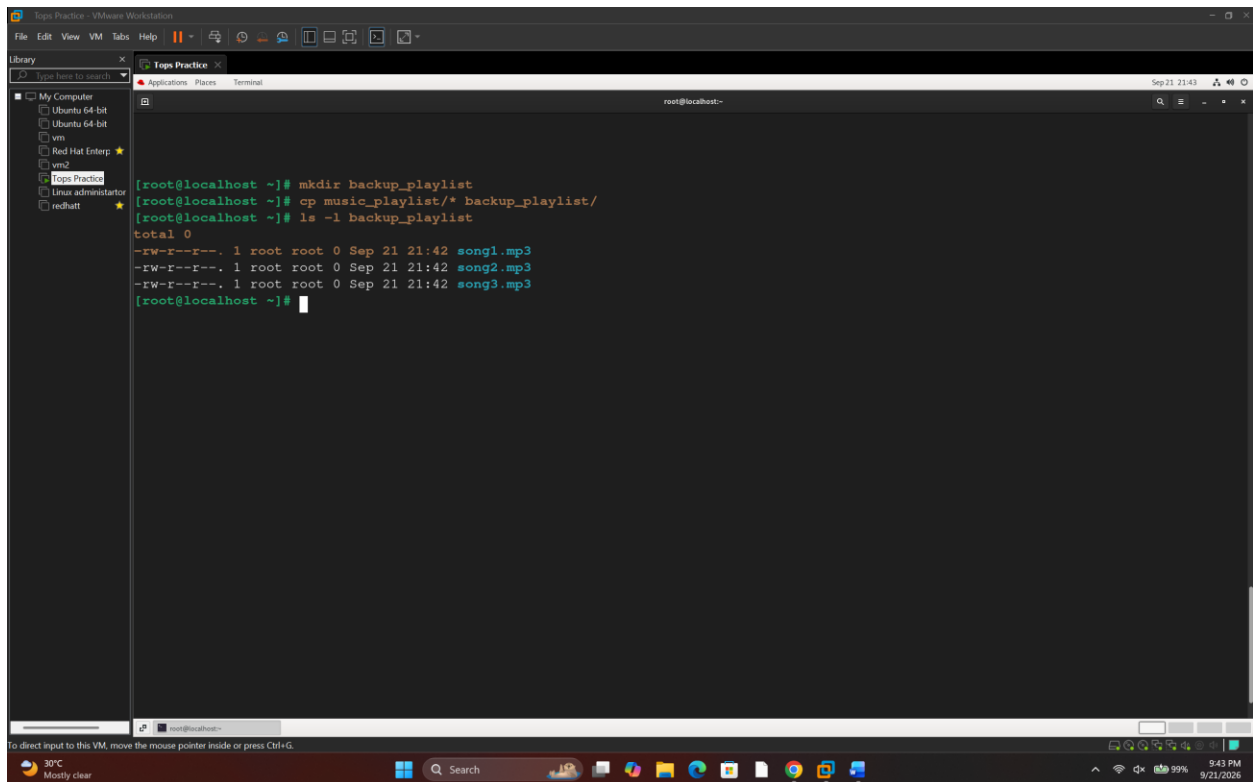


4.

Use the mv command to rename 'song1.mp3' to 'favorite_song.mp3' inside the 'music_playlist' directory, and then use the rm command to delete 'song3.mp3' from the same directory.

Hint: Make sure you are inside the correct directory before running mv or rm.

>

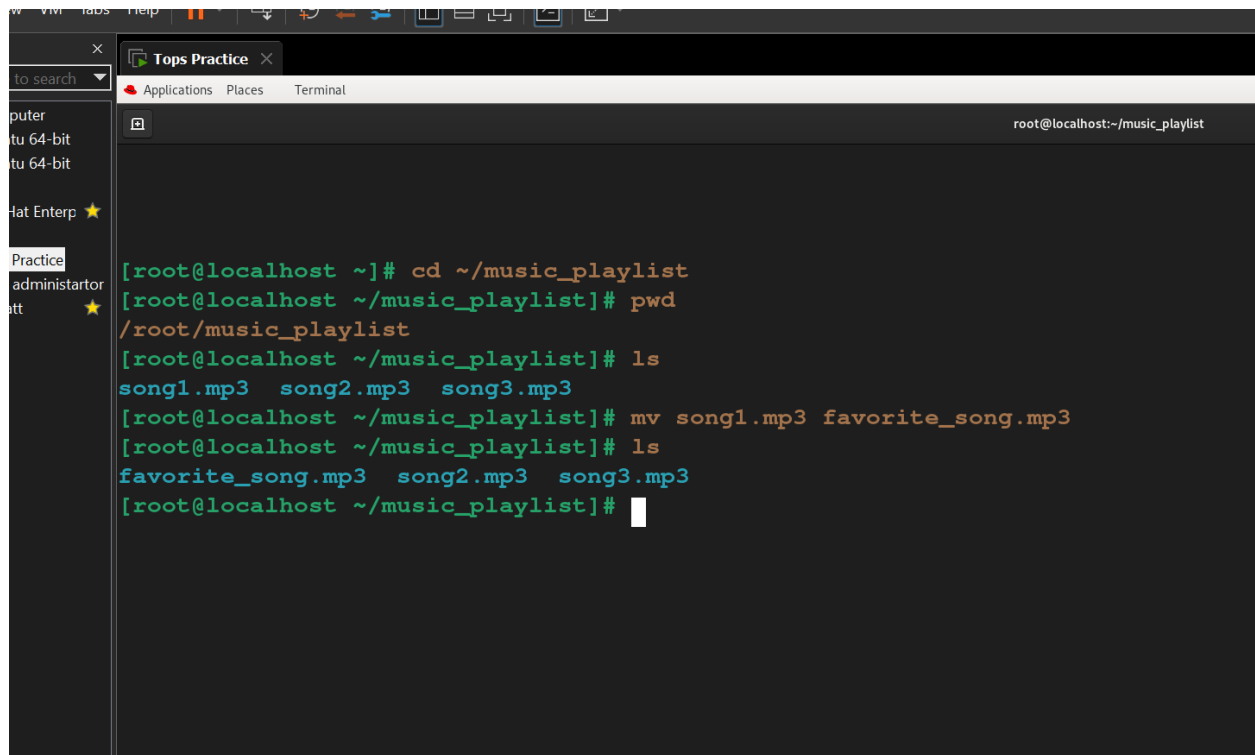

```
[root@localhost ~]# cd ~/music_playlist
[root@localhost ~/music_playlist]# pwd
/root/music_playlist
[root@localhost ~/music_playlist]# ls
song1.mp3  song2.mp3  song3.mp3
[root@localhost ~/music_playlist]# mv song1.mp3 favorite_song.mp3
[root@localhost ~/music_playlist]# ls
favorite_song.mp3  song2.mp3  song3.mp3
[root@localhost ~/music_playlist]#
```