

Task : 3

Tasks

1.

Install Ubuntu Server (or CentOS) on VirtualBox or VMware, take a screenshot of your running login screen, and save it as install_success.png.

>


In VMware/VirtualBox :

1. Linux ISO select it.
2. Create a New Virtual Machine .
3. RAM/CPU allocate it.
4. Boot ISO.
5. Complete the Linux install .
6. Boot the Vm.
7. Login in linux .

2.

Change the hostname of your Linux VM to 'myfoodiebox' using the hostnamectl command, then verify the change by running the hostname command.

>

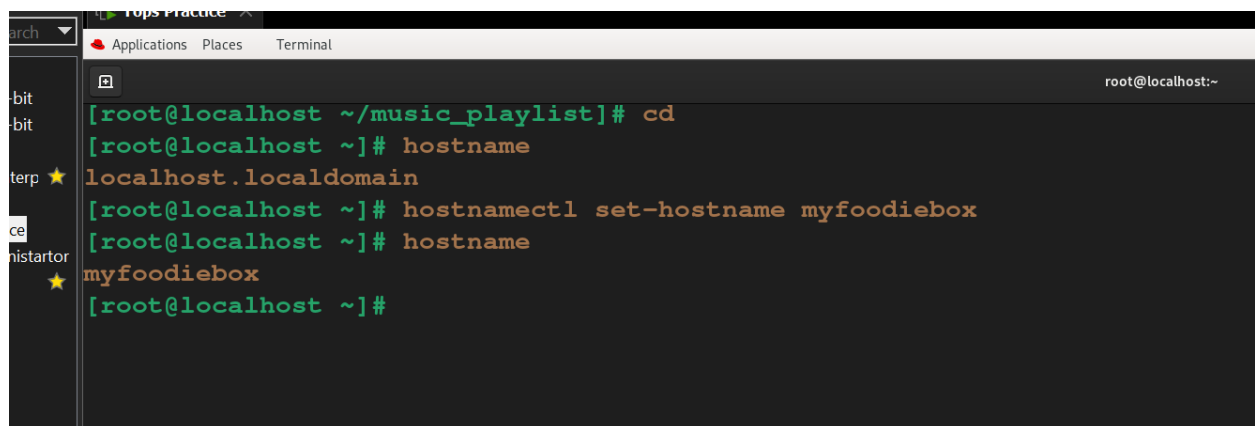


```
arch
Applications Places Terminal
[root@localhost ~/music_playlist]# cd
[root@localhost ~]# hostname
localhost.localdomain
[root@localhost ~]# hostnamectl set-hostname myfoodiebox
[root@localhost ~]# hostname
myfoodiebox
[root@localhost ~]#
```

3.

Configure a static IP address for your VM's network interface (e.g., enp0s3 or eth0) so that it always gets the same IP on reboot.

Hint: Edit /etc/netplan/*.yaml (Ubuntu) or /etc/sysconfig/network-scripts/ifcfg-eth0 (CentOS), then restart networking.

>

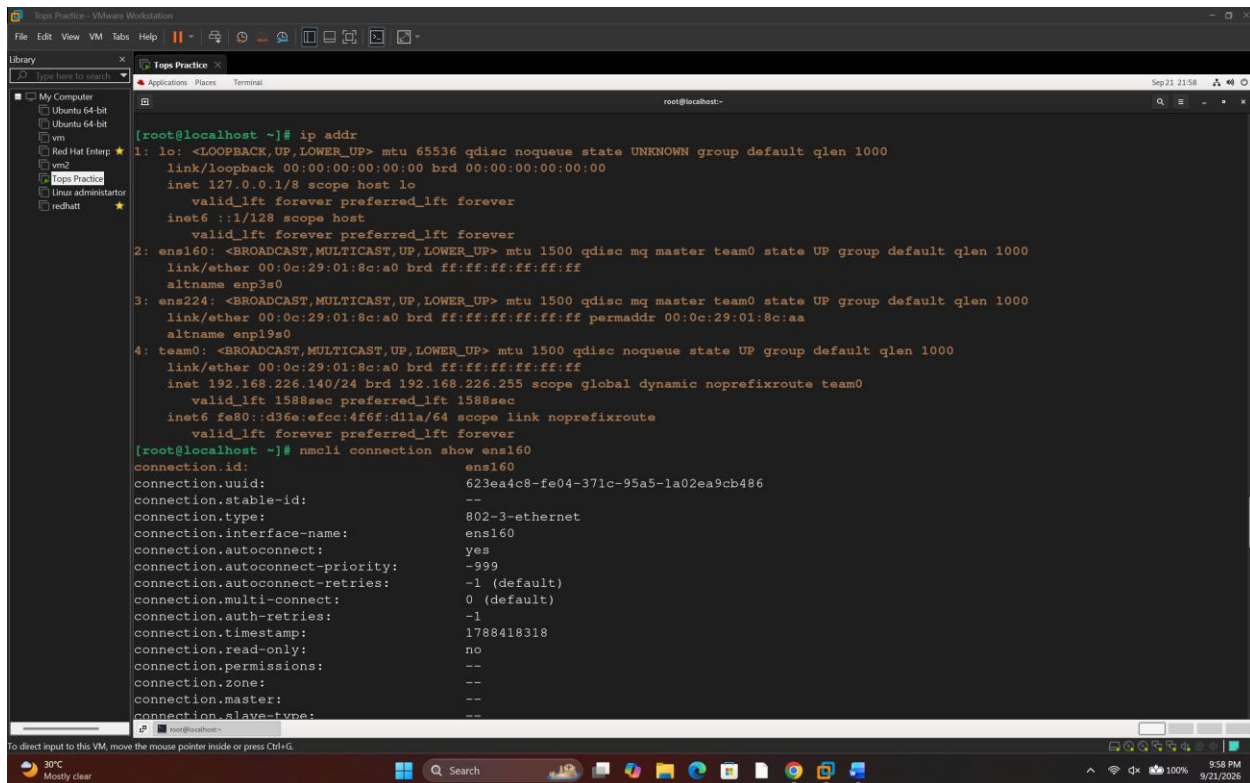

```
[root@localhost ~]# ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host
        valid_lft forever preferred_lft forever
2: ens160: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc mq master team0 state UP group default qlen 1000
    link/ether 00:0c:29:01:8c:a0 brd ff:ff:ff:ff:ff:ff
    altname enp3s0
3: ens224: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc mq master team0 state UP group default qlen 1000
    link/ether 00:0c:29:01:8c:a0 brd ff:ff:ff:ff:ff:ff permaddr 00:0c:29:01:8c:aa
    altname enp19a0
4: team0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc noqueue state UP group default qlen 1000
    link/ether 00:0c:29:01:8c:a0 brd ff:ff:ff:ff:ff:ff
    inet 192.168.226.140/24 brd 192.168.226.255 scope global dynamic noprefixroute team0
        valid_lft 1588sec preferred_lft 1588sec
    inet6 fe80::d36e:efcc:4f6f:d1a/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
[root@localhost ~]# nmcli connection show ens160
connection.id:           ens160
connection.uuid:         623ea4c8-fe04-371c-95a5-1a02ea9cb486
connection.stable-id:    --
connection.type:         802-3-ethernet
connection.interface-name: ens160
connection.autoconnect:  yes
connection.autoconnect-priority: -999
connection.autoconnect-retries: -1 (default)
connection.multi-connect: 0 (default)
connection.auth-retries: -1
connection.timestamp:    1788418318
connection.read-only:    no
connection.permissions:  --
connection.zone:         --
connection.master:       --
connection.slave-type:   --
```

```
proxy.method: none
proxy.browser-only: no
proxy.pac-url: --
proxy.pac-script: --
[root@localhost ~]# nmcli connection modify ens160 ipv4.method manual ipv4.addresses 192.168.226.150/24 ipv4.gateway 192.168.226.2 ip
v4.dns 8.8.8.8
[root@localhost ~]# nmcli connection down ens160
Error: 'ens160' is not an active connection.
Error: no active connection provided.
[root@localhost ~]# nmcli connection up ens160
Connection successfully activated (D-Bus active path: /org/freedesktop/NetworkManager/ActiveConnection/4)
[root@localhost ~]# ip addr show ens160
2: ens160: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc mq state UP group default qlen 1000
    link/ether 00:0c:29:01:8c:a0 brd ff:ff:ff:ff:ff:ff
    altname enp3s0
    inet 192.168.226.150/24 brd 192.168.226.255 scope global noprefixroute ens160
        valid_lft forever preferred_lft forever
    inet6 fe80::20c:29ff:fe01:8ca0/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
[root@localhost ~]# ip route
default via 192.168.226.2 dev ens160 proto static metric 102
default via 192.168.226.2 dev team0 proto dhcp metric 350
192.168.226.0/24 dev ens160 proto kernel scope link src 192.168.226.150 metric 102
192.168.226.0/24 dev team0 proto kernel scope link src 192.168.226.140 metric 350
[root@localhost ~]# ping -c 4 8.8.8.8
PING 8.8.8.8 (8.8.8.8) 56(84) bytes of data:
64 bytes from 8.8.8.8: icmp_seq=1 ttl=128 time=163 ms
64 bytes from 8.8.8.8: icmp_seq=2 ttl=128 time=157 ms
64 bytes from 8.8.8.8: icmp_seq=3 ttl=128 time=132 ms
64 bytes from 8.8.8.8: icmp_seq=4 ttl=128 time=87.2 ms

--- 8.8.8.8 ping statistics ---
4 packets transmitted, 4 received, 0% packet loss, time 3004ms
rtt min/avg/max/mdev = 87.212/134.916/162.723/29.858 ms
[root@localhost ~]#
[root@localhost ~]#
```

4.

Enable SSH access on your Linux VM and connect to it from your host machine using an SSH client (like PuTTY or ssh command). Show the output of whoami after login.

>

The screenshot shows a VMware Workstation window titled 'Tops Practice - VMware Workstation'. Inside, a terminal window is open with the prompt 'root@localhost~'. The terminal output is as follows:

```
BaseOS
[root@localhost ~]#
[root@localhost ~]# dnf install openssh -y
Updating Subscription Management repositories.
Unable to read consumer identity

This system is not registered with an entitlement server. You can use subscription-manager to register.

RHEL 9 BaseOS                               156 MB/s | 1.7 MB    00:00
RHEL 9 AppStream                             194 MB/s | 5.8 MB    00:00
Package openssh-8.7p1-8.el9.x86_64 is already installed.
Dependencies resolved.
Nothing to do.
Complete!
[root@localhost ~]# systemctl enable --now sshd
[root@localhost ~]# systemctl status sshd
● sshd.service - OpenSSH server daemon
   Loaded: loaded (/usr/lib/systemd/system/ssh.service; enabled; vendor preset: enabled)
   Active: active (running) since Mon 2026-09-21 20:50:43 IST; 2h 36min ago
     Docs: man:sshd(8)
           man:sshd_config(5)
   Main PID: 1143 (sshd)
     Tasks: 1 (limit: 10800)
    Memory: 2.5M
       CPU: 9ms
   CGroup: /system.slice/ssh.service
           └─1143 "sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups"

Sep 21 20:50:43 localhost systemd[1]: Starting OpenSSH server daemon...
Sep 21 20:50:43 localhost sshd[1143]: Server listening on 0.0.0.0 port 22.
Sep 21 20:50:43 localhost sshd[1143]: Server listening on :: port 22.
Sep 21 20:50:43 localhost systemd[1]: Started OpenSSH server daemon.
[root@localhost ~]# ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
```

The bottom of the image shows the Windows taskbar with the date and time '11:28 PM 9/21/2026'.

5.

Create a new user named 'zomatouser' and add them to a new group called 'foodies'. Set their password and verify group membership using the groups command.

>

The screenshot shows a Linux desktop environment with a terminal window titled "Tops Practice". The terminal is running a series of commands to create a user and a group. The commands and their outputs are as follows:

```
[root@localhost ~]# groupadd foodies
[root@localhost ~]# useradd zomatouser
[root@localhost ~]# passwd zomatouser
Changing password for user zomatouser.
New password:
BAD PASSWORD: The password is shorter than 8 characters
Retype new password:
passwd: all authentication tokens updated successfully.
[root@localhost ~]# gpasswd -M zomatouser foodies
[root@localhost ~]# groups zomatouser
zomatouser : zomatouser foodies
[root@localhost ~]#
```

The terminal window is part of a desktop environment with a sidebar on the left containing a search bar and a list of applications. The top of the window has a menu bar with "View", "VM", "Tabs", and "Help", and a toolbar with various icons.