

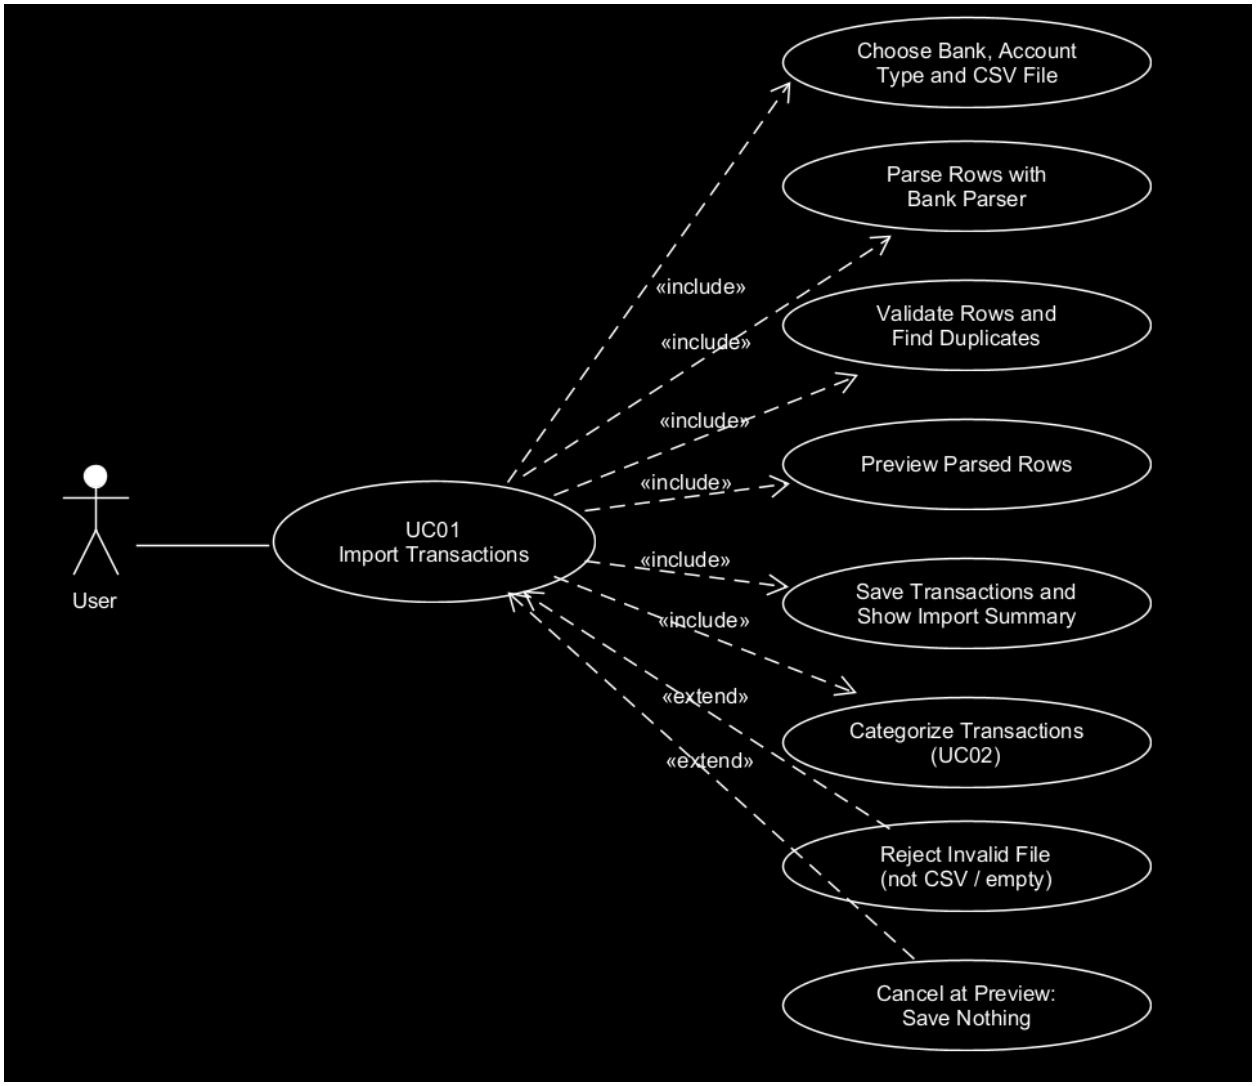


Use Case	#01
Name	File Import
Actor(s)	User
Goals	Import CSV from selected bank, clean file from duplicates, and categorize (Use case #02)
Preconditions	The application is running. The user has a CSV statement file exported from their bank.
Trigger	The user clicks the import button from GUI
Main Success Scenario	1) The user chooses the bank name, the

	account type, and the CSV file. 2) The system selects the parser that matches the bank's CSV layout and converts each row into a transaction (date, amount, description, account). 3) The system validates the rows and finds duplicates. 4) The system shows a preview of the parsed rows. 5) The user confirms, and the system saves the transactions and shows an import summary. 6) The system categorizes the transactions which follows use case #02.
Alternative Flows	1) File is not in CSV format 2) Empty file
Postconditions	The transactions are saved and categorized. Also, the import summary is shown.
Related Feature(s)	Use case #02 to categorize transactions

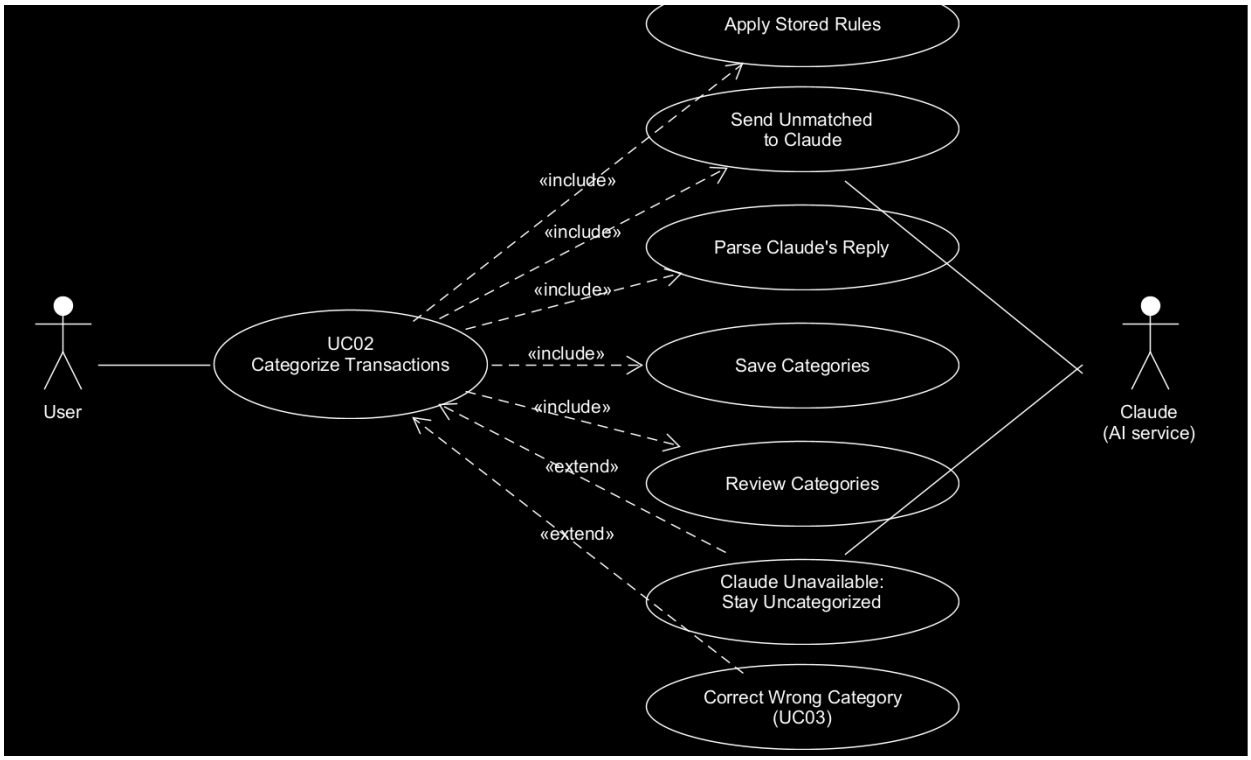


Use Case	#02
Name	Categorize Transactions
Actor(s)	User for reviewing and agent to match transactions to categories
Goals	Assign every imported transaction to a category such as groceries, dining, rent, or transport.
Preconditions	Transactions have been imported and are not yet categorized. The list of allowed categories and the stored category rules exist in order to accurately categorize items
Trigger	Runs automatically at the end of UC01.
Main Success Scenario	1) The system applies the stored rules to each transaction. 2) The system collects the unmatched descriptions and sends them to the agent with the list of allowed categories. 3) The system parses the agent's structured response. 4) The system lets the user review the categories, showing each category's name, total amount, and percentage of total spending. 5) The system saves the categories.
Alternative Flows	1) The agent times out in which case transactions stay unmatched 2) The agent categorizes transactions in the wrong category. The user will be able to correct it in use case #03
Postconditions	Every transaction has a category, the category totals, and percentages for categories
Related Feature(s)	Use case #03 to correct transactions

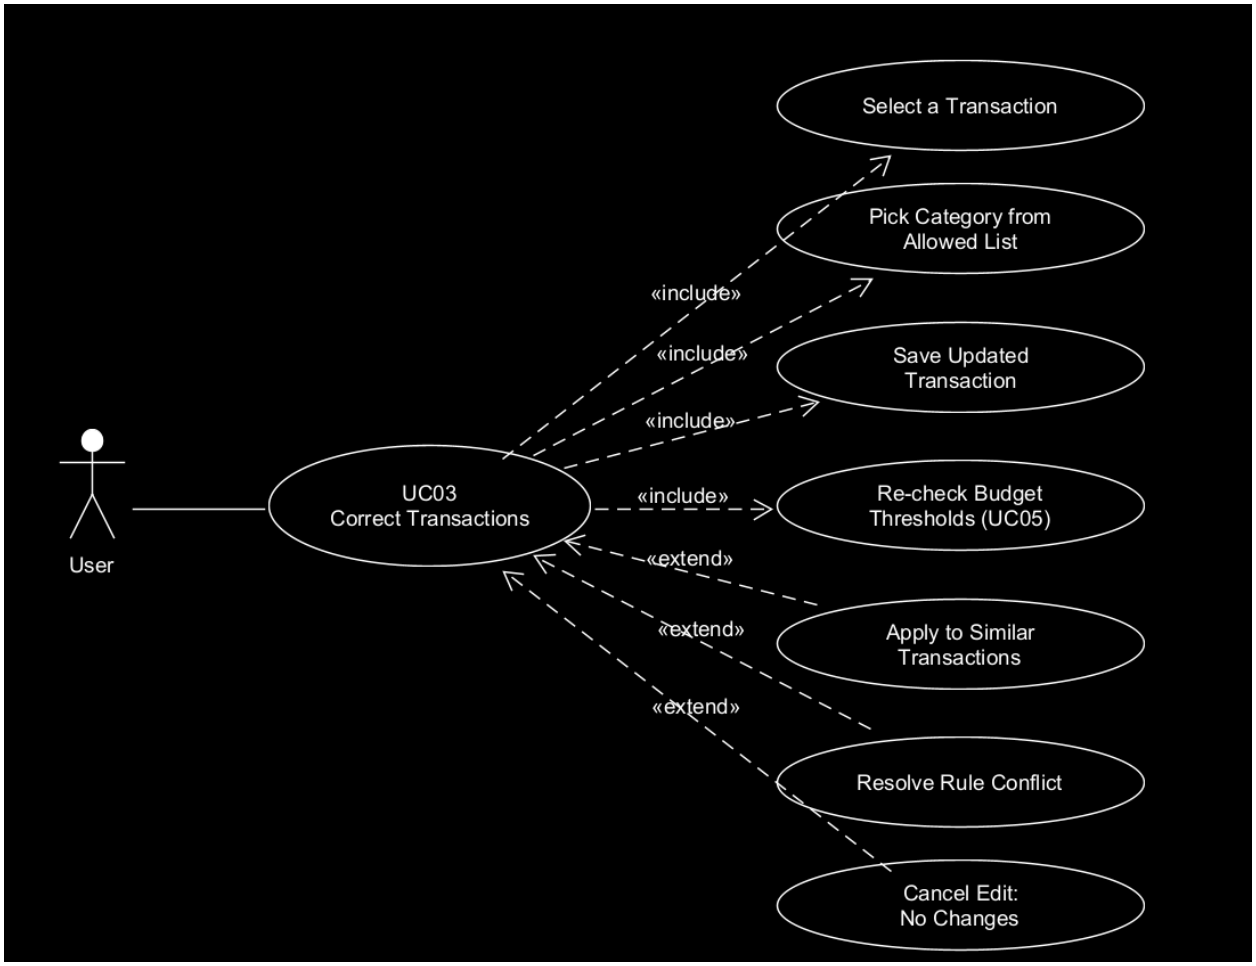


Use Case	#03
Name	Correct Transactions
Actor(s)	User for reviewing and correcting
Goals	Override an AI-assigned category on a transaction and save a rule to apply for future transactions
Preconditions	Transactions exist and have categories
Trigger	The user clicks a transaction row in the GUI and selects edit category
Main Success Scenario	1) The user selects a transaction. 2) The system shows the current category and the full list of allowed categories, and the user picks a category from the list.

	3) The system saves the change and is updated
Alternative Flows	1) The user cancels mid-edit: no changes are saved.
Postconditions	The transaction has the new category, a rule is stored if requested, and the dashboard is up to date
Related Feature(s)	Use case #02

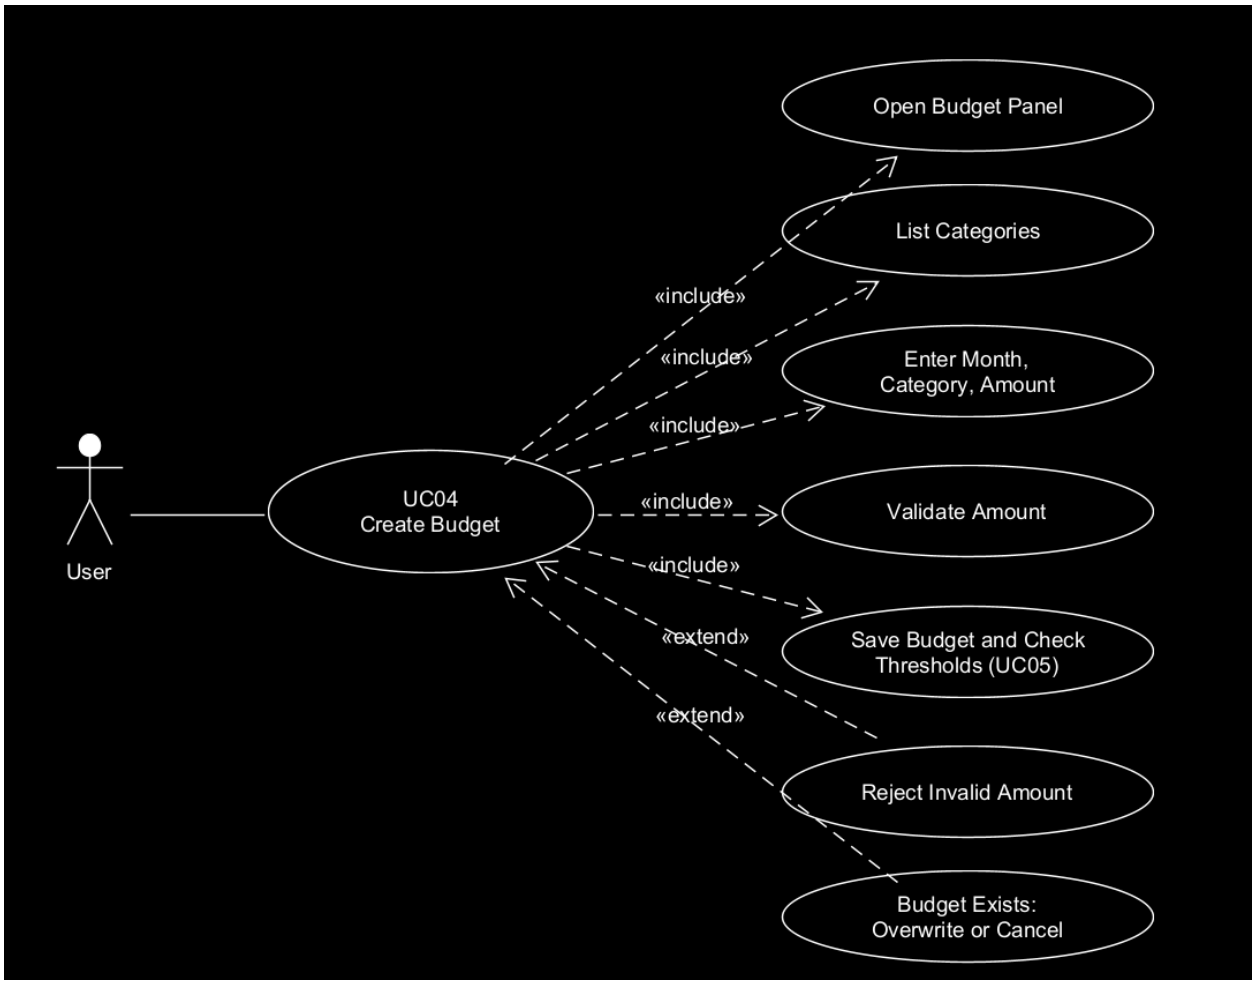


Use Case	#04
Name	Create budget
Actor(s)	User for inputting values for budget

Goals	Set a monthly spending limit for a category.
Preconditions	The application is running and categories exist
Trigger	The user opens the budget panel in the GUI and clicks new budget
Main Success Scenario	1) The user opens the budget panel. 2) The system lists the categories. 3) The user enters a month, a category, and an amount. 4) The system validates the amount. 5) The system saves the budget and the dashboard updates.
Alternative Flows	1) The amount is negative or zero in which case the system rejects it and prompts again 2) A budget already exists for that month and category in which case the system asks whether to overwrite it or cancel
Postconditions	The budget is saved and displayed on the dashboard. The next process will involve having the spending monitored to see if budget will be met
Related Feature(s)	Use case #05

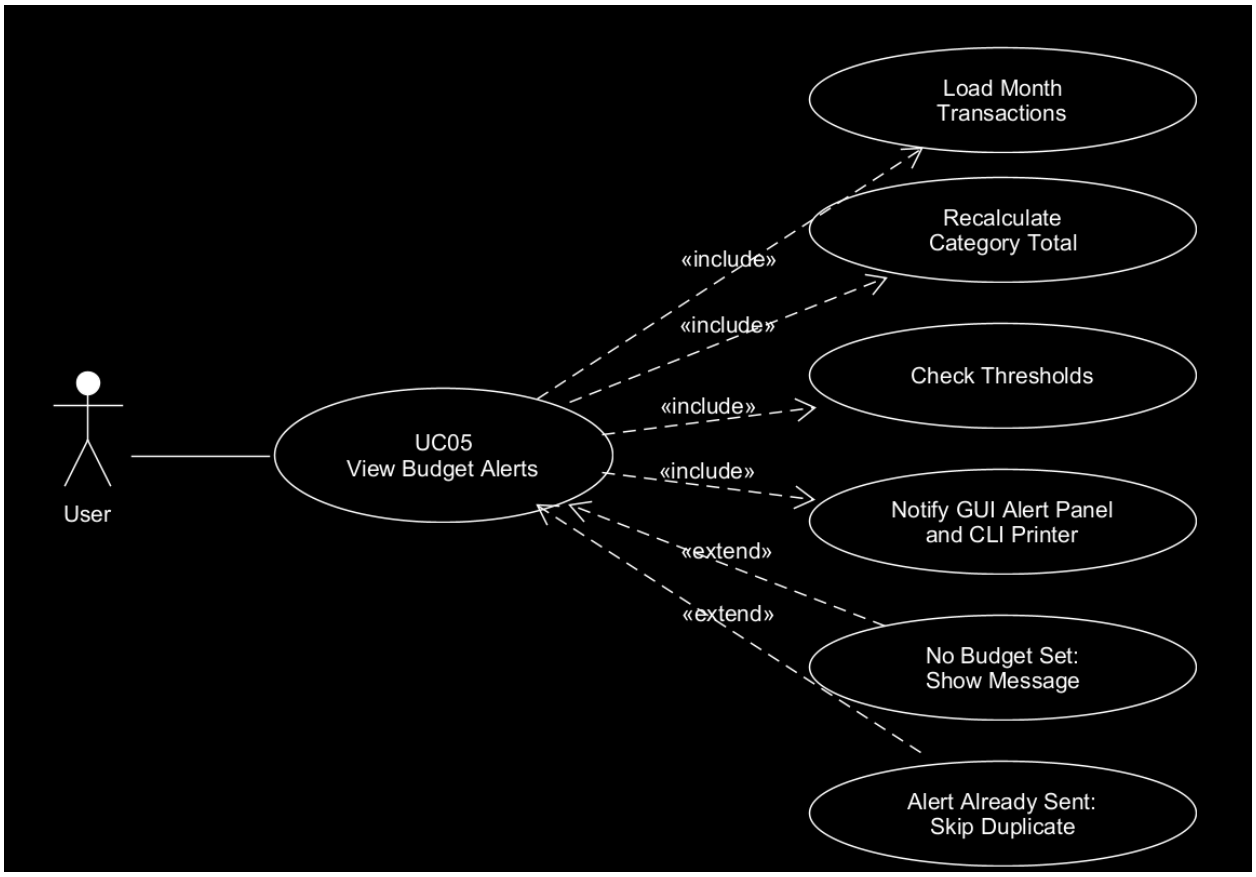


Use Case	#05
Name	View budget alerts
Actor(s)	User will be alerted for their budget
Goals	Be alerted when spending in a category nears or exceeds its budget limit.
Preconditions	At least one budget exists and transactions are categorized.
Trigger	A transaction is added or changed and the notification icon in the alert panel updates if transaction causes budget to be met or exceeded
Main Success Scenario	1) A transaction is added or changed. 2) The system recalculates the total for the affected category. 3) The system checks the threshold. 4) If the threshold is met or exceeded for the

	first time that month, the system sends a notification showing the amount spent in the category and the amount remaining
Alternative Flows	1) No budget is set for category 2) No budget is defined at all
Postconditions	1) If no budget is set for the category, then system display no budget set
Related Feature(s)	Use case #04

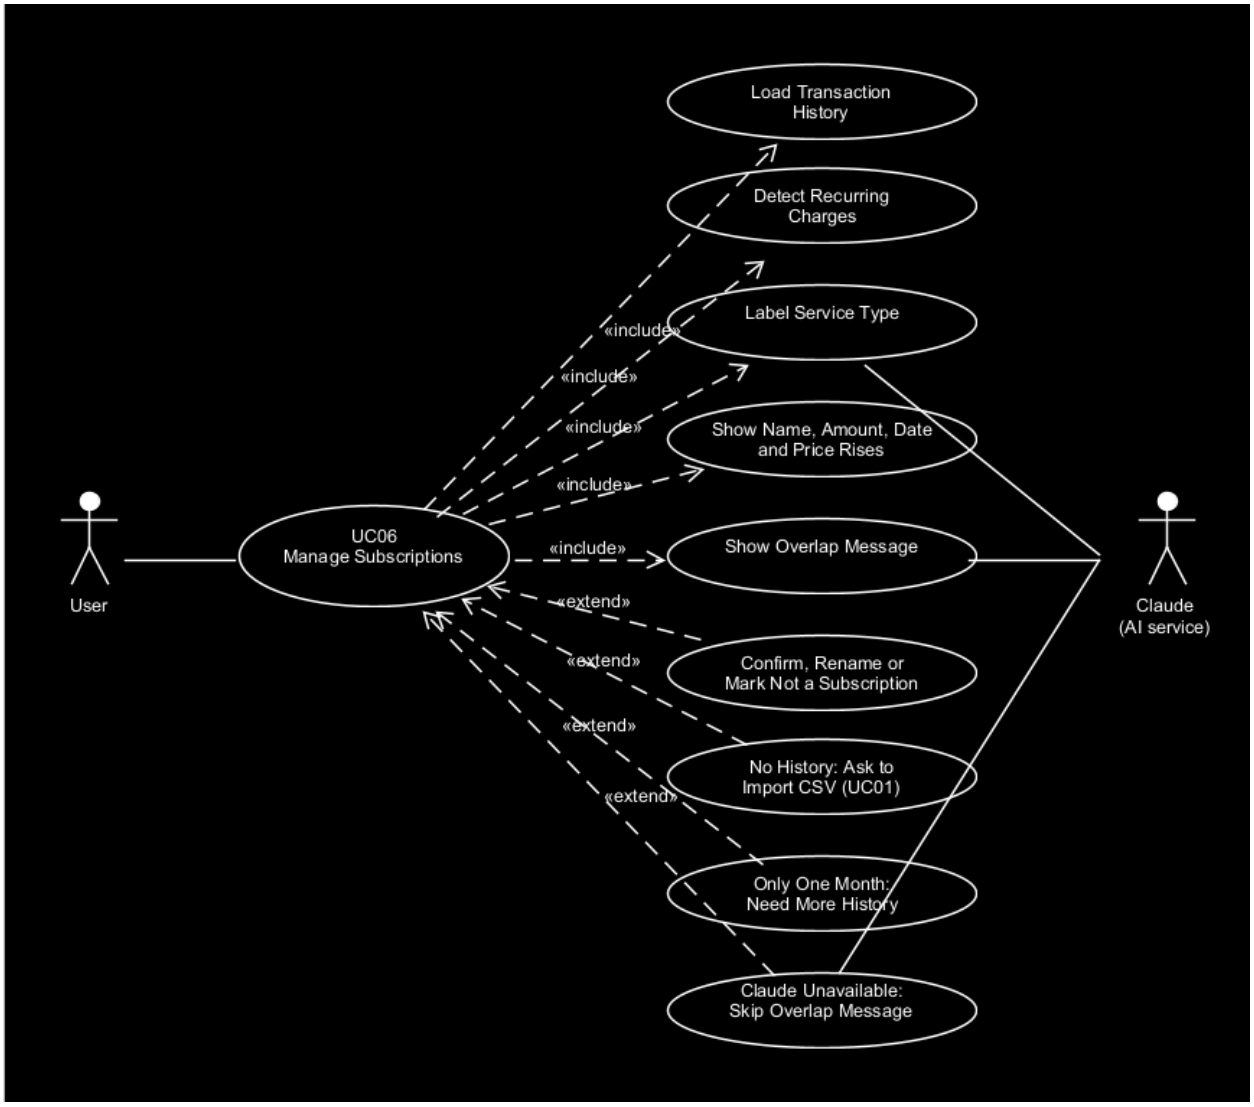


Use Case	#06
Name	Manage subscriptions
Actor(s)	User and Agent
Goals	Recognize repeating charges as subscriptions and track them, including their name, amount, date, and price increases.
Preconditions	The user has a CSV of transaction history.
Trigger	The user opens the Subscriptions tab in the GUI.

Main Success Scenario	1) The system loads transaction history 2) The system detects the recurring subscriptions by grouping transactions by merchant and checking for similar amounts at regular intervals. 3) The agent categorizes each subscription by service and type (for example, Spotify and Apple Music are both music streaming). 4) The user views each subscription's name, amount, date, and price rises. 5) The agent shows a message about any overlap between subscriptions.
Alternative Flows	1) The user has limited history. If a user uploads a CSV for one month, nothing repeats, so the system notifies the user that more history is needed. 2) If empty file, then prompt user to reupload CSV
Postconditions	The subscription list is up to date and the overlap message is shown.
Related Feature(s)	Use case #01

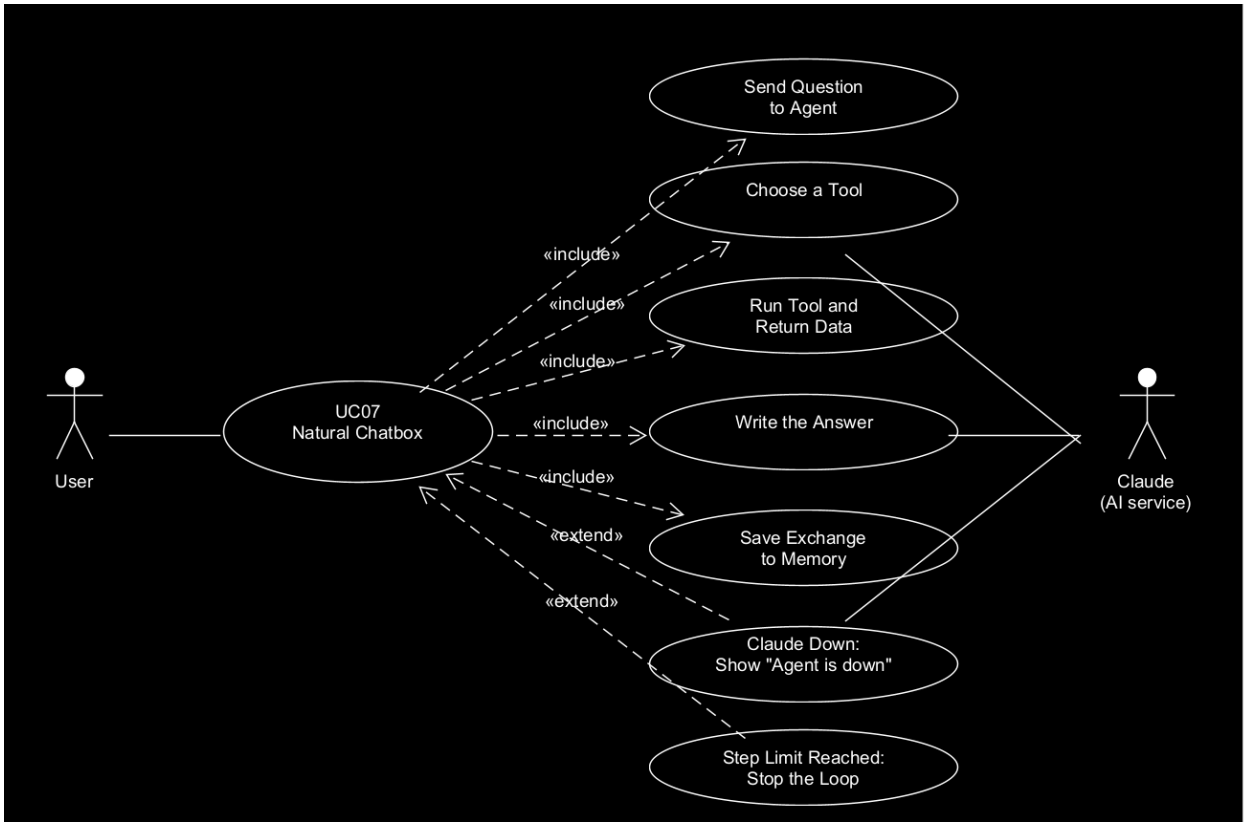


Use Case	#07
Name	Natural Chatbox
Actor(s)	User and Agent
Goals	Ask open-ended questions about spending, budgets, subscriptions, and goals in plain language and get a personalized answer based on the user's own transaction history.
Preconditions	Transactions have been imported for the agent to analyze.
Trigger	The user types a question in the AI chat box
Main Success Scenario	1) The system sends the user's question, with the conversation memory, to the agent. 2) The agent chooses a tool. 3) The system runs the tool and returns the data. 4) The agent writes the answer from the tool results, and the answer is shown to the user.

	5) The system saves the exchange to memory.
Alternative Flows	1) Claude is unavailable or requests a time out 2) The step limit is reached before Claude produces an answer
Postconditions	The user sees an answer and the exchange is saved in memory
Related Feature(s)	Use case #01

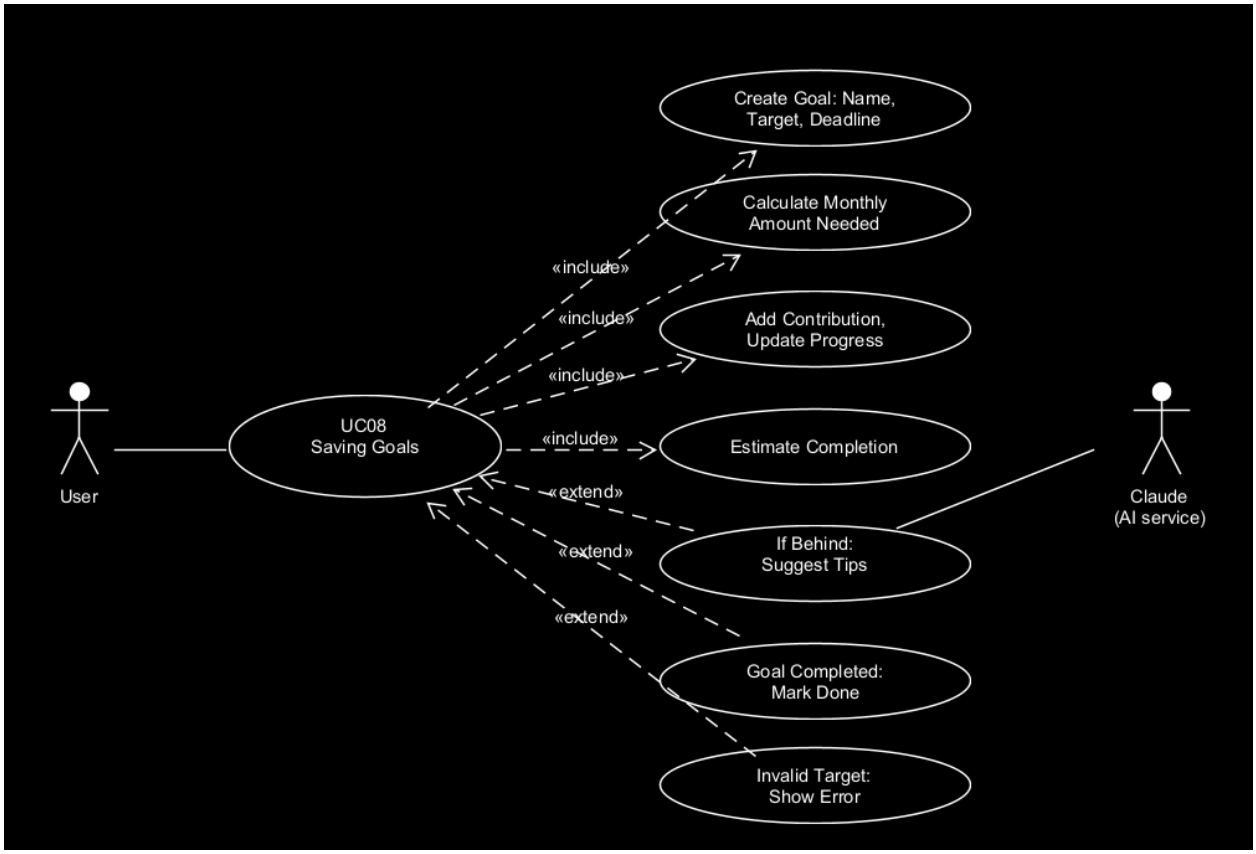


Use Case	#08
Name	Saving goals
Actor(s)	User and Agent
Goals	Set savings goals, record contributions, and see progress and the monthly amount needed.
Preconditions	The application is running.
Trigger	The user opens the goals tab in the GUI and clicks new goal or contribute
Main Success Scenario	1) The user creates a goal with a name, a target amount, and a date (deadline). 2) The system calculates the monthly amount needed. 3) Contributions update the progress. 4) The system estimates the completion date and shows the progress percentage, the required monthly contribution, and whether

	the user is on track.
Alternative Flows	1) The goal is completed: the system marks it as done and stops displaying the required contribution. 2) The target is 0 or less: the system flags it and shows an error.
Postconditions	The goal and its progress are saved.
Related Feature(s)	Use case #01

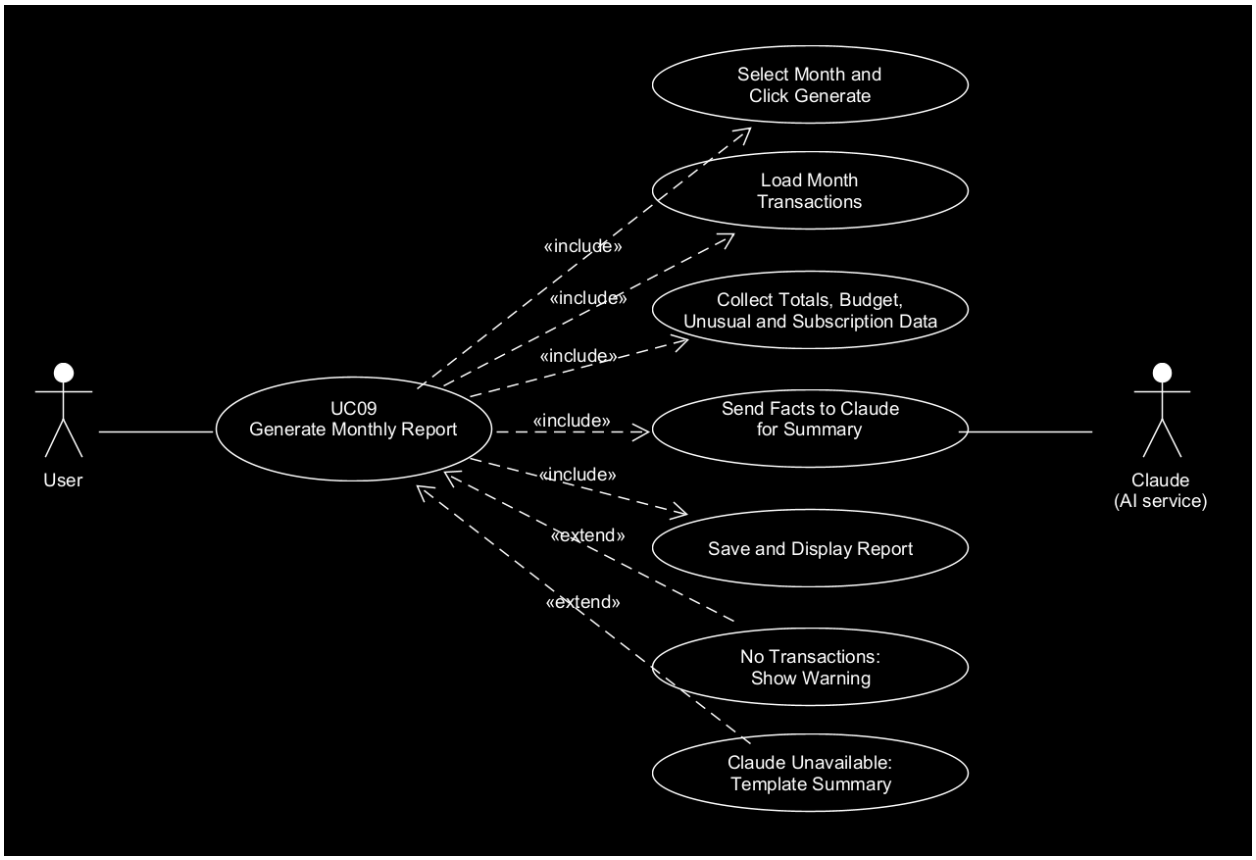

Use Case	#09
Name	Generate Monthly Report
Actor(s)	User and Agent
Goals	Produce a summary of a selected month with the total income, total spending, the breakdown by

	category, budget performance, unusual transactions, subscription changes, and advice on where the user can save.
Preconditions	Transactions have been imported and categorized.
Trigger	The user opens the Reports tab in the GUI, selects a month, and clicks Generate.
Main Success Scenario	1) The user selects a month and clicks Generate. 2) The system loads the month's transactions. 3) The system calculates the totals and the category breakdown, gets the budget status, finds unusual transactions, and detects subscription changes. 4) The system sends these facts to Claude, which writes a plain-language summary with saving advice. 5) The system saves the report and displays it on screen.
Alternative Flows	1) There are no transactions in the selected month: the system shows a warning and does not generate a report. 2) Claude is unavailable: the system writes a plain template summary instead, and the report is still produced.
Postconditions	The report is saved and displayed, with the key figures and a written summary.
Related Feature(s)	The report can be exported with F10

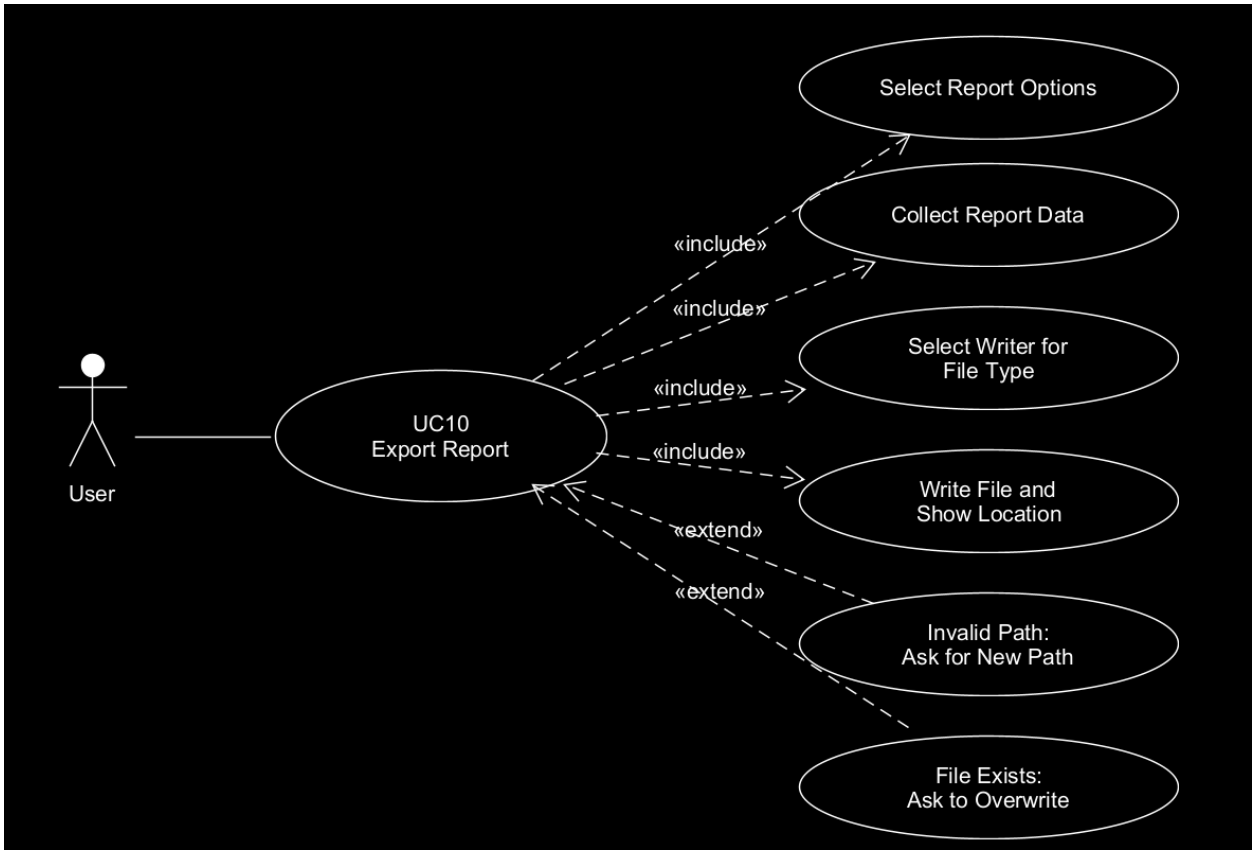

Use Case	#10
Name	Export Report
Actor(s)	User
Goals	Export a report to a file the user can save or share.
Preconditions	Data exists for the selected period.
Trigger	The user opens the exports tab in the GUI and clicks export
Main Success Scenario	1) The user selects the report options (type, month, format, and destination path). 2) The system collects the data. 3) The system selects the exporter for the chosen file type. 4) The system writes the file and shows its location

Alternative Flows	1) The path is invalid or does not exist in which case the system shows an error and asks for a new path.
Postconditions	The file exists at the chosen location.
Related Feature(s)	-/-