


0.4: New note diagram

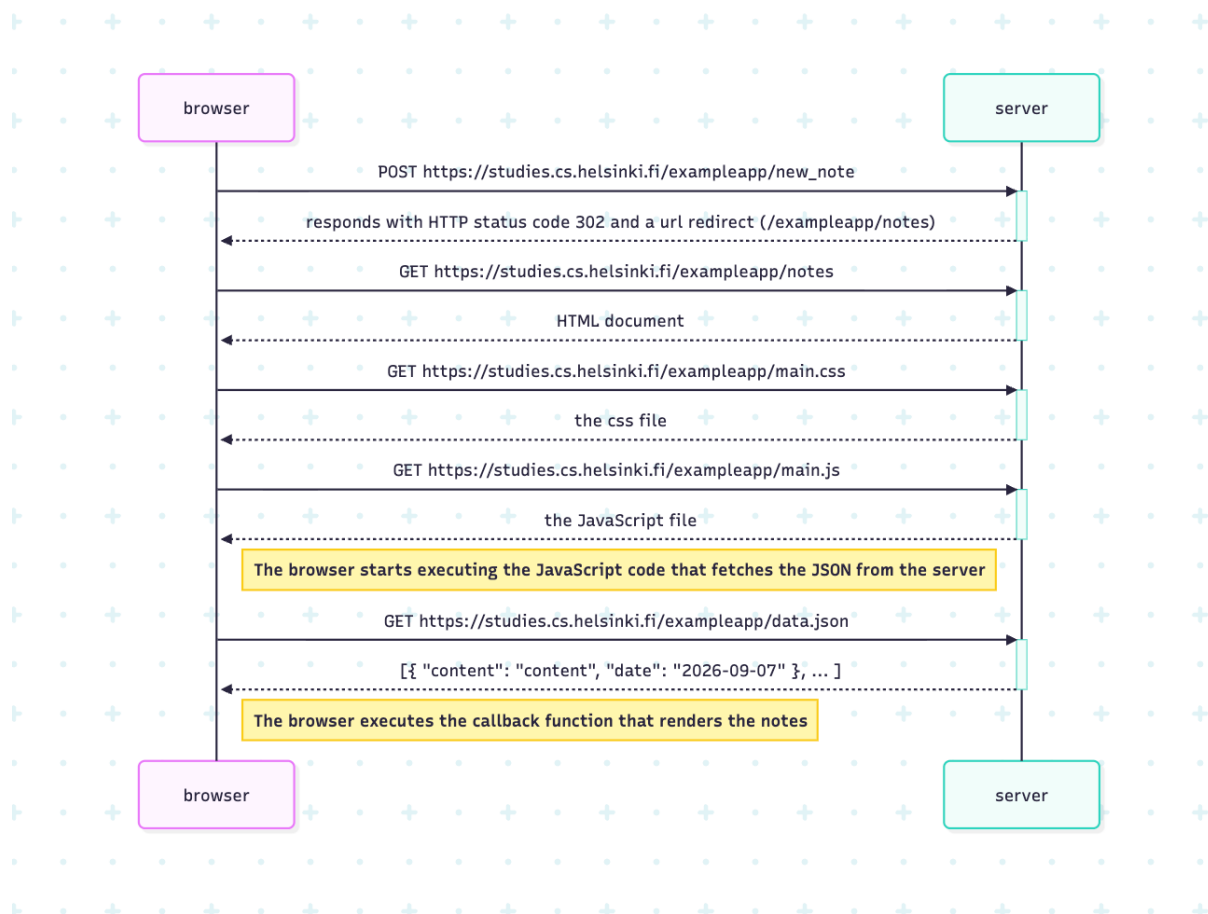

sequenceDiagram

participant browser
participant server

```
browser->>server: POST https://studies.cs.helsinki.fi/exampleapp/new_note
activate server
server-->>browser: responds with HTTP status code 302 and a url redirect
(/exampleapp/notes)
deactivate server
```

```
browser->>server: GET https://studies.cs.helsinki.fi/exampleapp/notes
activate server
server-->>browser: HTML document
deactivate server
```

```
browser->>server: GET https://studies.cs.helsinki.fi/exampleapp/main.css
activate server
server-->>browser: the css file
deactivate server
```

```
browser-->>server: GET https://studies.cs.helsinki.fi/exampleapp/main.js
activate server
server-->>browser: the JavaScript file
deactivate server
```

Note right of browser: The browser starts executing the JavaScript code that fetches the JSON from the server

```
browser-->>server: GET https://studies.cs.helsinki.fi/exampleapp/data.json
activate server
server-->>browser: [{ "content": "content", "date": "2026-09-07" }, ... ]
deactivate server
```

Note right of browser: The browser executes the callback function that renders the notes