

1

<https://www.oracle.com/technetwork/developer-tools/sql-developer/downloads/index.html>

The screenshot shows the Oracle SQL Developer Downloads page. The header includes the Oracle logo, a menu icon, a search bar, and links for Account, Country/Region, and Call. The breadcrumb trail reads: Oracle Technology Network / Developer Tools / SQL Developer / Downloads. A left sidebar lists various Oracle Developer Tools. The main content area is titled 'SQL Developer Downloads' and includes a 'License Agreement' section with a link to the OTN License Agreement for SQL Developer. Below this, the 'SQL Developer 18.2' section shows the version '18.2.0.183.1748' dated 'July 3, 2018', with links for 'New Features', 'Release Notes', and 'Bugs Fixed'. A table lists download links for different operating systems, each with a file size, a 'Download' button, and a download icon.


Operating System	File Size	Download Link
Windows 64-bit with JDK 9 included (c442b804048d5d3dafd1b1c19f27f808)	424 MB	Download
Windows 32-bit/64-bit (ad45f9db2e81f856c778e357f6129e36)	347 MB	Download
Mac OSX (dce4e86d9d1f3827fb19811c71404dd3)	347 MB	Download
Linux RPM (dce4e86d9d1f3827fb19811c71404dd3)	338 MB	Download
Other Platforms (ad45f9db2e81f856c778e357f6129e36)	347 MB	Download

Below the table, there is a link for 'Troubleshooting - Previous Version' and a section for 'Command Line - SQLcl 18.2' dated 'July 2018 - Update 18.2'.

2. 자신의 컴퓨터 환경에 맞는 버전을 다운로드

3. 압축을 푼 후 sqldeveloper.exe 실행

4. 파일 - 새로만들기 -데이터베이스 접속 또는 + 기호 클릭

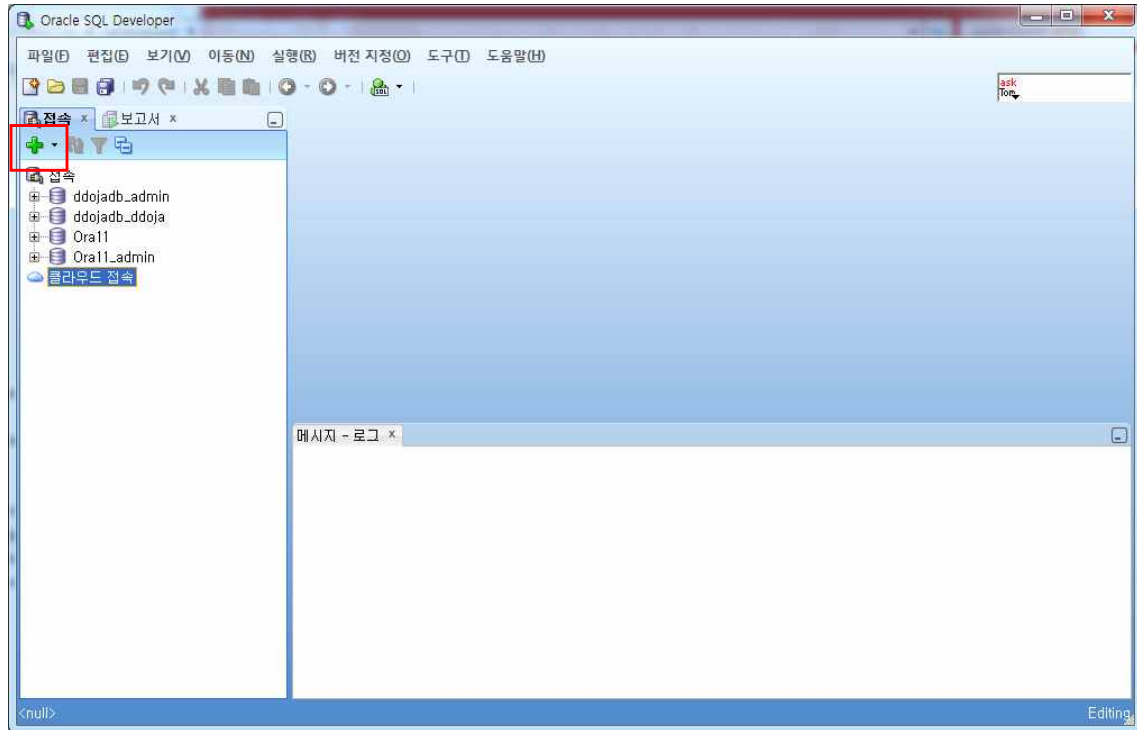

3. 접속이름 : 여러분이 정하면 됩니다.

- ◆ 사용자 이름 : ce학번 (예 : ce1267011)
- ◆ 비밀번호 : 본인 e-mail 계정(예:ddoja@pcu.ac.kr 이라면 @뒤를 제외한 ddoja)
 - ※ 이메일 계정이 숫자로 시작하는 경우(9705@pcu.ac.kr)에는 a를 추가한 비밀번호임, 즉 a9705가 비밀번호
 - ※ 이메일 계정에 특수문자를 포함한 경우 (jj97-@pcu.ac.kr)에는 -를 제외, 즉 jj97가 비밀번호
- ◆ 호스트이름 : 203.250.143.243
- ◆ SID : xe

새로 만들기/데이터베이스 접속 선택

접속 이름	접속 세부 정보
ddojadb_admin	sys@//local...
ddojadb_ddoja	ddoja@//loc...
Ora11	ddoja@//192...
Ora11_admin	sys@//192,1...

접속 이름(N)

사용자 이름(U)

비밀번호(P)

☐ 비밀번호 저장(Y)

Oracle Access

접속 유형(Y) 기본 롤(L) 기본값

호스트 이름(A) localhost

포트(P) 1521

☒ SID(I) xe

☐ 서비스 이름(E)

☐ OS 인증 ☐ Kerberos 인증 ☐ 프록시 접속

상태:

도움말(H) 저장(S) 지우기(C) 테스트(T) **접속(Q)** 취소