


FALK™ WRAPFLEX® ELASTOMERIC COUPLINGS

INCH DIMENSIONS CLOSE-COUPLED TYPE R10 SERIES

Falk™ Wrapflex® Inch Dimensions Close-Coupled Type R10 Elastomeric Couplings deliver premium non-lubricated performance across generic fractional and high-horsepower industrial drive configurations. Designed with a flexible polyurethane split-half element wrap design, the Type R10 series allows rapid element swap-outs without moving hubs or removing auxiliary machinery shaft linkages.

TECHNICAL CONFIGURATION PROFILE BLUEPRINT

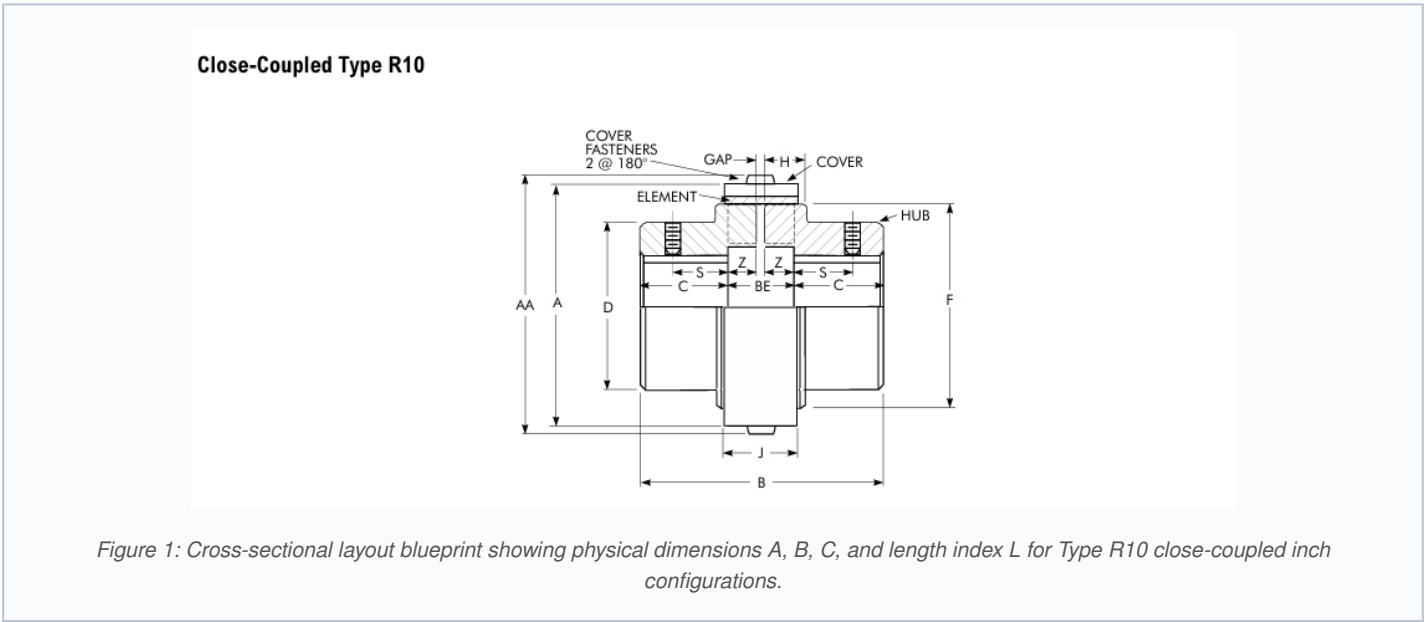

TECHNICAL SPECIFICATIONS & INTERFACE DIMENSIONAL REFERENCES (INCH SYSTEM)

COUPLING SIZE	CONTINUOUS TORQUE [lb-in]	MAX SPEED [rpm]	BORE SIZE CAPACITY RANGE		PHYSICAL DIMENSIONS LAYOUT REFERENCE				APPROX. WEIGHT [lb]
			MIN [in]	MAX [in]	A [in]	B [in]	C [in]	L [in]	
5R	550	4500	0.500	1.500	3.54	1.38	1.34	2.83	1.5
10R	1100	4500	0.500	1.625	4.02	1.57	1.50	3.31	2.4
20R	2750	4500	0.750	2.125	4.88	1.89	1.73	3.94	4.9
30R	5000	4500	0.938	2.562	5.67	2.17	2.05	4.53	7.9
40R	8500	4500	1.125	2.938	6.54	2.56	2.28	5.31	12.6
50R	15000	4200	1.500	3.562	8.27	3.07	2.83	6.38	22.9
60R	27000	3800	1.625	4.125	9.65	3.54	3.31	7.40	37.0

COUPLING SIZE	CONTINUOUS TORQUE [lb-in]	MAX SPEED [rpm]	BORE SIZE CAPACITY RANGE		PHYSICAL DIMENSIONS LAYOUT REFERENCE				APPROX. WEIGHT [lb]
			MIN [in]	MAX [in]	A [in]	B [in]	C [in]	L [in]	
70R	50000	3300	1.875	4.500	11.22	4.13	3.94	8.66	60.6
80R	133000	2000	2.375	5.500	14.96	5.31	5.28	12.60	141.1

- Technical Notes & Catalog Specifications:**
- Weight indices are computed based on complete assembly setups with default solid pilot-bore hub blocks. Machined finished sets differ slightly.
 - Always check that operational and dynamic angular errors do not exceed factory thresholds to optimize element performance lifetimes.
 - Tough polyurethane flexible formulation is highly resistant to standard chemical contaminants and oils.

Authorized India Engineering Distribution & Technical Support Center:

Jinharsh Industrial Solutions Private Limited

Email: crm@jinharsh.com | Official Web Domain: www.jinharsh.com