

Explore ExIm study FB

ddd


9/3/2020

```
## # A tibble: 6 x 11
##   .set access cogeffect influence gut careful awareness intention control
##   <chr>  <int>      <dbl>      <dbl> <dbl>  <int>      <int>      <dbl>  <int>
## 1 nf          7          1          1     2      2          7          5      4
## 2 pymk         6          4          6     1      1          6          3      3
## 3 nf          2          4          5     2      2          3          2      4
## 4 pymk         2          2          2     2      1          3          2      3
## 5 nf          5          3          3     2      2          2          2      1
## 6 pymk         5          3          3     2      1          2          2      1
## # ... with 2 more variables: efficiency <int>, speed <dbl>

## [1] "new_?(!)_(!)_(!)"


## `summarise()` ungrouping output (override with `!groups` argument)

## `summarise()` regrouping output by 'cat' (override with `!groups` argument)
```

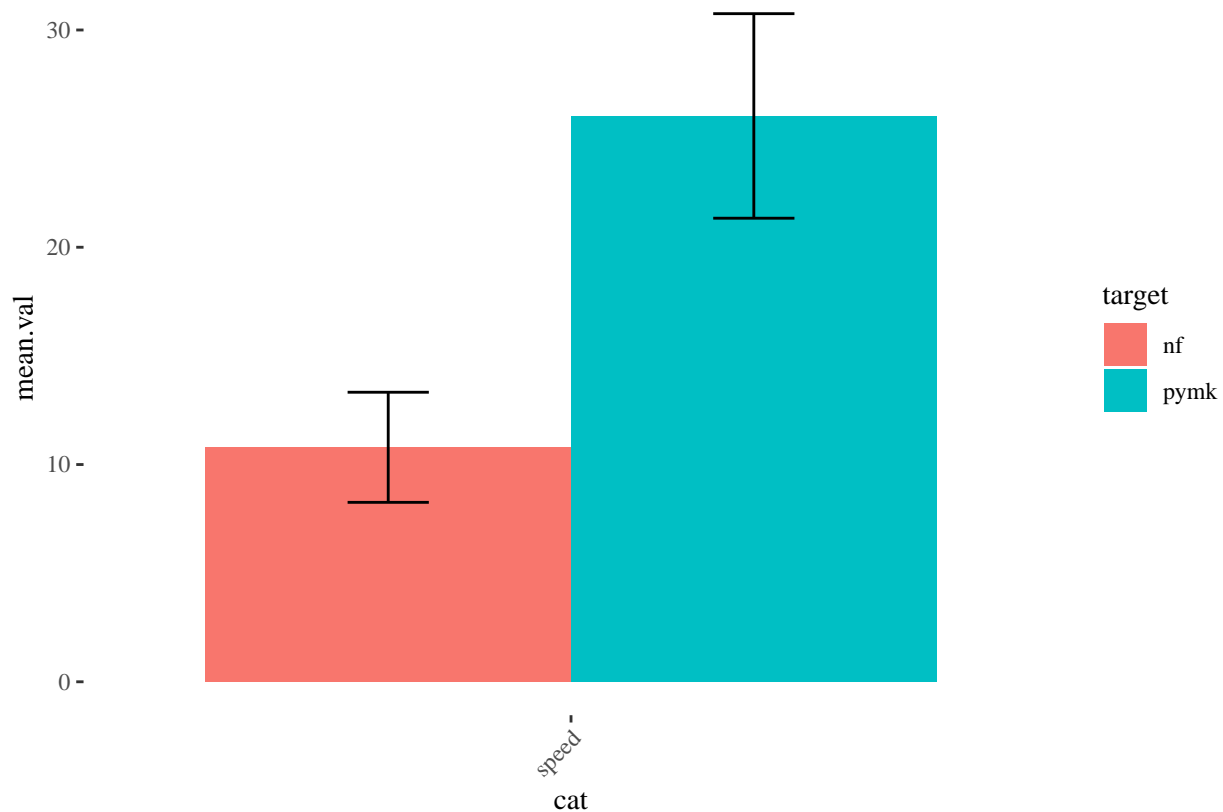

```
## quartz_off_screen
## 3
```


```
## pdf
## 2
## `summarise()` regrouping output by 'cat' (override with ` .groups` argument)
## Coordinate system already present. Adding new coordinate system, which will replace the existing one
```

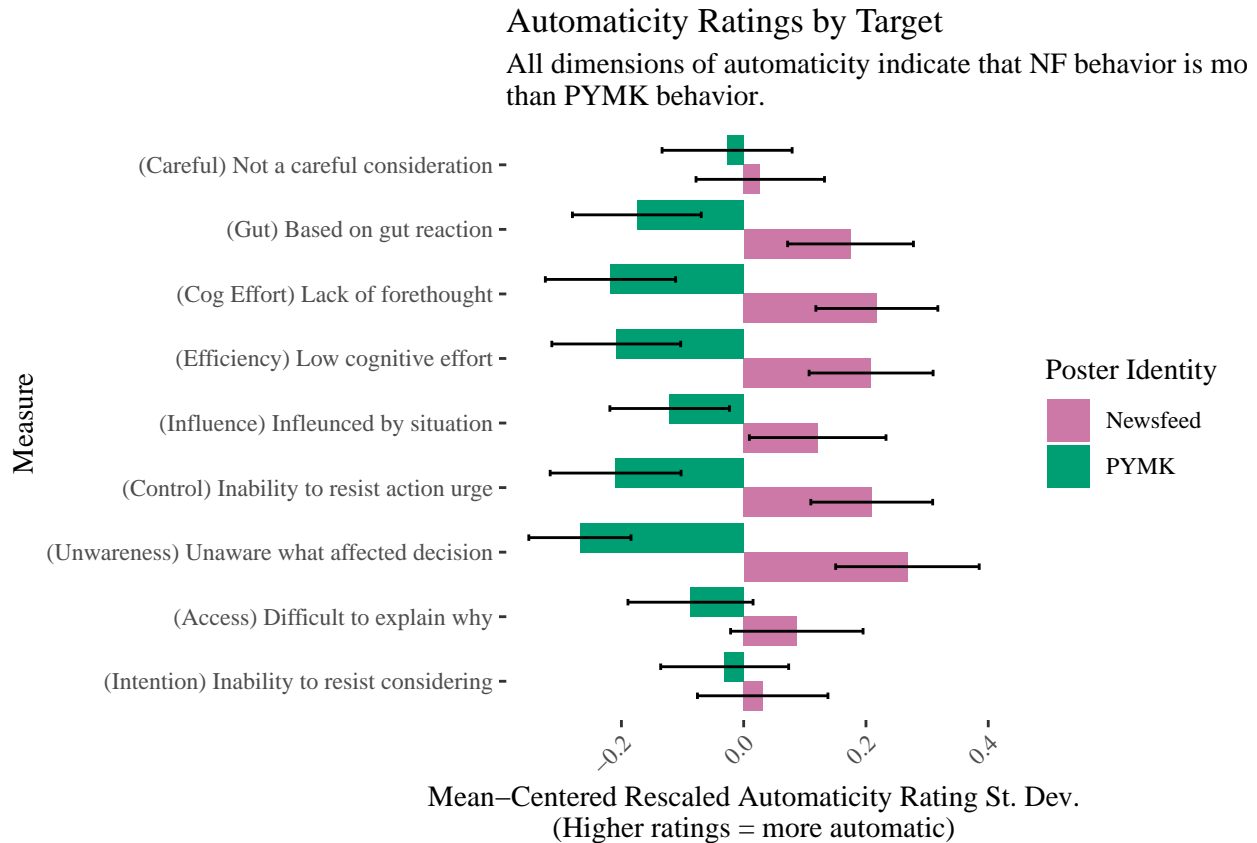

```
## `summarise()` regrouping output by 'cat' (override with ` .groups` argument)
## `summarise()` ungrouping output (override with ` .groups` argument)
```

Automaticity Ratings by Target

All dimensions of automaticity indicate that NF behavior is more automatic than PYMK behavior.

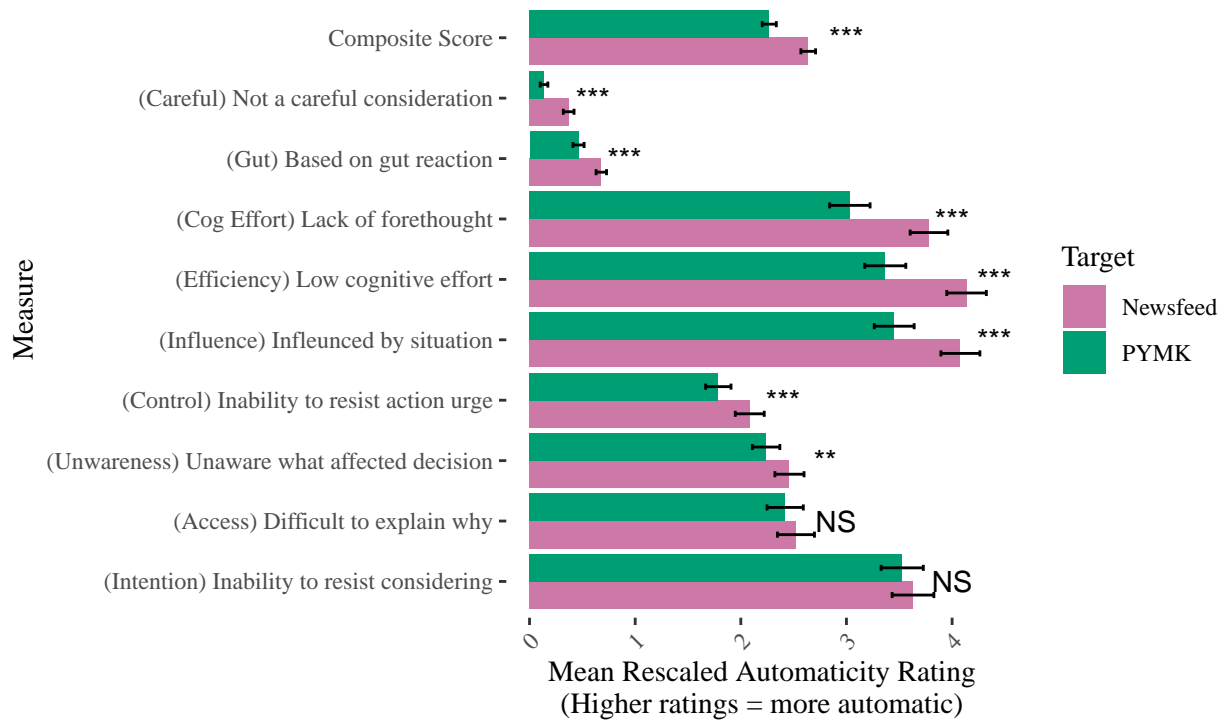


```
## quartz_off_screen
```

```
## 3
```

```
## pdf
```

```
## 2
```

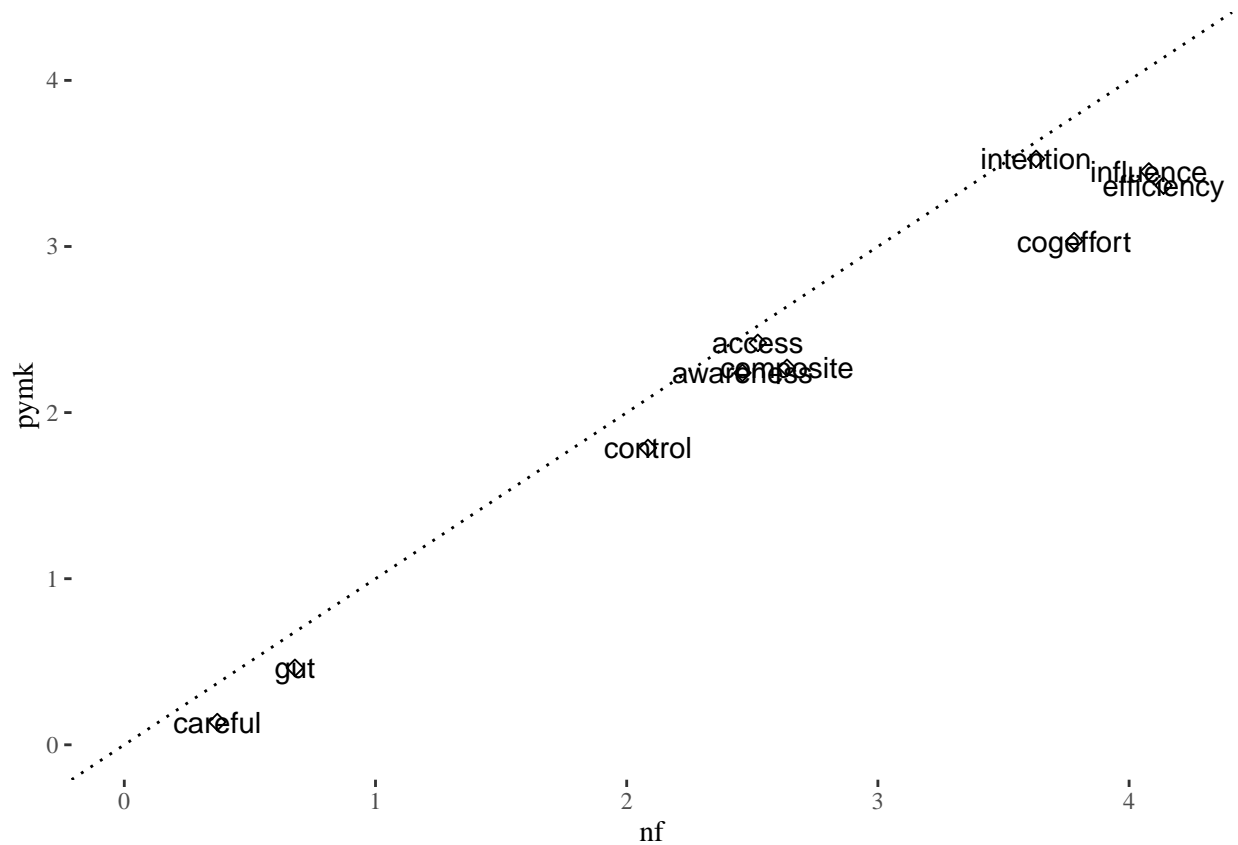


```
## quartz_off_screen
##      3

## pdf
##    2

## `summarise()` regrouping output by 'val', 'target' (override with `.groups` argument)
## `summarise()` regrouping output by 'cat' (override with `.groups` argument)
## Warning: Removed 20 rows containing non-finite values (stat_bin).
```

Automaticity Ratings by Target

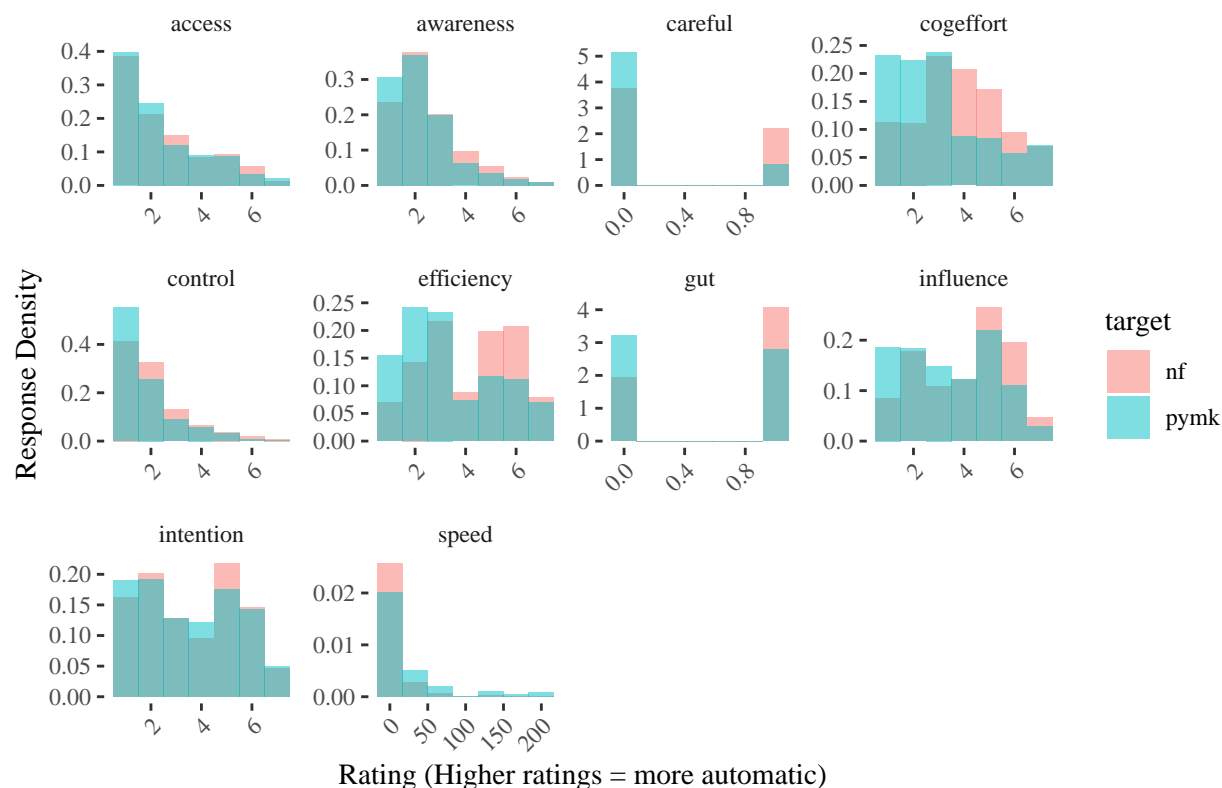


```
## quartz_off_screen
## 3
```

```
## pdf
## 2
```

```
## Warning: The labeller API has been updated. Labellers taking `variable` and
## `value` arguments are now deprecated. See labellers documentation.
```


```
## Warning: Removed 3 rows containing missing values (position_stack).
```

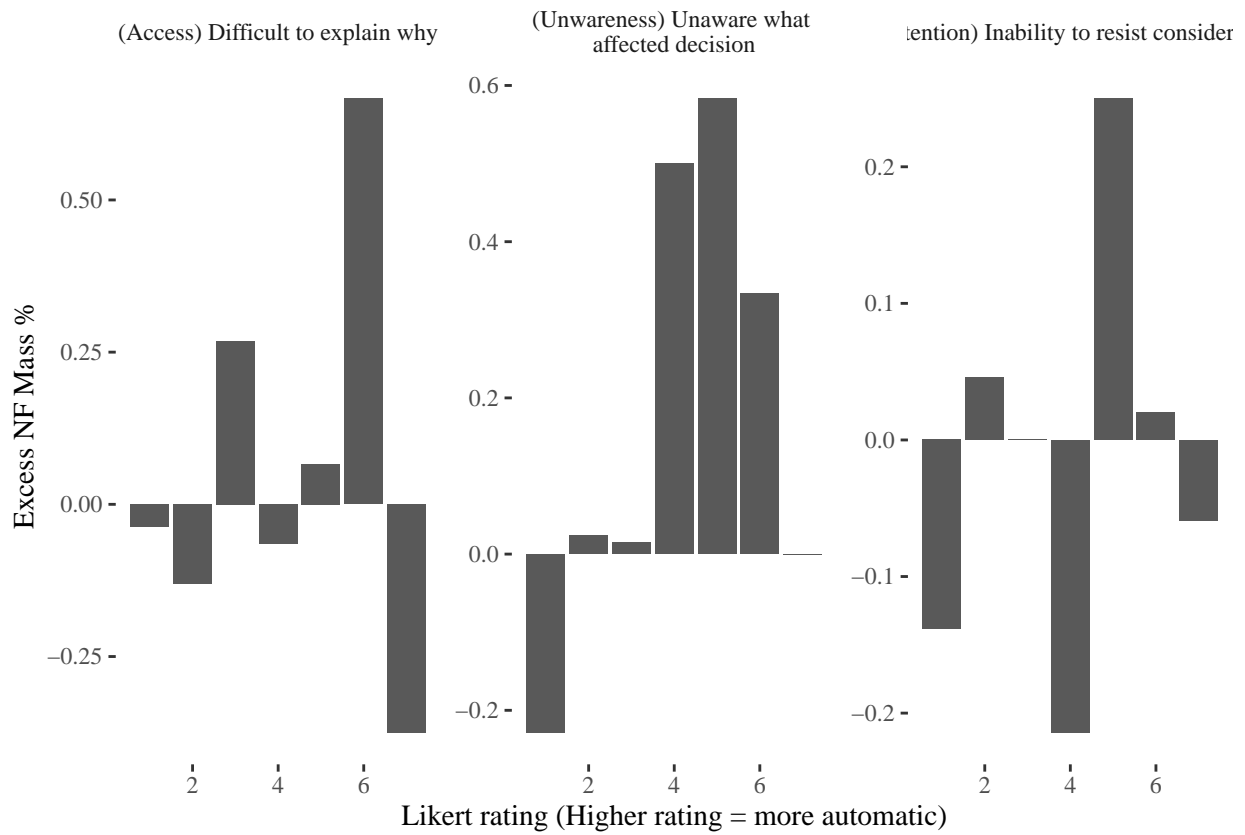


```
## quartz_off_screen
## 3
```

```
## pdf
## 2
```

```
## Warning: Removed 6 rows containing non-finite values (stat_ecdf).
```

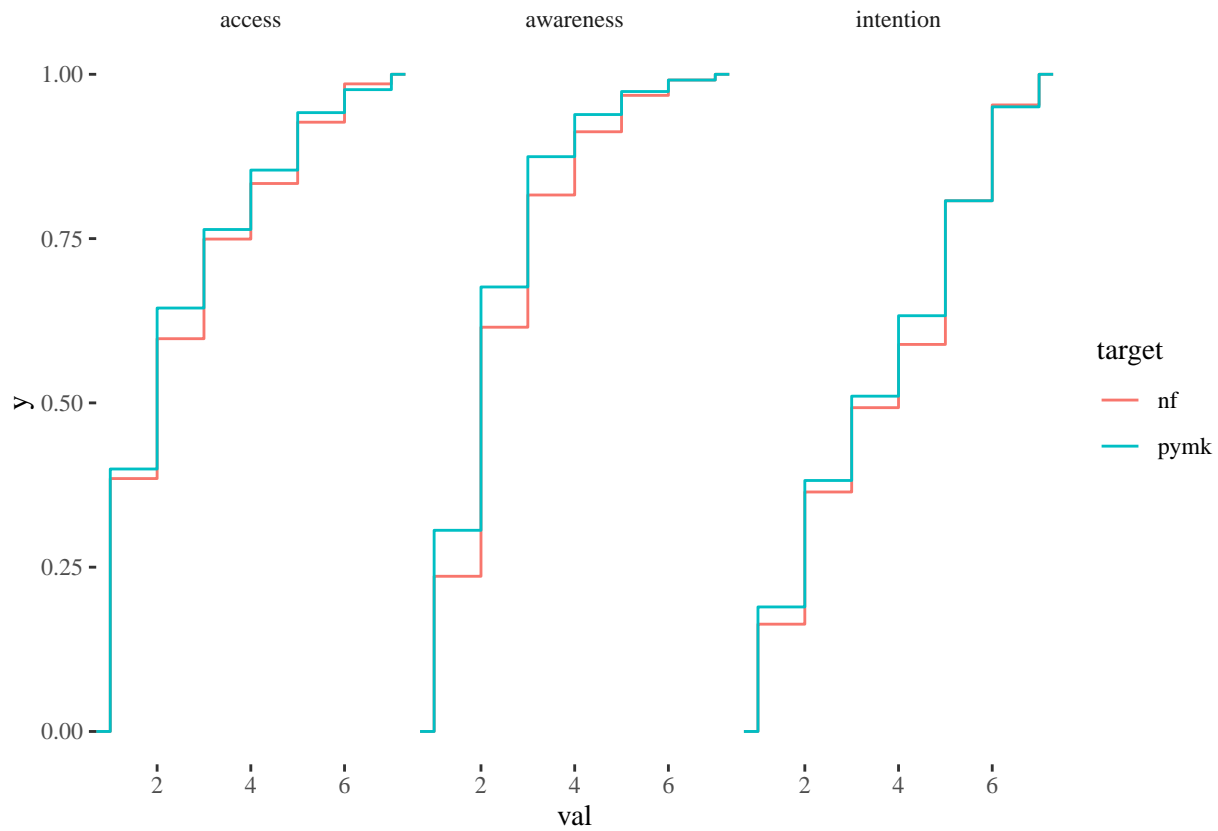

Warning: Removed 14 rows containing non-finite values (stat_ecdf).

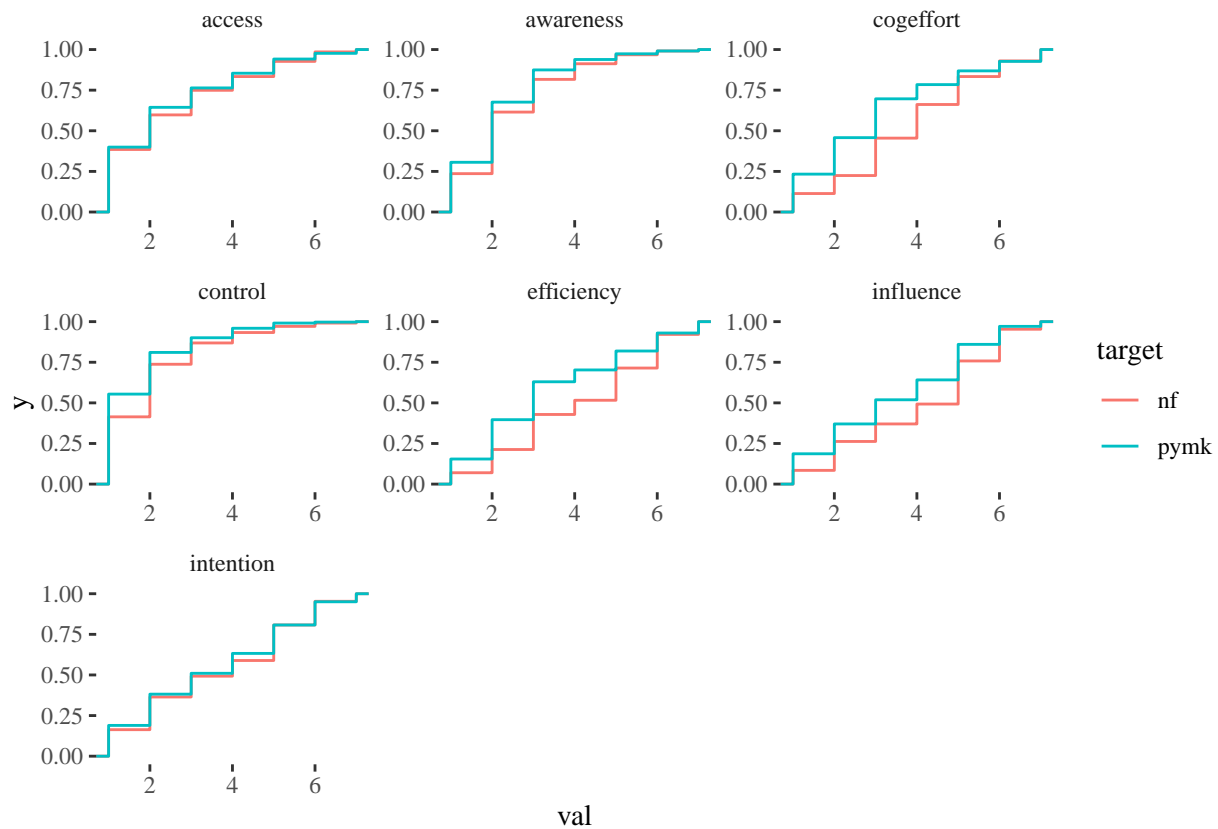


```
## quartz_off_screen
##      3

## pdf
##      2

## `summarise()` regrouping output by 'cat' (override with `.groups` argument)

## Warning: The labeller API has been updated. Labellers taking `variable` and
## `value` arguments are now deprecated. See labellers documentation.
```

Median splits of automaticity Ratings by Target

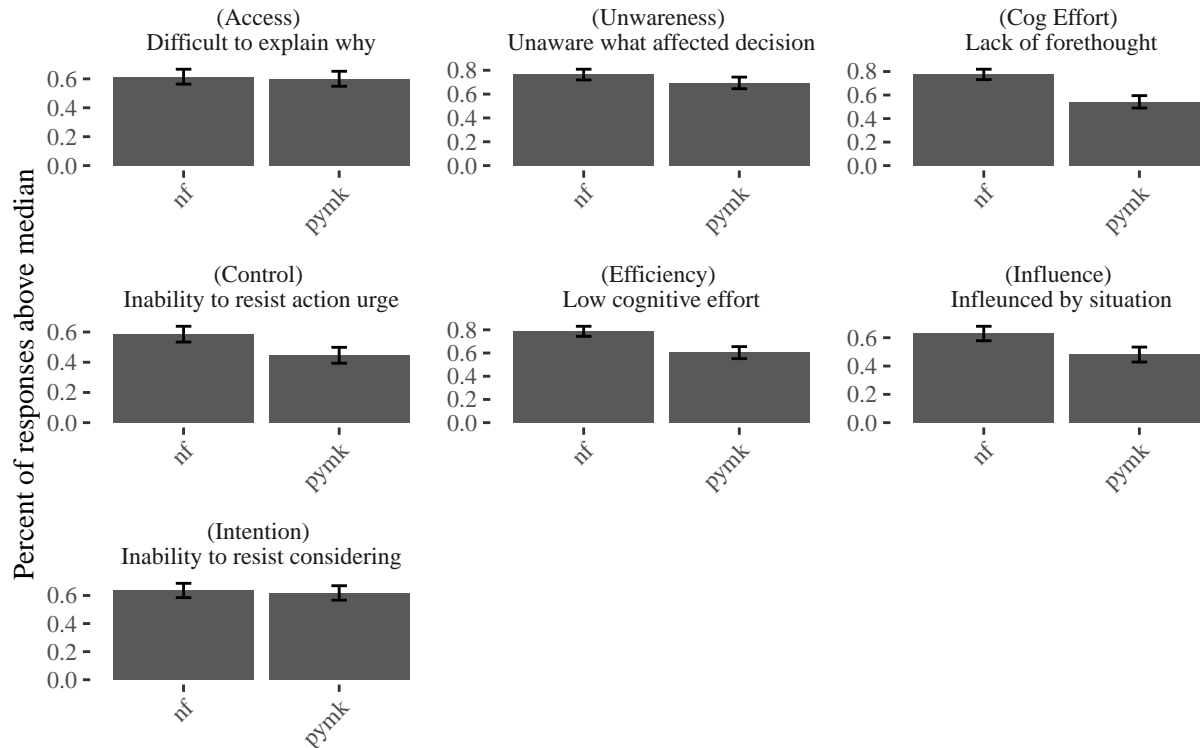


```
## quartz_off_screen
##      3

## pdf
##      2

## `summarise()` regrouping output by 'cat' (override with `.groups` argument)

## Warning: The labeller API has been updated. Labellers taking `variable` and
## `value` arguments are now deprecated. See labellers documentation.
```


Rate of Affirming Automaticity by Target

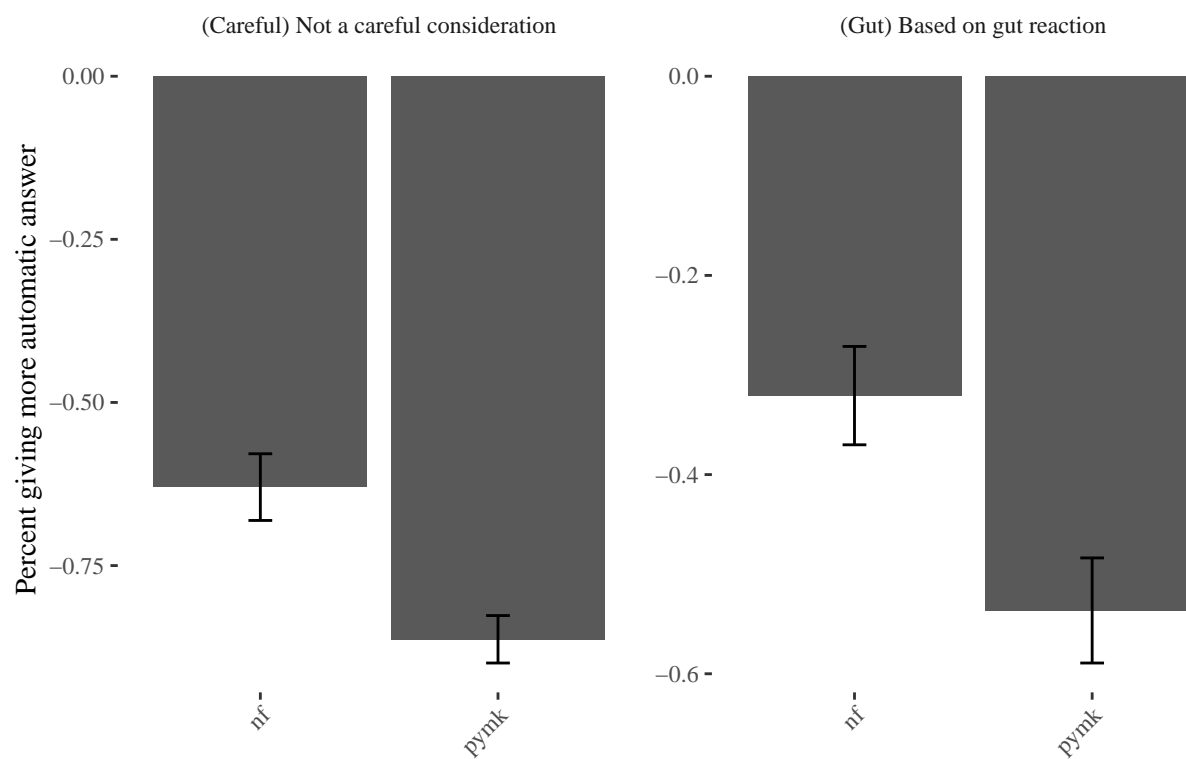


```
## quartz_off_screen
## 3
```

```
## pdf
## 2
```

```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

```
## Warning: Removed 2 rows containing non-finite values (stat_bin).
```


Histogram of reported time to decide

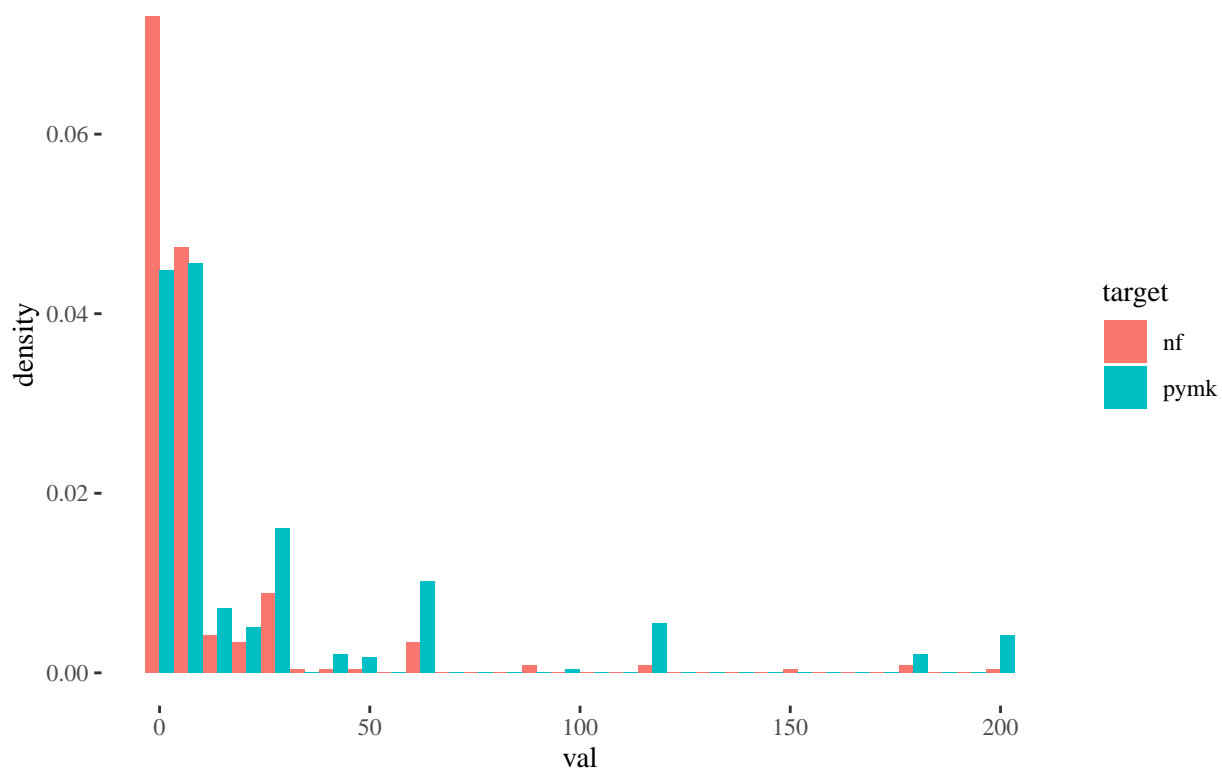

```
## quartz_off_screen
##      3

## pdf
##      2

## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
## Warning: Removed 2 rows containing non-finite values (stat_bin).
```

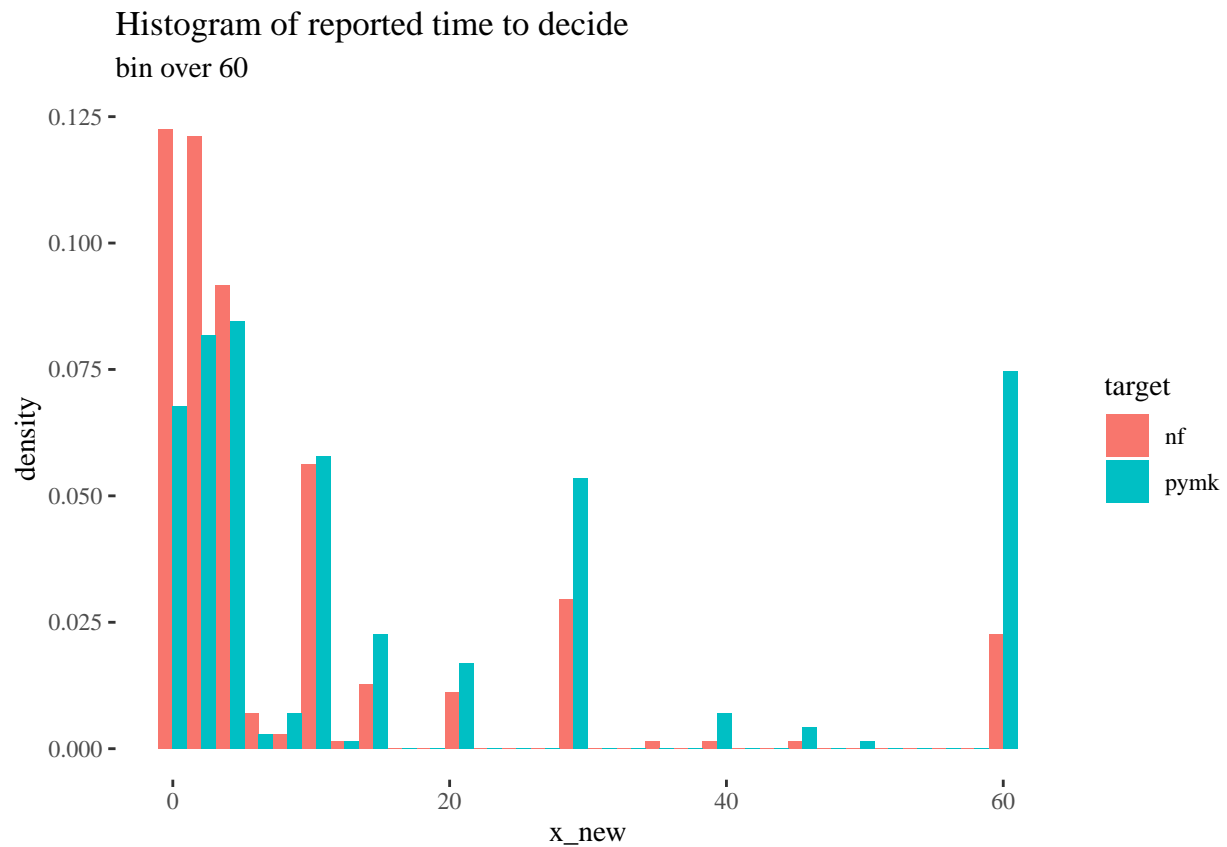


```
## quartz_off_screen
##      3

## pdf
##      2

## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
## Warning: Removed 2 rows containing non-finite values (stat_bin).
```


Histogram of reported time to decide
bin over 30

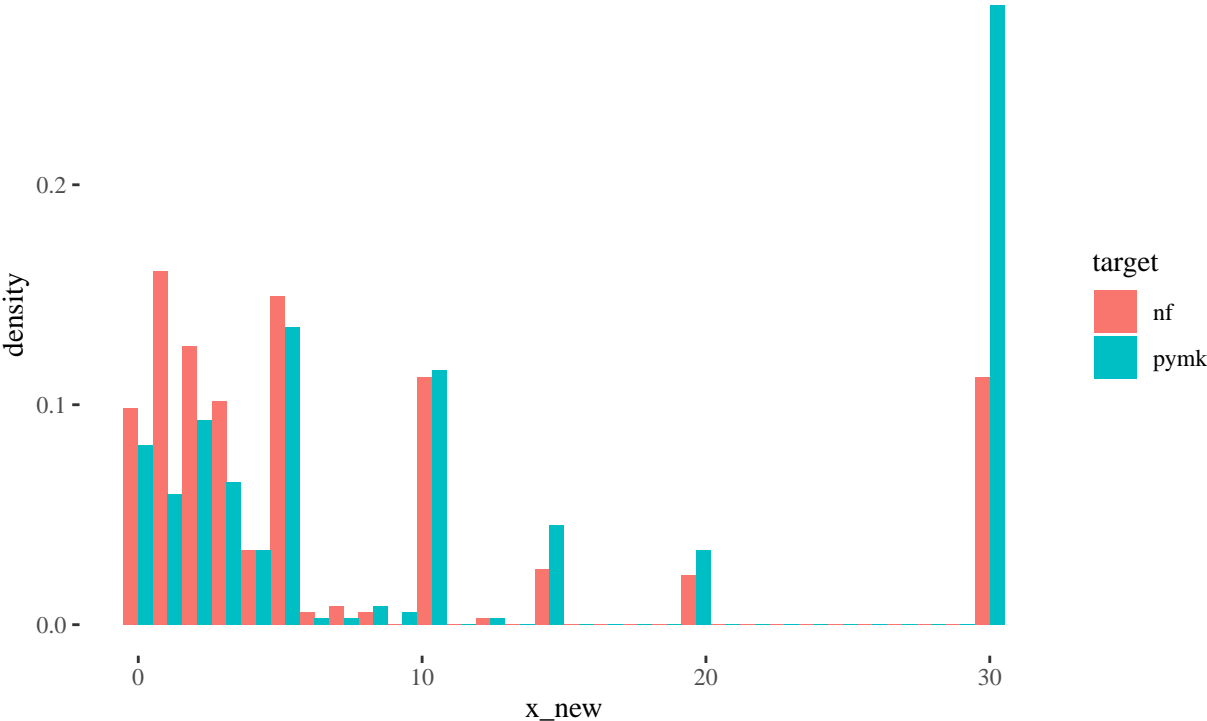

```
## quartz_off_screen
##      3

## pdf
##      2

## Warning: Removed 2 rows containing non-finite values (stat_ecdf).
```

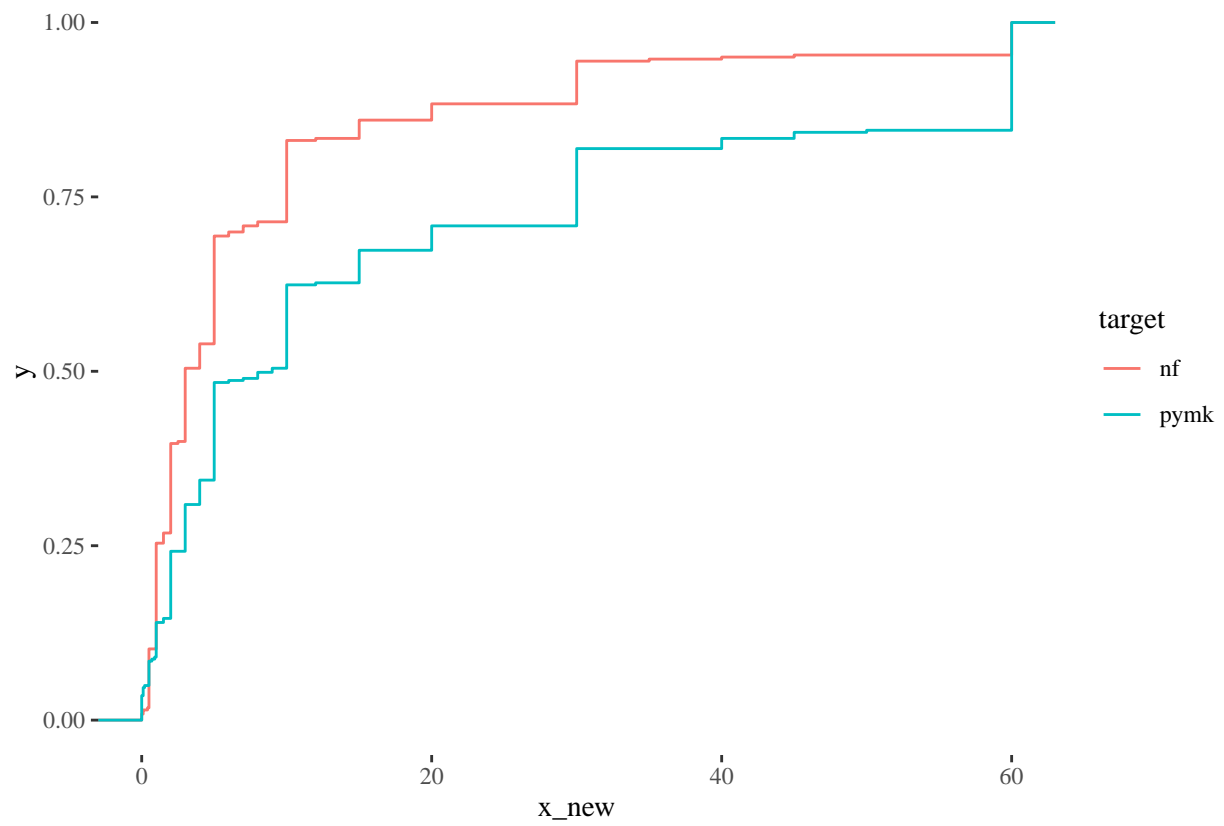

```
## quartz_off_screen
##           3
## pdf
##    2
```