


Explore ExIm study FB

ddd

9/3/2020

```
## # A tibble: 6 x 11
##   .set access cogeffer influence gut careful awareness intention control
##   <chr> <int> <dbl> <dbl> <dbl> <int> <int> <dbl> <int>
## 1 nf      7      1      1      2      2      7      5      4
## 2 pymk     6      4      6      1      1      6      3      3
## 3 nf      2      4      5      2      2      3      2      4
## 4 pymk     2      2      2      2      1      3      2      3
## 5 nf      5      3      3      2      2      2      2      1
## 6 pymk     5      3      3      2      1      2      2      1
## # ... with 2 more variables: efficiency <int>, speed <dbl>
## [1] "new_?(.*)_(.)(.*)"
## `summarise()` ungrouping output (override with `.groups` argument)
## `summarise()` regrouping output by 'cat' (override with `.groups` argument)
```

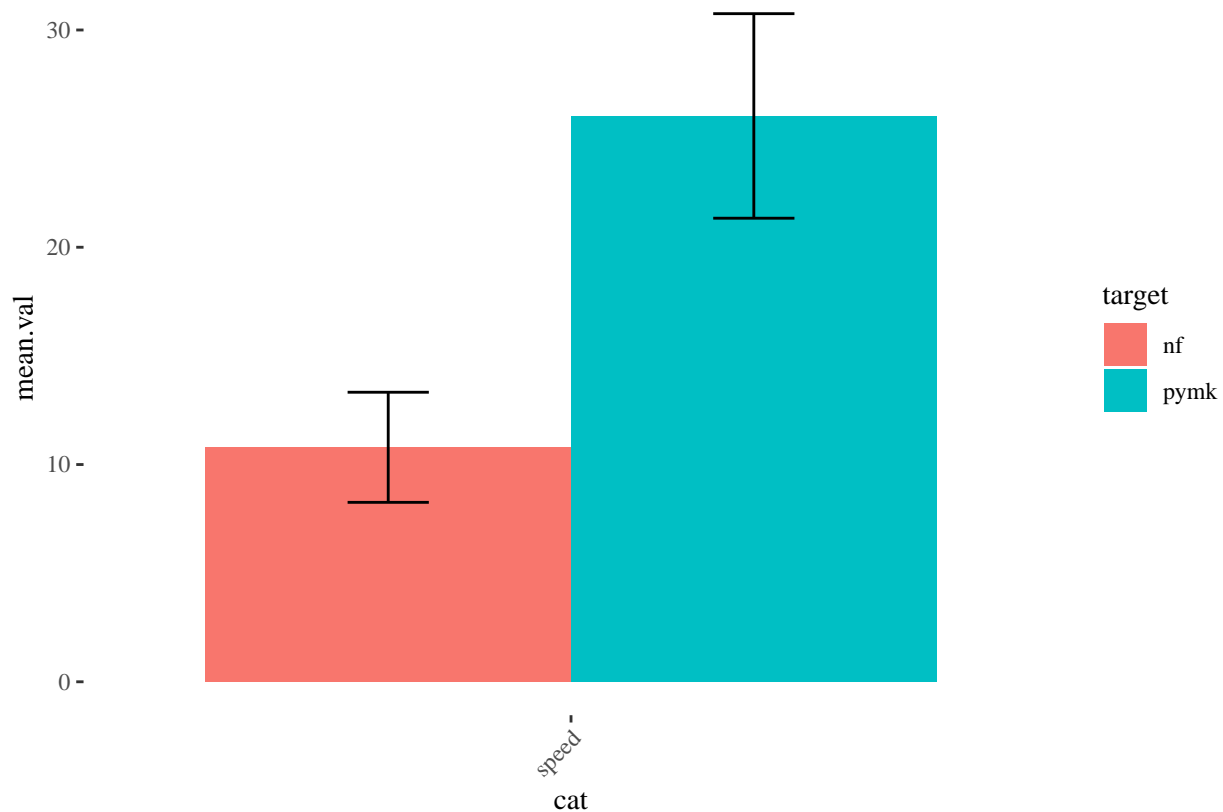


```
## quartz_off_screen
## 3
```

```
## pdf
## 2

## `summarise()` regrouping output by 'cat' (override with ` .groups` argument)
## `summarise()` ungrouping output (override with ` .groups` argument)
## `summarise()` ungrouping output (override with ` .groups` argument)
```


Automaticity Ratings by Target

All dimensions of automaticity indicate that NF behavior is more automatic than PYMK behavior.

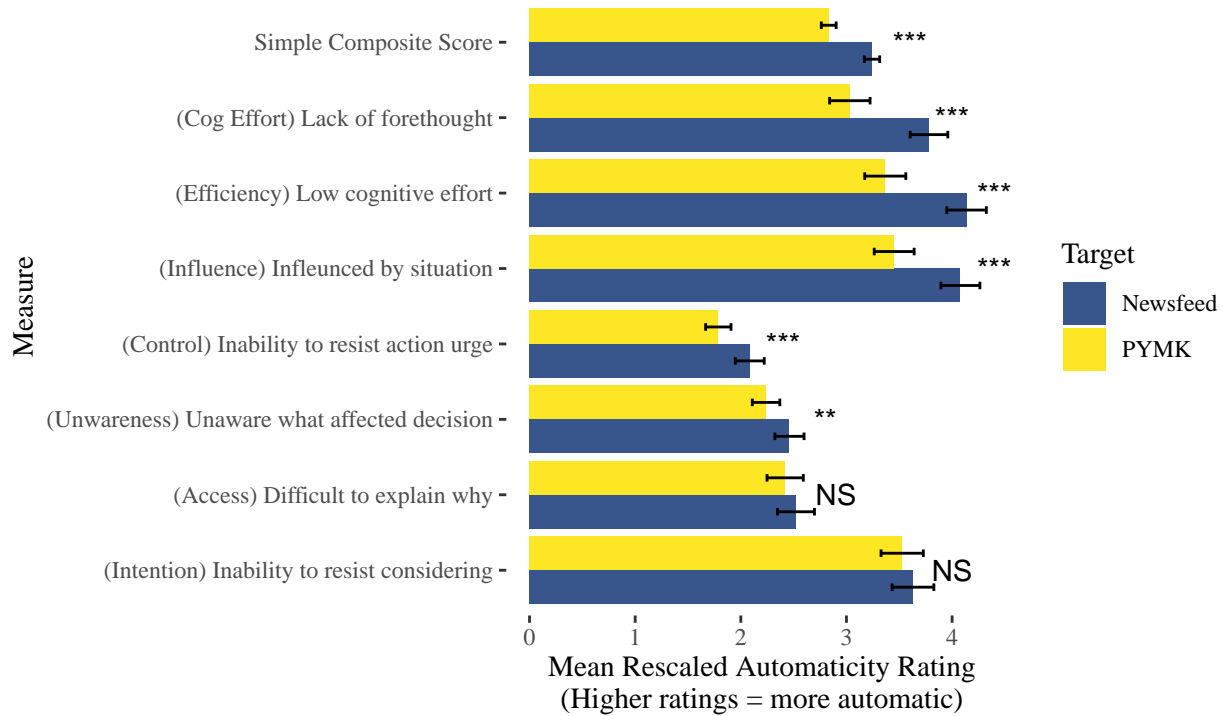


```
## quartz_off_screen
## 3

## pdf
## 2
```

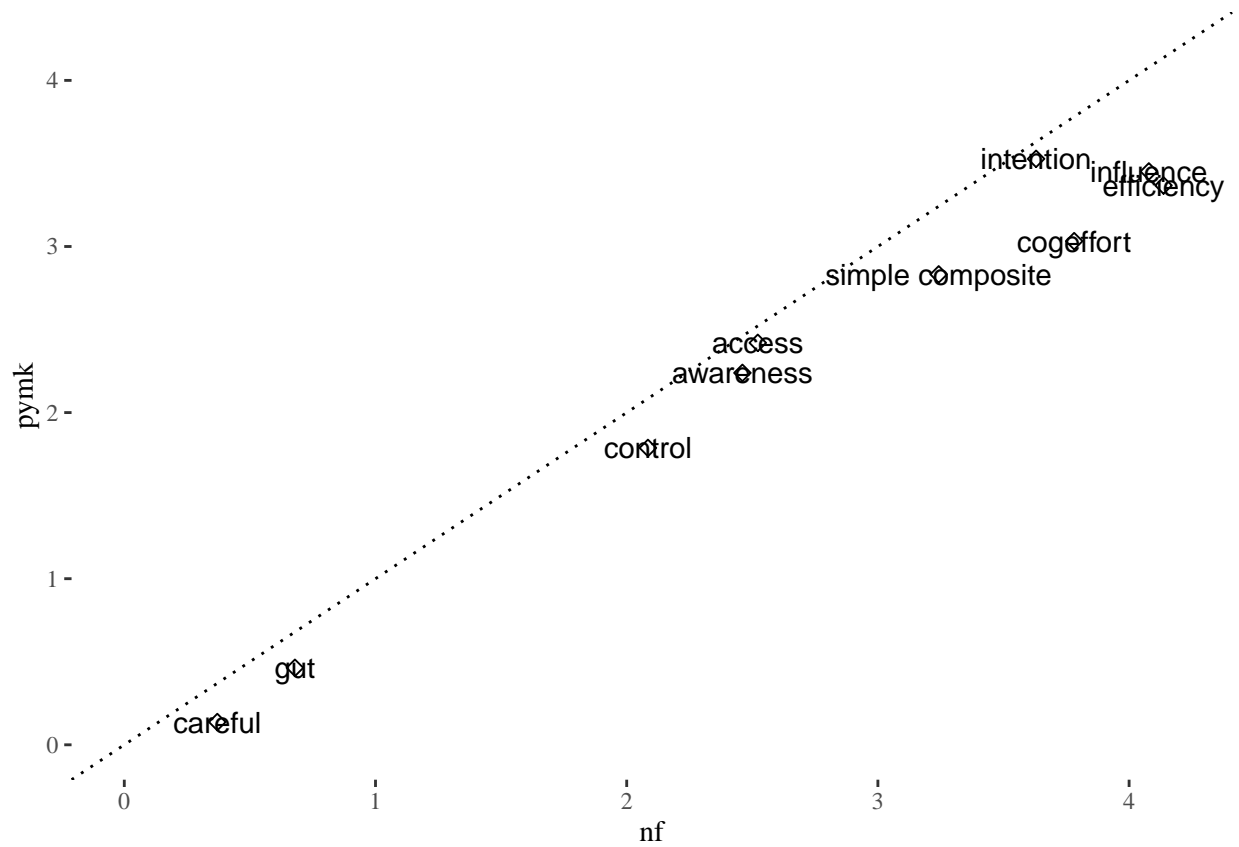

```
## quartz_off_screen
##      3
## pdf
##    2
```

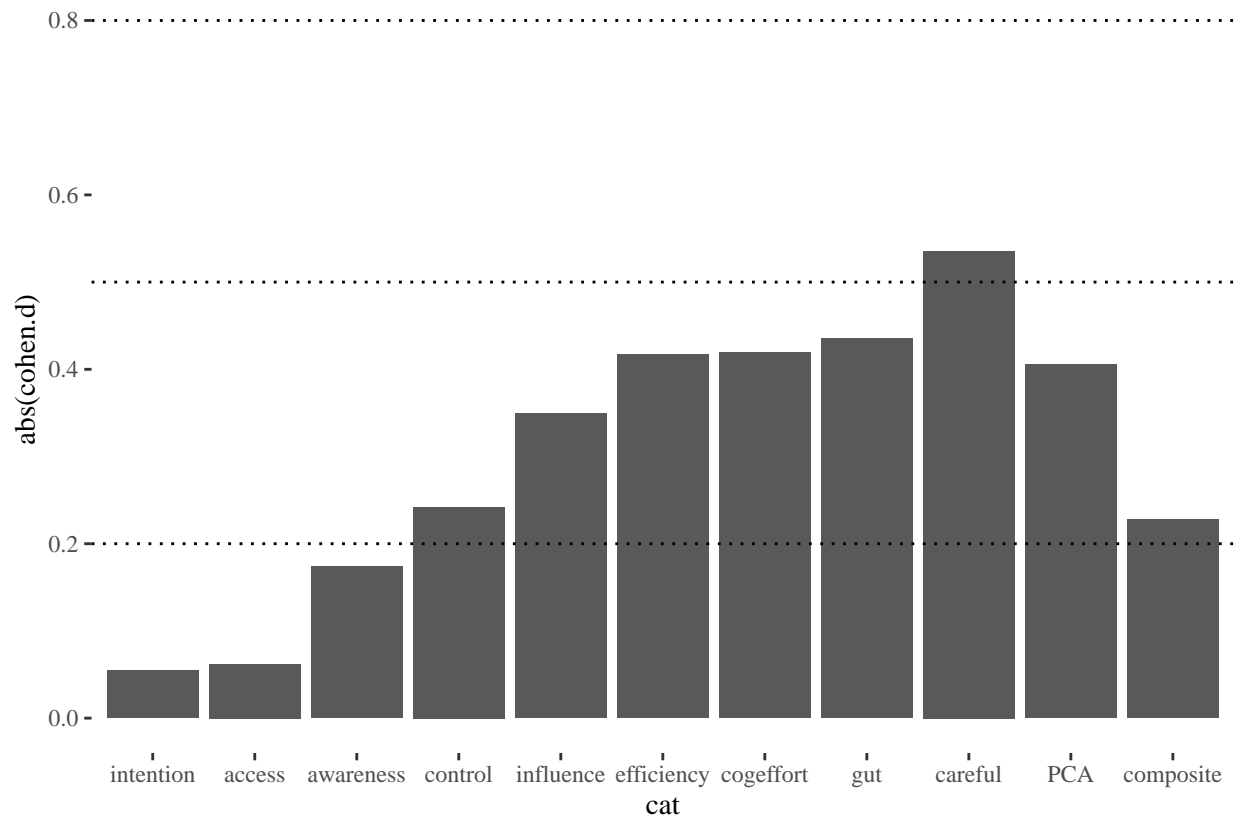


```
## quartz_off_screen
##           3

## pdf
##    2

## `summarise()` regrouping output by 'val', 'target' (override with `.groups` argument)
## `summarise()` regrouping output by 'cat' (override with `.groups` argument)
## Warning: Removed 20 rows containing non-finite values (stat_bin).
```

Automaticity Ratings by Target

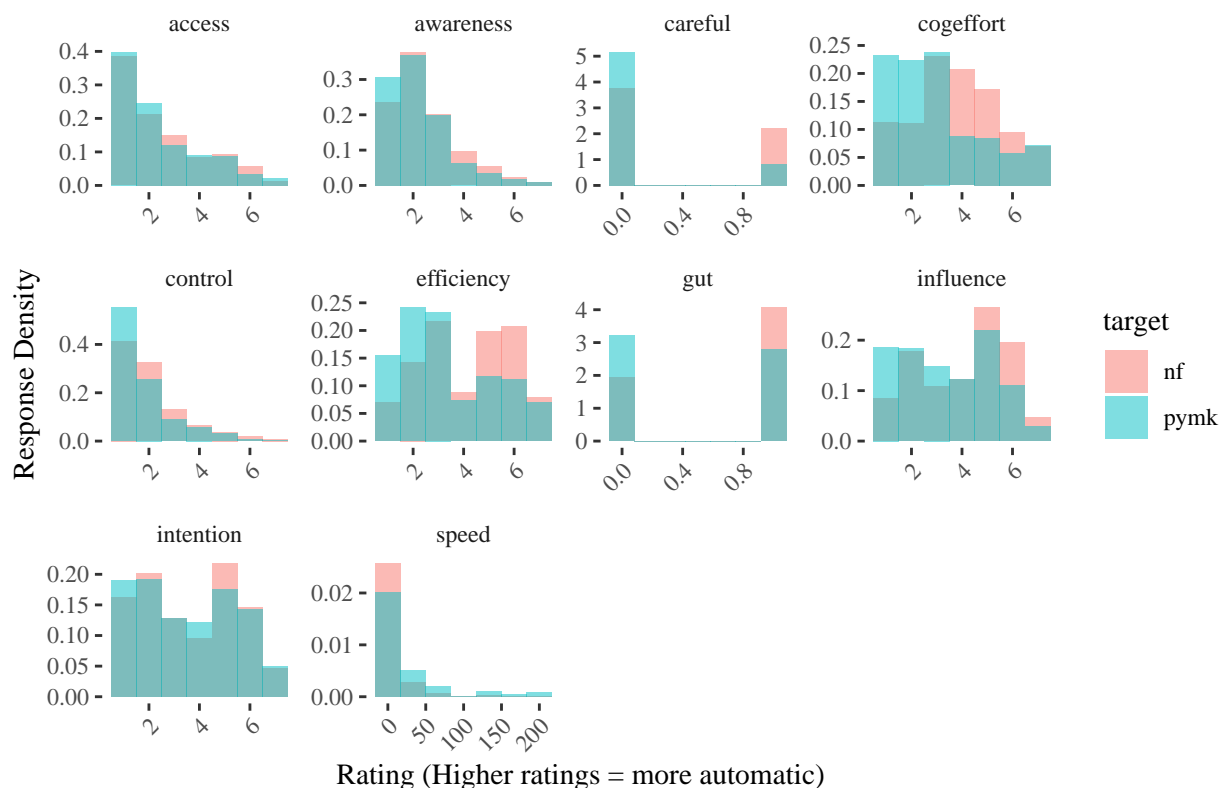


```
## quartz_off_screen
## 3
```

```
## pdf
## 2
```

```
## Warning: The labeller API has been updated. Labellers taking `variable` and
## `value` arguments are now deprecated. See labellers documentation.
```


```
## Warning: Removed 3 rows containing missing values (position_stack).
```

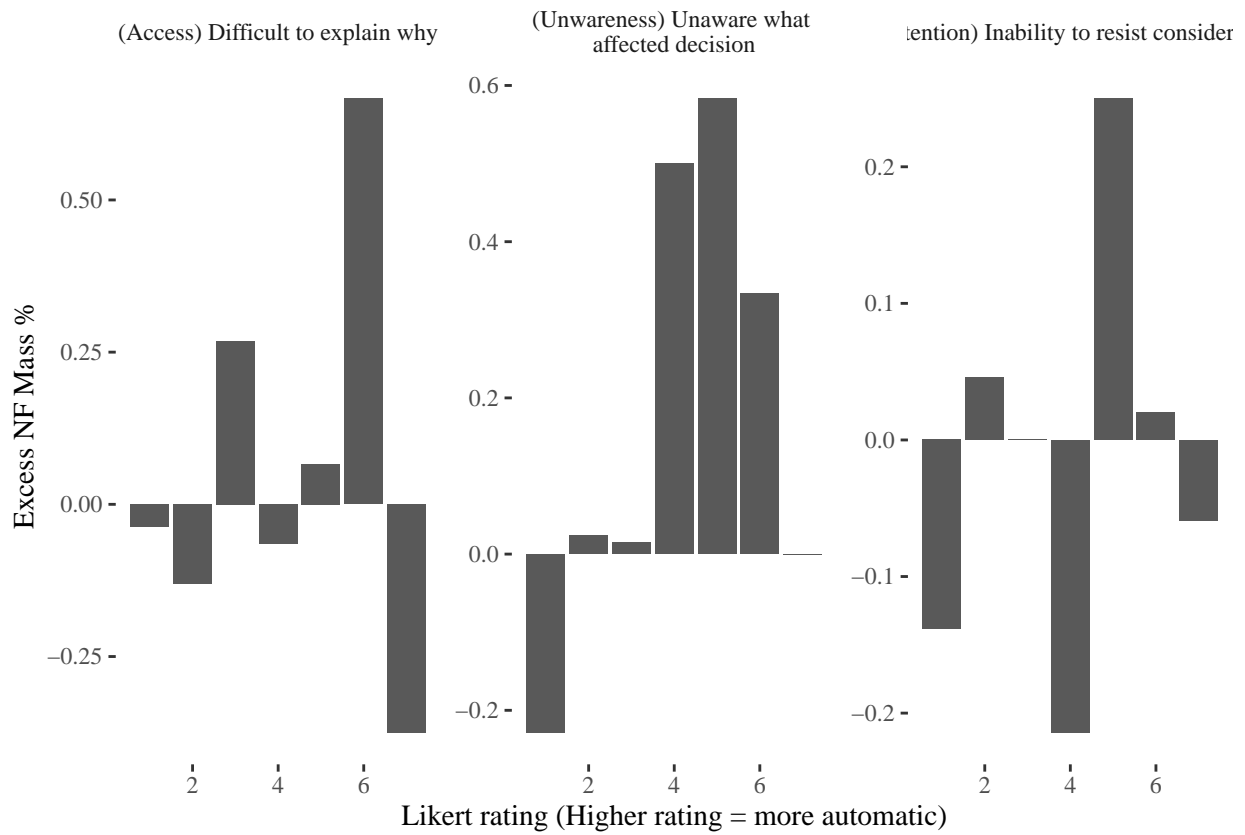


```
## quartz_off_screen
## 3
```

```
## pdf
## 2
```

```
## Warning: Removed 6 rows containing non-finite values (stat_ecdf).
```

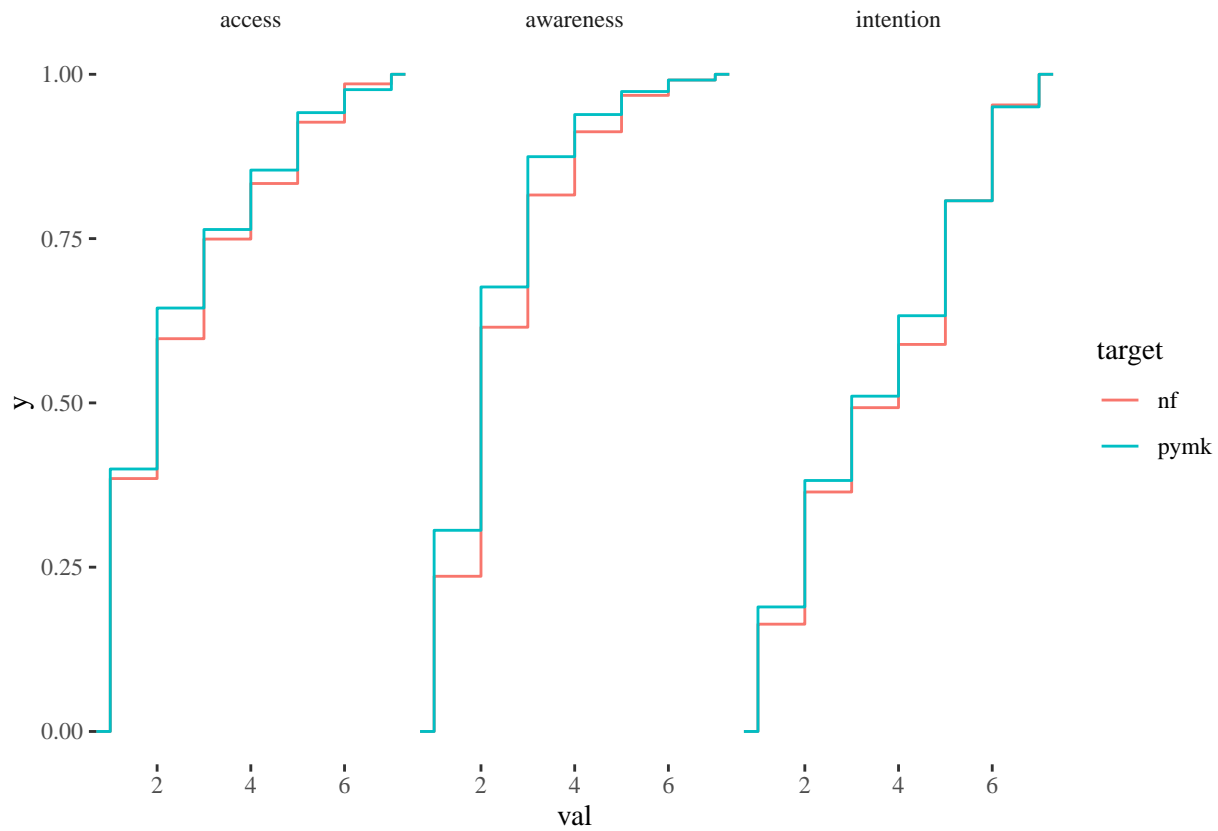

Warning: Removed 14 rows containing non-finite values (stat_ecdf).

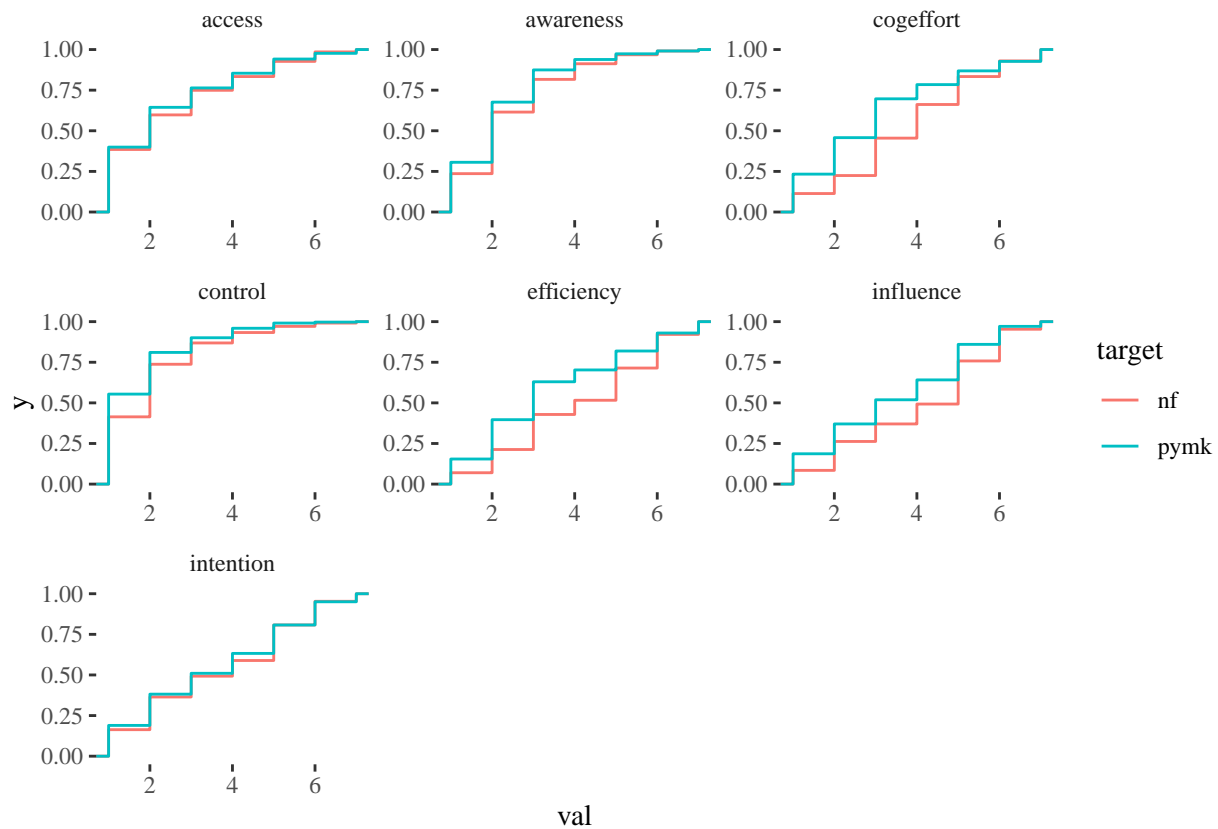


```
## quartz_off_screen
##           3

## pdf
##      2

## `summarise()` regrouping output by 'cat' (override with `.groups` argument)

## Warning: The labeller API has been updated. Labellers taking `variable` and
## `value` arguments are now deprecated. See labellers documentation.
```

Median splits of automaticity Ratings by Target

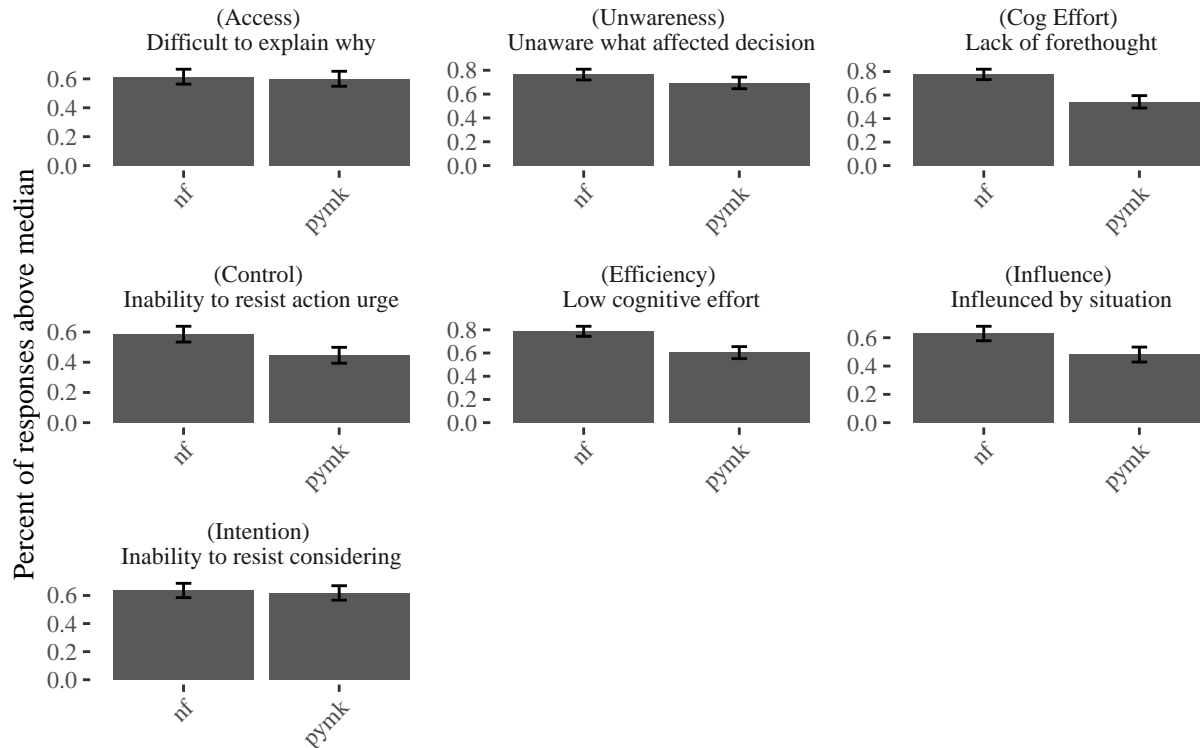


```
## quartz_off_screen
##           3

## pdf
##      2

## `summarise()` regrouping output by 'cat' (override with `.groups` argument)

## Warning: The labeller API has been updated. Labellers taking `variable` and
## `value` arguments are now deprecated. See labellers documentation.
```


Rate of Affirming Automaticity by Target

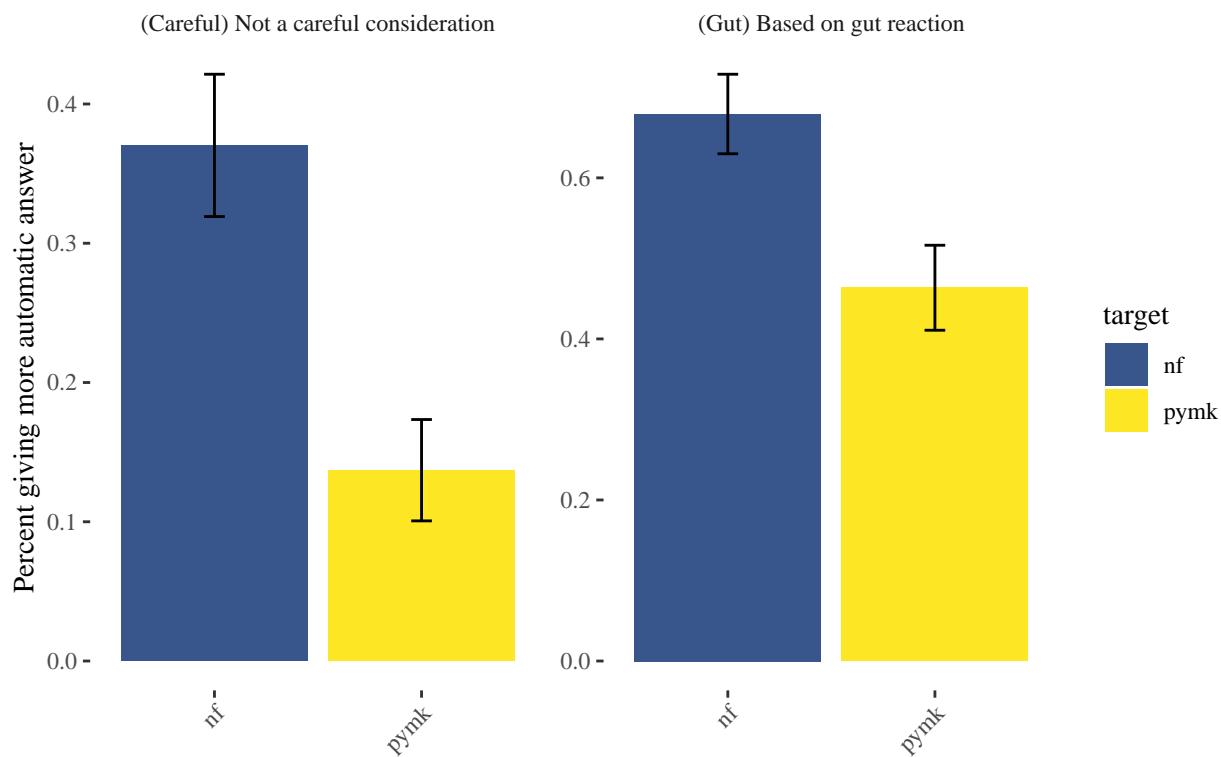


```
## quartz_off_screen
## 3

## pdf
## 2

## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
## Warning: Removed 2 rows containing non-finite values (stat_bin).
```


Histogram of reported time to decide

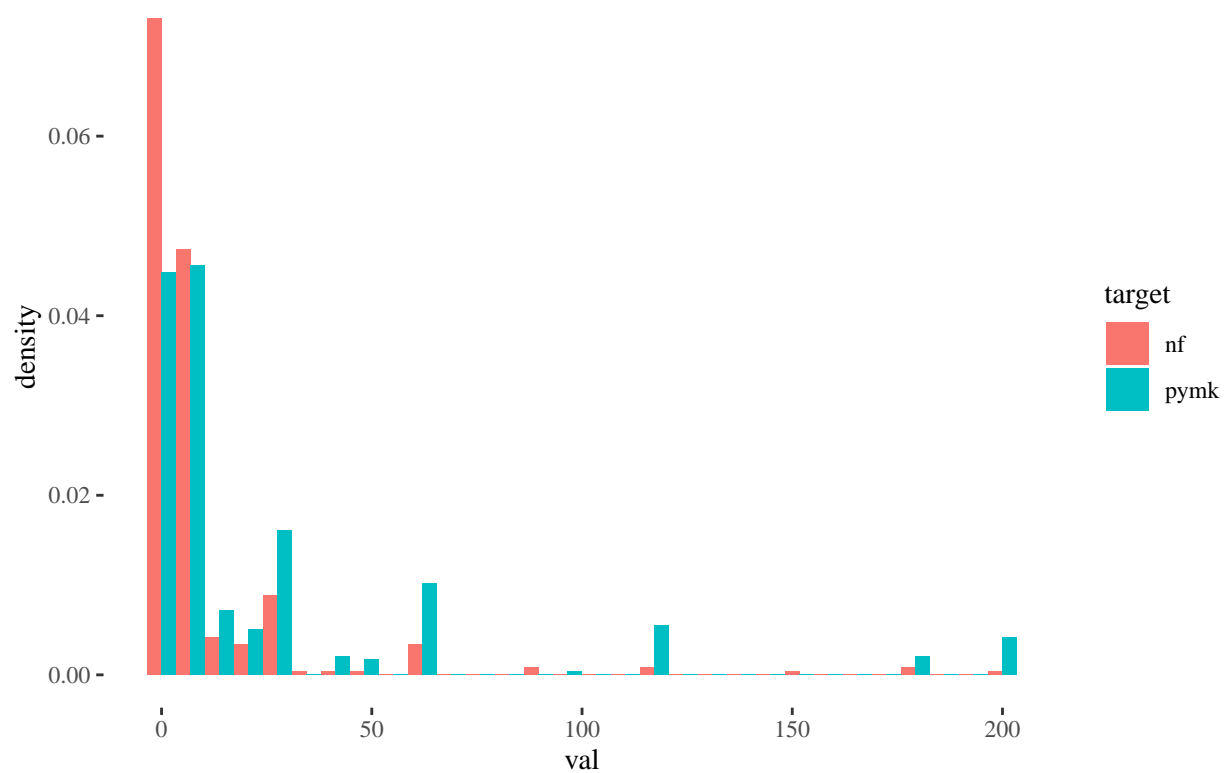

```
## quartz_off_screen
##      3

## pdf
##      2

## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
## Warning: Removed 2 rows containing non-finite values (stat_bin).
```

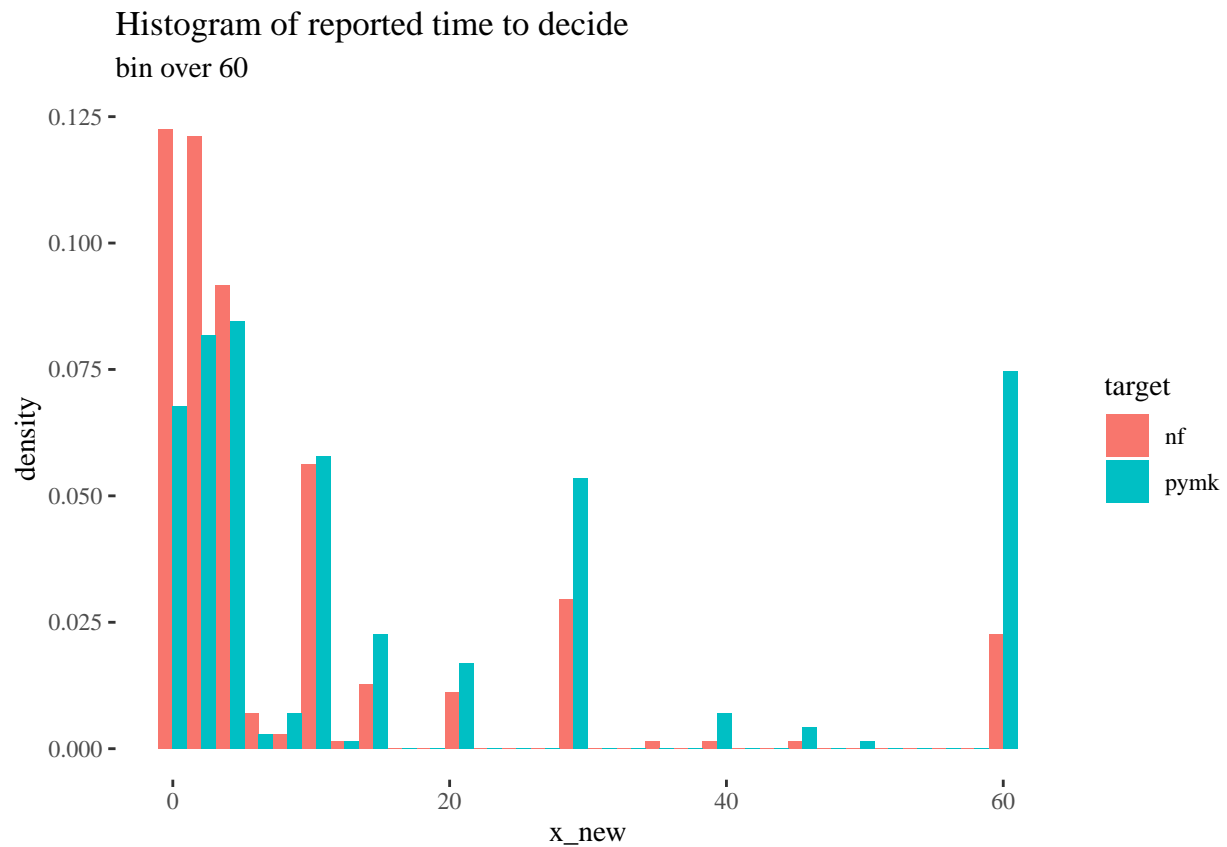


```
## quartz_off_screen
##      3

## pdf
##      2

## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
## Warning: Removed 2 rows containing non-finite values (stat_bin).
```


Histogram of reported time to decide
bin over 30

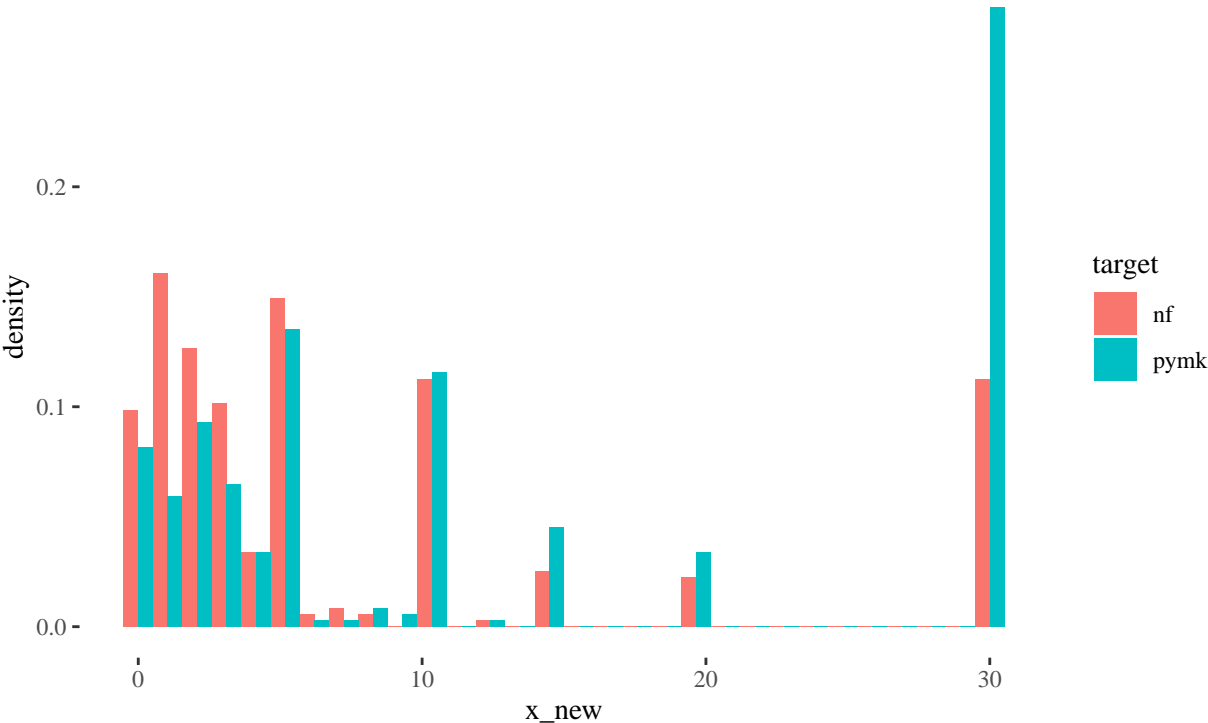

```
## quartz_off_screen
##      3

## pdf
##      2

## Warning: Removed 2 rows containing non-finite values (stat_ecdf).
```

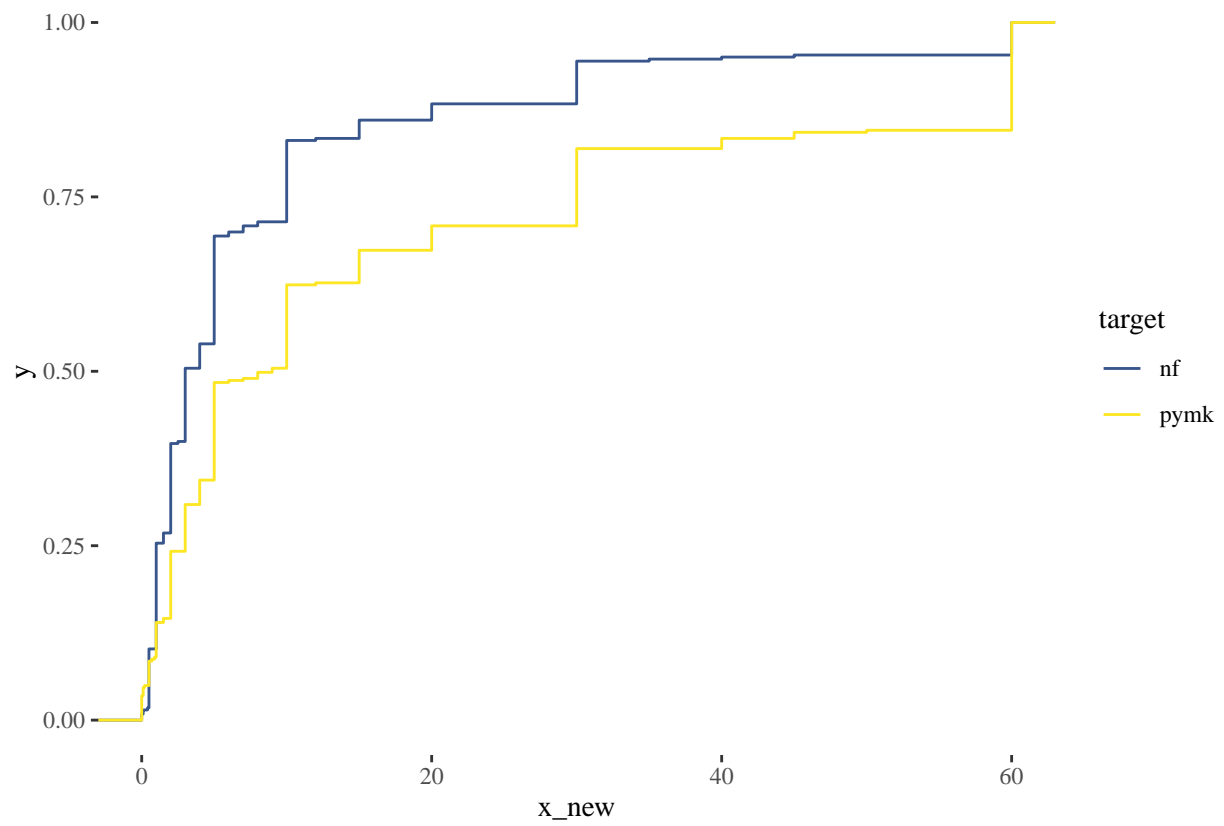

```
## quartz_off_screen
##      3
## pdf
##    2
```