

Supplementary Information

Bakary N. Diallo

2026-08-13

Table of contents

1	Supplementary Figures	1
2	Supplementary Data	1

1 Supplementary Figures

Redocking validation is shown in Figure [S1](#), and the complete screening workflow is summarized in Figure [S2](#). Annotated candidate structures are provided in Figure [S3](#).

2 Supplementary Data

Screening records are provided in Supplementary Data [S1](#), and physicochemical and ADMET-AI profiles are provided in Supplementary Data [S2](#).

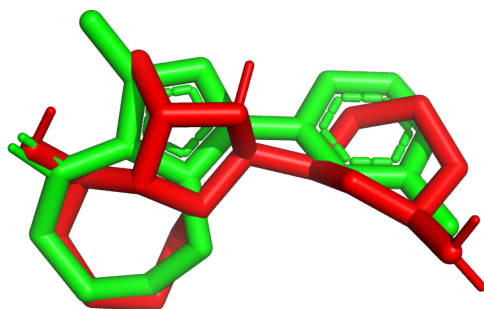


Figure S1: Superposition of crystallographic and redocked I5K poses in PfBDP1. The crystallographic pose is shown in green and the best pose redocked at exhaustiveness 32 in red. Heavy-atom RMSD was 1.019 Å.

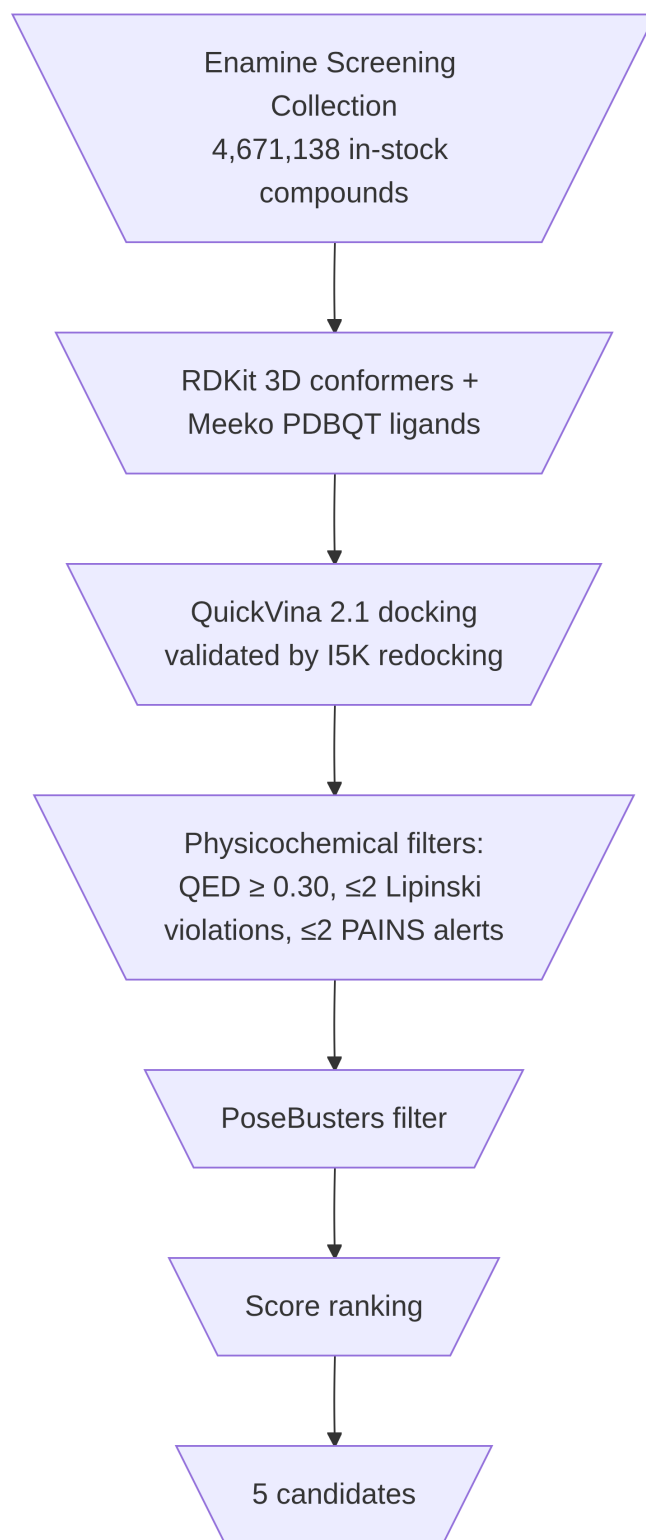


Figure S2: Funnel-shaped virtual-screening pipeline used to prioritize five PfBDP1 candidate ligands from the Enamine Screening Collection. Explicit thresholds ensure reproducibility: minimum QED 0.30³, maximum two Lipinski rule-of-five violations, maximum two PAINS alerts, and zero PoseBusters failures.

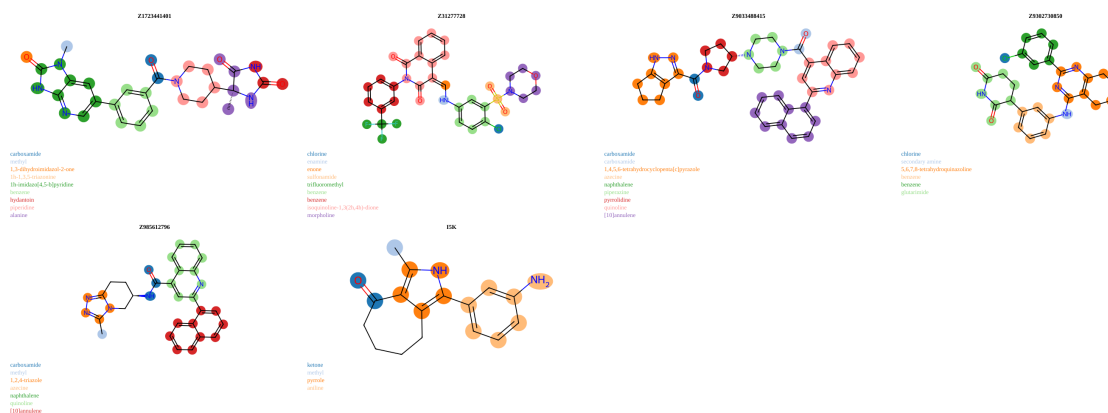


Figure S3: Functional-group and ring-system annotations for the five selected Enamine candidates and co-crystallized reference ligand I5K. Colored highlights and labels show the structural features used to support qualitative interpretation of hydrogen bonding, nonpolar interactions, MM/GBSA components, and predicted ADMET properties.

- [Download screening results](#)

Supplementary Data S1: Docking and hit-selection records for the five Enamine candidates, including compound identifiers, scores, physicochemical descriptors, structures, and binding estimates.

- [Download ADMET-AI profiles](#)

Supplementary Data S2: Compound-level physicochemical descriptors and ADMET-AI predictions for the five Enamine candidates and the co-crystallized reference ligand I5K.