
RDS

Dentro del rds copiamos la clave de acceso.

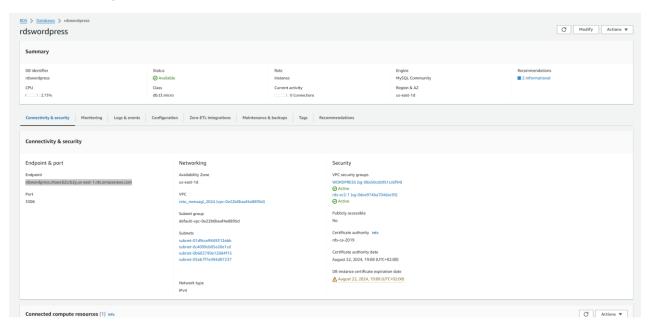

Accedemos a la instancia a través de ssh y ponemos el siguiente comando

```
ubuntu@ip-10-100-10-36:~$ mysql -h rdswordpress.chawc62ccb2y.us-east-1.rds.amazonaws.com -u root -p Enter password:
```

Ponemos la contraseña y estamos dentro

```
ubuntu@ip-10-100-10-36:~$ mysql -h rdswordpress.chawc62ccb2y.us-east-1.rds.amazonaws.com -u root -p
Enter password:
Welcome to the MySQL monitor. Commands end with ; or \g.
Your MySQL connection id is 2795
Server version: 8.0.35 Source distribution
Copyright (c) 2000, 2024, Oracle and/or its affiliates.
Oracle is a registered trademark of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.
Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.
mysql>
```