



```
[clean_up 63540fe] Remove all the cats
5 files changed, 5 deletions(-)
delete mode 100644 blue_octocat.txt
delete mode 100644 octocat.txt
delete mode 100644 octofamily/baby_octocat.txt
delete mode 100644 octofamily/momma_octocat.txt
delete mode 100644 red_octocat.txt
```

Success!

```
$ git checkout master
```

Switched to branch 'master'

Success!

```
$ |
```



```
unmatched double quote: git commit -m \ Remove a
```

```
$
```

```
$
```


```
$ git commit -m "Remove all the cats"
```

```
[clean_up 63540fe] Remove all the cats
5 files changed, 5 deletions(-)
delete mode 100644 blue_octocat.txt
delete mode 100644 octocat.txt
delete mode 100644 octofamily/baby_octocat.txt
delete mode 100644 octofamily/momma_octocat.txt
delete mode 100644 red_octocat.txt
```

Success!

```
$ |
```



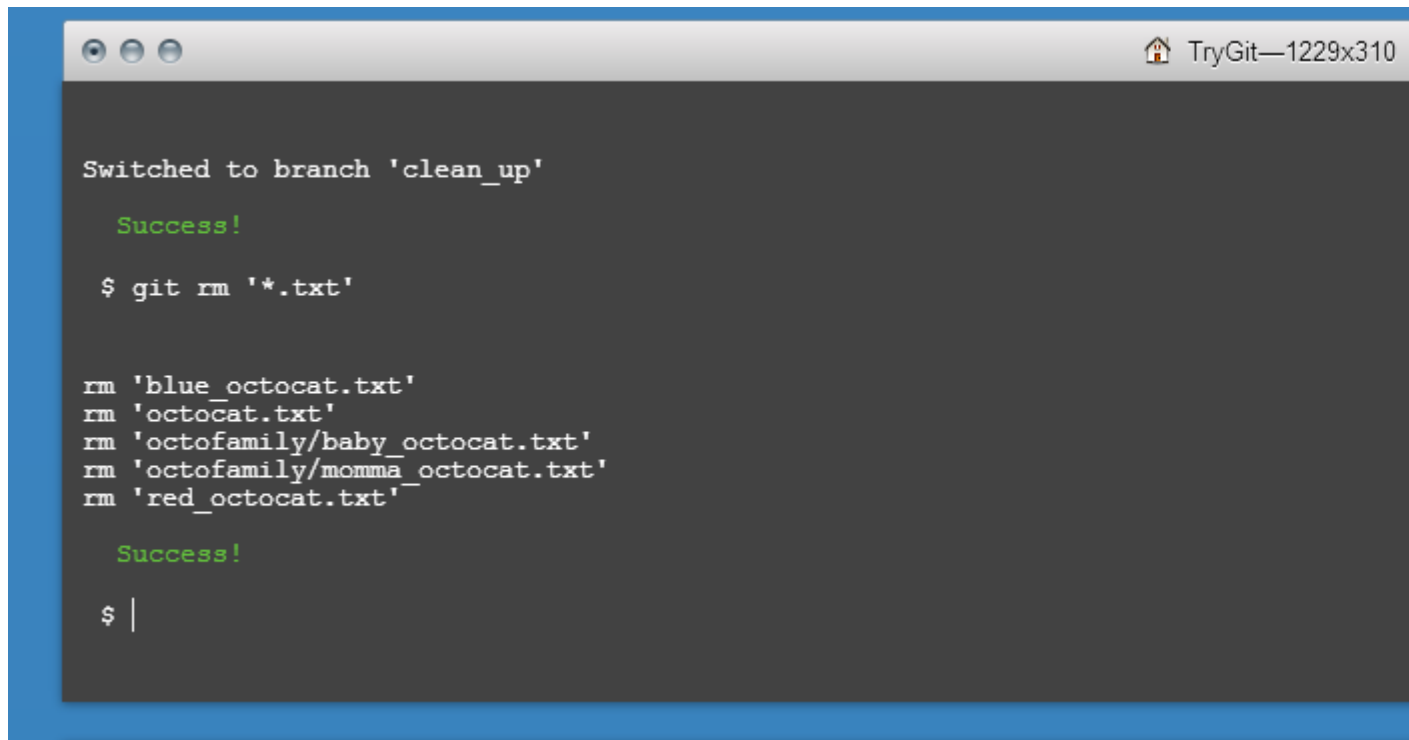

A terminal window titled "TryGit—1229x310" with a dark gray background. It shows the process of switching to a new branch and removing files. The text is as follows:

```
Switched to branch 'clean_up'


Success!

$ git rm '*.txt'

rm 'blue_octocat.txt'
rm 'octocat.txt'
rm 'octofamily/baby_octocat.txt'
rm 'octofamily/momma_octocat.txt'
rm 'red_octocat.txt'

Success!

$ |
```

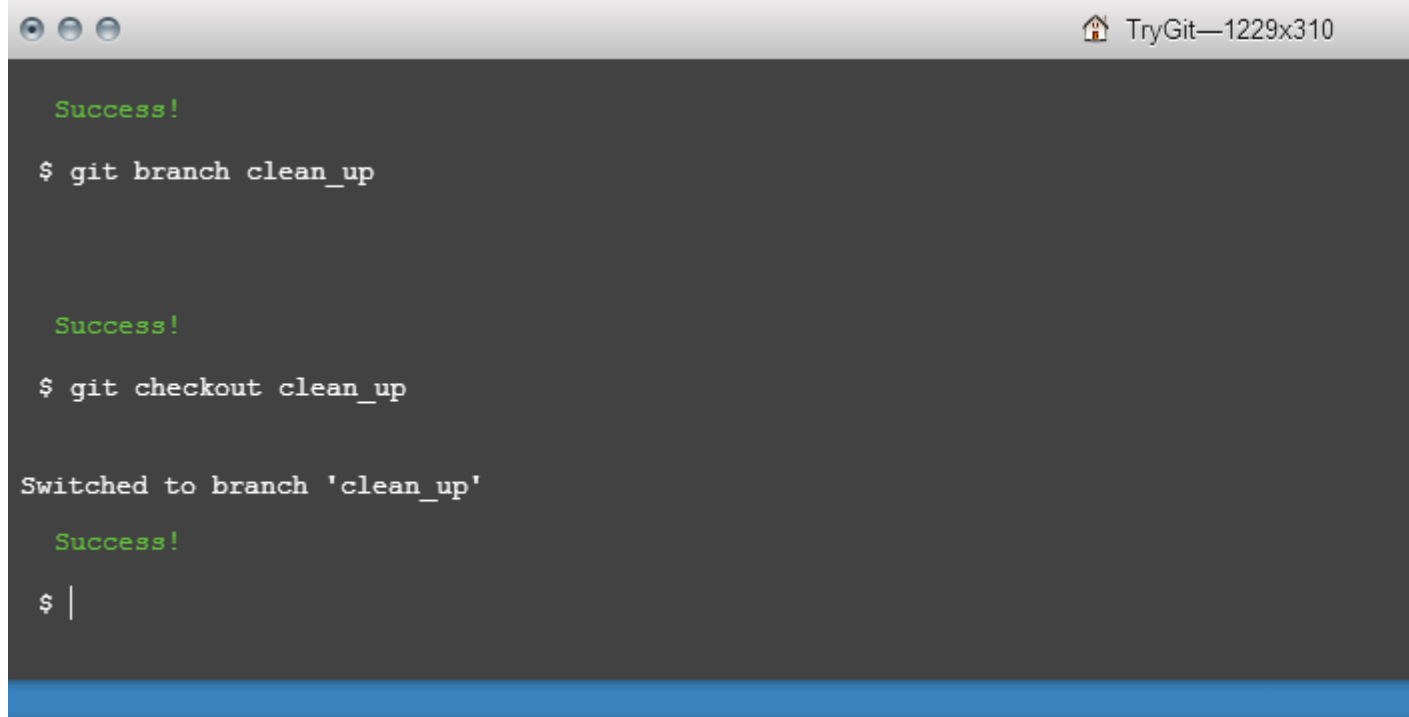

A terminal window titled "TryGit—1229x310" with a dark gray background. It shows the process of creating a new branch and checking it out. The text is as follows:

```
Success!

$ git branch clean_up


Success!

$ git checkout clean_up

Switched to branch 'clean_up'


Success!

$ |
```

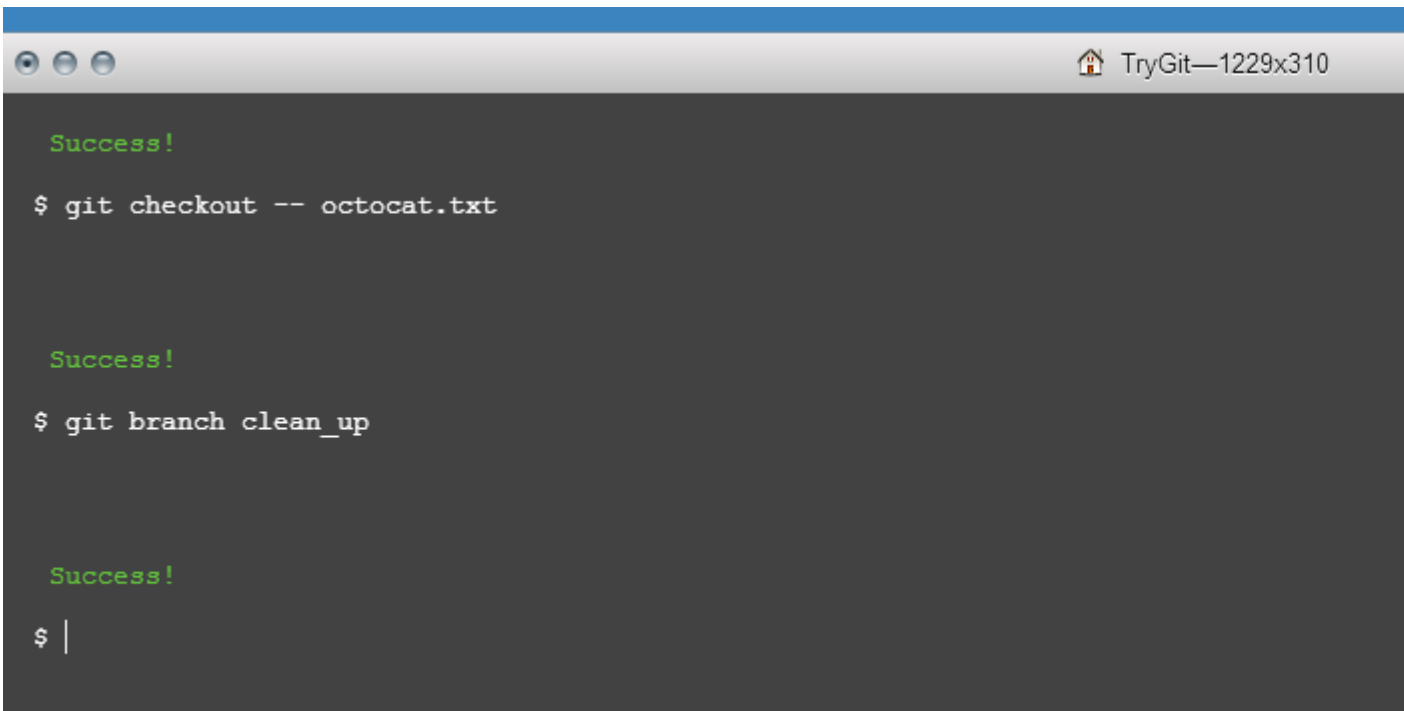

A terminal window titled "TryGit—1229x310" with a blue header bar. The terminal has a dark gray background and displays the following text:

```
Success!  
$ git checkout -- octocat.txt  
  
Success!  
$ git branch clean_up  
  
Success!  
$ |
```

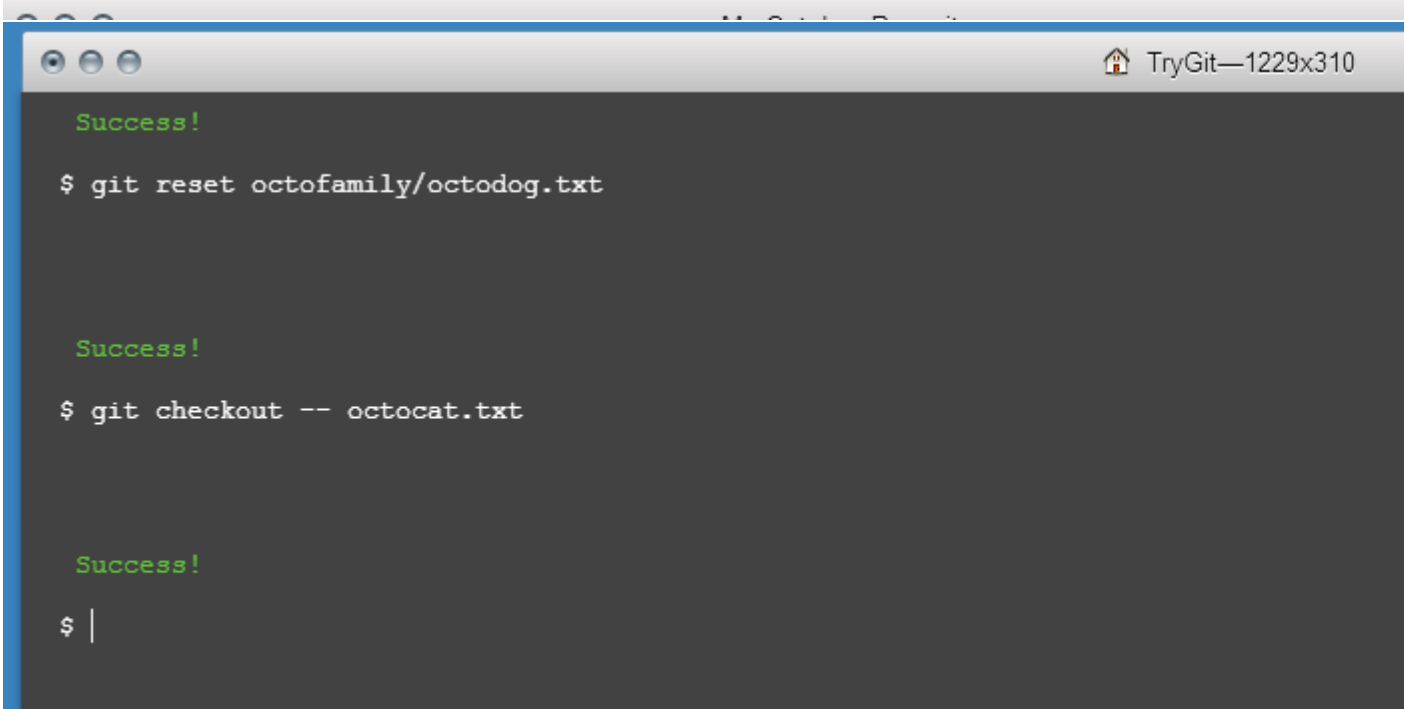

A terminal window titled "TryGit—1229x310" with a blue header bar. The terminal has a dark gray background and displays the following text:

```
Success!  
$ git reset octofamily/octodog.txt  
  
Success!  
$ git checkout -- octocat.txt  
  
Success!  
$ |
```



```
diff --git a/octofamily/octodog.txt b/octofamily/octodog.txt
new file mode 100644
index 0000000..cfbc74a
--- /dev/null
+++ b/octofamily/octodog.txt
@@ -0,0 +1 @@
+{wwoof
```

Success!

```
$ git reset octofamily/octodog.txt
```

Success!

```
$ |
```



Success!

```
$ git diff --staged
```

```
diff --git a/octofamily/octodog.txt b/octofamily/octodog.txt
new file mode 100644
index 0000000..cfbc74a
--- /dev/null
+++ b/octofamily/octodog.txt
@@ -0,0 +1 @@
+{wwoof
```

Success!

```
$ |
```



```
diff --git a/octocat.txt b/octocat.txt
index 7d8d808..e725ef6 100644
--- a/octocat.txt
+++ b/octocat.txt
@@ -1,1 @@
-A Tale of Two Octocats
+[m]A Tale of Two Octocats and an Octodog

Success!

$ git add octofamily/octodog.txt

Success!

$ |
```

```
- ---- -, - ----, ,
create mode 100644 yellow_octocat.txt


Success!

$ git diff HEAD

diff --git a/octocat.txt b/octocat.txt
index 7d8d808..e725ef6 100644
--- a/octocat.txt
+++ b/octocat.txt
@@ -1,1 @@
-A Tale of Two Octocats
+[m]A Tale of Two Octocats and an Octodog


Success!

$ |
```

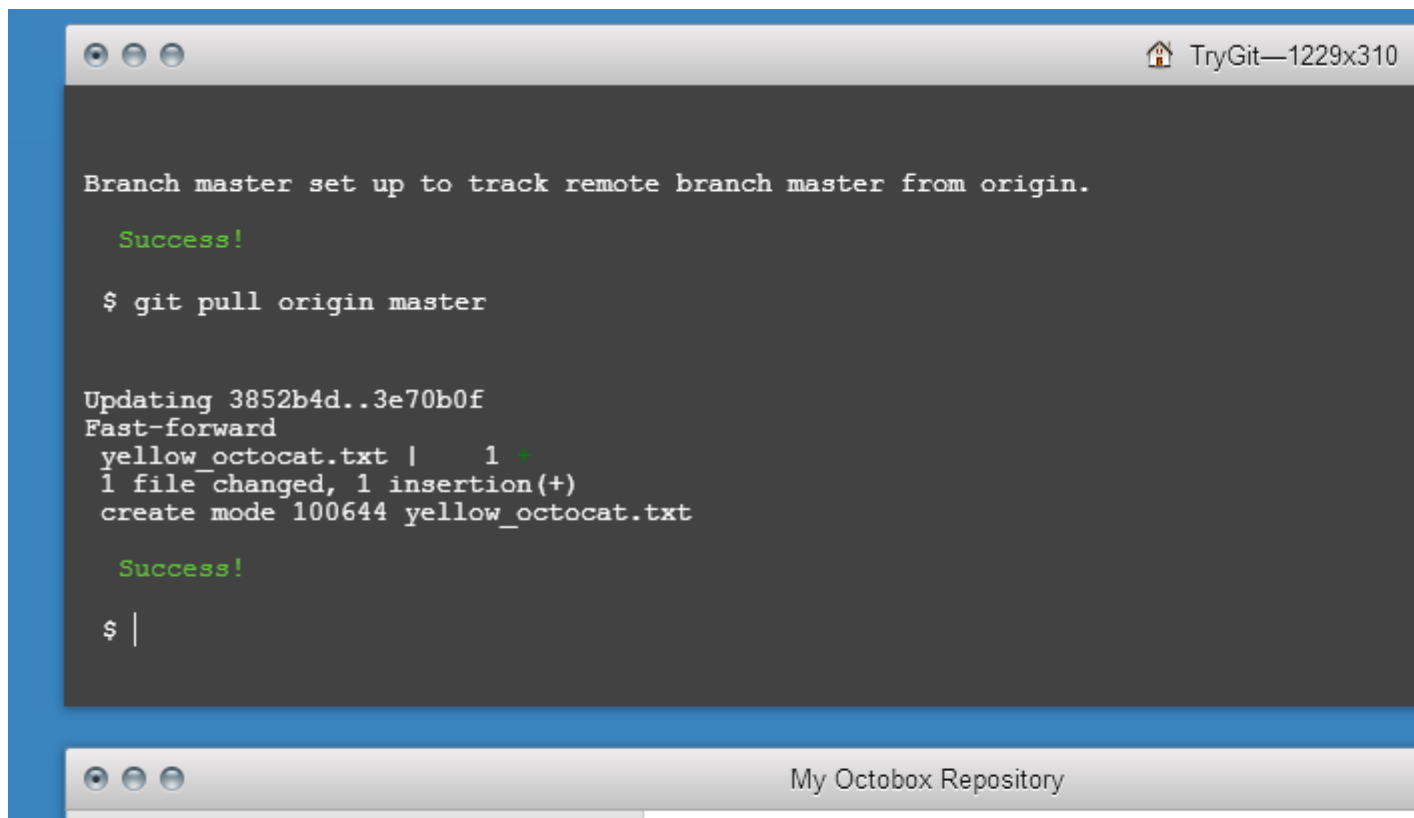

A terminal window with a title bar containing three window control buttons and the text 'TryGit—1229x310'. The terminal output shows a message about tracking the remote branch, a success message, the execution of 'git pull origin master', and details of a fast-forward update for 'yellow_octocat.txt'. The prompt '\$ |' is visible at the bottom.

```
Branch master set up to track remote branch master from origin.  
  
Success!  
  
$ git pull origin master  
  
Updating 3852b4d..3e70b0f  
Fast-forward  
yellow_octocat.txt | 1 +  
1 file changed, 1 insertion(+)  
create mode 100644 yellow_octocat.txt  
  
Success!  
  
$ |
```

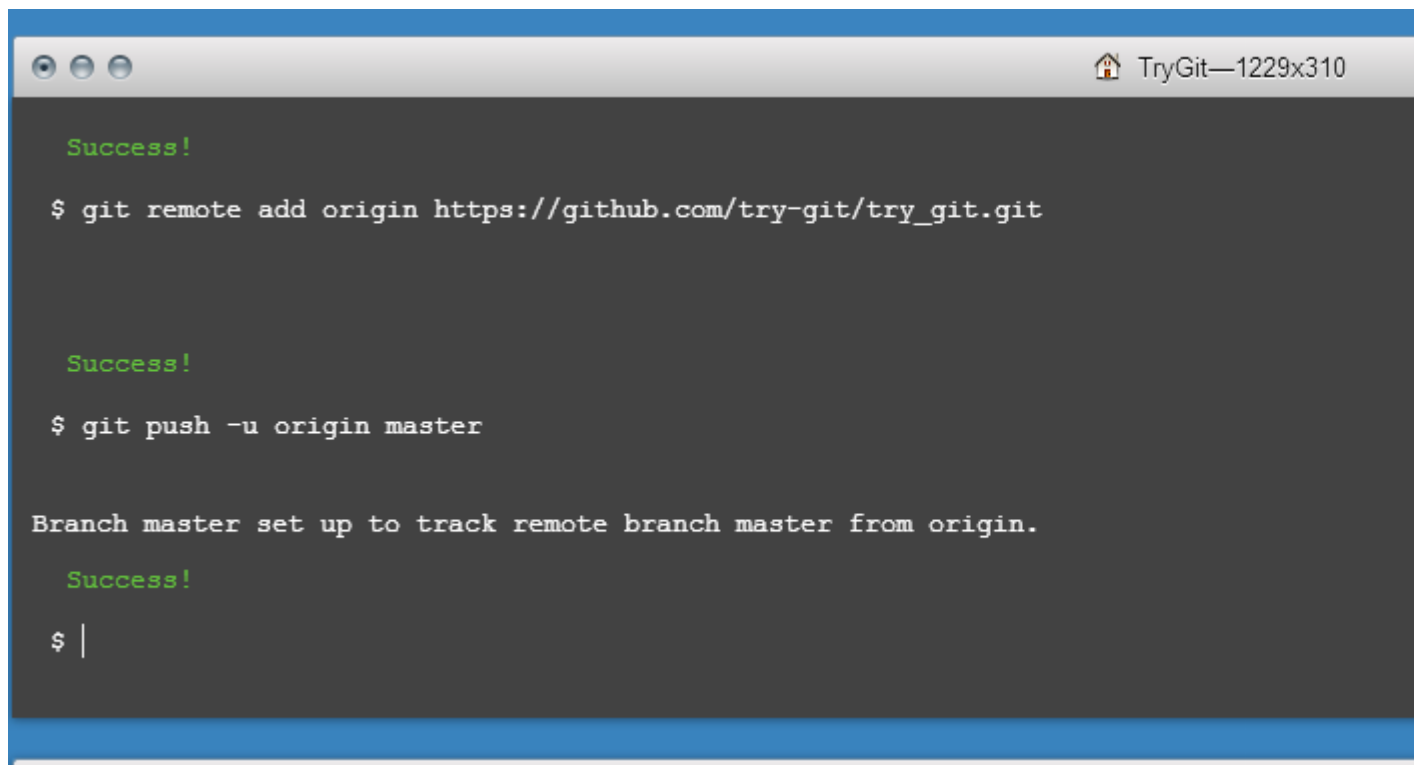

A terminal window with a title bar containing three window control buttons and the text 'TryGit—1229x310'. The terminal output shows a success message, the execution of 'git remote add origin https://github.com/try-git/try_git.git', another success message, the execution of 'git push -u origin master', and a message about tracking the remote branch. The prompt '\$ |' is visible at the bottom.

```
Success!  
  
$ git remote add origin https://github.com/try-git/try_git.git  
  
Success!  
  
$ git push -u origin master  
  
Branch master set up to track remote branch master from origin.  
  
Success!  
  
$ |
```

Add all the octocat txt files

commit b652edfd888cd3d5e7fcb857d0dabc5a0fcb5e28

Author: Try Git <try_git@github.com>

Date: Sat Oct 10 08:30:00 2020 -0500

Added cute octocat story

Success!

\$ git remote add origin https://github.com/try-git/try_git.git

Success!

\$ |

\$ git log

commit 3852b4db1634463d0bb4d267edb7b3f9cd02ace1

Author: Try Git <try_git@github.com>

Date: Sat Oct 10 08:30:00 2020 -0500

Add all the octocat txt files

commit b652edfd888cd3d5e7fcb857d0dabc5a0fcb5e28

Author: Try Git <try_git@github.com>

Date: Sat Oct 10 08:30:00 2020 -0500

Added cute octocat story

Success!

\$ |

TryGit—1229x310

Success!

\$ git commit -m 'Add all the octocat txt files'

[master 3852b4d] Add all the octocat txt files
4 files changed, 4 insertions(+)
create mode 100644 blue_octocat.txt
create mode 100644 octofamily/baby_octocat.txt
create mode 100644 octofamily/momma_octocat.txt
create mode 100644 red_octocat.txt

Success!

\$ |

My Octobox Repository

TryGit—1229x310

\$ git commit -m "Add cute octocat story"

[master (root-commit) 20b5ccd] Add cute octocat story
1 file changed, 1 insertion(+)
create mode 100644 octocat.txt

Success!

\$ git add '*.txt'

Success!

\$



```
$ git statusgit commit -m "Add cute octocat story"
```

```
git: 'statusgit' is not a git command. See 'git --help'.
```

```
Did not use git commit
```

```
$ git commit -m "Add cute octocat story"
```

```
[master (root-commit) 20b5ccd] Add cute octocat story  
1 file changed, 1 insertion(+)  
create mode 100644 octocat.txt
```

```
Success!
```

```
$ |
```



```
Nice job, you've added octocat.txt to the Staging Area
```

```
$ git status
```

```
# On branch master  
#  
# Initial commit  
#  
# Changes to be committed:  
#   (use "git rm --cached <file>..." to unstage)  
#  
#       new file:   octocat.txt  
#
```

```
Success!
```

```
$ git status
```

```
TryGit—1229x310

$ git status
$

# On branch master
#
# Initial commit
#
nothing to commit (create/copy files and use "git add" to track)

Success!

$ git status

# On branch master
#
# Initial commit
#
# Untracked files:
#   (use "git add <file>..." to include in what will be committed)
```

```
TryGit—1229x310

Press enter to submit commands

> git init

Initialized empty Git repository in /.git/

Success!

$
$
$
$
$
$
$
$
~
```

Congratulations



Nice job completing the TryGit course from O'Reilly. You've earned that cute little badge over there. To get more badges, show off your whiskers for all eternity, [sign in](#) or [create a free account](#). We know how easy it is to try Git!

Share With Your Friends



Two



Continue Learning Git

If you enjoyed this course, take the next step and dive deeper into Git, focusing on topics such as Rebasing.

Continue Learning



Continue Learning Git



More



success:

```
$ git branch -d clean_up
```

Deleted branch clean_up (was ec6888b).

Success!

```
$ git push
```

To https://github.com/try-git/try_git.git
3e70b0f..b845b1f master -> master

Success!

>

Updating 3852b4d..ec6888b

Fast-forward

blue_octocat.txt		1	-
octocat.txt		1	-
octofamily/baby_octocat.txt		1	-
octofamily/momma_octocat.txt		1	-
red_octocat.txt		1	-

5 files changed, 5 deletions(-)

delete mode 100644 blue_octocat.txt

delete mode 100644 octoCat.txt

delete mode 100644 octofamily/baby_octocat.txt

delete mode 100644 octofamily/momma_octocat.txt

delete mode 100644 red_octocat.txt

Success!

```
$ git branch -d clean_up|
```