




Despliegue a Producción Control de Clientes

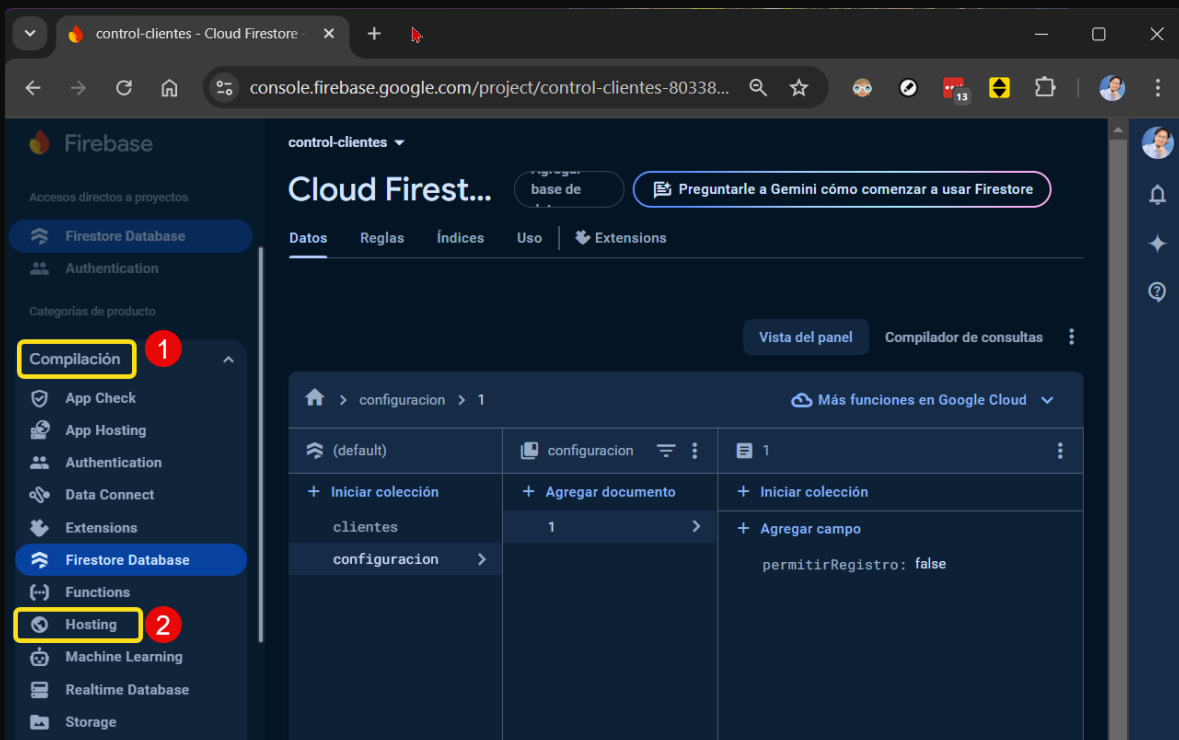


A continuación, vamos a ver las nuevas pantallas para el despliegue a producción del proyecto de Control de Clientes, incluyendo los cambios necesarios en los comandos a ejecutar.

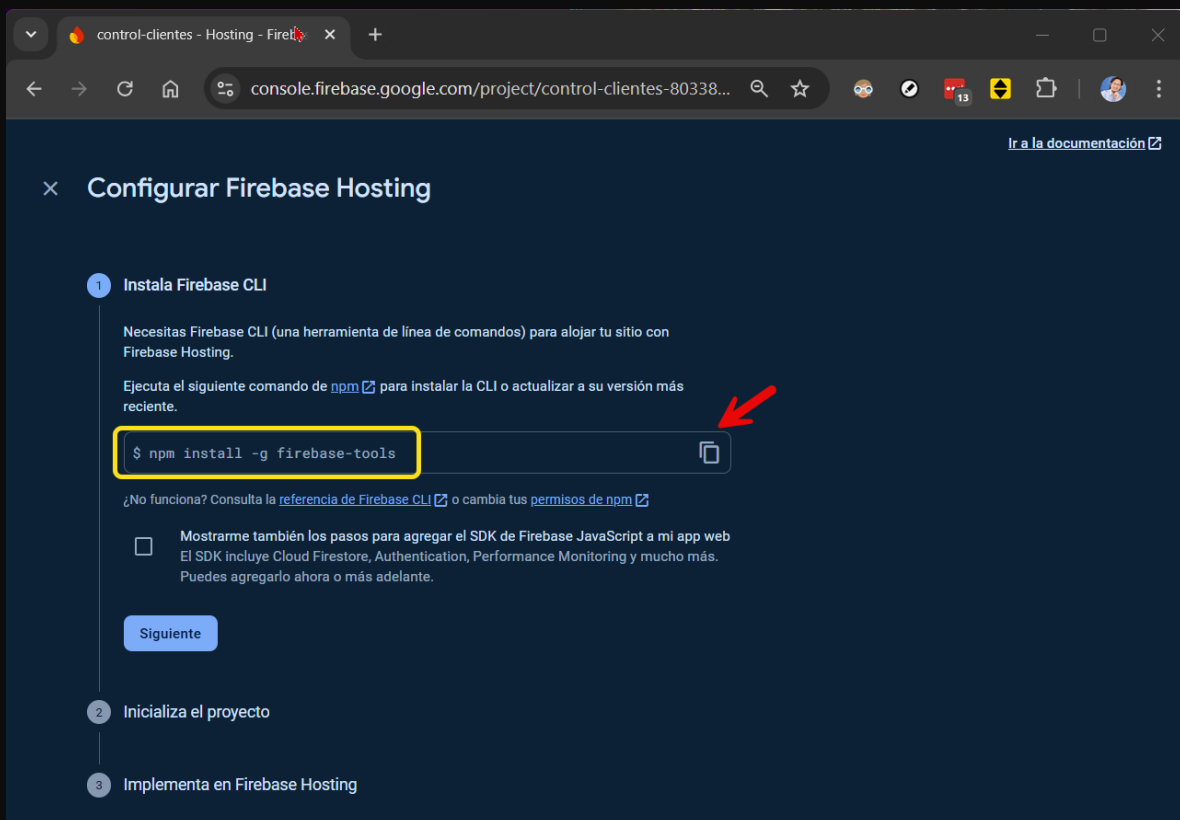

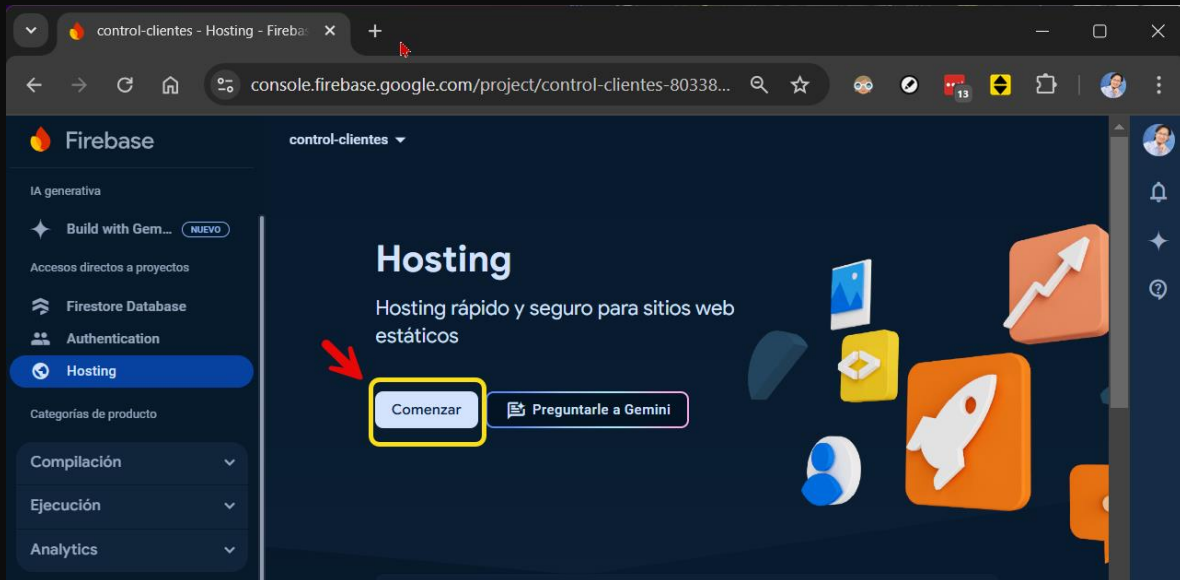

Ejecutar el comando como se indica:

`npm install -g firebase-tools`

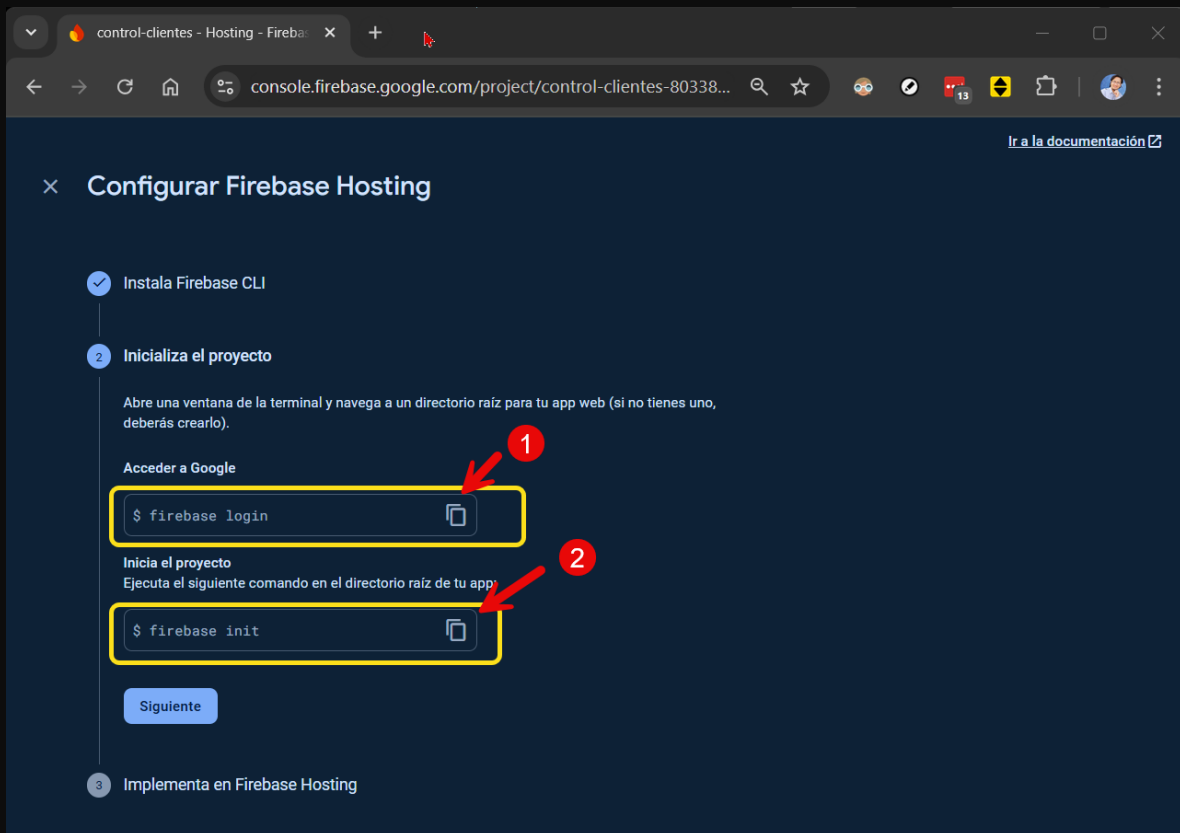


Ejecutar los comandos que se muestran:

firebase login

firebase init

Indicamos que si deseamos proceder (los siguientes pasos pueden variar dependiendo de la versión que estén utilizando de firebase, pero en general son los mismos, revisarlos antes de responder a las preguntas):

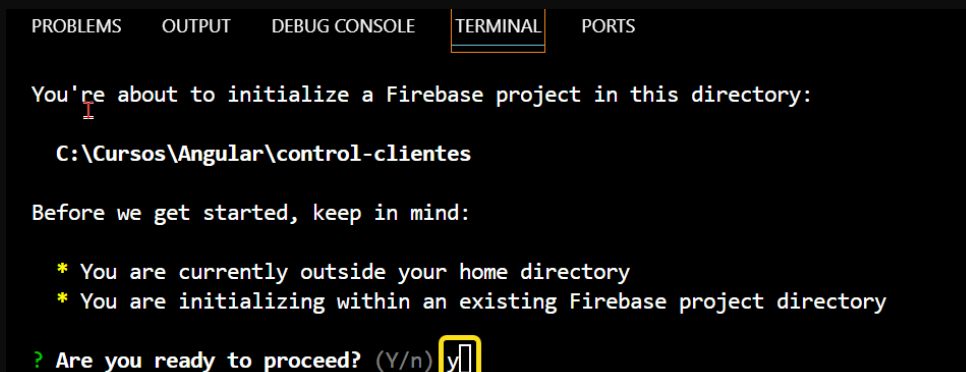

Seleccionar las siguientes opciones y dar enter:

```

PROBLEMS  OUTPUT  DEBUG CONSOLE  TERMINAL  PORTS

1 choices. (Press <space> to select, <a> to toggle all, <i> to invert
selection, and <enter> to proceed)
  (*) Firestore: Configure security rules and indexes files for
  Firestore
2  ( ) Functions: Configure a Cloud Functions directory and its files
  (*) Hosting: Configure files for Firebase Hosting and (optionally)
  set up GitHub Action deploys
  ( ) Storage: Configure a security rules file for Cloud Storage
  ( ) Emulators: Set up local emulators for Firebase products
(Move up and down to reveal more choices)

```

En el caso del comando init ya no muestra directamente el proyecto a seleccionar, solo indicar que vamos a agregar Firebase a un proyecto existente y dar enter.

```

PROBLEMS  OUTPUT  DEBUG CONSOLE  TERMINAL  PORTS

ct.
You can create multiple project aliases by running firebase use --a
dd,
but for now we'll just set up a default project.

? Please select an option: (Use arrow keys)
> Use an existing project
  Create a new project
  Add Firebase to an existing Google Cloud Platform project
  Don't set up a default project

```

Seleccionamos el proyecto de control-clientes-xxx y damos enter:

```

PROBLEMS  OUTPUT  DEBUG CONSOLE  TERMINAL  PORTS

ct.
You can create multiple project aliases by running firebase use --a
dd,
but for now we'll just set up a default project.

? Please select an option: Use an existing project
? Select a default Firebase project for this directory: (Use arrow
keys)
> control-clientes-80338 (control-clientes)
  zippy-sublime-305313 (My First Project)

```

Dejamos los valores por default y damos enter para crear el archivo firestore.rules:

```

PROBLEMS  OUTPUT  DEBUG CONSOLE  TERMINAL  PORTS

i Using project control-clientes-80338 (control-clientes)

=== Firestore Setup

Firestore Security Rules allow you to define how and when to allow
requests. You can keep these rules in your project directory
and publish them with firebase deploy.

? What file should be used for Firestore Rules? (firebase.rules)

```

Igual dejamos los valores por default y damos enter para que se cree el archivo `firebase.indexes.json`:

```

? What file should be used for Firestore Rules? firebase.rules
? File firebase.rules already exists. Do you want to overwrite it with the
Firestore Rules from the Firebase Console? Yes

Firestore indexes allow you to perform complex queries while
maintaining performance that scales with the size of the result
set. You can keep index definitions in your project directory
and publish them with firebase deploy.

? What file should be used for Firestore indexes? (firebase.indexes.json)

```

Dejamos los valores por default y damos enter:

```

? File firebase.indexes.json already exists. Do you want to overwrite it with
the Firestore Indexes from the Firebase Console? Yes

=== Hosting Setup

Your public directory is the folder (relative to your project directory) that
will contain Hosting assets to be uploaded with firebase deploy. If you
have a build process for your assets, use your build's output directory.

? What do you want to use as your public directory? (public)

```

Se generan los archivos de firebase y al momento de proporcionar el directorio público, indicar la siguiente ruta (tal como se muestra): `dist/control-clientes/browser`

```

PROBLEMS  OUTPUT  DEBUG CONSOLE  TERMINAL  PORTS

our project directory) that
will contain Hosting assets to be uploaded with firebase deploy. If you
have a build process for your assets, use your build's output directory.

? What do you want to use as your public directory? dist/control-clientes

```

Nos pregunta si deseamos redirigir todas las url a index.html, le decimos que no:

```

PROBLEMS  OUTPUT  DEBUG CONSOLE  TERMINAL  PORTS

the Firestore Indexes from the Firebase Console? Yes

=== Hosting Setup

Your public directory is the folder (relative to your project directory) that
will contain Hosting assets to be uploaded with firebase deploy. If you
have a build process for your assets, use your build's output directory.

? What do you want to use as your public directory? public
? Configure as a single-page app (rewrite all urls to /index.html)? (y/N) n

```

Indicamos que no haga deploys automáticos con GitHub.

```

PROBLEMS  OUTPUT  DEBUG CONSOLE  TERMINAL  PORTS

our project directory) that
will contain Hosting assets to be uploaded with firebase deploy. If you
have a build process for your assets, use your build's output directory.

? What do you want to use as your public directory?
? What do you want to use as your public directory? dist/control-clientes
? Configure as a single-page app (rewrite all urls to /index.html)? No
? Set up automatic builds and deploys with GitHub? (y/N) n

```

Eliminamos la carpeta de dist creada y ejecutamos el comando `ng build`, este comando cambio, por lo que ahora deben ejecutar el siguiente comando:

`ng build --configuration=production --aot`

Si arroja el siguiente error:

X [ERROR] bundle initial exceeded maximum budget. Budget 1.05 MB was not met by 189.02 kB with a total of 1.24 MB.

Hay que incrementar el tamaño para compilar para producción en el archivo `angular.json`:

Valores iniciales:

```
"configurations": {  
  "production": {  
    "budgets": [  
      {  
        "type": "initial",  
        "maximumWarning": "500kB",  
        "maximumError": "1MB"  
      },  
    ]  
  }  
}
```


Cambiarlos por:

```
"configurations": {  
  "production": {  
    "budgets": [  
      {  
        "type": "initial",  
        "maximumWarning": "2mb",  
        "maximumError": "5mb"  
      },  
    ]  
  }  
}
```

Finalmente hacemos deploy (despliegue de la aplicación):

firebase deploy

En caso de tener problemas al desplegar la aplicación, revisar la ruta dist y lo que contiene, en caso necesario ajustar la ruta en el archivo de firebase.json según se muestra:

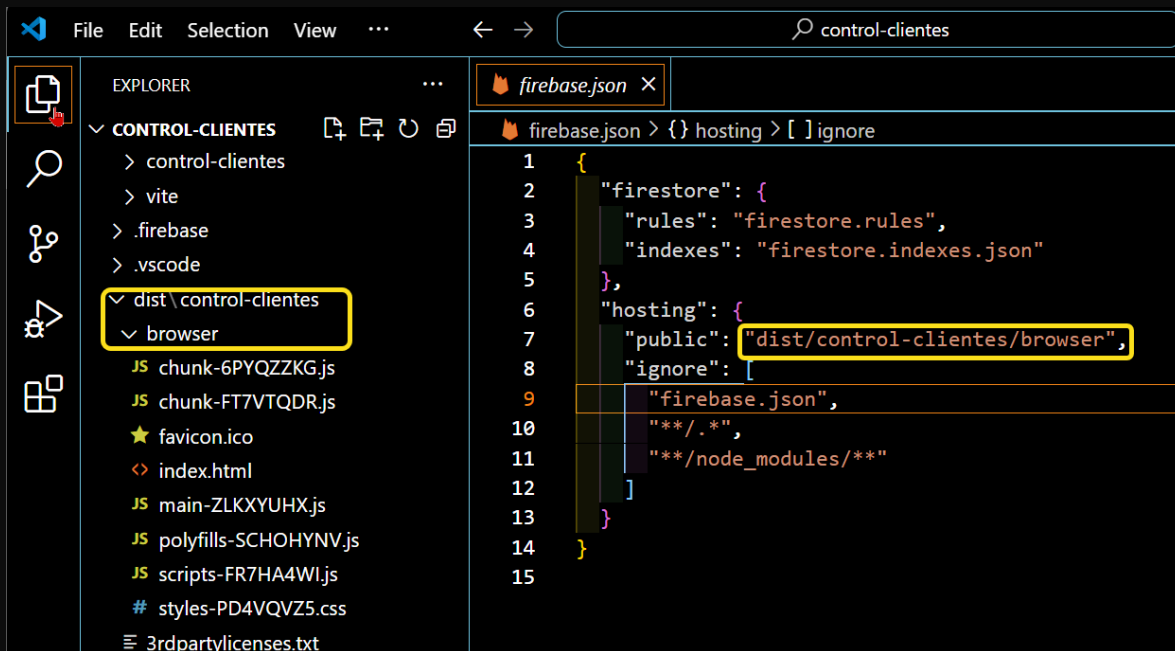

Hacer los ajustes y volver a compilar y desplegar nuevamente:

1. Recompilar y Desplegar:


- Asegúrate de haber ejecutado el comando de build para producción antes de desplegar:

```
ng build --configuration=production --aot
```

- Luego, despliega nuevamente a Firebase Hosting:

```
firebase deploy
```

Así se visualiza la aplicación:

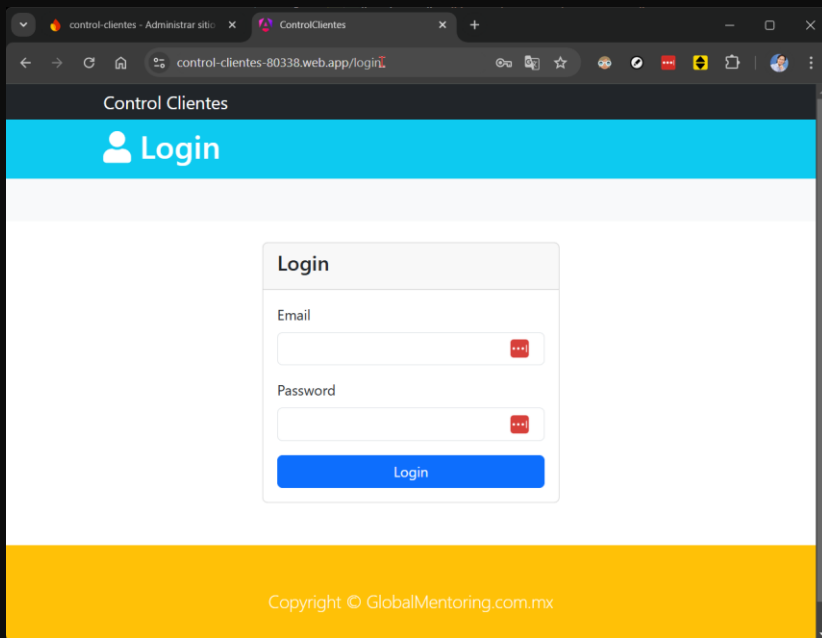

Saludos!

Ing. Ubaldo Acosta

Fundador de [GlobalMentoring.com.mx](http://www.globalmentoring.com.mx)