

Evidencia de las solicitudes y respuestas en Postman

Consulta general y consulta por ID de un producto activo:

HTTP `http://localhost:3000/api/v1/products/getAll` Save </>

GET `http://localhost:3000/api/v1/products/getAll` Send

Params Auth Headers (6) Body Pre-req. Tests Settings Cookies

Query Params

Key	Value	Bulk Edit
Key	Value	

Body 200 OK 18 ms 439 B Save Response

Pretty Raw Preview Visualize JSON

```
1 {
2   "id": 1,
3   "name": "Producto de Ejemplo",
4   "price": "27000.00",
5   "stock": 5,
6   "description": "Descripción del producto de ejemplo",
7   "brand": "Ejemplo",
8   "img": "https://ejemplo.com/imagenes/ejemplo-img.jpg",
9   "active": 1
10 }
11
12
```

HTTP `http://localhost:3000/api/v1/products/getById/1` Save </>

GET `http://localhost:3000/api/v1/products/getById/1` Send

Params Auth Headers (6) Body Pre-req. Tests Settings Cookies

Query Params


Key	Value	Bulk Edit
Key	Value	

Body 200 OK 9 ms 437 B Save Response


Pretty Raw Preview Visualize JSON

```
1 {
2   "id": 1,
3   "name": "Producto de Ejemplo",
4   "price": "27000.00",
5   "stock": 5,
6   "description": "Descripción del producto de ejemplo",
7   "brand": "Ejemplo",
8   "img": "https://ejemplo.com/imagenes/ejemplo-img.jpg",
9   "active": 1
10 }
```

Creación de un producto:

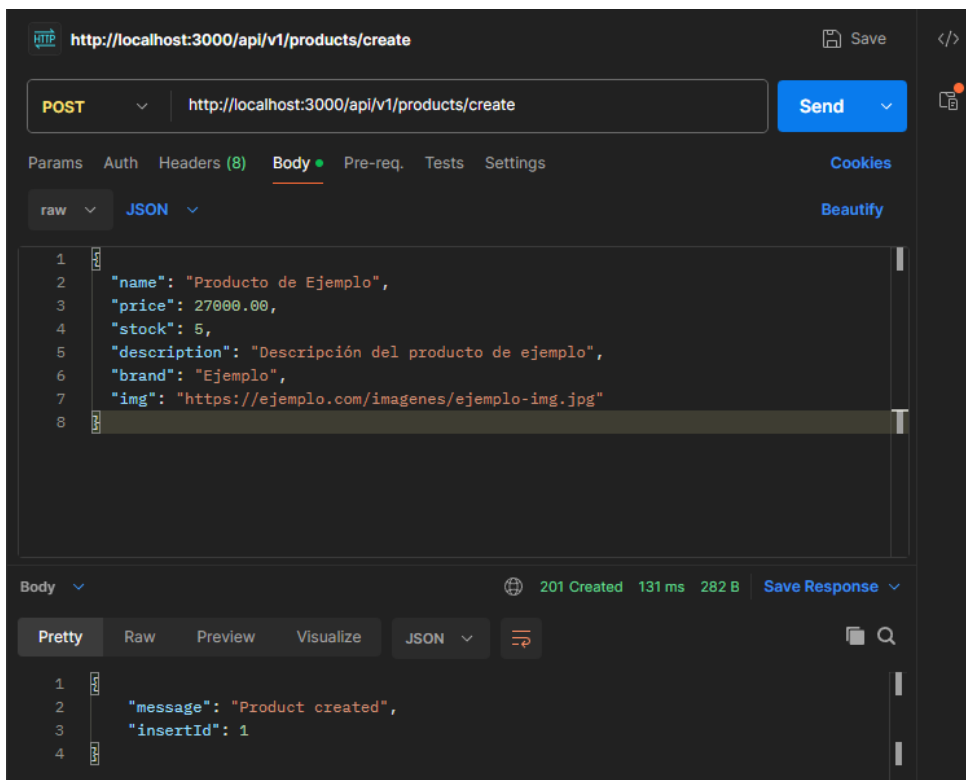

Actualización completa y cambio de precio del producto creado:

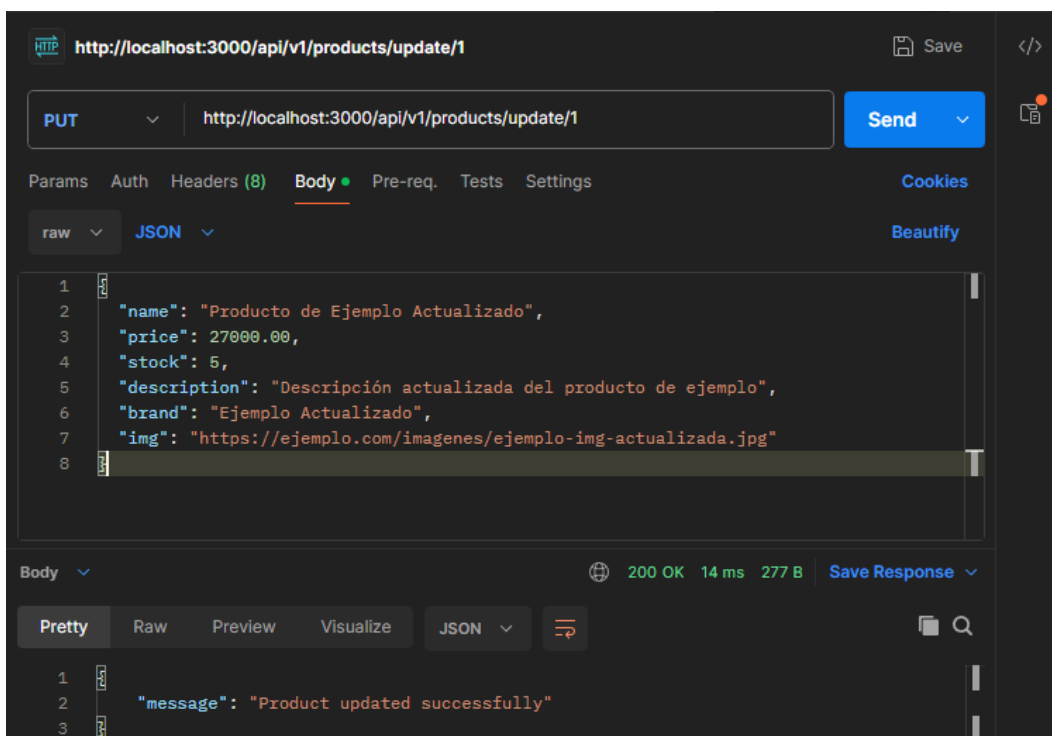

HTTP <http://localhost:3000/api/v1/products/change-price/1> Save </>

PATCH <http://localhost:3000/api/v1/products/change-price/1> Send

Params Auth Headers (8) **Body** Pre-req. Tests Settings Cookies Beautify

raw JSON

```
1 {
2   "price": 24999.99
3 }
```

Body 200 OK 12 ms 283 B Save Response

Pretty Raw Preview Visualize JSON

```
1 {
2   "message": "Product price updated successfully"
3 }
```

Baja lógica del producto:

HTTP <http://localhost:3000/api/v1/products/delete/1> Save </>

DELETE <http://localhost:3000/api/v1/products/delete/1> Send

Params Auth Headers (6) **Body** Pre-req. Tests Settings Cookies

Query Params

	Key	Value	Bulk Edit
	Key	Value	

Body 200 OK 9 ms 281 B Save Response

Pretty Raw Preview Visualize JSON

```
1 {
2   "message": "Product deactivated successfully"
3 }
```

Comprobación de que el producto dado de baja ya no aparece en `getAll` ni en `getById/:id`:

The screenshot shows the Postman interface for a GET request to `http://localhost:3000/api/v1/products/getAll`. The status bar at the bottom indicates a successful response: `200 OK`, `6 ms`, and `235 B`. The response body is currently empty, showing only a line number `1` and a placeholder `[]`.

The screenshot shows the Postman interface for a GET request to `http://localhost:3000/api/v1/products/getById/1`. The status bar at the bottom indicates a `404 Not Found` response, with a response time of `5 ms` and a size of `285 B`. The response body is displayed in JSON format:

```
1  []
2  "message": "Product not found or inactive"
3  []
```

Un caso de ID existente y un caso de datos inválidos:

HTTP **GET** `http://localhost:3000/api/v1/products/getById/1314` **Send**

Params Auth Headers (6) Body Pre-req. Tests Settings Cookies

Query Params

	Key	Value	Bulk Edit
	Key	Value	

Body **404 Not Found** 7 ms 285 B **Save Response**

Pretty Raw Preview Visualize JSON **Send**

```
1 {
2   "message": "Product not found or inactive"
3 }
```

HTTP **POST** `http://localhost:3000/api/v1/products/create` **Send**

Params Auth Headers (8) **Body** Pre-req. Tests Settings Cookies Beautify

raw JSON

```
1 {
2   "name": "Producto de Ejemplo",
3   "price": -250,
4   "stock": 5,
5   "description": "Descripción del producto de ejemplo",
6   "brand": "Ejemplo",
7   "img": "https://ejemplo.com/imagenes/ejemplo-img.jpg"
8 }
```

Body **400 Bad Request** 5 ms 295 B **Save Response**

Pretty Raw Preview Visualize JSON **Send**

```
1 {
2   "message": "Price must be a number greater than 0"
3 }
```