



Exploring The Demo

[Canion Network Quickstart Guide | 2025](#)

Version: 1.0.6-2025-04-11

Contents

[Exploring the Demo](#)

[Prerequisites](#)

[Walkthrough](#)

[Canton Console](#)

[Daml Shell](#)

[Connect to DevNet](#)

[Important: Migration ID for DevNet Connections](#)

[Configuring Non-Default DevNet Sponsors](#)

[SV UIs](#)

[Canton Coin Scan](#)

[Observability Dashboard](#)

[Development Journey in the CN QS Lifecycle](#)

[CN QS Components](#)

[Development Tools](#)

[LocalNet](#)

[Network Components](#)

[ScratchNet](#)

[Sample Application](#)

[Application Components](#)

[Development Lifecycle](#)

[Learning Phase](#)

[Experimentation Phase](#)

[Development Phase](#)

[Gradle Settings](#)

[Environment Variables](#)

[Docker Compose](#)

[Separation Phase](#)

[Ongoing Updates](#)

[Upgrades On The Global Synchronizer](#)

[Type 1: Backward-Compatible Changes](#)

[Type 2: Daml Model Changes](#)

[Type 3: Non-Compatible Protocol Changes](#)

[Preparing for Upgrades](#)

[Keycloak in the CN-QS](#)

[Realm Structure](#)

[Keycloak Configuration](#)

[Customizing Keycloak for Business Needs](#)

[Accessing the Admin Console](#)

[Customization Scenarios](#)

[Add a New User](#)

[Modify Client Settings](#)

[Add a New Client](#)

[Update Environment Variables](#)

[Troubleshooting](#)

[Next Steps](#)

Exploring the Demo

The CN-QS and its guides are a work-in-progress (WIP). As a result, the CN-QS guides may not accurately reflect the state of the application. If you find errors or other inconsistencies, please contact your representative at Digital Asset.

This section works through a complete business operation within the CN-QS.

Prerequisites

You should have successfully installed the CN-QS before beginning this demonstration.

Access to the [CN-Quickstart Github repository](#) and [CN Docker repository](#) is needed to successfully pull the Digital Asset artifacts from JFrog Artifactory.

Access to the *Daml-VPN* connection or [a SV Node](#) that is whitelisted on the CN is required to connect to DevNet. The GSF publishes a [list of SV nodes](#) who have the ability to sponsor a Validator node. To access DevNet, contact your sponsoring SV agent for VPN connection information.

If you need access, email support@digitalasset.com.

The CN-QS is a Dockerized application and requires [Docker Desktop](#). Running CN-QS on LocalNet is resource intensive. It is recommended to allocate 18 GB of memory and 3 GB of Swap memory to properly run the required Docker containers. If you witness unhealthy containers, please consider allocating additional resources, if possible.

DevNet is not as intensive because the SVs and other LocalNet containers are hosted outside of your local machine.

Walkthrough

After the QS is installed and running, confirm that you are in the quickstart subdirectory of the CN-QS.

Open an incognito browser.


Navigate to:

localhost:3000/login

 Currently, localhost URLs do not work in Safari. We are working on a solution and apologize for the inconvenience.

Alternatively, in the terminal, from quickstart/ run:

```
make open-app-ui
```

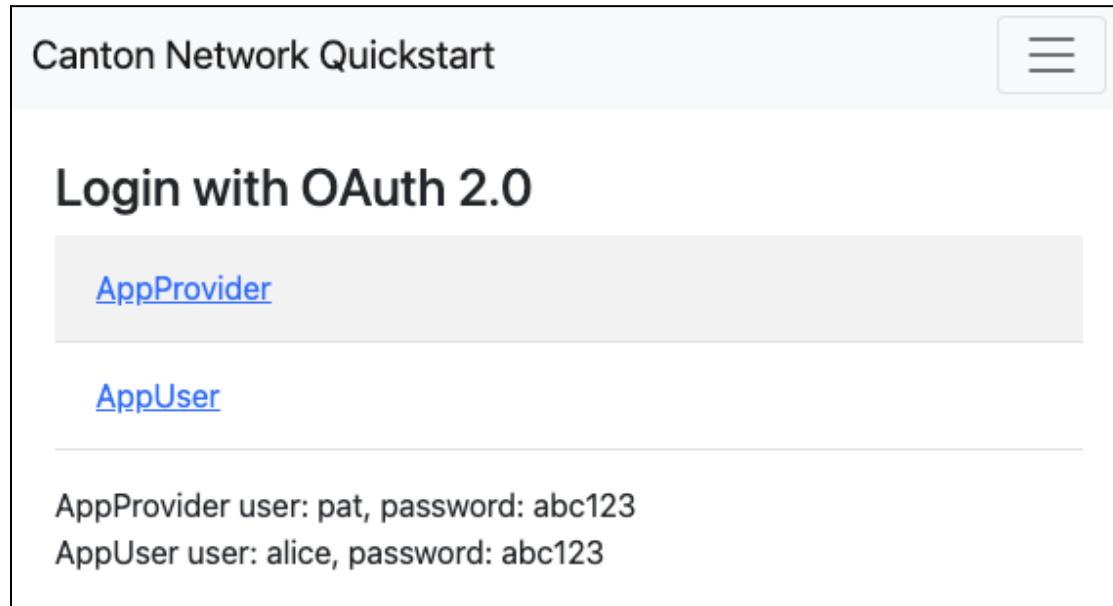


The screenshot shows a web application titled "Canton Network Quickstart". At the top, there is a navigation bar with a three-line menu icon. Below the title, the text "Login with OAuth 2.0" is displayed. There are two buttons: "AppProvider" (highlighted in blue) and "AppUser". Below these buttons, the text "AppProvider user: pat, password: abc123" and "AppUser user: alice, password: abc123" is shown.

Make note that the AppProvider's username is “pat” and the password is “abc123” (all lowercase).

Login as the AppProvider.

Fill in the login credentials: username: pat, password: abc123

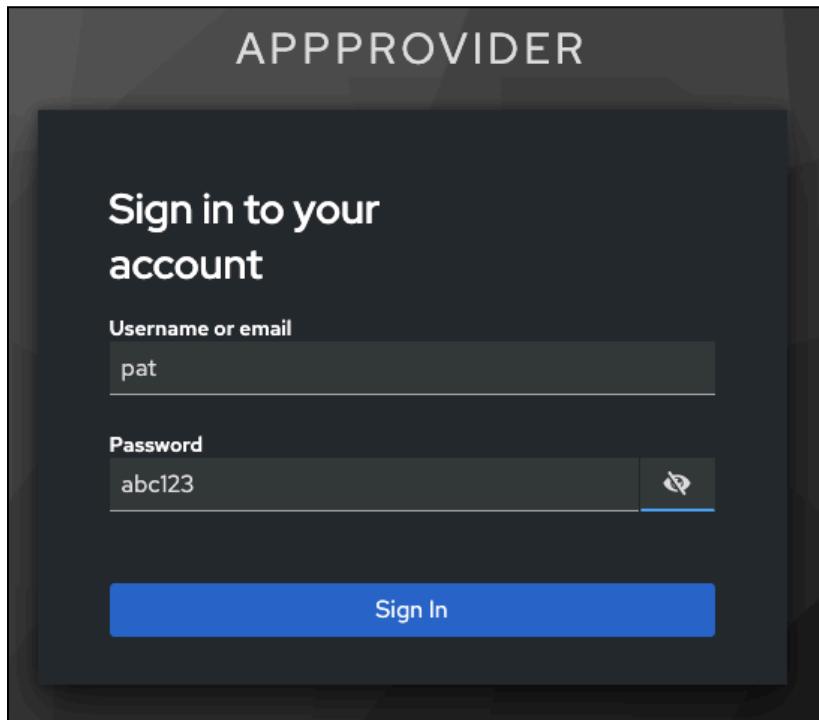

Select “AppInstalls” in the menu.

A screenshot of the "Canton Network Quickstart" application. The top navigation bar includes links for "Canton Network Quickstart", "Home", "AppInstalls", "Licenses", and "Tenants". On the right, there is a link "Pat the provider". Below the navigation, the "App Installs" section is highlighted. A note at the top of this section says "Note: Run make create-app-install-request to submit an AppInstallRequest". A table below lists various columns: Contract ID, Status, DSO, Provider, User, Meta, # Licenses, and Actions.

Open a terminal.

From /quickstart/ run:

```
make create-app-install-request
```

This command creates an App Installation Request on behalf of the Participant.

```
(base) quickstart ~ % make create-app-install-request
docker compose -f docker/app-user-shell/compose.yaml --env-file .env run --rm create-app-install-request || true
get_token ledger-api-user AppProvider
get_user_party AppProvider participant-app-provider
http://participant-app-provider:7575/v2/users/AppProvider
get_token ledger-api-user Org1
get_user_party Org1 participant-app-user
http://participant-app-user:7575/v2/users/Org1
get_token administrator Org1
http://validator-app-user:5003/api/validator/v0/scan-proxy/dso-party-id
http://participant-app-user:7575/v2/commands/submit-and-wait
--data-raw {
  "commands" : [
    { "CreateCommand" : {
        "template_id": "#quickstart-licensing:Licensing.AppInstall:AppInstallRequest",
        "create_arguments": {
          "dso": "DSO::12209a3af80af3fa93853be8a8b9f5887055edc3b0a94f4b198f486d08d197784c09",
          "provider": "AppProvider::1220b3de80de523473aa2ca56745ef1fb29a2203dfd13029e0448336bbcf382aaaf86",
          "user": "Org1::1220e69bc6115cd8ed360aa6caafce122c2a24561262c2f6ce6a6070e170e9e8244d",
          "meta": {"values": []}
        }
      }
    }
  ],
  "workflow_id" : "create-app-install-request",
  "application_id": "ledger-api-user",
  "command_id": "create-app-install-request",
  "deduplication_period": { "Empty": {} },
  "act_as": ["Org1::1220e69bc6115cd8ed360aa6caafce122c2a24561262c2f6ce6a6070e170e9e8244d"],
  "read_as": ["Org1::1220e69bc6115cd8ed360aa6caafce122c2a24561262c2f6ce6a6070e170e9e8244d"],
  "submission_id": "create-app-install-request",
  "disclosed_contracts": [],
  "domain_id": "",
  "package_id_selection_preference": []
}
{"update_id":"1220aebcd64fc960c2aec834d41596789994f21a69ef9cab5639b8521169a0ca67","completion_offset":81}
```

If your machine is not powerful enough to host LocalNet or if the docker containers are not responsive then the response may show a failure with status code 404 or 000.

Increasing Docker memory limit to at least 18 GB should allow the LocalNet containers to operate properly.

```
(base) quickstart ~ % make create-app-install-request
docker compose -f docker/app-user-shell/compose.yaml --env-file .env run --rm create-app-install-request || true
[+] Building 0.s (0/0)
[+] Building 0.s (0/0)
get_token ledger-api-user AppProvider
get_user_party AppProvider participant-app-provider
http://participant-app-provider:7575/v2/users/AppProvider
get_token ledger-api-user Org1
get_user_party Org1 participant-app-user
http://participant-app-user:7575/v2/users/Org1
get_token administrator Org1
http://validator-app-user:5003/api/validator/v0/scan-proxy/dso-party-id
Request failed with HTTP status code 404
Response body: The requested resource could not be found.
```

Return to the browser.

The install request appears in the list.

Click “Accept”.

Canton Network Quickstart Home AppInstalls Licenses Tenants Pat the provider

App Installs

Note: Run `make create-app-install-request` to submit an AppInstallRequest

Contract ID	Status	DSO	Provider	User	Meta	# Licenses	Actions
00a2f3c34cc5e...	REQUEST	DSO::12206b3c...	app_provider_q...	app_user_quick...	{"data":{}}	0	<button>Accept</button> <button>Reject</button> <button>Cancel</button>

The AppInstallRequest is Accepted. The actions update to create or cancel the license.

Canton Network Quickstart Home AppInstalls Licenses Tenants Pat the provider

App Installs

Note: Run `make create-app-install-request` to submit an AppInstallRequest

Success

```
Success: Accepted AppInstallRequest
00a2f3c34cc5edf660aeb6658cd7000541349f3e
5b2e3268330f1f3307067aa9fbca012204022da1
3d54f9c9321e2401364a3123671ebcadde47deb6
2ee39f9c81e4f0c9f
```

Contract ID	Status	DSO	Provider	User	Meta	# Licenses	Actions
00502121cb22e...	INSTALL	DSO::12206b3c...	app_provider_q...	app_user_quick...	{"data":{}}	0	<button>Create License</button> <button>Cancel Install</button>

Click “Create License”.

The license is created and the “# Licenses” field is updated.

Canton Network Quickstart Home AppInstalls Licenses Tenants Pat the provider

App Installs

Note: Run `make create-app-install-request` to submit an AppInstallRequest

Success

```
Success: Created License:
00be4bac78d731505d04d5e4964c9a297d9e479
54942c54809bc24d3b65cd0342bca010220a263
af0d31f1043cbb903c58b0479db70935d107ae0a
0a6299e510c84c402909
```

Contract ID	Status	DSO	Provider	User	Meta	# Licenses	Actions
00fdf01728922...	INSTALL	DSO::12206b3c...	app_provider_q...	app_user_quick...	{"data":{}}	1	<button>Create License</button> <button>Cancel Install</button>


In the AppProvider, “Pat the provider’s,” account, navigate to the **Licenses** menu and select “Actions.”

Canton Network Quickstart Home AppInstalls Licenses Tenants Pat the provider


Licenses

License Contract ID	DSO	Provider	User	Expires At	License #	Renew Fee	Extension	Actions
00be4bac78d731505d04...	DSO::122...	app_provide...	app_user_q...	2025-03-13T21:20:...	1			<button>Actions</button>

An “Actions for License” modal opens with an option to renew or expire the license. Per the Daml contract, licenses are created in an expired state. To activate the license, it must be renewed.

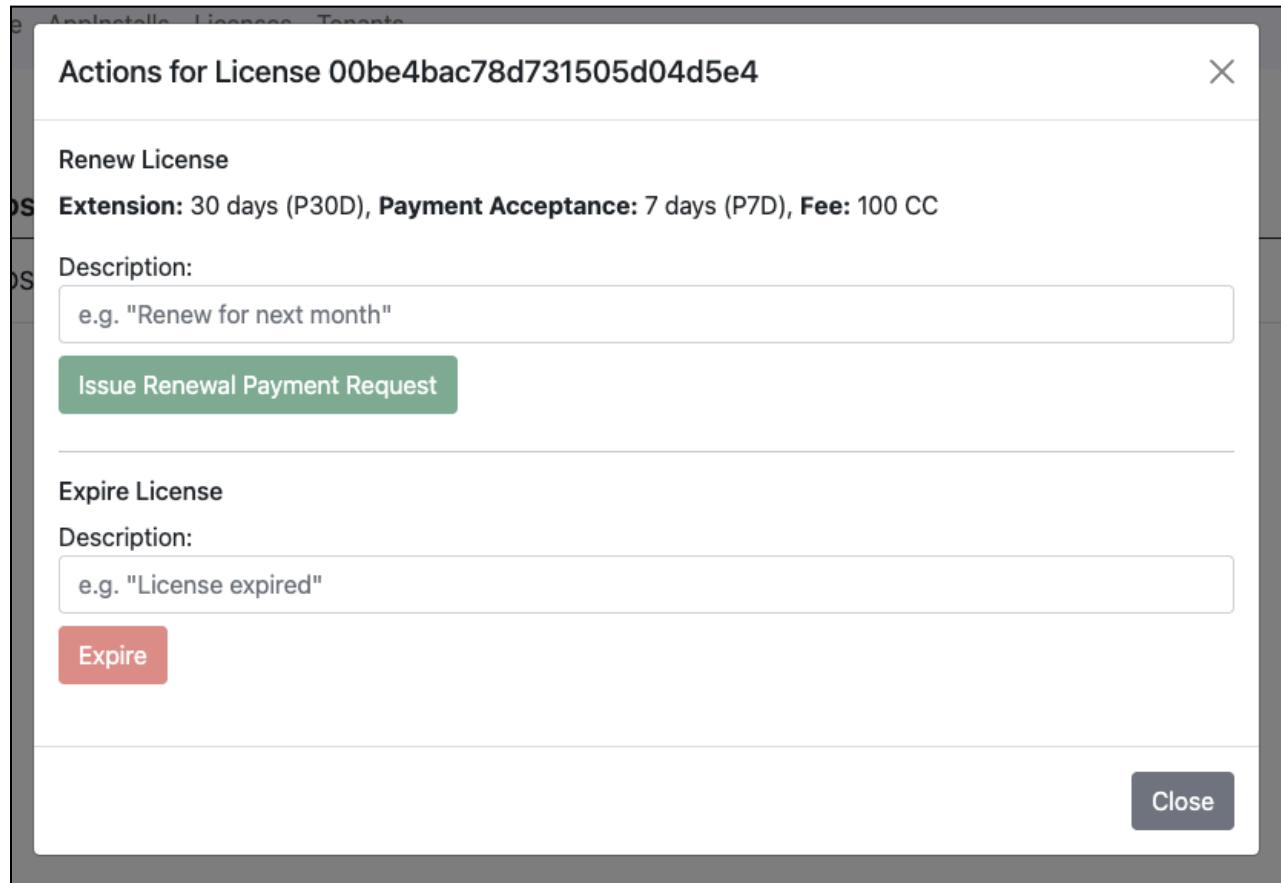

To renew the license, enter a description then click the green “Issue Renewal Payment Request” button.

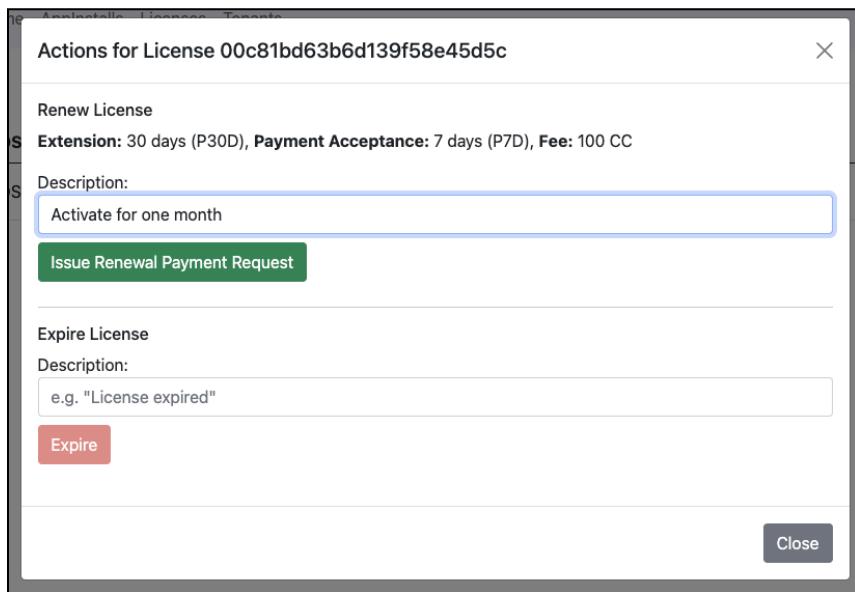

The license renewal process is initiated and ultimately successful.

Licenses									Pat the provider
License Contract ID	DSO	Provider	User	Expires At	License #	Renew Fee	Extension	Actions	
00be4bac78d731505d04...	DSO::122...	app_provide...	app_user_q...	2025-03-13T21:20:...	1	100	30 days	<button>Actions</button>	<div style="background-color: green; color: white; padding: 2px;">Success Success: License Renewal initiated successfully</div>


The license is now available for a 30-day extension for a flat fee of \$100 CC.

Licenses									Pat the provider
License Contract ID	DSO	Provider	User	Expires At	License #	Renew Fee	Extension	Actions	
00be4bac78d731505d04...	DSO::122...	app_provide...	app_user_q...	2025-03-13T21:20:...	1	100	30 days	<button>Actions</button>	<div style="background-color: green; color: white; padding: 2px;">Success Success: License Renewal initiated successfully</div>

Pat the provider has done as much as they are able until Alice pays the renewal fee.


 For the next step we recommend opening a separate browser in incognito mode. Each user, AppProvider, and Org1, should be logged into separate browsers for most consistent results. For example, if you logged into AppProvider using Chrome, you would use Firefox when logging into Org1.

Navigate to `http://localhost:3000/login` using a separate browser in incognito or private mode.

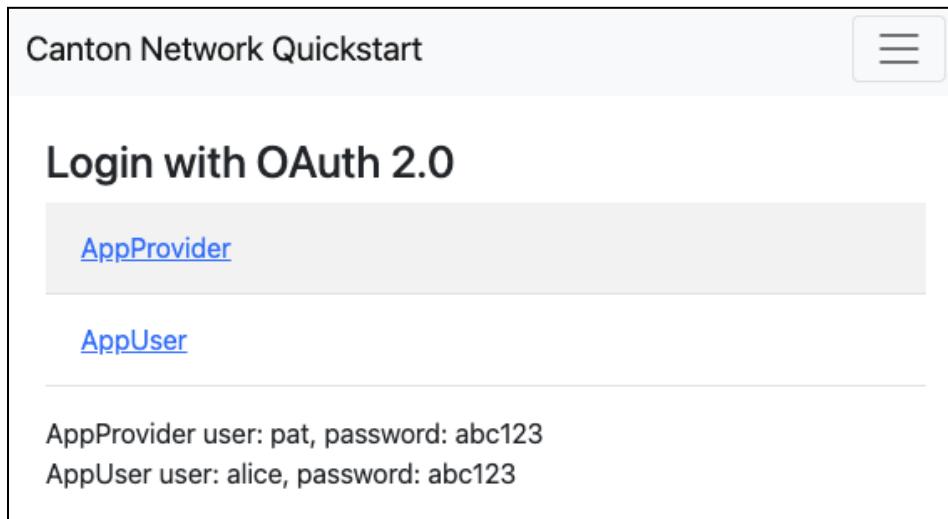

Login as AppUser alice.

Note that AppUser's username is "alice" and the password is "abc123".

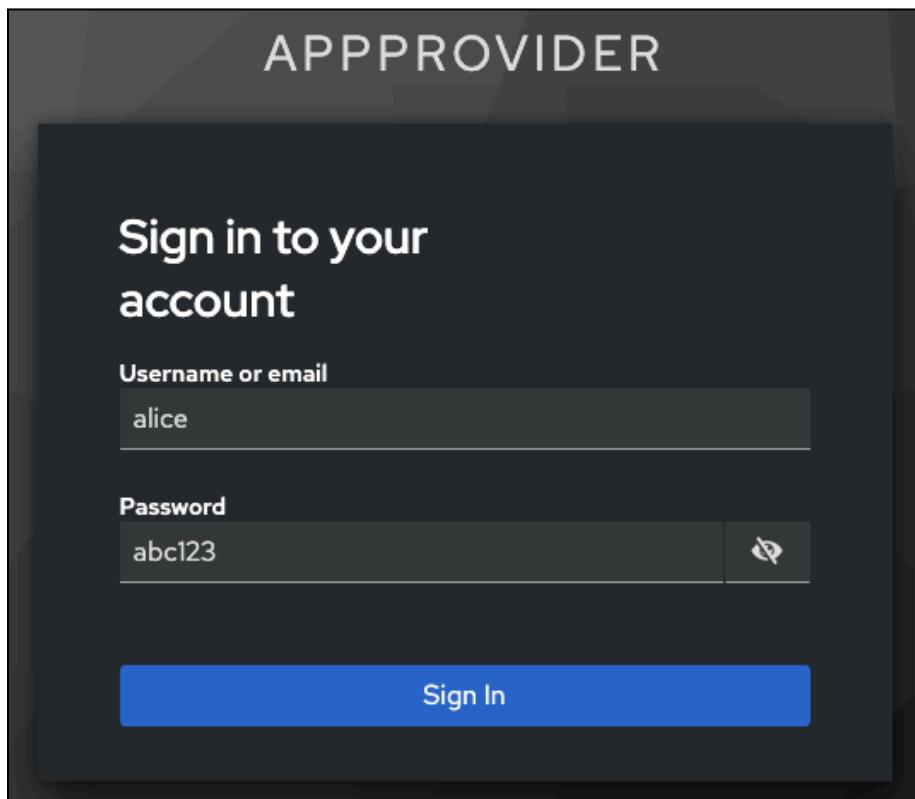


Go to the **Licenses View** and click the "Pay renewal" button.

Canton Network Quickstart									Alice the user
Licenses									
License Contract ID	DSO	Provider	User	Expires At	License #	Renew Fee	Extension	Actions	
00be4bac78d731505d04...	DSO::122...	app_provide...	app_user_q...	2025-03-13T21:20:...	1	100	30 days	<button>Pay Renewal</button>	

Click on the Pay Renewal button. This navigates to the Canton Coin Wallet log in. Click “LOG IN WITH OAUTH2”.

 If you have any issues with log in, navigate directly to <http://wallet.localhost:2000/>.

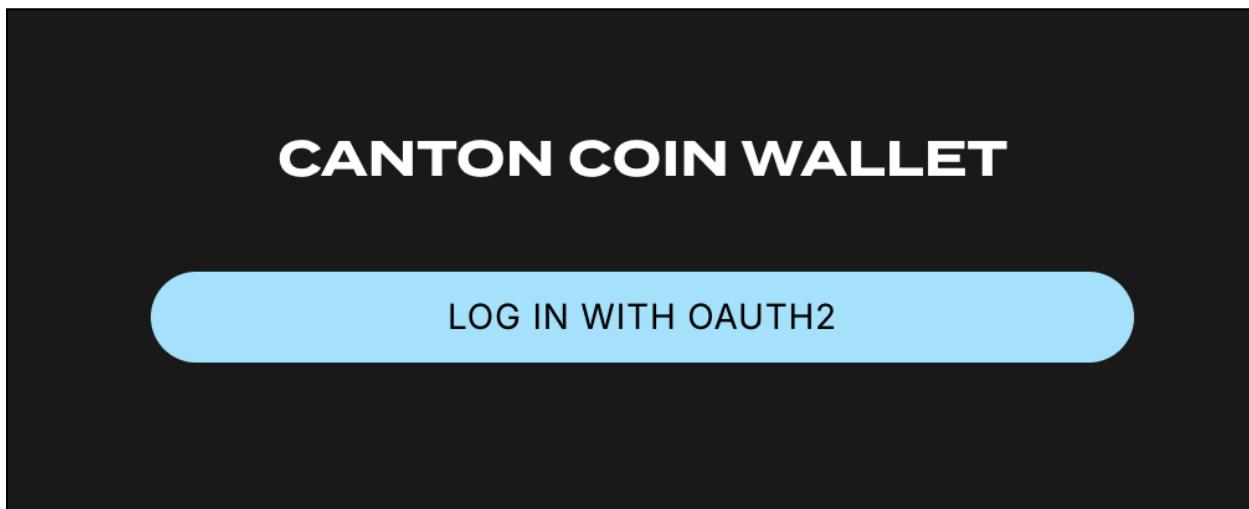

This navigates to a keycloak login.
Enter the same username and password as before.

Signing in directs to the Canton Coin Wallet.


The screenshot shows the Digital Asset Canton Coin Wallet interface. At the top, there are tabs for 'Transactions', 'Transfer', 'Subscriptions', 'FAQs', and 'app_user_qui...'. Below these are buttons for 'SELF-GRANT FEATURED APP RIGHTS' and 'PRE-APPROVE INCOMING DIRECT TRANSFERS OF CANTON COIN'. A 'Logout' button is also present. The main area displays 'Total Available Balance' as 564 CC (2.82 USD). It includes a note about反映了 unlocked Canton Coin, rewards earned and holding fees. There is a text input field for 'Amount' with '0' entered, and a 'TAP' button next to it. A blue circular button labeled 'Action Needed 0' is visible. Below this, a message states 'No transfer offers available'. The 'Transaction History' section has columns for 'TYPE', 'DATE', 'SENDER OR RECEIVER', 'REWARDS CREATED', and 'BALANCE CHANGE'. One entry is shown: 'Sent (Automation)' on 2025-03-14 at 09:54:50, from 'Automation via app_user_quickstart-j...', to 'Validator Rewards: 570 CC', with a balance change of '+564 CC +2.82 USD @ 200 CC/USD'. A 'Load More' button is at the bottom of the history list. Copyright information 'Copyright © Digital Asset 2025.' is at the very bottom.

The wallet must be populated with CC in order to fulfill the transaction.

In CC Wallet, populate the wallet with \$100 USD, or the equivalent of 20,000 CC.

This screenshot shows the same Digital Asset Canton Coin Wallet interface as the previous one, but with a different amount in the balance field. The 'Total Available Balance' is now 564 CC (2.82 USD), reflecting the addition of 100 CC. The transaction history and other UI elements remain the same, including the 'Action Needed 0' button.


The wallet was prepopulated with 564 CC so it now contains 20,564 CC.

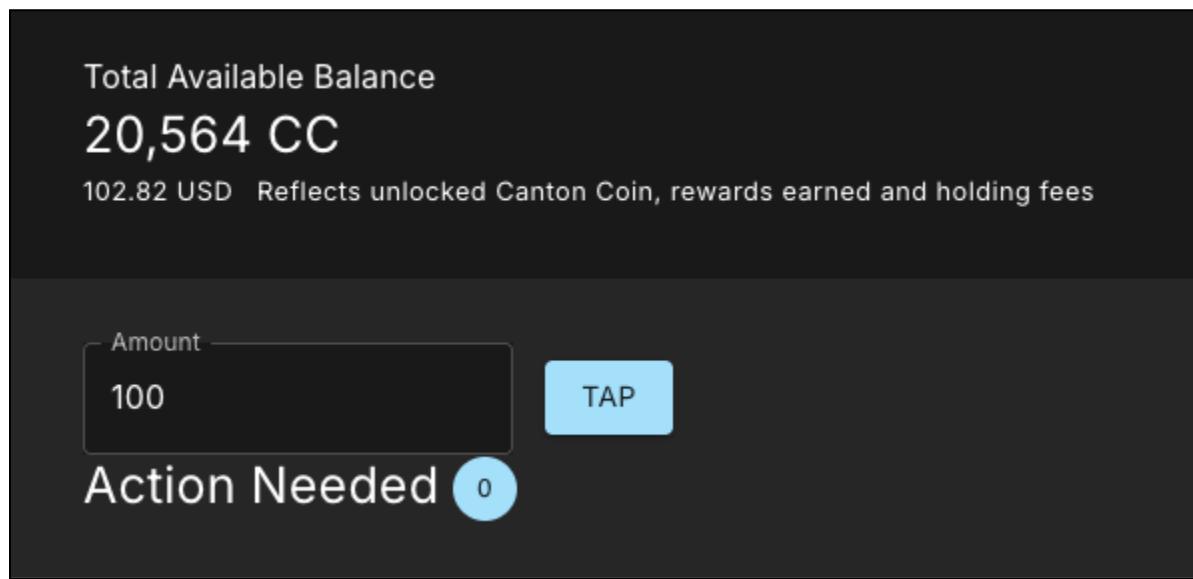

Return to the License Renewal Request as Org1. Click “Pay Renewal”.

Licenses								
License Contract ID	DSO	Provider	User	Expires At	License #	Renew Fee	Extension	Actions
00a01c1718dbe1a0f5e45...	DSO::122...	app_provide...	app_user_q...	2025-03-14T14:36:...	1	100	30 days	<button>Pay Renewal</button>

The CC Wallet balance is sufficient to send payment to the Provider.

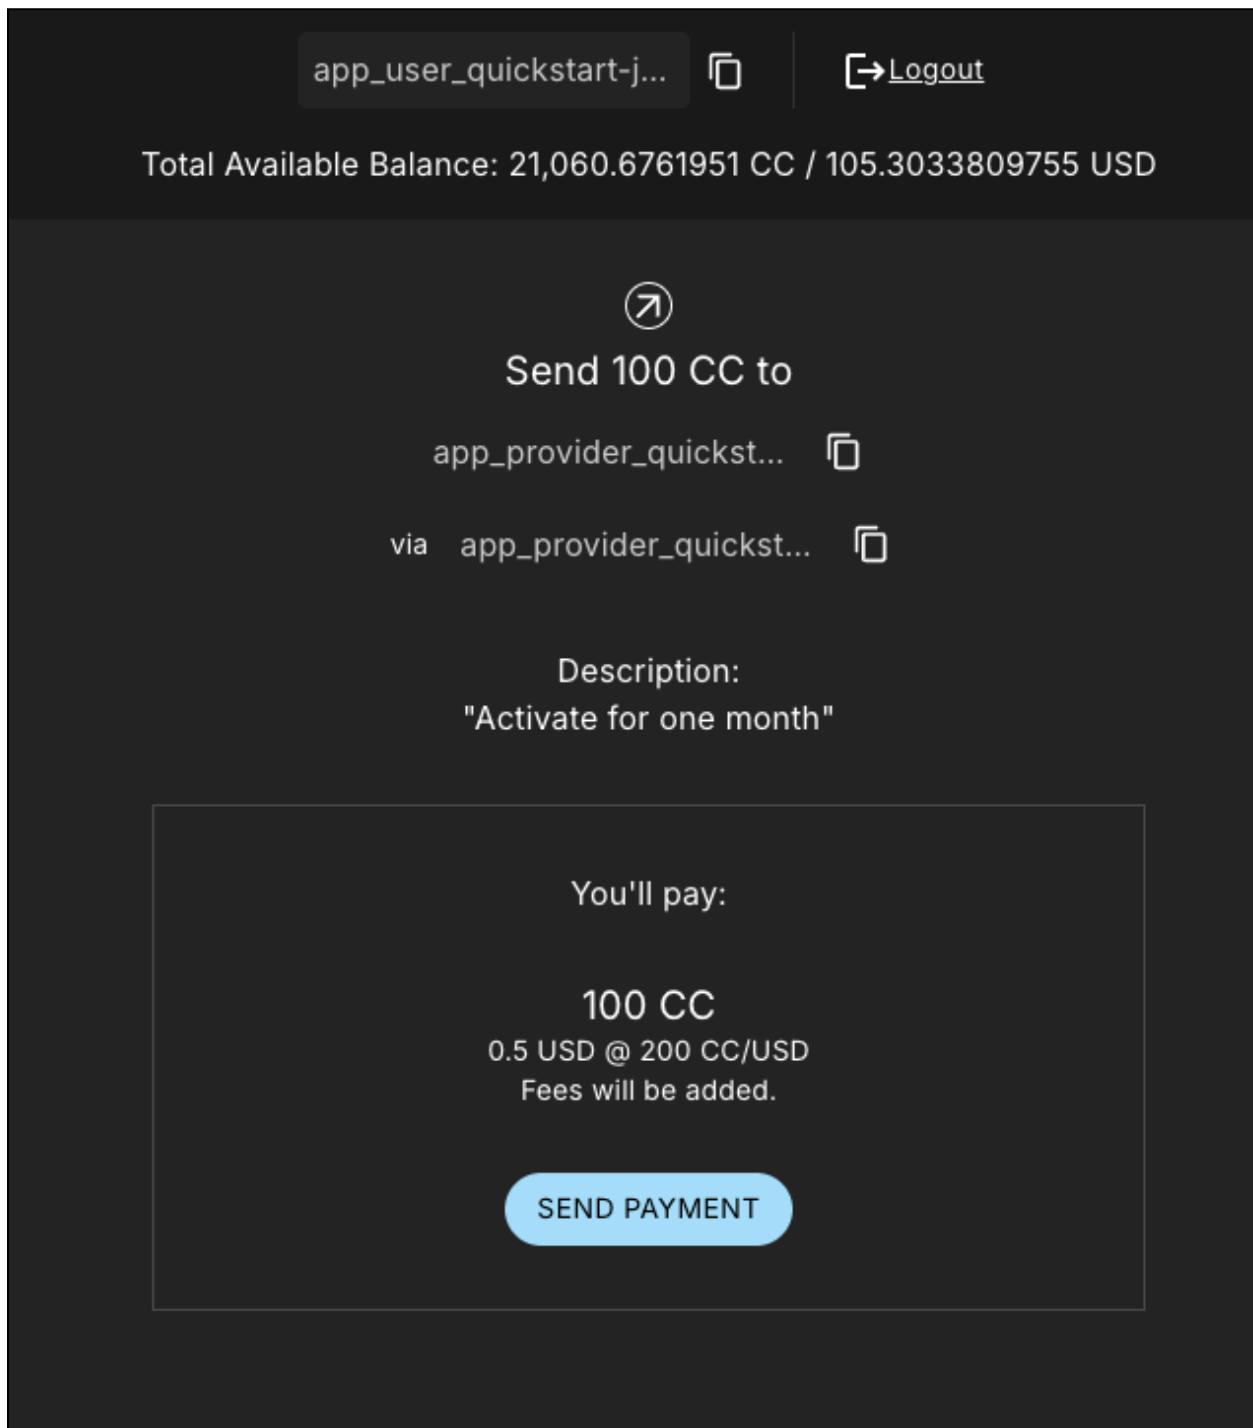

Return to the AppProvider's License Renewal Requests View.
The AppProvider may now Complete the Renewal.

Quickstart Home AppInstalls Licenses Tenants								Pat the provider
Licenses								
License Contract ID	DSO	Provider	User	Expires At	License #	Renew Fee	Extension	Actions
00a01c1718dbe1a0f5e45...	DSO::122...	app_provide...	app_user_q...	2025-03-14T14:36:...	1	100	30 days	<button>Complete Renewal</button>

Clicking "Complete Renewal" results in a Success.

Licenses									Success
Success: License renewal completed successfully									X
License Contract ID	DSO	Provider	User	Expires At	License #	Renew Fee	Extension	Actions	
00a01c1718dbe1a0f5e45...	DSO::122...	app_provide...	app_user_q...	2025-03-14T14:36:...	1			<button>Actions</button>	

Alice's License view shows the activated license.

Canton Network Quickstart Home AppInstalls Licenses								Alice the user	Logout
Licenses									
License Contract ID	DSO	Provider	User	Expires At	License #	Renew Fee	Extension		
00f77a38c88b2ce54687...	DSO::122...	app_provide...	app_user_q...	2025-04-13T15:11:1...	1				

Congratulations. You've successfully created and activated a license with a payment transfer!

Canion Console

The Canton Console connects to the running application ledger. The console allows a developer to bypass the UI to interact with the CN in a more direct manner. For example, in Canton Console you can connect to the Participant to see the location of the Participant and their domain.

The app provider and the app user each have their own console. To activate the app provider's Canton Console in a terminal from the `quickstart/` directory. Run:

```
make console-app-provider
```

Open the participant's Canton Console with

```
make console-app-user
```

After the console initiates, run the `participant` and `participant.domains` commands, respectively.

`participant`

Returns their location in the ledger.

```
[@ participant
res0: com.digitalasset.canton.console.RemoteParticipantReference = Participant 'participant'
```

`participant.domains`

Shows the Participant's synchronizer.

```
[@ participant.domains
res1: participant.domains.type = com.digitalasset.canton.console.commands.ParticipantAdministration$domains$04f4c3934
```

`participant.health.ping(participant)`

Runs a health ping. The ping makes a round trip through the CN blockchain. Pinging yourself validates communication throughout the entire network.

```
[@ participant.health.ping(participant)
res0: Duration = 4979 milliseconds
```

Daml Shell

The Daml Shell connects to the running PQS database of the application provider's Participant. In the Shell, the assets and their details are available in real time.

Run the shell from `quickstart/` in the terminal with:

```
make shell
```

Run the following commands to see the data:

```
active
```

Shows unique identifiers and the asset count

```
postgres-splice-app-provider:5432/scribe> active
```

Identifier	Type	Count
quickstart-licensing:Licensing.AppInstall:AppInstall	Template	1
quickstart-licensing:Licensing.License:License	Template	1
splice-amulet:Splice.Amulet:Amulet	Template	1
splice-amulet:Splice.Amulet:ValidatorRight	Template	1
splice-wallet:Splice.Wallet.Install:WalletAppInstall	Template	1

```
active quickstart-licensing:Licensing.License:License
```

List the license details.

```
postgres-splice-app-provider:5432/scribe 6d → f7> active quickstart-licensing:Licensing.License:License
```

Created at	Contract ID	Contract Key	Payload
a9	000cd68ca7d2cf95454b...		dso: DS0::12203a329668884fac6377f41c924df6a11c59f3be909737d27799252930e537c42b user: Org1::12209d2965deec586b4a6d12b80e535bb52407fad54dc2dd88575291780ed5fd9ff4 params: meta: values: provider: AppProvider::12206e5249b12cd9fd05e9b25894c0663b73a18c90baccd7f2d48e7958157b510358 expiresAt: 2025-03-16T21:59:38.403435Z licenseNum: 1

```
active quickstart-licensing:Licensing.License:LicenseRenewalRequest
```

Displays license renewal request details.

```
archives quickstart-licensing:Licensing.AppInstall:AppInstallRequest
```

Shows any archived license(s).

```
postgres-splice-app-provider:5432/scribe 6d → f7> archives quickstart-licensing:Licensing.AppInstall:AppInstallRequest
```

Created at	Archived at	Contract ID	Contract Key	Payload
6f	75	00e906b2720a9b7965a3...		dso: DS0::12203a329668884fac6377f41c924df6a11c59f3be909737d27799252930e537c42b meta: values: user: Org1::12209d2965deec586b4a6d12b80e535bb52407fad54dc2dd88575291780ed5fd9ff4 provider: AppProvider::12206e5249b12cd9fd05e9b25894c0663b73a18c90baccd7f2d48e7958157b510358

Connect to DevNet

Stop the LocalNet containers to change the connection from LocalNet to DevNet.

In the terminal, run:

```
make stop && make clean-all
```

To edit the connection and observability parameters run:

```
make setup
```

When prompted to enable LocalNet, enter “n”. This enables DevNet

Optionally, enter “Y” to enable observability. This starts additional containers which may require more memory for Docker.

You may leave the party hint as the default value by tapping ‘return’ on the keyboard.

```
(base) quickstart ~ % make setup
Starting local environment setup tool...
./gradlew configureProfiles --no-daemon --console=plain --quiet
Enable LocalNet? (Y/n): n
  LOCALNET_ENABLED set to 'false'.

Enable Observability? (Y/n): Y
  OBSERVABILITY_ENABLED set to 'true'.

Specify a party hint (this will identify the participant in the network) [quickstart-... -1]:
  PARTY_HINT set to 'quickstart-... -1'.

.env.local updated successfully.
(base) quickstart ~ %
```

 Running `make setup` regenerates `.env.local` but preserves the contents of the `.env` file settings.

The application is now connected to DevNet.

Important: Migration ID for DevNet Connections

When connecting to DevNet, verify that the `MIGRATION_ID` value in `.env` matches the current network migration ID for your DevNet Super Validator (SV).

Check the current migration ID at <https://sync.global/sv-network/> under the GSF DevNet information section.

For example, if the SV Node Information shows the `migration_id` value as “0” then update `MIGRATION_ID` to “0” in your `.env`.

GSF DevNet Super Validator Node Information

```
{  
  "network": "devnet",  
  "sv": {  
    "migration_id": 0,  
    "version": "0.3.15"  
  },  
  "synchronizer": {  
    "active": {  
      "chain_id_suffix": "5",  
      "migration_id": 0,  
      "version": "0.3.15"  
    },  
    "legacy": null,  
    "staging": null  
  }  
}
```

In .env:

```
ONBOARDING_SECRET_URL=https://sv.sv-1.dev.global.canton.network.digitalasset.com/api/sv/v0/devnet/onboard/validator/prepare  
MIGRATION_ID=0  
APP_PROVIDER_VALIDATOR_PARTICIPANT_ADDRESS=participant-app-provider  
APP_USER_VALIDATOR_PARTICIPANT_ADDRESS=participant-app-user
```

Configuring Non-Default DevNet Sponsors

In DevNet mode, you can configure a non-default SPONSOR_SV_ADDRESS, SCAN_ADDRESS and ONBOARDING_SECRET_URL or ONBOARDING_SECRET in the quickstart/.env file.

 Connecting to DevNet requires a connection to an [approved SV](#). If your organization provides access to the DAML-VPN, then connect to it to access the Digital Asset-sponsored SV.

Your organization may sponsor another [CN-approved SV](#). If this is the case, speak with your administrator for privileged access.

Review the DevNet Global Synchronizer (GS) documentation to learn more about the [SV onboarding process](#).


 If you run into errors when making DevNet operations, double check that the DevNet VPN is active. DevNet VPNs may timeout, especially if left unattended for extended periods of time.

In an incognito browser navigate to `localhost:3000/login`. Login as the `Org1` user and create and archive assets, as before. Logout and do the same as the `AppProvider`.

SV UIs

Navigate to `http://sv.localhost:4000/` for the SV Web UI. The SV view displays data directly from the validator in a GUI that is straightforward to navigate.

Login as ‘administrator’.

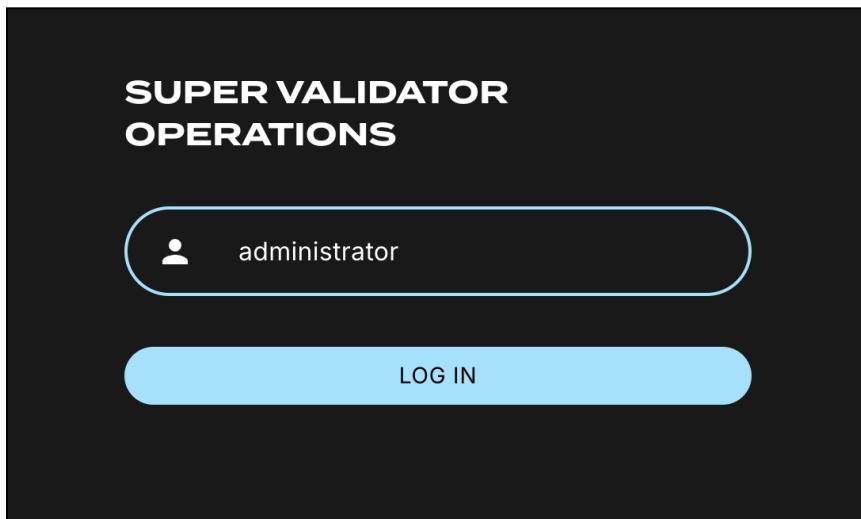

The UI shows information about the SV and lists the active SVs.

A screenshot of the "SUPER VALIDATOR OPERATIONS" dashboard. The top navigation bar includes links for "Information", "Validator Onboarding", and "Canton Coin Price". Below the navigation is a horizontal menu with tabs: "General" (which is selected and highlighted in yellow), "DSO Info", "Canton Coin Info", "CometBFT Debug Info", and "Domain Node Status".

Super Validator Information
svUser: administrator
svPartyId: sv::1220e29d956452e... [🔗](#)

Active Super Validators
sv: sv::1220e29d956452e... [🔗](#)

Decentralized Synchronizer Operations
dsoLeaderPartyId: sv::1220e29d956452e... [🔗](#)
dsoPartyId: DSO::12200af1e2b814... [🔗](#)
dsoEpoch: 0

The Validator Onboarding menu allows for the creation of validator onboarding secrets.

The screenshot shows the "Validator Onboarding Secrets" section of the "SUPER VALIDATOR OPERATIONS" menu. It displays three entries, each with a "CREATE A VALIDATOR ONBOARDING SECRET" button. The columns are "EXPIRES AT", "ONBOARDING SECRET", and "SPONSOR".

EXPIRES AT	ONBOARDING SECRET	SPONSOR
02/13/2025 15:13	quickstart-jpmiller-1::122077f1ae74e... <input type="checkbox"/>	sv::122016716056ad8... <input type="checkbox"/> THIS SV
02/13/2025 15:13	quickstart-jpmiller-1::12203783f656... <input type="checkbox"/>	sv::122016716056ad8... <input type="checkbox"/> THIS SV
02/13/2025 15:10	sv::122016716056ad8277a9220b78... <input type="checkbox"/>	sv::122016716056ad8... <input type="checkbox"/> THIS SV

The CC Price menu option has an option to set the price for open mining rounds.

The screenshot shows the "Canton Coin Price for Next Open Mining Round" section of the "SUPER VALIDATOR OPERATIONS" menu. It displays the current price as "0.005 USD" and a median value from other validators. There is a form to enter a "Your Desired Canton Coin Price" of "1.0" with "UPDATE" and "CANCEL" buttons. Below this, it lists "Desired Canton Coin Prices of Other Super Validators" and "Open Mining Rounds".

SUPER VALIDATOR	SUPER VALIDATOR PARTY ID	DESIRED CANTON COIN PRICE	LAST UPDATED AT

ROUND	CANTON COIN PRICE	OPENS AT	TARGET CLOSES AT
6	0.005 USD	12/11/2024 11:19	12/11/2024 11:39
5	0.005 USD	12/11/2024 11:09	12/11/2024 11:29
4	0.005 USD	12/11/2024 10:58	12/11/2024 11:18

Update the price of the CC.

The screenshot shows the 'SUPER VALIDATOR OPERATIONS' section of the Digital Asset platform. At the top, there are navigation links: 'Information', 'Validator Onboarding', and 'Canton Coin Price' (which is underlined, indicating it's the current page). Below this, the main content area displays the 'Canton Coin Price for Next Open Mining Round' as '1 USD'. A note below states 'Median of Canton Coin prices voted by all Super Validators'. There is also a field labeled 'Your Desired Canton Coin Price' with the value '1 USD' and a pencil icon for editing.


The updated coin price reflects the new open mining rounds.

The screenshot shows the 'Desired Canton Coin Prices of Other Super Validators' and 'Open Mining Rounds' sections. The first section lists other validators with their desired coin prices: Super Validator 1 has a price of 1 USD, Super Validator 2 has 0.005 USD, and Super Validator 3 has 0.005 USD. The second section lists three open mining rounds with their respective start and end times: Round 7 opens at 12/11/2024 11:29 and closes at 12/11/2024 11:49; Round 6 opens at 12/11/2024 11:19 and closes at 12/11/2024 11:39; and Round 5 opens at 12/11/2024 11:09 and closes at 12/11/2024 11:29.

Canton Coin Scan

Navigate to the CC Scan Web UI at <http://scan.localhost:4000/>.

The default activity view shows the total CC balance and the Validator rewards.

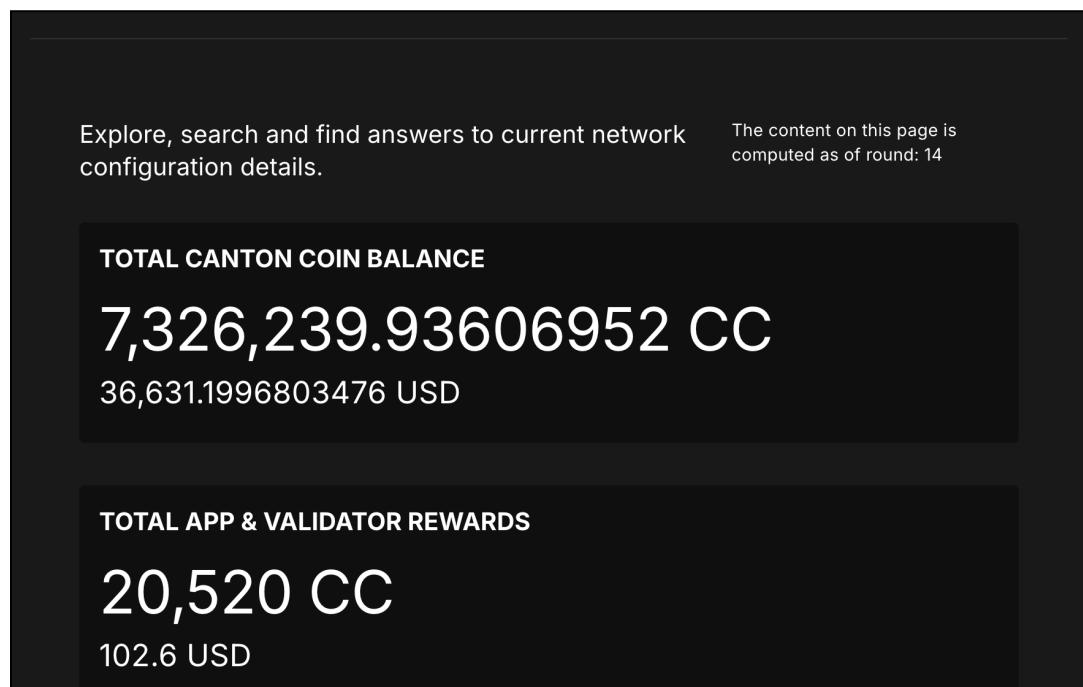

Select the Network Info menu to view SV identification.

The screenshot shows the "SUPER VALIDATOR OPERATIONS" interface. At the top, there are tabs for Information, Validator Onboarding, Canton Coin Price, Delegate Election, and Governance. Below these are sub-tabs for General, DSO Info, Canton Coin Info, CometBFT Debug Info, and Domain Node Status. The General tab is selected. Under "Super Validator Information", it shows svUser: administrator. Under "Active Super Validators", it shows sv: sv::1220e29d956452e... (with a copy icon). Under "Decentralized Synchronizer Operations", it shows dsoLeaderPartyId: sv::1220e29d956452e... (with a copy icon), dsoPartyId: DSO::12200af1e2b814... (with a copy icon), and dsoEpoch: 0.

The Validators menu shows that the local validator has been registered with the SV.

CANTON COIN SCAN		Col 2	Col 3	Col 4	Col 5	Col 6
Created At	Validator	Sponsor	Actions			
02/11/2025 08:06	sv::12201b7f2459db0f8...	sv::12201b7f2...	View	Edit	Delete	THIS SV
02/11/2025 08:05	quickstart-jpmiller-1::12...	sv::12201b7f2...	View	Edit	Delete	THIS SV
02/11/2025 08:05	quickstart-jpmiller-1::12...	sv::12201b7f2...	View	Edit	Delete	THIS SV

Observability Dashboard

In a web browser, navigate to <http://localhost:3030/dashboards> to view the observability dashboards. Select “Quickstart - consolidated logs”.

The screenshot shows the Digital Asset Observability Dashboard at the URL <http://localhost:3030/dashboards>. The left sidebar includes links for Home, Starred, Dashboards (which is selected), Explore, Alerting, Connections, and Administration. The main area is titled "Dashboards" and contains a sub-header "Create and manage dashboards to visualize your data". It features a search bar, a filter by tag dropdown, and a "Starred" checkbox. Below these are two sections: "Name" and "Tags". The "Name" section lists "Infrastructure", "Participant", "Platform", and "Quickstart - consolidated logs". The "Tags" section shows "logs" and "loki" next to the "Quickstart - consolidated logs" entry. A small "Logs" icon is also present near the "logs" tag.

The default view shows a running stream of all services.

1 http://localhost:3000#/v/quickstart-consolidated-logs/quickstart-consolidated-logs?orgId=1&refresh=10s

Q Search or jump to... Add Share Last 5 minutes 10s

Home Dashboards Quickstart - consolidated logs

Services All Levels All Search Enter variable value Trace ID Enter variable value

Logs

```
> 2024-12-11 11:25:17.113 [participant] Here is our list of the 15 most expensive database queries for dm1.db.storage.write.executor with total of 1.2s:
count= 167 mean= 6.84 ms total= 1.0 s com.digitalasset.canton.time.ClockQueued.Sanonfun$try$1(Clock.scala:77)
count= 2 mean= 40.66 ms total= 0.1 s com.digitalasset.canton.store.db.BsSequencedEventStore.Sanonfun$store$2(BsSequencedEventStore.scala:121)
count= 165 mean= 1.07 ms total= 0.1 s com.digitalasset.canton.participant.store.db.DBIInFlightSubmissionStore.observeSequencing(ObInFlightSubmissionStore.scala:180)
count= 2 mean= 1.07 ms total= 0.0 s com.digitalasset.canton.participant.store.db.DBIInFlightSubmissionStore.delays(ObInFlightSubmissionStore.scala:275)
count= 2 mean= 0.94 ms total= 0.0 s com.digitalasset.canton.participant.store.db.DBIInFlightSubmissionStore.Sanonfun$delete$6(ObInFlightSubmissionStore.scala:276)

> 2024-12-11 11:25:16.977 [validator_backend] Here is our list of the 15 most expensive database queries for cn-db.storage.general.executor with total of 0.2 s:
count= 8 mean= 6.83 ms total= 0.0 s org.lfcentralizedtrust.splice.validator.store.db.DBValidatorStore.Sanonfun$listXpriedFromPayloadXpiry$3(DOMultiDomainAcStore.scala:288)
count= 4 mean= 9.88 ms total= 0.0 s org.lfcentralizedtrust.splice.validator.store.db.DBValidatorStore.Sanonfun$lookupValidPortfoliosWithInfo$3(DOMultiDomainAcStore.scala:297)
count= 2 mean= 16.73 ms total= 0.0 s org.lfcentralizedtrust.splice.validator.store.db.DBValidatorStore.Sanonfun$lookupValidPortfoliosWithInfo$3(DOMultiDomainAcStore.scala:334)
count= 4 mean= 1.06 ms total= 0.0 s org.lfcentralizedtrust.splice.validator.store.db.DBValidatorStore.Sanonfun$listAssignedContracts$1(DOMultiDomainAcStore.scala:254)
count= 3 mean= 8.13 ms total= 0.0 s org.lfcentralizedtrust.splice.validator.store.db.DBValidatorStore.Sanonfun$listAssignedContracts$1(DOMultiDomainAcStore.scala:254)
count= 5 mean= 4.76 ms total= 0.0 s org.lfcentralizedtrust.splice.validator.store.db.DBValidatorStore.Sanonfun$listContractsPaginated$1(DOMultiDomainAcStore.scala:226)
count= 2 mean= 4.42 ms total= 0.0 s org.lfcentralizedtrust.splice.validator.store.db.DBValidatorStore.Sanonfun$listXpiringTransferReproposals$1(DOMultiDomainAcStore.scala:281)

> 2024-12-11 11:25:16.978 [validator_backend] Using the client-cache (validUntil: Some(2024-12-11T17:25:21.810Z)) to load following issuing rounds: Vector(I(1286, 1128), I(1126, 1128), I(1126, 1128))

> 2024-12-11 11:25:16.938 [sequencer] Here is our list of the 15 most expensive database queries for dm1.db.storage.general.executor with total of 0.0 s:
count= 1 mean= 0.07 ms total= 0.0 s com.digitalasset.canton.store.db.BsSequencedEventStore.Sanonfun$preheat$1(BsSequencedEventStore.scala:48)

> 2024-12-11 11:25:16.918 [sv] Completed processing PeriodicTask for 2024-12-11T25:16.918(2973172) with outcome: Updated domain parmas to 1

> 2024-12-11 11:25:16.317 [sv] Request (tid:fdd255af6e7ac5b0c591bd51d29e1) com.digitalasset.canton.topology.admin.v30.TopologyManagerReadService/listDomainParameterState to participant-sv:5992: succeeded(OK)
> 2024-12-11 11:25:16.317 [sv] Request (tid:fdd255af6e7ac5b0c591bd51d29e1) com.digitalasset.canton.topology.admin.v30.TopologyManagerReadService/listDomainParameterState to participant-sv:5982: received a message
> 2024-12-11 11:25:16.312 [sv] Request (tid:fdd255af6e7ac5b0c591bd51d29e1) com.digitalasset.canton.topology.admin.v30.TopologyManagerReadService/listDomainParameterState to participant-sv:5982: sending request
> 2024-12-11 11:25:16.311 [sv] Request (tid:c9649a1742908a1ffcced1cc493798) com.digitalasset.canton.admin.participant.v30.DomainConnectivityService/listConnectedDomains to participant-sv:5902: succeeded(OK)
> 2024-12-11 11:25:16.310 [sv] Request (tid:c9649a1742908a1ffcced1cc493798) com.digitalasset.canton.admin.participant.v30.DomainConnectivityService/listConnectedDomains to participant-sv:5902: received a message
> 2024-12-11 11:25:16.308 [sv] Request (tid:c9649a1742908a1ffcced1cc493798) com.digitalasset.canton.admin.participant.v30.DomainConnectivityService/listConnectedDomains to participant-sv:5902: sending request
> 2024-12-11 11:25:16.308 [sv] Request (tid:c9649a1742908a1ffcced1cc493798) com.digitalasset.canton.admin.participant.v30.DomainConnectivityService/listConnectedDomains to participant-sv:5902: received a message
> 2024-12-11 11:25:16.305 [sv] Request (tid:f8ae1fb9a964b723c34da3f741366f5) com.digitalasset.canton.topology.admin.v30.TopologyManagerReadService/listDomainParameterState to participant-sv:5982: succeeded(OK)
> 2024-12-11 11:25:16.305 [sv] Request (tid:f8ae1fb9a964b723c34da3f741366f5) com.digitalasset.canton.topology.admin.v30.TopologyManagerReadService/listDomainParameterState to participant-sv:5982: received a message
> 2024-12-11 11:25:16.304 [sv] Request (tid:f8ae1fb9a964b723c34da3f741366f5) com.digitalasset.canton.topology.admin.v30.TopologyManagerReadService/listDomainParameterState to participant-sv:5982: sending request
> 2024-12-11 11:25:16.304 [sv] Request (tid:d447c28e26c9b722cb7d83dfac3) com.digitalasset.canton.admin.participant.v30.DomainConnectivityService/listConnectedDomains to participant-sv:5902: succeeded(OK)
```

Change the services filter from “All” to “participant” to view participant logs. Select any log entry to view its details.

Development Journey in the CN QS Lifecycle

The CN QS provides a foundation for developing applications on the GS.

CN QS Components

The CN QS consists of three components that the developer may find of interest. These include the CN QS development tools, LocalNet, and the sample application. Each component holds significance based on where the developer is in the lifecycle of the application.

Development Tools

The development tools in CN-QS provide critical infrastructure that outlasts the sample application code. Understanding these tools informs decisions about which components to keep, modify, or replace as your application evolves.

Build System

The build system integrates Daml smart contract with the Java and TypeScript applications. Running `./gradlew build` generates code from the Daml model, packages contracts into DAR files, and prepares deployment.

To understand the project structure, dependencies, and root project configuration, examine `quickstart/build.gradle.kts`. For Daml-specific build configurations, review `quickstart/daml/build.gradle.kts`.

To extend the build system for your application, create parallel project structures in `quickstart/settings.gradle.kts`. These settings allow you to maintain your code alongside the original CN QS components while leveraging the same build infrastructure. Customize code generation by modifying the Gradle tasks in `quickstart/buildSrc/src/main/kotlin/` to target specific languages or adjust output formats.

As your application evolves, you can fine-tune dependency management across language boundaries, configure artifact publishing for CI/CD pipelines, and integrate with the Canton ledger APIs. The build system serves as the foundation that connects your Daml models to client applications.

When troubleshooting build issues, check the generated code in `build/generated-daml-bindings/` to verify that your Daml models are correctly translated to your target languages.

Understanding the build system can save extensive time in development efforts compared to creating custom build processes from scratch.

Makefile Command Interface

The Makefile provides standardized commands for common operations:

make setup	Configure environment variables and dependencies
make build	Build all components (Daml, backend, frontend)
make start	Start the application stack
make console-app-provider	Access Canton console for the provider
make console-app-user	Access Canton console for the user
make shell	Start Daml Shell for interactive testing

The Makefile serves as the primary control panel for interacting with the CN QS environment.

Run `make setup` to configure environment variables in `.env` files.

`make start` applies the appropriate environment settings and orchestrates all services through Docker Compose.

When you need direct access to the Canton ledger, use `make console-app-provider` to open an interactive console session.

Makefile integrates with Gradle to trigger builds and code generation with a single command, rather than needing to map complex Gradle tasks directly. Examine `makefile` to understand all available commands to streamline common development workflows and extend with your own custom commands as your application evolves.

Configuration Files

Customize service behavior by modifying the configuration files to match your application's requirements. Start with the Canton console configuration in `quickstart/config/canton-console/app.conf` to adjust ledger access permissions and admin operations. When you need to change network routing or add SSL certificates, edit the NGINX configurations in `quickstart/config/nginx/` directory.

Fine-tune your observability stack by modifying the configurations in `quickstart/config/o11y/` to capture application-specific metrics and create custom dashboards for monitoring your services. These files use standard formats (`HOCON` for Canton, `YAML` for Docker services, `JSON` for dashboards), making them easy to edit with standard tools.

Override configuration values by setting environment variables in your `.env` files rather than editing the configuration files directly. This approach makes it easier to incorporate upstream updates by keeping your customizations separate from the base configurations. For example, set `CANTON_ADMIN_PORT=5022` in your `.env` file to change the Canton admin API port without modifying the `app.conf` file.

When troubleshooting, examine these configuration files to understand how services are connected and what parameters control their behavior. As your application grows, create additional configuration files for your custom services following the same patterns established in the CN QS configurations.

Utility Tools

Leverage the CN QS utility tools during development and testing workflows. Use the build utilities in `quickstart/buildSrc/` to automate common development tasks. The `UnpackTarGzTask` helps extract archive files while preserving permissions and symbolic links. The Java convention scripts standardize your application's build configuration across modules.

Configure your deployment environment by selecting the appropriate Docker Compose files in `quickstart/docker/`. Use `compose-validator.yaml` for validator nodes and adjust resource allocations with the `resource-constraints-*.yaml` files. Start the observability stack with `docker-compose -f quickstart/docker/o11y/compose.yaml` up to monitor your application's performance. The `o11y` directory integrates with Grafana dashboards defined in `quickstart/config/o11y/` to provide real-time metrics visualization.

Examine these utilities early in your development process to understand their capabilities. Extend them to match your specific requirements rather than building similar functionality from scratch. For example, add custom test cases to the existing test framework or create new deployment scripts based on the provided templates.

We recommend keeping these utilities when you replace the sample application code. They provide infrastructure that would require significant effort to recreate. Copy them to your application's directory structure during the separation phase to maintain their functionality while decoupling from the original CN QS code.

LocalNet

LocalNet provides a self-contained Canton Network environment for development and testing. It includes all necessary components to simulate a production network on a single laptop without external dependencies.

Network Components

The LocalNet environment consists of three core components that work together to simulate a production Canton Network. The Application Provider and User Validator nodes run Canton participant nodes to host your contracts and represent user participants. Each validator operates within its own preconfigured domain.

The Global Synchronizer (GS) acts as the network coordinator through its Super Validator (SV). It runs a Canton domain node that handles transaction ordering and conflict resolution using sequencer and mediator services. It verifies that all network participants maintain a consistent view of the distributed ledger.

A set of essential services supports these core components. PostgreSQL stores the ledger data, while Keycloak handles authentication and authorization. The Wallet Service manages digital assets and payments, and NGINX provides routing and SSL termination for secure communication between services.

Technical Implementation

The LocalNet environment is defined in Docker Compose files:

- quickstart/compose.yaml: Main application stack
- quickstart/docker/compose-validator.yaml: Validator configuration
- quickstart/docker/compose-super-validator.yaml: SV configuration

Key configuration files:

- quickstart/.env: Environment variables for the entire stack
- quickstart/docker/localnet.env: Network-specific configuration
- quickstart/config/canton-console/app.conf: Canton node configuration

LocalNet persists data through Docker volumes. Its network topology can be modified to meet specific business requirements. Canton console provides direct ledger access for debugging.

Access service logs in terminal using

```
make logs
```

Access git logs in terminal with

```
git log
```

Most teams maintain LocalNet throughout development, even after replacing the sample application. LocalNet provides a consistent testing platform that mirrors a production CN.

ScratchNet

ScratchNet is a term that refers to a persistent Canton Network environment that extends beyond the limitations of LocalNet, but is not as decentralized as DevNet. It's designed for scenarios requiring longer-running instances, more resources, and multi-developer collaboration.

We've found that our clients prefer to set up their own ScratchNet to create a more persistent LocalNet-like environment that can also be developed upon by a team.

Technical Implementation

A successful ScratchNet should include the following requirements:

- Server or VM (recommended minimum 64GB RAM, 16 CPU cores)
- Docker and Docker Compose
- External storage volumes for data persistence
- Network configuration that allows team access

Deployment Architecture

ScratchNet also requires persistent storage directories that are accessible across a team. Deploying ScratchNet architecture may use the following pattern:

```
# Clone CN-QS repository to server
git clone https://github.com/digital-asset/cn-quickstart.git
cd cn-quickstart

# Create persistent storage directories
mkdir -p /mnt/scratchnet/postgres-data
mkdir -p /mnt/scratchnet/canton-data
```

Configure external volume mounts in a custom compose override file:

```
# scratchnet.yaml
```

```
version: '3.8'

services:
  postgres-splice-app-provider:
    volumes:
      -
        /mnt/scratchnet/postgres-data/app-provider:/var/lib/postgresql/data

  postgres-splice-app-user:
    volumes:
      -
        /mnt/scratchnet/postgres-data/app-user:/var/lib/postgresql/data

  postgres-splice-sv:
    volumes:
      -
        /mnt/scratchnet/postgres-data/sv:/var/lib/postgresql/data

  participant-app-provider:
    volumes:
      -
        /mnt/scratchnet/canton-data/app-provider:/canton-data

  participant-app-user:
    volumes:
      -
        /mnt/scratchnet/canton-data/app-user:/canton-data
```

Create a basic environment configuration.

```
# .env.scratchnet
# Unique network name
DOCKER_NETWORK=scratchnet

# External hostname where ScratchNet is accessible
EXTERNAL_HOSTNAME=scratchnet.example.com
Launch with persistent volumes:
# Set up environment
export ENV_FILE=.env.scratchnet

# Launch with volume persistence
COMPOSE_FILE=quickstart/compose.yaml:scratchnet.yaml make start
```

If your team is interested in setting up a ScratchNet environment, be sure to implement a regular, and preferably automated, backup strategy. Verify that access control is properly in place. We also suggest establishing a reliable way to monitor resource consumption, especially

for extended runs. Your team may want to take advantage of resource management tools available through CN's Observability tools (Learn more in the Project Structure Guide), or you may choose to incorporate your own lightweight tools.

For example, a monitoring script in crontab can offer basic alerting.

```
#!/bin/bash
# db-monitor.sh - Run daily to monitor database growth

THRESHOLD=80
DB_PATH="/mnt/scratchnet/postgres-data"

USAGE=$(df -h $DB_PATH | grep -v Filesystem | awk '{ print $5 }' | sed 's/%//')
SIZE=$(du -sh $DB_PATH | awk '{ print $1 }')

echo "$(date): DB size is $SIZE, volume usage at $USAGE%" >>
/var/log/scratchnet-storage.log

if [ $USAGE -gt $THRESHOLD ]; then
    echo "ScratchNet PostgreSQL volume has reached ${USAGE}% capacity
($SIZE)"
fi
```

Containers can also be configured to automatically prune older data to reduce latency and maintain system integrity.

```
participant-app-provider:
  environment:
    CANTON_PARAMETERS:
      --canton.participants.participant.storage.write.pruning-interval=7d"
```

Sample Application

The CN-QS includes a complete reference application that demonstrates Canton Network application patterns. While you'll likely replace this component entirely, understanding its architecture provides valuable insights for your own application design.

Application Components

Daml Models quickstart/daml/licensing/:

- Core business logic implemented as smart contracts
- License and AppInstall templates demonstrate multi-party workflows
- Integration with Splice

Backend Service quickstart/backend/

- Java Spring Boot application
- Ledger API integration for contract creation and exercise
- REST API exposing contract operations to frontend
- Automated code generation from Daml models

Frontend quickstart/frontend/

- React/TypeScript single-page application
- Component-based architecture with state management using React hooks
- REST API integration with backend service

Technical Implementation

The API Design is defined in quickstart/common/openapi.yaml. It contains the RESTful API definitions, establishes the JSON schema for request/response objects, provides error handling conventions, and creates authentication patterns.

Development Lifecycle

We've observed five distinct phases of the CN QS development journey. Each phase presents unique strategies for interacting with the CN QS.

Learning Phase

(½ - 2 weeks)

Often the first interaction with the CN QS is understanding how to get the environment running. The next goal is to explore the application and develop knowledge around the architecture and its workflow. It's also important to learn how to navigate the most common observability dashboards and move between LocalNet and DevNet.

The most direct update strategy in this phase is to regularly update your local copy of the CN QS by making a `git pull` from the main branch.

```
# Initial setup
git clone https://github.com/digital-asset/cn-quickstart.git
cd cn-quickstart

# Regular updates during learning
git pull origin main

# Environment customization (only if needed)
```

```
echo 'export PARTY_HINT="company-name"' > .envrc.private
direnv allow
```

Experimentation Phase

(1-2 weeks)

In this phase, you'll reinforce your understanding of the CN QS by experimenting with the configurations, exploring the Ledger and CN app APIs, and modify the Daml code, Java client, and Makefile to test integration patterns.

At this phase, you may want to establish upstream tracking to selectively incorporate changes.

```
# Set up upstream tracking
git remote add upstream
https://github.com/digital-asset/cn-quickstart.git

# Create a branch for experiments
git checkout -b experiments

# Periodically incorporate upstream changes
git fetch upstream
git merge upstream/main
```

Development Phase

(2-3 weeks)

This is where you begin building your own application alongside the CN QS sample application. Many developers create their new app in parallel code directories to the CN QS application to learn from the CN QS while building their own application.

```
cn-quickstart/
└── quickstart/          # Original CN-QS code
    ├── daml/             # CN-QS Daml code
    ├── backend/           # CN-QS backend service
    └── frontend/          # CN-QS frontend

└── myapp/               # Your application code
    ├── daml/              # Your Daml models
    ├── backend/            # Your backend services
    └── frontend/           # Your frontend code
```

Developers may generate new Daml packages, new client code in languages other than Java or TypeScript, UI elements, CI/CD integration, and unit tests.

Gradle Settings

When you develop parallel directories, remember to update your build configuration to include both structures.

```
// In settings.gradle.kts
include("quickstart:daml")
include("quickstart:backend")
include("quickstart:frontend")

include("myapp:daml")
include("myapp:backend")
include("myapp:frontend")
```

Maintain separate build files for application components.

```
// In myapp/backend/build.gradle.kts
dependencies {
    // Reference CN QS components if needed
    implementation(project(":quickstart:daml"))

    // Your specific dependencies
    implementation("your.dependency:library:1.0.0")
}
```

Environment Variables

Use `.envrc.private` for local overrides.

```
# Override CN QS defaults
export PARTY_HINT="your-company"
export DAML_SDK_VERSION="your-version"

# Add your application-specific variables
export MY_APP_CONFIG="/path/to/config"
```

Create separate environment files for your application.

```
# In myapp/.env
MY_APP_PORT=8080
```

```
MY_APP_DB_URL=jdbc:postgresql://localhost:5432/myapp
```

Docker Compose

Create custom compose files that extend the CN QS configuration.

```
# In myapp/compose.yaml
version: '3.8'

# Import the CN QS services
include:
  - ./quickstart/compose.yaml

# Add your services
services:
  myapp-backend:
    build: ./backend
    depends_on:
      - postgres
      - participant
    environment:
      - DB_URL=${MY_APP_DB_URL}
```

Use profiles to selectively enable groups of services.

```
# Start with CN QS and your services
docker-compose --profile quickstart --profile myapp up

# Start only your services (once they are able to run independently)
docker-compose --profile myapp up
```

Separation Phase

Over the course of a few weeks, CN developers have gained enough experience and their new application's complexity begins to exceed that of the CN QS. At this point, the CN QS is no longer helpful and the developer is advised to cut ties with the sample application.

To remove dependence on the CN QS, delete the example application directories, adjust gradle files, change the environment variable files, and remove the upstream connection in git.

The developer's source code repository is disconnected from the CN QS repository. It is advisable to write a bridge document that maps your application components to their CN QS

origins. This creates a historical development record and can make it more straightforward to incorporate future updates.

```
# Remove the CN-QS remote  
git remote remove upstream  
  
# Clean up unused directories (after backing up if needed)  
rm -rf quickstart/  
  
# Update build files to remove CN-QS references  
# Edit settings.gradle.kts, build.gradle.kts, etc.
```

Ongoing Updates

By now, your application is likely to outgrow the capabilities of the CN QS. However, you may want the ability to update the development tooling or LocalNet support. The CN QS continuously adds more tooling features and updates existing tool versions.

This process includes periodically checking into CN QS, reviewing the ChangeLog to see what is new, and then selecting components you'd like to include in your application. You'll find the CN QS to be a source for improvements, rather than a direct dependency.

We recommend establishing a regular schedule (monthly or quarterly) to review CN QS updates.

Your update strategy may include creating a temporary clone of the CN QS to review changes, manually incorporate them into your project, and then remove the temporary clone.

```
# Temporary clone to review changes  
git clone https://github.com/digital-asset/cn-quickstart.git  
cn-quickstart-temp  
cd cn-quickstart-temp  
git log --since="3 months ago" --pretty=format:"%h - %an, %ar : %s"  
  
# After identifying useful changes, manually incorporate them into  
your project  
# Then remove the temporary clone  
cd ..  
rm -rf cn-quickstart-temp
```

Every development team's journey is unique. Adapt these strategies to fit your specific needs, team structure, and application requirements. As a CN developer, your goal is to find an

approach that supports your development goals while also using the CN QS as a foundation to accelerate your development lifecycle.

Upgrades On The Global Synchronizer

The SVs periodically implement upgrades to the GS to improve functionality, resolve issues, and introduce new features. As a node operator or application provider you should be aware of the three types of upgrades that may occur.

Type 1: Backward-Compatible Changes

Type 1 upgrades involve backward-compatible changes to the Splice applications and/or modifications to the behavior of the Canton synchronization layer. These non-breaking changes occur on Mondays, weekly.

While validators can operate effectively when behind by a version or two, the SVs recommend keeping your node up to date with weekly upgrades. It's worth noting that "skip upgrades" (jumping multiple versions at once) are not officially tested by the SVs, so while they generally work, they come with increased risk.

Type 2: Daml Model Changes

Type 2 upgrades modify the Daml models that underlie the Splice applications. These changes introduce a fork in the application chains and occur every few months.

The process for Type 2 upgrades begins with distribution of the new Daml models through Type 1 upgrades, followed by an offline Canton Improvement Proposal (CIP) that must be approved by the SV node owners. Next, the SVs conduct an onchain vote to establish a specific date and time when the new models take effect. At this cutoff point, only validators running the most recent Splice version are able to participate in transactions using the new models. Validators that haven't adopted the latest version are unable to participate in transactions.

Type 3: Non-Compatible Protocol Changes

Type 3 upgrades involve fundamental changes to the Canton synchronization protocol. These major upgrades require downtime (sometimes called Hard Migrations) and occur every three to four months.

The implementation of Type 3 upgrades requires a Canton Improvement Proposal (CIP) approved through an offchain vote, followed by an onchain vote by the SVs to schedule the upgrade. These migrations impact all SVs and Validators, requiring a coordinated transition from

the prior protocol to the new one. Currently, Canton requires all nodes to migrate together during these upgrades.

Preparing for Upgrades

Application providers should maintain nodes on DevNet, TestNet, and MainNet to guarantee smooth operations during upgrades. By maintaining nodes across all three environments you substantially increase the likelihood that MainNet upgrades proceed without disrupting your services or customers.

Keycloak in the CN-QS

Keycloak is an open-source Identity and Access Management (IAM) solution that provides authentication, authorization, and user management for modern applications and services. It acts as a centralized authentication server that handles user logins, session management, and security token issuance.

The CN-QS uses Keycloak to provide secure authentication across its distributed architecture. Keycloak maintains separation between authentication concerns and business logic.

Realm Structure

The CN-QS defines two Keycloak realms that mirror its business domains. The AppProvider realm manages authentication for services and users on the provider side of the application. The AppUser realm handles authentication for the consumer side. When components like validators or participant nodes receive requests, they validate the authentication tokens against the appropriate realm.

Keycloak Configuration

The default .env configuration includes predefined users in each realm:

- **User "Pat"** (AUTH_APP_PROVIDER_WALLET_ADMIN_USER_NAME=pat)
- **UUID:** 553c6754-8879-41c9-ae80-b302f5af92c9
(AUTH_APP_PROVIDER_WALLET_ADMIN_USER_ID)

AppUser Realm:

- **User "Alice"** (AUTH_APP_USER_WALLET_ADMIN_USER_NAME=alice)
- **UUID:** 92a520cb-2f09-4e55-b465-d178c6cfe5e4
(AUTH_APP_USER_WALLET_ADMIN_USER_ID)
- **Password:** abc123 (AUTH_APP_USER_WALLET_ADMIN_USER_PASSWORD)

Customizing Keycloak for Business Needs

You can customize the Keycloak configuration to meet your specific business requirements.


Accessing the Admin Console

The Keycloak Admin Console is available at:

```
http://keycloak.localhost:8082/admin/master/console/#/master
```

To log in use the default credentials:


- **Username:** `admin`
- **Password:** `admin`

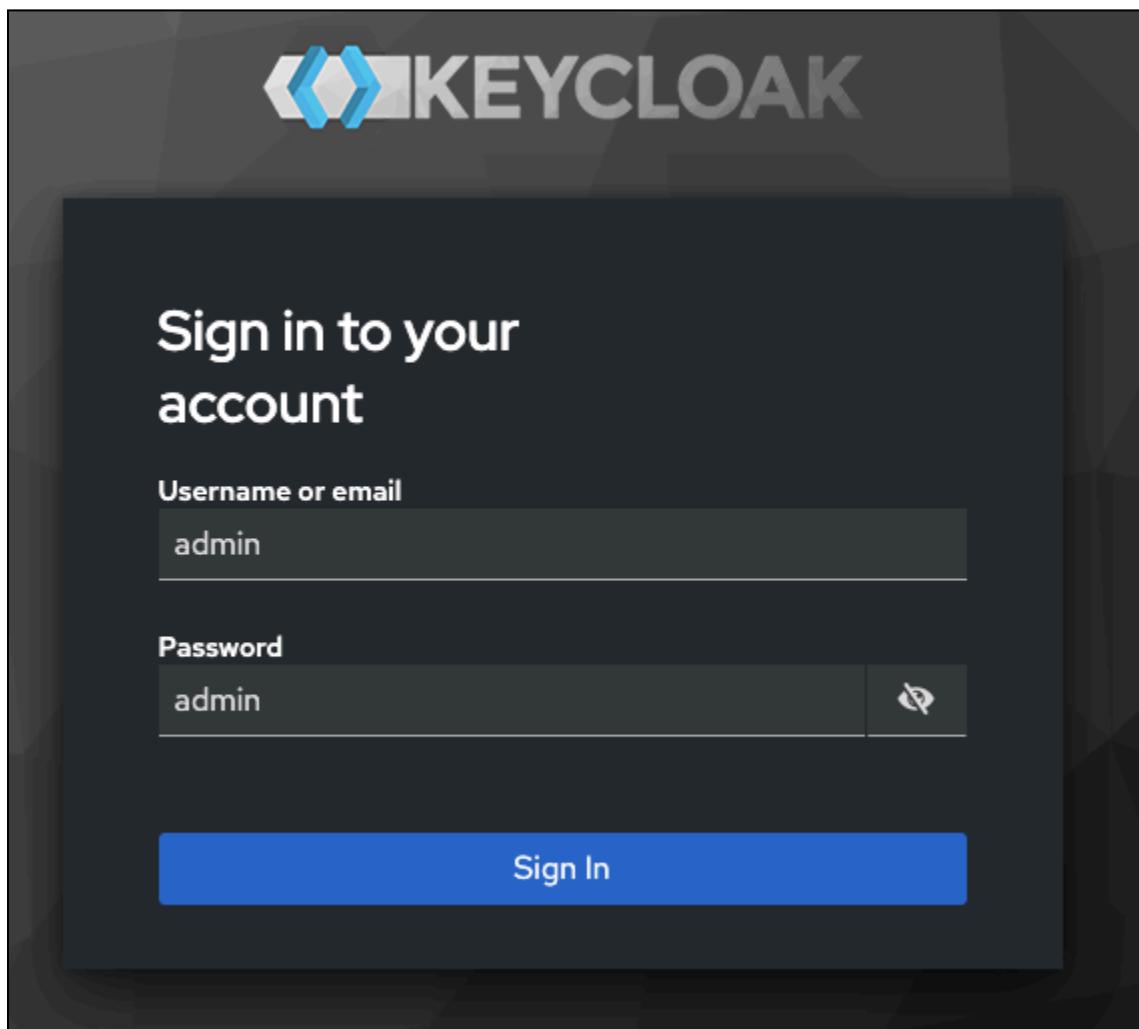


Customization Scenarios

Add a New User

1. Log in to the Keycloak Admin console

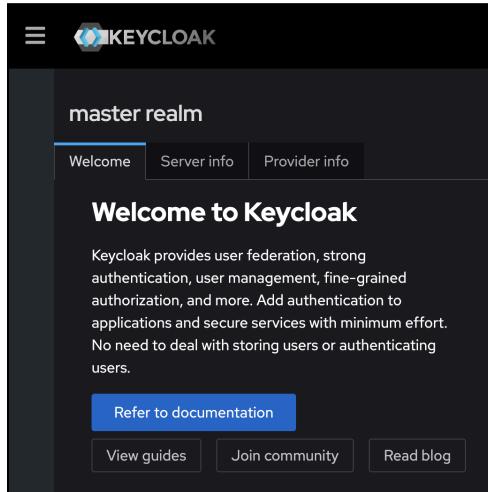

2. Select the appropriate realm (AppProvider or AppUser)

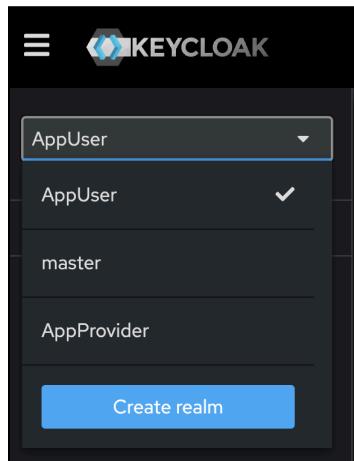

3. Navigate to the “Users” -> “Add user”

The screenshot shows the Digital Asset DAML interface. On the left, a sidebar menu is visible with the following items: AppUser (selected), Manage, Clients, Client scopes, Realm roles, Users (selected), Groups, Sessions, and Events. The main content area is titled "Users" and contains the sub-section "User list". At the top of the list view, there is a search bar with "Default search" and a search icon, followed by a "Search user" input field containing "bob", a "Create" button, and a "Add user" button. Below the search bar, there are buttons for "Delete user" and "Refresh". A pagination control shows "1-2" with arrows. The table header includes columns for "Username", "Email", "Last name", and "First name". Two rows of data are shown: one for "adrian" (Email: adrian@app-user.localhost, Last name: Doe, First name: Adrian) and one for "alice" (Email: alice@app-user.localhost, Last name: the user, First name: Alice). Each row has a checkbox and a three-dot menu icon.

4. Fill in the user details and click **Create**

General

Username * bob

Email Email

First name First name

Last name Last name

Groups ⓘ Join Groups

Create Cancel

This screenshot shows a user creation form titled 'General'. It includes fields for 'Username' (bob), 'Email' (Email placeholder), 'First name' (First name placeholder), 'Last name' (Last name placeholder), and a 'Groups' section with a 'Join Groups' button. At the bottom are 'Create' and 'Cancel' buttons.

5. Go to the **Credentials** tab to set a password

bob Enabled Action ▾

Details Credentials Role mapping Groups Consents Identity provider links Sessions

No credentials

This user does not have any credentials. You can set password for this user.

Set password

This screenshot shows the user details page for 'bob'. The 'Credentials' tab is selected. It displays a message stating 'No credentials' and a note that the user does not have any credentials, with a link to 'Set password'. Other tabs visible include 'Details', 'Role mapping', 'Groups', 'Consents', 'Identity provider links', and 'Sessions'. A top navigation bar shows 'Enabled' status and an 'Action' dropdown.

Set password for bob

Password * abc123 

Password confirmation * abc123 

Temporary  Off

Save **Cancel**

6. Save the password

Set password?

Are you sure you want to set the password for the user bob?

Save password **Cancel**

7. You can now sign in using the new user and their password.
 - a. Click **AppUser**


Canion Network Quickstart

Login with OAuth 2.0

[AppProvider](#)

[AppUser](#)

AppProvider user: pat, password: abc123
AppUser user: alice, password: abc123

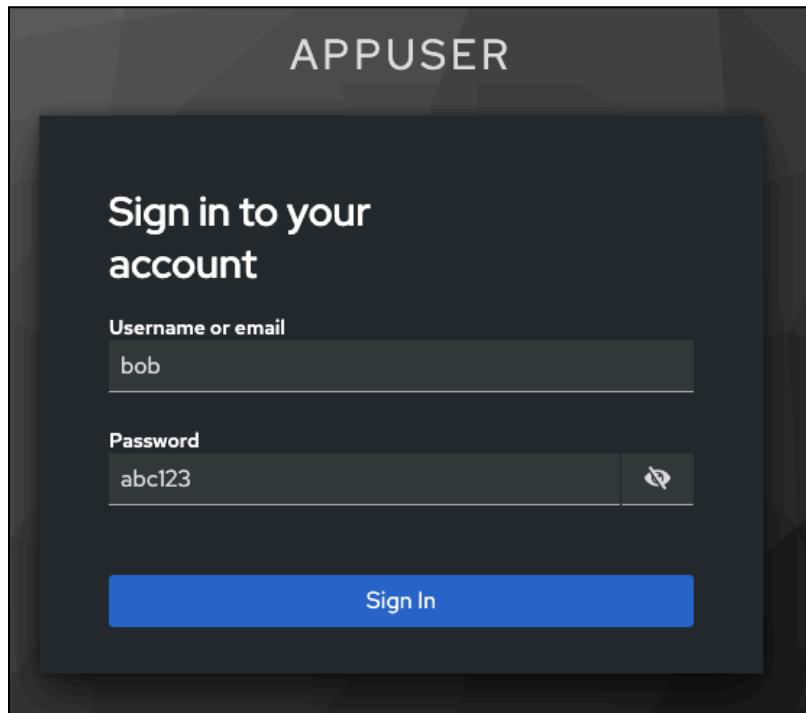

8. Bob is now a user

A screenshot of the "Canton Network Quickstart" web interface. The top navigation bar includes links for "Home", "AppInstalls", and "Licenses", along with a user session indicator for "bob doe" and a "Logout" link. The main content area is titled "App Installs" and contains a note: "Note: Run make create-app-install-request to submit an AppInstallRequest".

Modify Client Settings

1. Select the appropriate realm
2. Navigate to **Clients** -> Select the client to modify

The screenshot shows the Keycloak Admin UI for managing clients. The left sidebar is titled 'AppUser' and includes sections for Manage, Clients, Client scopes, Realm roles, Users, Groups, Sessions, Events, Configure, Realm settings, Authentication, Identity providers, and User federation. The 'Clients' section is currently selected. The main area is titled 'Clients' with the sub-section 'Clients list'. It displays a table of clients with columns: Client ID, Name, Type, Description, and Home URL. There are 10 clients listed, all of which are 'client' type, OpenID Connect, and have a home URL starting with 'http://keycloak.localhost:8082/realm/AppUser/'. A search bar, a 'Create client' button, and an 'Import client' link are at the top of the list table. A 'Refresh' button and a page number '1-10' are also present.

Client ID	Name	Type	Description	Home URL
account	client_1	OpenID Connect	—	http://keycloak.localhost:8082/realm/AppUser/account/
account	client_2	OpenID Connect	—	http://keycloak.localhost:8082/realm/AppUser/account/
admin	client_3	OpenID Connect	—	—
app	client_4	OpenID Connect	—	—
app	client_5	OpenID Connect	—	—
app	client_6	OpenID Connect	—	—
app	client_7	OpenID Connect	—	—
broker	client_8	OpenID Connect	—	—
realm	client_9	OpenID Connect	—	—
security	client_10	OpenID Connect	—	http://keycloak.localhost:8082/admin/AppUser/console/

3. Update settings per your needs

The screenshot shows the 'Clients' section of the Digital Asset management interface. A client named 'app-user-wallet' is selected, which is an 'OpenID Connect' type. The client is currently 'Enabled'. The 'General settings' tab is active, displaying fields for Client ID (app-user-wallet), Name (client_app-user-wallet), and Description (empty). An 'Always display in UI' toggle is set to 'Off'. The 'Access settings' tab is also visible, showing empty fields for Root URL and Home URL, and a Valid redirect URIs field containing 'http://wallet.localhost:2000'. A sidebar on the right lists other configuration sections: General settings, Access settings, Capability config, Login settings, and Logout settings. At the bottom are 'Save' and 'Revert' buttons.

4. Save changes

Add a New Client

1. Select the appropriate realm
2. Navigate to “Clients” -> “Create”

The screenshot shows the 'Clients list' page. It features three tabs at the top: 'Clients list' (selected), 'Initial access token', and 'Client registration'. Below the tabs is a search bar with the placeholder 'Search for client' and a 'Create client' button. The 'Create client' button is highlighted with a blue background.

3. Configure the client general settings. Click **Next** for additional configuration options

The screenshot shows the 'Create client' page with a dark theme. On the left, a sidebar lists three steps: 1. General settings (selected), 2. Capability config, and 3. Login settings. The main area contains fields for Client type (set to OpenID Connect), Client ID (empty), Name (empty), and Description (empty). A toggle switch for 'Always display in UI' is set to Off. At the bottom, there are Back, Next, and Cancel buttons.

Clients > Create client

Create client

Clients are applications and services that can request authentication of a user.

1 General settings 2 Capability config 3 Login settings

Client type ⓘ OpenID Connect

Client ID * ⓘ

Name ⓘ

Description ⓘ

Always display in UI ⓘ Off

Back Next Cancel

4. Configure additional settings

The screenshot shows the 'Create client' configuration interface. On the left, a sidebar lists three steps: 1. General settings, 2. Capability config (which is selected and highlighted in blue), and 3. Login settings. The main panel is titled 'Create client' and describes clients as applications and services that can request authentication of a user. Under 'Client authentication', the toggle switch is set to 'Off'. Under 'Authorization', the toggle switch is also set to 'Off'. In the 'Authentication flow' section, several options are listed: 'Standard flow' (checked), 'Implicit flow' (unchecked), 'Service accounts roles' (unchecked), 'OAuth 2.0 Device Authorization Grant' (unchecked), and 'OIDC CIBA Grant' (unchecked). At the bottom of the panel are 'Back', 'Next', and 'Cancel' buttons.

The screenshot shows the 'Create client' configuration interface. On the left, a sidebar lists three steps: 1. General settings, 2. Capability config, and 3. Login settings (which is selected and highlighted in blue). The main panel is titled 'Create client' and describes clients as applications and services that can request authentication of a user. Under 'Login settings', there are four sections with input fields: 'Root URL' (empty), 'Home URL' (empty), 'Valid redirect URIs' (empty with a '+ Add valid redirect URIs' button), 'Valid post logout redirect URIs' (empty with a '+ Add valid post logout redirect URIs' button), and 'Web origins' (empty with a '+ Add web origins' button). At the bottom of the panel are 'Back', 'Save' (highlighted in blue), and 'Cancel' buttons.

5. Save the client

Update Environment Variables

After making changes to Keycloak configuration, you may need to update the corresponding environment variables in the `.env` file:

1. The Keycloak user must have the same ID as the ledger user's ID.
 2. For client changes, update the corresponding client ID and secret
 3. For user changes, update the corresponding user ID and credentials
 4. Restart the services to apply the changes:

make stop && make start

Troubleshooting

Login Failures:

- ## 1. Verify Keycloak is running: `make status`

Find **keycloak** near **grafana** and **loki** in the list.

Keycloak should show as “healthy”

grafana	grafana/grafana:11.1.5	"run.sh"	grafana	30 minutes ago	Up 30 minutes	0.0.0.0:3008-3009/tcp
keycloak	quay.io/keycloak/keycloak:26.1.0	"./opt/keycloak/bin/k_-r"	keycloak	30 minutes ago	Up 30 minutes	0.0.0.0:8080-8043/tcp, 9000/tcp
keycloak-postgres	postgres:13	"docker-entrypoint-initdb.d/..._keycloak-postgres"	keycloak-postgres	30 minutes ago	Up 30 minutes	5432/tcp
loki	grafana/loki:3.1.1	"/usr/bin/loki --con..."	loki	30 minutes ago	Up 30 minutes	5108/tcp

- ## 2. Check keycloak credentials in .env file

```
AUTH_APP_USER_ISSUER_URL_BACKEND=http://nginx-keycloak:8082/realms/AppUser
# for backend
AUTH_APP_USER_ISSUER_URL=http://keycloak.localhost:8082/realms/AppUser
# for backend, wallet-ui
AUTH_APP_PROVIDER_ISSUER_URL=http://keycloak.localhost:8082/realms/AppProvider
# for backend oidc client conf, wallet-ui
AUTH_APP_PROVIDER_ISSUER_URL_BACKEND=http://nginx-keycloak:8082/realms/AppProvider
# for backends
```

3. Check that the Keycloak user ID matches the ledger user ID

- a. App User

- i. Compare the **ID** value in Keycloak's User Details with the **AUTH_APP_USER_WALLET_ADMIN_USER_ID** value in `.env`.

`AUTH_APP_USER_WALLET_ADMIN_USER_ID=92a520cb-2f09-4e55-b465-d178c6cf5e4`

The screenshot shows the Keycloak User details page for a user named 'alice'. The left sidebar has a dropdown set to 'AppUser' and a 'Users' tab selected. The main area shows the user 'alice' with an 'Enabled' toggle switch. The 'Details' tab is active, displaying the following fields:

ID *	92a520cb-2f09-4e55-b465-d178c6cf5e4
Created at *	2/18/2025, 4:33:20 PM
Required user actions	Select action

b. App Provider

Compare the **ID** value in Keycloak's User Details with the

AUTH_APP_PROVIDER_WALLET_ADMIN_USER_ID value in `.env`.

`AUTH_APP_PROVIDER_WALLET_ADMIN_USER_ID=553c6754-8879-41c9-ae80-b302f5af92c9`

The screenshot shows the Keycloak User details page for a user named 'pat'. The left sidebar has a dropdown set to 'AppProvider' and a 'Users' tab selected. The main area shows the user 'pat' with an 'Enabled' toggle switch. The 'Details' tab is active, displaying the following fields:

ID *	553c6754-8879-41c9-ae80-b302f5af92c9
Created at *	2/5/2025, 11:19:20 PM
Required user actions	Select action

Learn more about using Keycloak through their documentation portal:

[Keycloak Official Documentation](#)

[Keycloak Server Administration Guide](#)

[Securing Applications with Keycloak](#)

Next Steps

You've completed a business operation in the CN-QS and have been introduced to the basics of the Canton Console, Daml Shell, the SV UIs, the GS, and Keycloak.

Learn more about Daml Shell and the project structure in the Project Structure Guide.