



# Exploring The Demo

[Canton Network Quickstart Guide | 2025](#)

Version: 1.0.4-2025-03-28

## Contents

[Exploring the Demo](#)

[Prerequisites](#)

[Walkthrough](#)

[Canton Console](#)

[Daml Shell](#)

[Connect to DevNet](#)

[Important: Migration ID for DevNet Connections](#)

[Configuring Non-Default DevNet Sponsors](#)

[SV UIs](#)

[Canton Coin Scan](#)

[Observability Dashboard](#)

[Development Journey in the CN QS Lifecycle](#)

[CN QS Components](#)

[Development Tools](#)

[LocalNet](#)

[Network Components](#)

[Sample Application](#)

[Application Components](#)

[Development Lifecycle](#)

[Learning Phase](#)

[Experimentation Phase](#)

[Development Phase](#)

[Gradle Settings](#)

[Environment Variables](#)

[Docker Compose](#)

[Separation Phase](#)

[Ongoing Updates](#)

[Keycloak in the CN-QS](#)

[Realm Structure](#)

[Keycloak Configuration](#)

[Customizing Keycloak for Business Needs](#)

[Accessing the Admin Console](#)

[Customization Scenarios](#)

[Add a New User](#)

[Modify Client Settings](#)

[Add a New Client](#)

[Update Environment Variables](#)

[Troubleshooting](#)  
[Next Steps](#)

## Exploring the Demo

The CN-QS and its guides are a work-in-progress (WIP). As a result, the CN-QS guides may not accurately reflect the state of the application. If you find errors or other inconsistencies, please contact your representative at Digital Asset.

This section works through a complete business operation within the CN-QS.

## Prerequisites

You should have successfully installed the CN-QS before beginning this demonstration.

Access to the [CN-Quickstart Github repository](#) and [CN Docker repository](#) is needed to successfully pull the Digital Asset artifacts from JFrog Artifactory.

Access to the *Daml-VPN* connection or [a SV Node](#) that is whitelisted on the CN is required to connect to DevNet. The GSF publishes a [list of SV nodes](#) who have the ability to sponsor a Validator node. To access DevNet, contact your sponsoring SV agent for VPN connection information.

If you need access, email [support@digitalasset.com](mailto:support@digitalasset.com).

The CN-QS is a Dockerized application and requires [Docker Desktop](#). Running CN-QS on LocalNet is resource intensive. It is recommended to allocate 25 GB of memory and 3 GB of Swap memory to properly run the required Docker containers. If you witness unhealthy containers, please consider allocating additional resources, if possible.

DevNet is not as intensive because the SVs and other LocalNet containers are hosted outside of your local machine.

## Walkthrough

After the QS is installed and running, confirm that you are in the quickstart subdirectory of the CN-QS.

Open an incognito browser.


Navigate to:

localhost:3000/login

 Currently, localhost URLs do not work in Safari. We are working on a solution and apologize for the inconvenience.

Alternatively, in the terminal, from quickstart/ run:

```
make open-app-ui
```

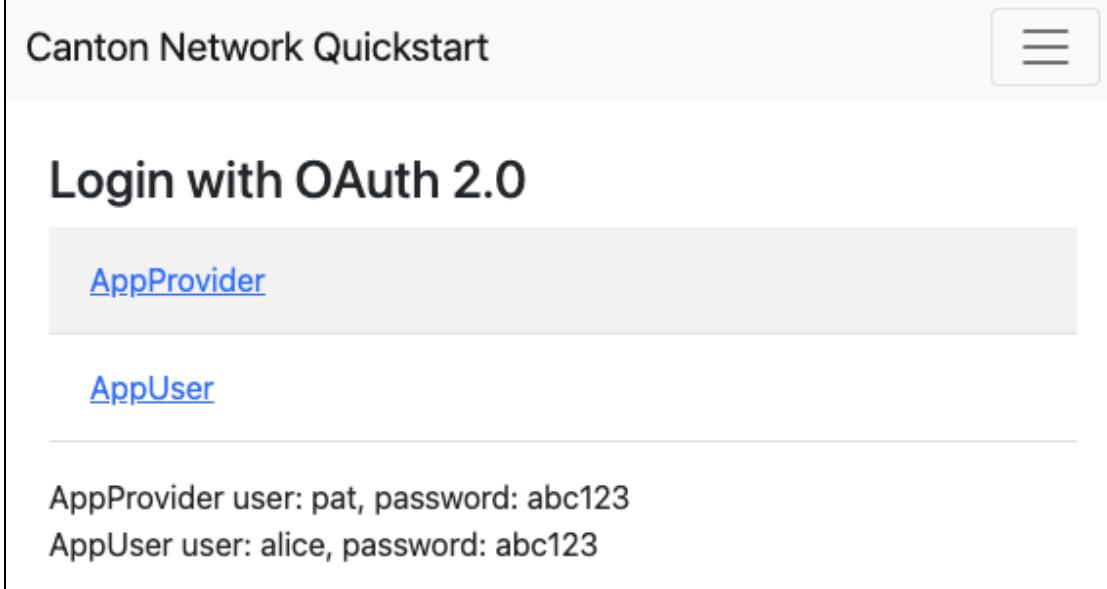

Canton Network Quickstart

## Login with OAuth 2.0

[AppProvider](#)


[AppUser](#)

AppProvider user: pat, password: abc123  
AppUser user: alice, password: abc123

Make note that the AppProvider's username is "pat" and the password is "abc123" (all lowercase).

Login as the AppProvider.

Fill in the login credentials: username: pat, password: abc123

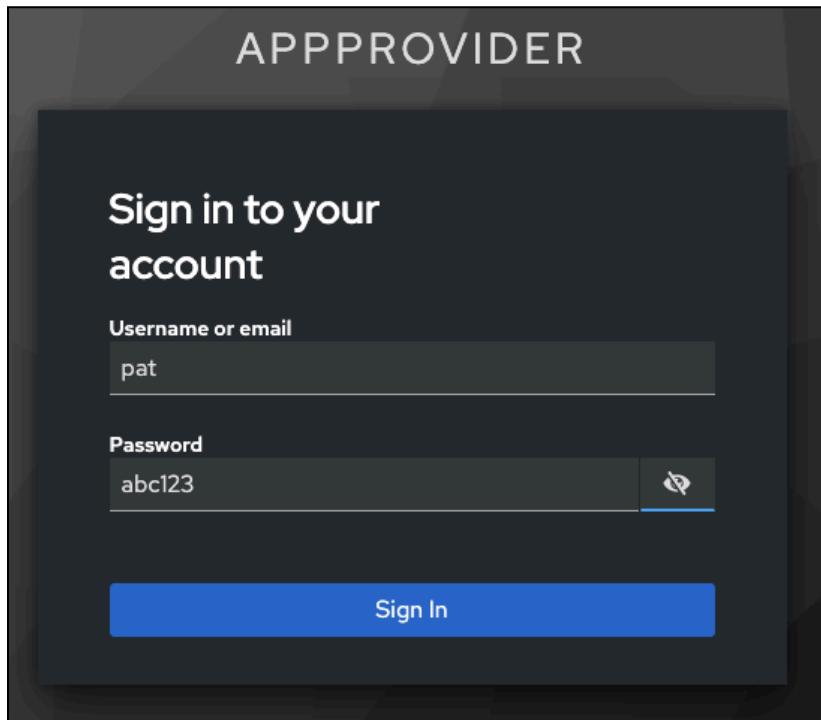

Select “AppInstalls” in the menu.

A screenshot of a web-based application interface titled "Canton Network Quickstart". The top navigation bar includes links for "Home", "AppInstalls", "Licenses", and "Tenants". On the right side of the header, there is a link "Pat the provider". The main content area is titled "App Installs". It contains a note: "Note: Run make create-app-install-request to submit an AppInstallRequest". Below this is a table with the following columns: Contract ID, Status, DSO, Provider, User, Meta, # Licenses, and Actions. The table currently has no data rows.

Open a terminal.

From /quickstart/ run:

```
make create-app-install-request
```

This command creates an App Installation Request on behalf of the Participant.

```
((base) quickstart ~ % make create-app-install-request
docker compose -f docker/app-user-shell/compose.yaml --env-file .env run --rm create-app-install-request || true
get_token ledger-api-user AppProvider
get_user_party AppProvider participant-app-provider
http://participant-app-provider:7575/v2/users/AppProvider
get_token ledger-api-user Org1
get_user_party Org1 participant-app-user
http://participant-app-user:7575/v2/users/Org1
get_token administrator Org1
http://validator-app-user:5003/api/validator/v0/scan-proxy/dso-party-id
http://participant-app-user:7575/v2/commands/submit-and-wait
--data-raw {
  "commands" : [
    { "CreateCommand" : {
        "template_id": "#quickstart-licensing:Licensing.AppInstall:AppInstallRequest",
        "create_arguments": {
          "dso": "DSO::12209a3af80af3fa93853be8a8b9f5887055edc3b0a94f4b198f486d08d197784c09",
          "provider": "AppProvider::1220b3de80de523473aa2ca56745ef1fb29a2203dfd13029e0448336bbcf3
82aaaf86",
          "user": "Org1::1220e69bc6115cd8ed360aa6caafce122c2a24561262c2f6ce6a6070e170e9e8244d",
          "meta": {"values": []}
        }
      }
    }
  ],
  "workflow_id" : "create-app-install-request",
  "application_id": "ledger-api-user",
  "command_id": "create-app-install-request",
  "deduplication_period": { "Empty": {} },
  "act_as": ["Org1::1220e69bc6115cd8ed360aa6caafce122c2a24561262c2f6ce6a6070e170e9e8244d"],
  "read_as": ["Org1::1220e69bc6115cd8ed360aa6caafce122c2a24561262c2f6ce6a6070e170e9e8244d"],
  "submission_id": "create-app-install-request",
  "disclosed_contracts": [],
  "domain_id": "",
  "package_id_selection_preference": []
}
{"update_id":"1220aebcd64fc960c2aec834d41596789994f21a69ef9cab5639b8521169a0ca67","completion_offset":81}
```

If your machine is not powerful enough to host LocalNet or if the docker containers are not responsive then the response may show a failure with status code 404 or 000.

Increasing Docker memory limit to at least 25 GB should allow the LocalNet containers to operate properly.

```
((base) quickstart ~ % make create-app-install-request
docker compose -f docker/app-user-shell/compose.yaml --env-file .env run --rm create-app-install-request || true
[+] Building 0.0s (0/0)
[+] Building 0.0s (0/0)
get_token ledger-api-user AppProvider
get_user_party AppProvider participant-app-provider
http://participant-app-provider:7575/v2/users/AppProvider
get_token ledger-api-user Org1
get_user_party Org1 participant-app-user
http://participant-app-user:7575/v2/users/Org1
get_token administrator Org1
http://validator-app-user:5003/api/validator/v0/scan-proxy/dso-party-id
Request failed with HTTP status code 404
Response body: The requested resource could not be found.
```

Return to the browser.

The install request appears in the list.

Click “Accept”.

Canton Network Quickstart Home AppInstalls Licenses Tenants Pat the provider

## App Installs

Note: Run `make create-app-install-request` to submit an AppInstallRequest

Contract ID	Status	DSO	Provider	User	Meta	# Licenses	Actions
00a2f3c34cc5e...	REQUEST	DSO::12206b3c...	app_provider_q...	app_user_quick...	{"data":{}}	0	<button>Accept</button> <button>Reject</button> <button>Cancel</button>

The AppInstallRequest is Accepted. The actions update to create or cancel the license.

Canton Network Quickstart Home AppInstalls Licenses Tenants Pat the provider

## App Installs

Note: Run `make create-app-install-request` to submit an AppInstallRequest

Success: Accepted AppInstallRequest  
00a2f3c34cc5edf660aeb6658cd7000541349f3e  
5b2e3268330f1f3307067aa9fbca012204022da1  
3d54f9c9321e2401364a3123671ebcadde47deb6  
2ee39f9c81e4f0c9f

Contract ID	Status	DSO	Provider	User	Meta	# Licenses	Actions
00502121cb22e...	INSTALL	DSO::12206b3c...	app_provider_q...	app_user_quick...	{"data":{}}	0	<button>Create License</button> <button>Cancel Install</button>

Click “Create License”.

The license is created and the “# Licenses” field is updated.

Canton Network Quickstart Home AppInstalls Licenses Tenants Pat the provider

## App Installs

Note: Run `make create-app-install-request` to submit an AppInstallRequest

Success: Created License:  
00be4bac78d731505d04d5e4964c9a297d9e479  
54942c54809bc24d3b65cd0342bca010220a263  
af0d31f1043cbb903c58b0479db70935d107ae0a  
0a6299e510c84c402909

Contract ID	Status	DSO	Provider	User	Meta	# Licenses	Actions
00fdf01728922...	INSTALL	DSO::12206b3c...	app_provider_q...	app_user_quick...	{"data":{}}	1	<button>Create License</button> <button>Cancel Install</button>


In the AppProvider, “Pat the provider’s,” account, navigate to the **Licenses** menu and select “Actions.”

Canton Network Quickstart Home AppInstalls Licenses Tenants Pat the provider


## Licenses

License Contract ID	DSO	Provider	User	Expires At	License #	Renew Fee	Extension	Actions
00be4bac78d731505d04...	DSO::122...	app_provide...	app_user_q...	2025-03-13T21:20:...	1			<button>Actions</button>

An “Actions for License” modal opens with an option to renew or expire the license. Per the Daml contract, licenses are created in an expired state. To activate the license, it must be renewed.

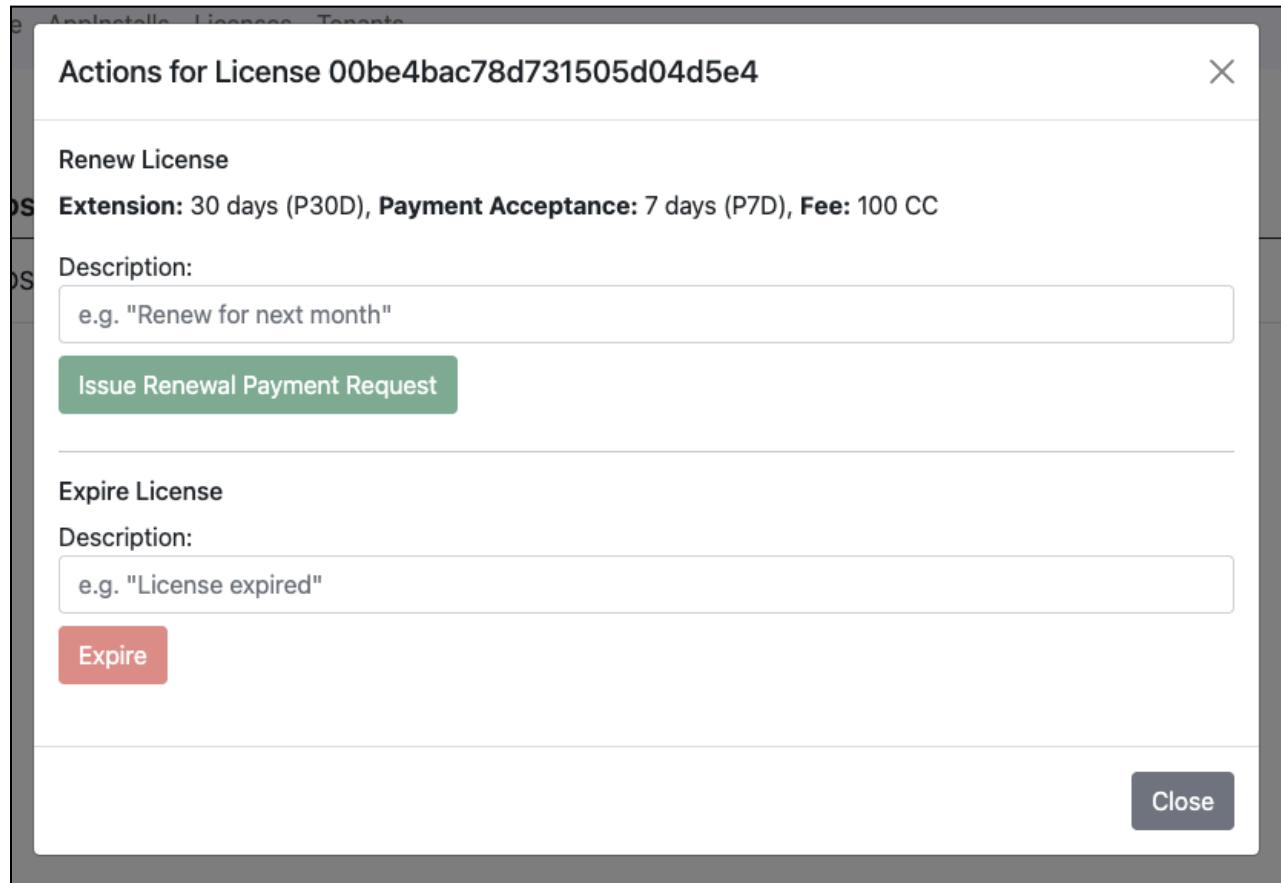

To renew the license, enter a description then click the green “Issue Renewal Payment Request” button.

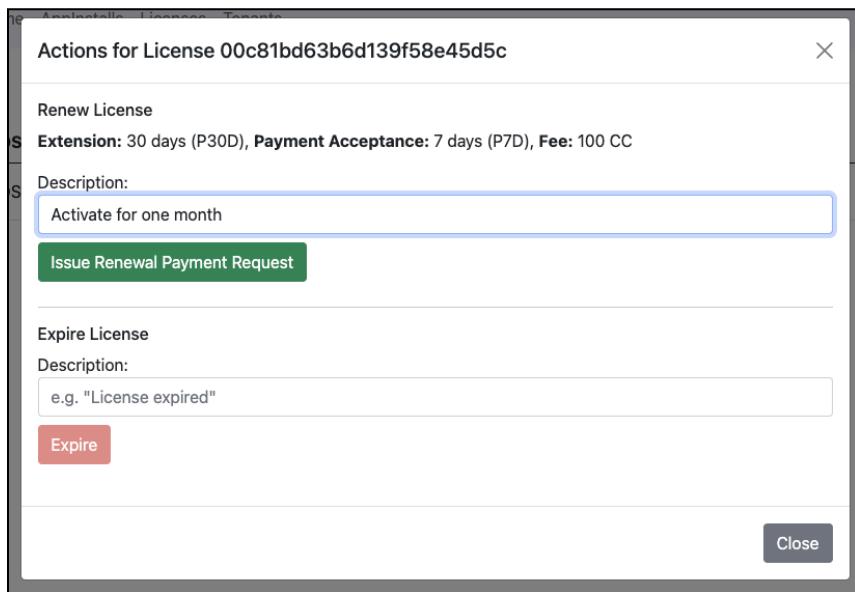

The license renewal process is initiated and ultimately successful.

Licenses								
License Contract ID	DSO	Provider	User	Expires At	License #	Renew Fee	Extension	Actions
00be4bac78d731505d04...	DSO::122...	app_provide...	app_user_q...	2025-03-13T21:20:...	1	100	30 days	<button>Actions</button>

A green 'Success' toast message is displayed above the table: 'Success: License Renewal initiated successfully'.


The license is now available for a 30-day extension for a flat fee of \$100 CC.

Licenses								
License Contract ID	DSO	Provider	User	Expires At	License #	Renew Fee	Extension	Actions
00be4bac78d731505d04...	DSO::122...	app_provide...	app_user_q...	2025-03-13T21:20:...	1	100	30 days	<button>Actions</button>

Pat the provider has done as much as they are able until Alice pays the renewal fee.


For the next step we recommend opening a separate browser in incognito mode. Each user, AppProvider, and Org1, should be logged into separate browsers for most consistent results. For example, if you logged into AppProvider using Chrome, you would use Firefox when logging into Org1.

Navigate to `http://localhost:3000/login` using a separate browser in incognito or private mode.

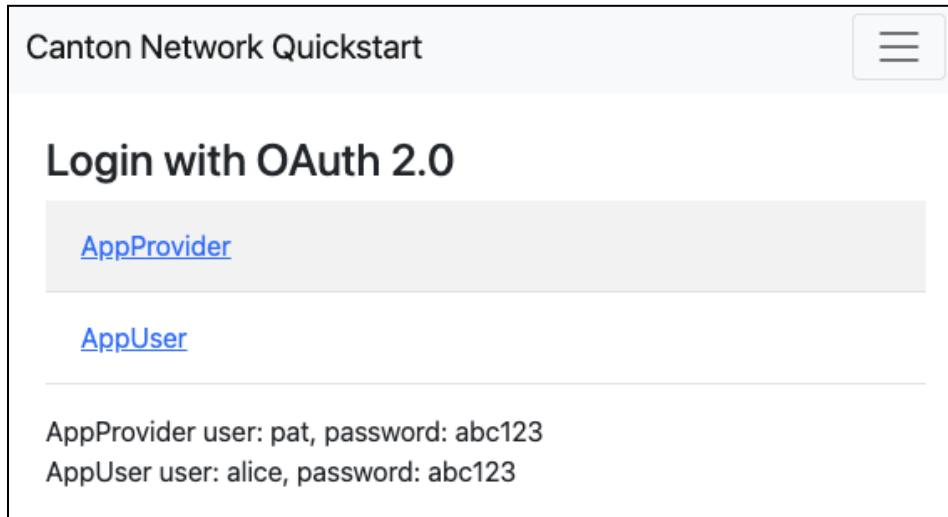

Login as AppUser alice.

Note that AppUser's username is "alice" and the password is "abc123".

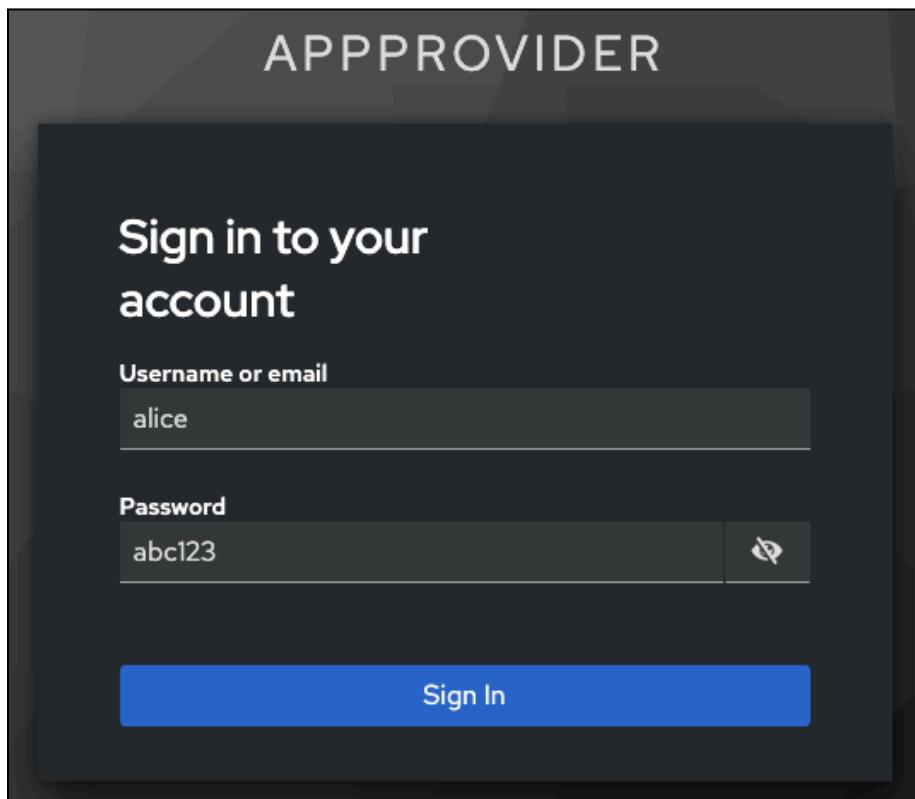


Go to the **Licenses View** and click the “Pay renewal” button.

Canton Network Quickstart									Alice the user
Licenses									
License Contract ID	DSO	Provider	User	Expires At	License #	Renew Fee	Extension	Actions	
00be4bac78d731505d04...	DSO::122...	app_provide...	app_user_q...	2025-03-13T21:20:...	1	100	30 days	<button>Pay Renewal</button>	

Click on the Pay Renewal button. This navigates to the Canton Coin Wallet log in. Click “LOG IN WITH OAUTH2”.

 If you have any issues with log in, navigate directly to <http://wallet.localhost:2000/>.

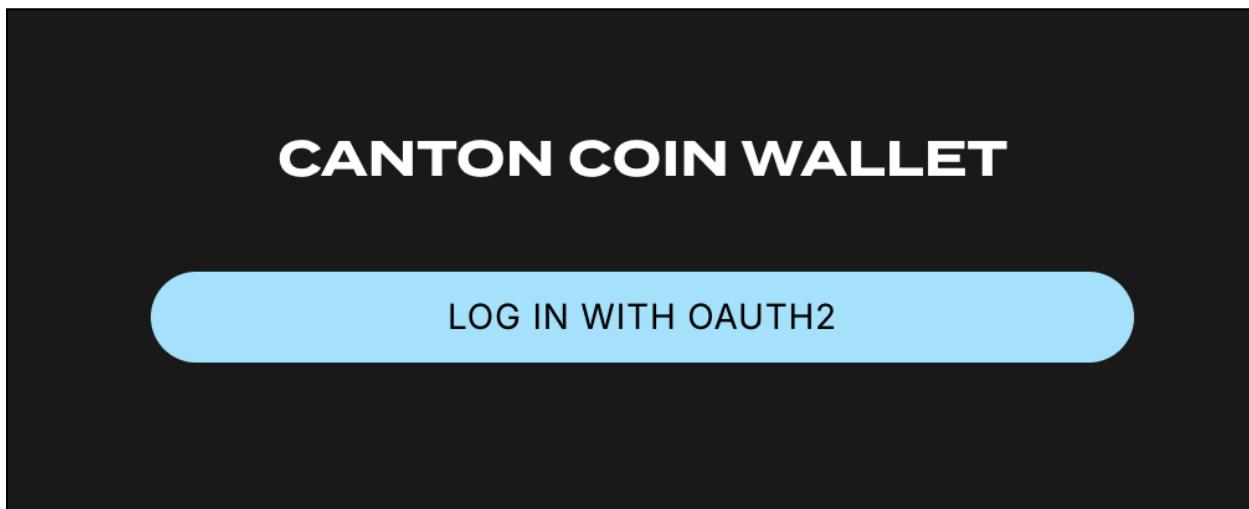

This navigates to a keycloak login.  
Enter the same username and password as before.

Signing in directs to the Canton Coin Wallet.


The screenshot shows the 'CANTON COIN WALLET' interface. At the top, there are tabs for 'Transactions', 'Transfer', 'Subscriptions', 'FAQs', and 'app\_user\_qui...'. Below these are buttons for 'SELF-GRANT FEATURED APP RIGHTS' and 'PRE-APPROVE INCOMING DIRECT TRANSFERS OF CANTON COIN'. A 'Logout' button is also present. The main area displays 'Total Available Balance' as 564 CC (2.82 USD). It includes a note about反映了 unlocked Canton Coin, rewards earned and holding fees. There is a text input field for 'Amount' with '0' entered, and a 'TAP' button. A blue circular badge below the input field says 'Action Needed 0'. Below this, it says 'No transfer offers available'. The 'Transaction History' section has columns for 'TYPE', 'DATE', 'SENDER OR RECEIVER', 'REWARDS CREATED', and 'BALANCE CHANGE'. One entry is shown: 'Sent (Automation)' on 2025-03-14 at 09:54:50, from 'Automation via app\_user\_quickstart-j...', to 'Validator Rewards: 570 CC', with a balance change of '+564 CC +2.82 USD @ 200 CC/USD'. A 'Load More' button is at the bottom. Copyright information at the bottom right reads 'Copyright © Digital Asset 2025.'

The wallet must be populated with CC in order to fulfill the transaction.

In CC Wallet, populate the wallet with \$100 USD, or the equivalent of 20,000 CC.

This screenshot shows the same wallet interface after population. The 'Total Available Balance' is now 564 CC (2.82 USD). The transaction history shows the same entry as before. The 'Amount' input field now contains '100', and the 'TAP' button is visible. The 'Action Needed' badge still says '0'.


The wallet was prepopulated with 564 CC so it now contains 20,564 CC.

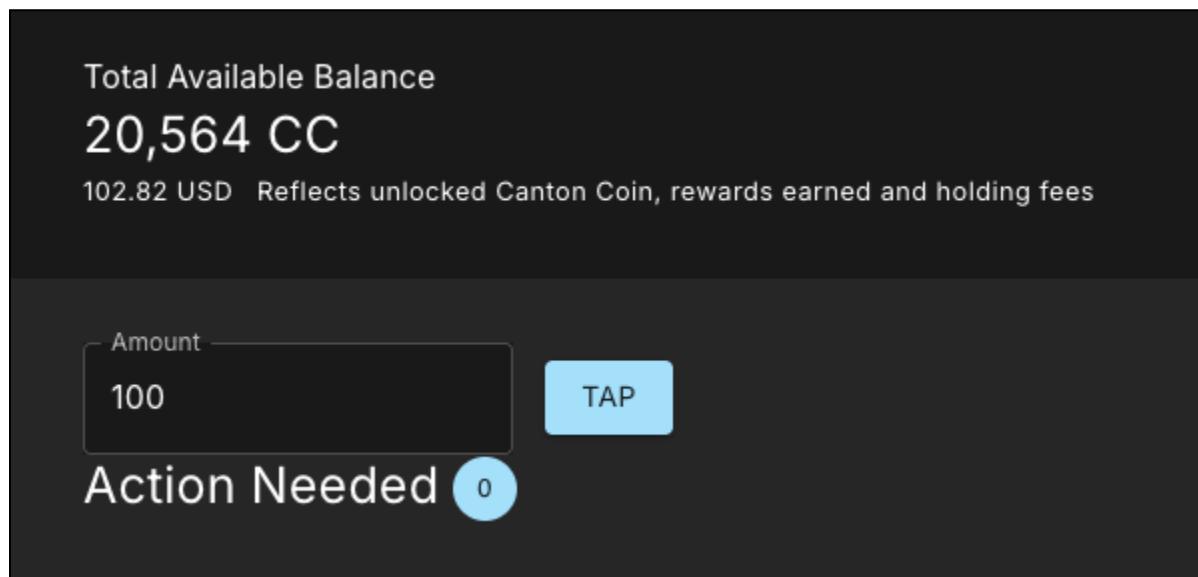

Return to the License Renewal Request as Org1. Click “Pay Renewal”.

Licenses								
License Contract ID	DSO	Provider	User	Expires At	License #	Renew Fee	Extension	Actions
00a01c1718dbe1a0f5e45...	DSO::122...	app_provide...	app_user_q...	2025-03-14T14:36:...	1	100	30 days	<button>Pay Renewal</button>

The CC Wallet balance is sufficient to send payment to the Provider.

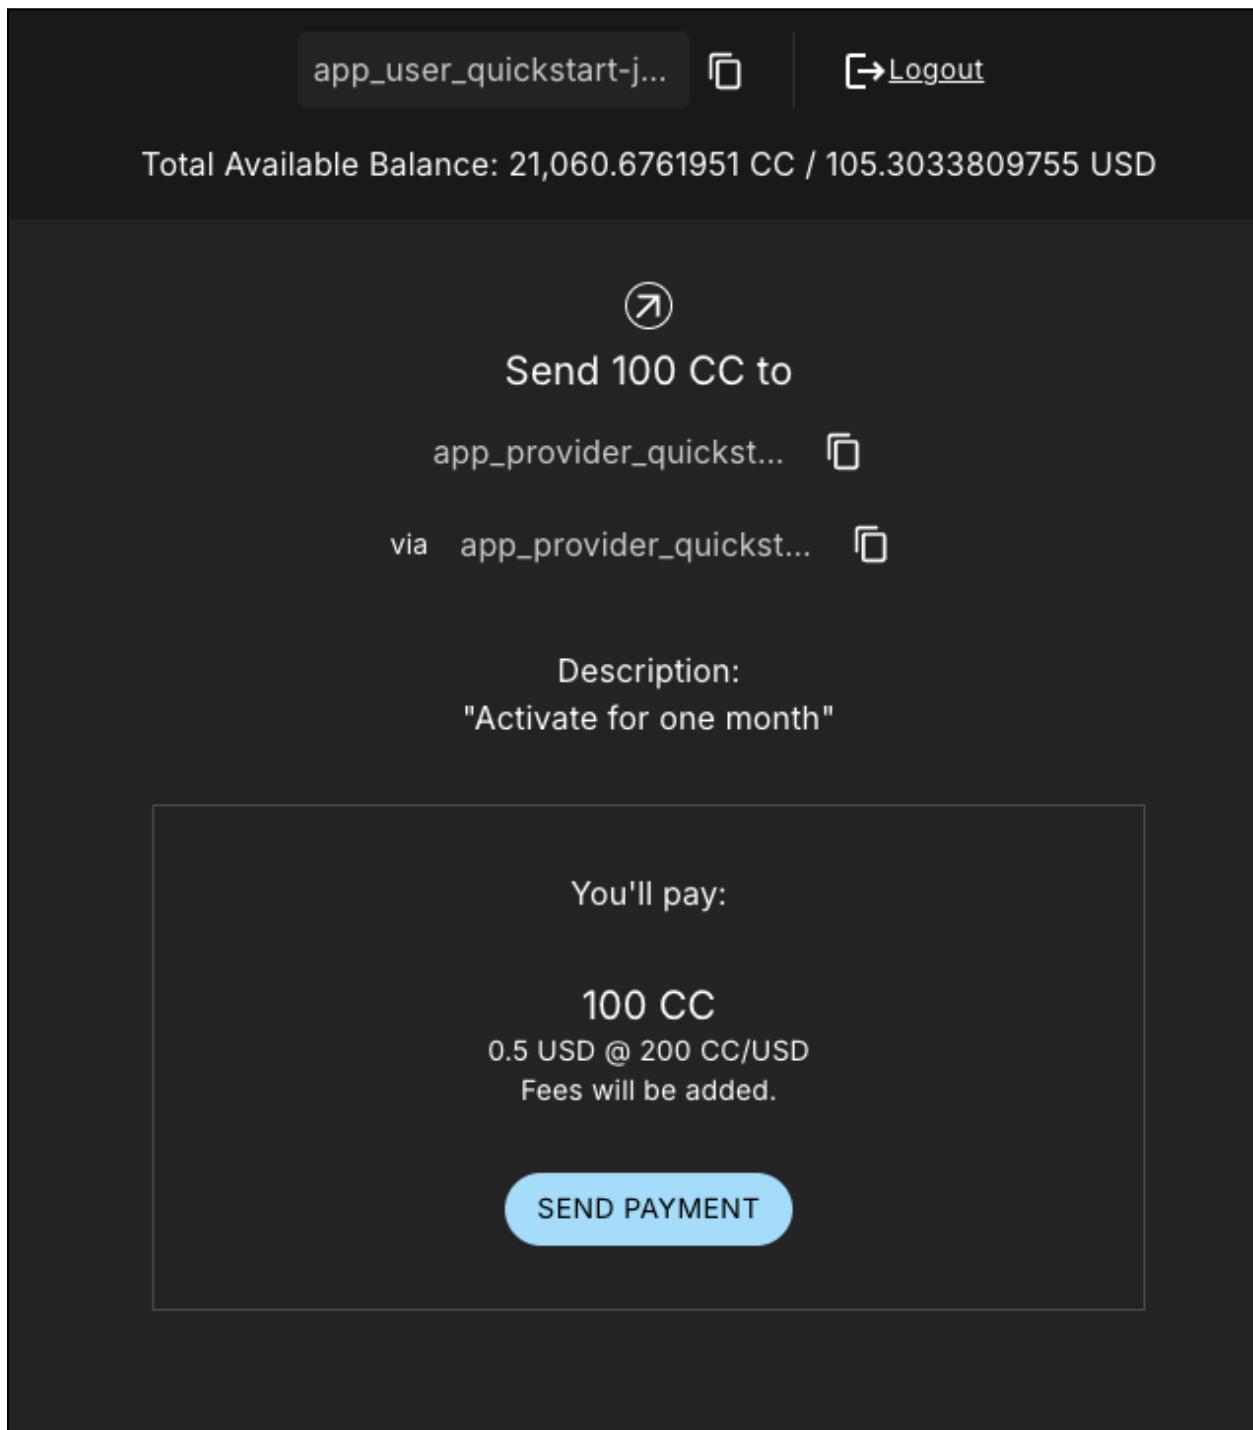

Return to the AppProvider's License Renewal Requests View.  
The AppProvider may now Complete the Renewal.

License Contract ID	DSO	Provider	User	Expires At	License #	Renew Fee	Extension	Actions
00a01c1718dbe1a0f5e45...	DSO::122...	app_provide...	app_user_q...	2025-03-14T14:36:...	1	100	30 days	<button>Complete Renewal</button>

Clicking "Complete Renewal" results in a Success.

License Contract ID	DSO	Provider	User	Expires At	License #	Renew Fee	Extension	Actions
00a01c1718dbe1a0f5e45...	DSO::122...	app_provide...	app_user_q...	2025-03-14T14:36:...	1			<button>Actions</button>

Alice's License view shows the activated license.

License Contract ID	DSO	Provider	User	Expires At	License #	Renew Fee	Extension	Actions
00f77a38c88b2ce54687...	DSO::122...	app_provide...	app_user_q...	2025-04-13T15:11:1...	1			<button>Actions</button>

Congratulations. You've successfully created and activated a license with a payment transfer!

## Colton Console

The Colton Console connects to the running application ledger. The console allows a developer to bypass the UI to interact with the CN in a more direct manner. For example, in Colton Console you can connect to the Participant to see the location of the Participant and their domain.

The app provider and the app user each have their own console. To activate the app provider's Colton Console in a terminal from the `quickstart/` directory. Run:

```
make console-app-provider
```

Open the participant's Colton Console with

```
make console-app-user
```

After the console initiates, run the `participant` and `participant.domains` commands, respectively.

`participant`

Returns their location in the ledger.

```
[@ participant
res0: com.digitalasset.canton.console.RemoteParticipantReference = Participant 'participant'
```

`participant.domains`

Shows the Participant's synchronizer.

```
[@ participant.domains
res1: participant.domains.type = com.digitalasset.canton.console.commands.ParticipantAdministration$domains$04f4c3934
```

`participant.health.ping(participant)`

Runs a health ping. The ping makes a round trip through the CN blockchain. Pinging yourself validates communication throughout the entire network.

```
[@ participant.health.ping(participant)
res0: Duration = 4979 milliseconds
```

## Daml Shell

The Daml Shell connects to the running PQS database of the application provider's Participant. In the Shell, the assets and their details are available in real time.

Run the shell from `quickstart/` in the terminal with:

```
make shell
```

Run the following commands to see the data:

```
active
```

Shows unique identifiers and the asset count

```
postgres-splice-app-provider:5432/scribe> active
```

Identifier	Type	Count
quickstart-licensing:Licensing.AppInstall:AppInstall	Template	1
quickstart-licensing:Licensing.License:License	Template	1
splice-amulet:Splice.Amulet:Amulet	Template	1
splice-amulet:Splice.Amulet:ValidatorRight	Template	1
splice-wallet:Splice.Wallet.Install:WalletAppInstall	Template	1

```
active quickstart-licensing:Licensing.License:License
```

List the license details.

```
postgres-splice-app-provider:5432/scribe 6d → f7> active quickstart-licensing:Licensing.License:License
```

Created at	Contract ID	Contract Key	Payload
a9	000cd68ca7d2cf95454b...		dso: DS0::12203a329668884fac6377f41c924df6a11c59f3be909737d27799252930e537c42b user: Org1::12209d2965deec586b4a6d12b80e535bb52407fad54dc2dd88575291780ed5fd9ff4 params: meta: values: provider: AppProvider::12206e5249b12cd9fd05e9b25894c0663b73a18c90baccd7f2d48e7958157b510358 expiresAt: 2025-03-16T21:59:38.403435Z licenseNum: 1

```
active quickstart-licensing:Licensing.License:LicenseRenewalRequest
```

Displays license renewal request details.

```
archives quickstart-licensing:Licensing.AppInstall:AppInstallRequest
```

Shows any archived license(s).

```
postgres-splice-app-provider:5432/scribe 6d → f7> archives quickstart-licensing:Licensing.AppInstall:AppInstallRequest
```

Created at	Archived at	Contract ID	Contract Key	Payload
6f	75	00e906b2720a9b7965a3...		dso: DS0::12203a329668884fac6377f41c924df6a11c59f3be909737d27799252930e537c42b meta: values: user: Org1::12209d2965deec586b4a6d12b80e535bb52407fad54dc2dd88575291780ed5fd9ff4 provider: AppProvider::12206e5249b12cd9fd05e9b25894c0663b73a18c90baccd7f2d48e7958157b510358

## Connect to DevNet

Stop the LocalNet containers to change the connection from LocalNet to DevNet.

In the terminal, run:

```
make stop && make clean-all
```

To edit the connection and observability parameters run:

```
make setup
```

When prompted to enable LocalNet, enter “n”. This enables DevNet

Optionally, enter “Y” to enable observability. This starts additional containers which may require more memory for Docker.

You may leave the party hint as the default value by tapping ‘return’ on the keyboard.

```
(base) quickstart ~ % make setup
Starting local environment setup tool...
./gradlew configureProfiles --no-daemon --console=plain --quiet
Enable LocalNet? (Y/n): n
  LOCALNET_ENABLED set to 'false'.

Enable Observability? (Y/n): Y
  OBSERVABILITY_ENABLED set to 'true'.

Specify a party hint (this will identify the participant in the network) [quickstart-... -1]:
  PARTY_HINT set to 'quickstart-... -1'.

.env.local updated successfully.
(base) quickstart ~ %
```

 Running `make setup` regenerates `.env.local` but preserves the contents of the `.env` file settings.

The application is now connected to DevNet.

## Important: Migration ID for DevNet Connections

When connecting to DevNet, verify that the `MIGRATION_ID` value in `.env` matches the current network migration ID for your DevNet Super Validator.

Check the current migration ID at <https://sync.global/sv-network/> under the GSF DevNet information section.

For example, if the Super Validator Node Information shows the `migration_id` value as “0” then update `MIGRATION_ID` to “0” in your `.env`.

## GSF DevNet Super Validator Node Information

```
{  
  "network": "devnet",  
  "sv": {  
    "migration_id": 0,  
    "version": "0.3.15"  
  },  
  "synchronizer": {  
    "active": {  
      "chain_id_suffix": "5",  
      "migration_id": 0,  
      "version": "0.3.15"  
    },  
    "legacy": null,  
    "staging": null  
  }  
}
```

In .env:

```
ONBOARDING_SECRET_URL=https://sv.sv-1.dev.global.canton.network.digitalasset.com/api/sv/v0/devnet/onboard/validator/prepare  
MIGRATION_ID=0  
APP_PROVIDER_VALIDATOR_PARTICIPANT_ADDRESS=participant-app-provider  
APP_USER_VALIDATOR_PARTICIPANT_ADDRESS=participant-app-user
```

## Configuring Non-Default DevNet Sponsors

In DevNet mode, you can configure a non-default SPONSOR\_SV\_ADDRESS, SCAN\_ADDRESS and ONBOARDING\_SECRET\_URL or ONBOARDING\_SECRET in the quickstart/.env file.

 Connecting to DevNet requires a connection to an [approved SV](#). If your organization provides access to the DAML-VPN, then connect to it to access the Digital Asset-sponsored SV.

Your organization may sponsor another [CN-approved SV](#). If this is the case, speak with your administrator for privileged access.

Review the DevNet Global Synchronizer documentation to learn more about the [SV onboarding process](#).


 If you run into errors when making DevNet operations, double check that the DevNet VPN is active. DevNet VPNs may timeout, especially if left unattended for extended periods of time.

In an incognito browser navigate to `localhost:3000/login`. Login as the `Org1` user and create and archive assets, as before. Logout and do the same as the `AppProvider`.

## SV UIs

Navigate to `http://sv.localhost:4000/` for the Super Validator Web UI. The SV view displays data directly from the validator in a GUI that is straightforward to navigate.

Login as ‘administrator’.

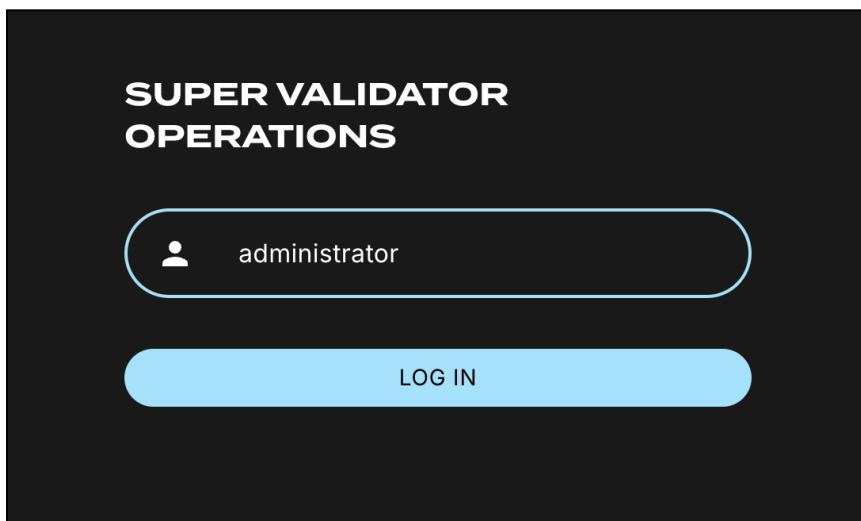

The UI shows information about the SV and lists the active SVs.

A screenshot of the "SUPER VALIDATOR OPERATIONS" dashboard. The top navigation bar includes links for "Information", "Validator Onboarding", and "Canton Coin Price". Below the navigation is a horizontal menu with tabs: "General" (which is selected and highlighted in yellow), "DSO Info", "Canton Coin Info", "CometBFT Debug Info", and "Domain Node Status".  
  
**Super Validator Information**  
svUser: administrator  
svPartyId: sv::1220e29d956452e... [🔗](#)  
  
**Active Super Validators**  
sv: sv::1220e29d956452e... [🔗](#)  
  
**Decentralized Synchronizer Operations**  
dsoLeaderPartyId: sv::1220e29d956452e... [🔗](#)  
dsoPartyId: DSO::12200af1e2b814... [🔗](#)  
dsoEpoch: 0

The Validator Onboarding menu allows for the creation of validator onboarding secrets.

The screenshot shows the "Validator Onboarding Secrets" section of the "SUPER VALIDATOR OPERATIONS" menu. It displays three entries, each with a "CREATE A VALIDATOR ONBOARDING SECRET" button. The columns are "EXPIRES AT", "ONBOARDING SECRET", and "SPONSOR".

EXPIRES AT	ONBOARDING SECRET	SPONSOR
02/13/2025 15:13	quickstart-jpmiller-1::122077f1ae74e... <input type="button" value="View"/>	sv::122016716056ad8... <input type="button" value="View"/> THIS SV
02/13/2025 15:13	quickstart-jpmiller-1::12203783f656... <input type="button" value="View"/>	sv::122016716056ad8... <input type="button" value="View"/> THIS SV
02/13/2025 15:10	sv::122016716056ad8277a9220b78... <input type="button" value="View"/>	sv::122016716056ad8... <input type="button" value="View"/> THIS SV

The CC Price menu option has an option to set the price for open mining rounds.

The screenshot shows the "Canton Coin Price" section of the "SUPER VALIDATOR OPERATIONS" menu. It displays the current price for the next open mining round and a form to set a desired price. Below this, it lists other validators' desired prices and open mining rounds.

SUPER VALIDATOR	SUPER VALIDATOR PARTY ID	DESIRED CANTON COIN PRICE	LAST UPDATED AT
		0.005 USD	

**Your Desired Canton Coin Price**

Amount	1.0	UPDATE	CANCEL
--------	-----	--------	--------

**Desired Canton Coin Prices of Other Super Validators**

SUPER VALIDATOR	SUPER VALIDATOR PARTY ID	DESIRED CANTON COIN PRICE	LAST UPDATED AT
		0.005 USD	

**Open Mining Rounds**

ROUND	CANTON COIN PRICE	OPENS AT	TARGET CLOSES AT
6	0.005 USD	12/11/2024 11:19	12/11/2024 11:39
5	0.005 USD	12/11/2024 11:09	12/11/2024 11:29
4	0.005 USD	12/11/2024 10:58	12/11/2024 11:18

Update the price of the CC.

The screenshot shows the 'SUPER VALIDATOR OPERATIONS' section. At the top, there are navigation links: 'Information', 'Validator Onboarding', and 'Canton Coin Price' (which is underlined, indicating it's the current page). Below this, the main content area displays the 'Canton Coin Price for Next Open Mining Round' as '1 USD'. A note below states 'Median of Canton Coin prices voted by all Super Validators'. There is also a field labeled 'Your Desired Canton Coin Price' with the value '1 USD' and a pencil icon for editing.

The updated coin price reflects the new open mining rounds.

The screenshot shows two tables. The first table, titled 'Desired Canton Coin Prices of Other Super Validators', lists four columns: SUPER VALIDATOR, SUPER VALIDATOR PARTY ID, DESIRED CANTON COIN PRICE, and LAST UPDATED AT. The second table, titled 'Open Mining Rounds', lists four columns: ROUND, CANTON COIN PRICE, OPENS AT, and TARGET CLOSES AT. Both tables have a dark background.


SUPER VALIDATOR	SUPER VALIDATOR PARTY ID	DESIRED CANTON COIN PRICE	LAST UPDATED AT
Super Validator 1	SV1	1 USD	2024-11-12 11:29
Super Validator 2	SV2	1 USD	2024-11-12 11:29
Super Validator 3	SV3	1 USD	2024-11-12 11:29
Super Validator 4	SV4	1 USD	2024-11-12 11:29

ROUND	CANTON COIN PRICE	OPENS AT	TARGET CLOSES AT
7	1 USD	2024-11-12 11:29	2024-11-12 11:49
6	0.005 USD	2024-11-12 11:19	2024-11-12 11:39
5	0.005 USD	2024-11-12 11:09	2024-11-12 11:29

## CC Scan

Navigate to the CC Scan Web UI at <http://scan.localhost:4000/>.

The default activity view shows the total CC balance and the Validator rewards.

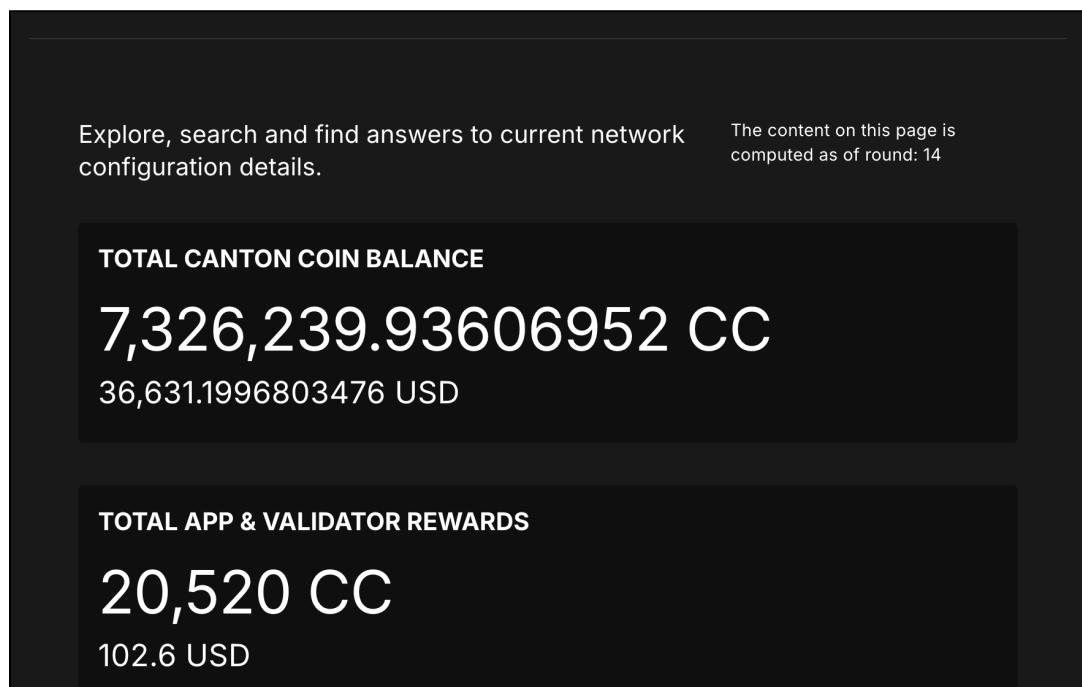

Select the Network Info menu to view SV identification.

The Network Info interface shows Super Validator Operations. It includes sections for Super Validator Information, Active Super Validators, and Decentralized Synchronizer Operations. The Super Validator Information section shows svUser: administrator and svPartyId: sv::1220e29d956452e... . The Active Super Validators section shows sv: sv::1220e29d956452e... . The Decentralized Synchronizer Operations section shows dsoLeaderPartyId: sv::1220e29d956452e..., dsoPartyId: DSO::12200af1e2b814..., and dsoEpoch: 0.

**SUPER VALIDATOR OPERATIONS**

Information Validator Onboarding Canton Coin Price Delegate Election Governance

General DSO Info Canton Coin Info CometBFT Debug Info Domain Node Status

**Super Validator Information**

svUser: administrator

svPartyId: sv::1220e29d956452e... ⓘ

**Active Super Validators**

sv: sv::1220e29d956452e... ⓘ

**Decentralized Synchronizer Operations**

dsoLeaderPartyId: sv::1220e29d956452e... ⓘ

dsoPartyId: DSO::12200af1e2b814... ⓘ

dsoEpoch: 0

The Validators menu shows that the local validator has been registered with the SV.

CANTON COIN SCAN		Col 2	Col 3	Col 4	Col 5	Col 6
Created At	Validator	Sponsor	Actions			
02/11/2025 08:06	sv::12201b7f2459db0f8...	sv::12201b7f2...	<a href="#">View</a>	<a href="#">Edit</a>	<a href="#">Delete</a>	THIS SV
02/11/2025 08:05	quickstart-jpmiller-1::12...	sv::12201b7f2...	<a href="#">View</a>	<a href="#">Edit</a>	<a href="#">Delete</a>	THIS SV
02/11/2025 08:05	quickstart-jpmiller-1::12...	sv::12201b7f2...	<a href="#">View</a>	<a href="#">Edit</a>	<a href="#">Delete</a>	THIS SV

## Observability Dashboard

In a web browser, navigate to <http://localhost:3030/dashboards> to view the observability dashboards. Select “Quickstart - consolidated logs”.

The screenshot shows the Digital Asset Observability Dashboard at <http://localhost:3030/dashboards>. The left sidebar includes links for Home, Starred, Dashboards (which is selected), Explore, Alerting, Connections, and Administration. The main area is titled 'Dashboards' and contains a search bar and a 'Filter by tag' dropdown. A list of dashboards is shown, with one named 'Quickstart - consolidated logs' highlighted by a green tag icon labeled 'logs loki'.

The default view shows a running stream of all services.

This screenshot shows the Digital Asset Quickstart - consolidated logs dashboard. The left sidebar includes Home, Starred, Dashboards (selected), Explore, Alerting, Connections, and Administration. The main area has tabs for Services (selected), All, Levels, and Search. It also includes Trace ID and Enter variable value fields. The Logs section displays a continuous stream of log entries. A specific entry is highlighted:

```
> 2024-12-11 11:25:17.113 [participant] Here is our list of the 15 most expensive database queries for daml.db-storage.write.executor with total of 1.2 s:
  count= 167 mean= 6.84 ms total= 1.0 s com.digitalasset.canton.time.Clock$queued$anonfun$run$1(Clock.scala:77)
  count= 2 mean= 48.66 ms total= 0.1 s com.digitalasset.canton.store.db.$dbSequencedEventStore.$anonfun$store$2($dbSequencedEventStore.scala:121)
  count= 165 mean= 0.58 ms total= 0.1 s <unknown>
  count= 2 mean= 0.67 ms total= 0.1 s com.digitalasset.canton.participant.store.db.$dbInfo$lightSubmissionStore.$anonfun$submit$1($dbInfo$lightSubmissionStore.scala:188)
  count= 2 mean= 0.67 ms total= 0.1 s com.digitalasset.canton.participant.store.db.$dbInfo$lightSubmissionStore.$anonfun$submit$2($dbInfo$lightSubmissionStore.scala:275)
  count= 2 mean= 0.67 ms total= 0.1 s com.digitalasset.canton.participant.store.db.$dbInfo$lightSubmissionStore.$anonfun$submit$3($dbInfo$lightSubmissionStore.scala:276)
> 2024-12-11 11:25:16.977 [validator_backend] Here is our list of the 15 most expensive database queries for com.db-storage-general.executor with total of 0.2 s:
  count= 8 mean= 6.83 ms total= 0.0 s org.ldcentralizedtrust.splice.store.db.$dbMultiDomainAcctsStore.$anonfun$listExpiredFromPayloadExpiry$3($dbMultiDomainAcctsStore.scala:288)
  count= 4 mean= 9.88 ms total= 0.0 s org.ldcentralizedtrust.splice.store.db.$dbValidatorStore.$anonfun$lookupValidatorLicenseWithOfffsets$1($dbValidatorStore.scala:297)
  count= 2 mean= 16.78 ms total= 0.0 s org.ldcentralizedtrust.splice.validator.store.db.$dbValidatorStore.lookupInstallByParty($dbValidatorStore.scala:184)
  count= 4 mean= 6.86 ms total= 0.0 s org.ldcentralizedtrust.splice.store.db.$dbValidatorStore.$anonfun$installContract$1($dbValidatorStore.scala:334)
  count= 2 mean= 16.78 ms total= 0.0 s org.ldcentralizedtrust.splice.store.db.$dbValidatorStore.$anonfun$installContract$2($dbValidatorStore.scala:254)
  count= 5 mean= 4.76 ms total= 0.0 s org.ldcentralizedtrust.splice.store.db.$dbMultiDomainAcctsStore.$anonfun$listSignedContracts$1($dbMultiDomainAcctsStore.scala:226)
  count= 2 mean= 4.42 ms total= 0.0 s org.ldcentralizedtrust.splice.validator.store.db.$dbValidatorStore.$anonfun$listExpiringTransfersPreApproval$1($dbValidatorStore.scala:281)
> 2024-12-11 11:25:16.978 [validator_backend] Using the client-cache (valiudInit $com(2024-12-11T17:34:21.810Z)) to load following issuing rounds: Vector(11208, 11208, 11208, 11208).
> 2024-12-11 11:25:16.938 [sequencer] Here is our list of the 15 most expensive database queries for daml.db-storage-general.executor with total of 0.0 s:
  count= 167 mean= 6.87 ms total= 0.0 s com.digitalasset.canton.store.db.$dbCursor$ReadheadStore.$prehead($dbCursor$ReadheadStore.scala:46)
> 2024-12-11 11:25:16.318 [x] Completed processing PeriodicTask for = 2024-12-11T17:25:16.297Z with outcome: Updated domain params to 1
> 2024-12-11 11:25:16.317 [x] Request (tid:fdd25356fe7e5d9b5591b451d5294e) com.digitalasset.canton.topology.admin.v30.TopologyManagerReadService/ListDomainParametersState to participant-v:5802: succeeded(OK)
> 2024-12-11 11:25:16.317 [x] Request (tid:fdd25356fe7e5d9b5591b451d5294e) com.digitalasset.canton.topology.admin.v30.TopologyManagerReadService/ListDomainParametersState to participant-v:5802: received a message
> 2024-12-11 11:25:16.312 [v] Request (tid:fdd25356fe7e5d9b5591b451d5294e) com.digitalasset.canton.topology.admin.v30.TopologyManagerReadService/ListDomainParametersState to participant-v:5802: sending request
> 2024-12-11 11:25:16.311 [v] Request (tid:c98649174f298a81f8eed1cc43708) com.digitalasset.canton.admin.participant.v30.DomainConnectivityService/listConnectedDomains to participant-v:5802: succeeded(OK)
> 2024-12-11 11:25:16.311 [v] Request (tid:c98649174f298a81f8eed1cc43708) com.digitalasset.canton.admin.participant.v30.DomainConnectivityService/listConnectedDomains to participant-v:5802: received a message
> 2024-12-11 11:25:16.303 [v] Request (tid:c98649174f298a81f8eed1cc43708) com.digitalasset.canton.admin.participant.v30.DomainConnectivityService/listConnectedDomains to participant-v:5802: sending request
> 2024-12-11 11:25:15.965 [validator_backend] Completed processing PeriodicTask for = 2024-12-11T17:25:15.933Z with outcome: Updated domain params to 1
> 2024-12-11 11:25:15.968 [validator_backend] Request (tid:fbaef1b8a964b5723c3dc4d3fa741366f) com.digitalasset.canton.topology.admin.v30.TopologyManagerReadService/ListDomainParametersState to participant-v:5802: succeeded(OK)
> 2024-12-11 11:25:15.968 [validator_backend] Request (tid:fbaef1b8a964b5723c3dc4d3fa741366f) com.digitalasset.canton.topology.admin.v30.TopologyManagerReadService/ListDomainParametersState to participant-v:5802: received a message
> 2024-12-11 11:25:15.948 [validator_backend] Request (tid:d447cb28e28c69b722b7d83dfc3) com.digitalasset.canton.admin.participant.v30.DomainConnectivityService/listConnectedDomains to participant-v:5802: sending request
> 2024-12-11 11:25:15.948 Validator backend Request (tid:d447cb28e28c69b722b7d83dfc3) com.digitalasset.canton.admin.participant.v30.DomainConnectivityService/listConnectedDomains to participant-v:5802: succeeded(OK)
```

Change the services filter from “All” to “participant” to view participant logs. Select any log entry to view its details.

This screenshot shows the Digital Asset Quickstart - consolidated logs dashboard with the services filter set to "participant". The main area has tabs for Services (selected), participant, Levels, All, and Search. It also includes Trace ID and Enter variable value fields. The Logs section displays a list of log entries. One entry is selected:

```
> 2024-12-11 11:26:19.742 [participant] Request com.digitalasset.canton.admin.participant.v30.DomainConnectivityService/ListConfiguredDomains by /172.19.0.18:44912: completed
```

Details for the selected log entry:

Fields	
all _timestamp	2024-12-11T17:26:19.742Z
all _version	1
all container_id	f54d920d96fcfd9244003a77ab88ce42b0becd2be66c72f3c81e819a1faef8e67
all container_name	/participant
all detected_level	debug
all fluent_tag	f54d920d96fc
all level	DEBUG
all level_value	10000
all logger_name	c.d.c.n.g.ApiRequestLogger:participant=participant
all message	Request com.digitalasset.canton.admin.participant.v30.DomainConnectivityService/ListConfiguredDomains by /172.19.0.18:44912: completed
all service_name	participant
all source	stdout
all thread_name	canton-env-ec-278
all trace_id	5241b43733c65a4015518a2b92b26e50

Links:

- TraceID: 5241b43733c65a4015518a2b92b26e50

Tempo

More log entries are listed below the selected one:

```
> 2024-12-11 11:26:19.740 [participant] Request com.digitalasset.canton.admin.participant.v30.DomainConnectivityService/ListConfiguredDomains by /172.19.0.18:44912: succeeded(OK)
> 2024-12-11 11:26:19.740 [participant] Request com.digitalasset.canton.admin.participant.v30.DomainConnectivityService/ListConfiguredDomains by /172.19.0.18:44912: sending response
  Request tid:5241b43733c65a4015518a2b92b26e50
> 2024-12-11 11:26:19.739 [participant] Request com.digitalasset.canton.admin.participant.v30.DomainConnectivityService/ListConfiguredDomains by /172.19.0.18:44912: received a message
  Request tid:5241b43733c65a4015518a2b92b26e50
> 2024-12-11 11:26:19.735 [participant] Request com.digitalasset.canton.admin.participant.v30.DomainConnectivityService/ListConfiguredDomains by /172.19.0.18:44912: succeeded(OK)
> 2024-12-11 11:26:19.735 [participant] Request com.digitalasset.canton.admin.participant.v30.DomainConnectivityService/ListConfiguredDomains by /172.19.0.18:44912: completed
```

# Development Journey in the CN QS Lifecycle

The CN QS provides a foundation for developing applications on the GS.

## CN QS Components

The CN QS consists of three components that the developer may find of interest. These include the CN QS development tools, LocalNet, and the sample application. Each component holds significance based on where the developer is in the lifecycle of the application.

### Development Tools

The development tools in CN-QS provide critical infrastructure that outlasts the sample application code. Understanding these tools informs decisions about which components to keep, modify, or replace as your application evolves.

### Build System

The build system integrates Daml smart contract with the Java and TypeScript applications. Running `./gradlew build` generates code from the Daml model, packages contracts into DAR files, and prepares deployment.

To understand the project structure, dependencies, and root project configuration, examine `quickstart/build.gradle.kts`. For Daml-specific build configurations, review `quickstart/daml/build.gradle.kts`.

To extend the build system for your application, create parallel project structures in `quickstart/settings.gradle.kts`. These settings allow you to maintain your code alongside the original CN QS components while leveraging the same build infrastructure. Customize code generation by modifying the Gradle tasks in `quickstart/buildSrc/src/main/kotlin/` to target specific languages or adjust output formats.

As your application evolves, you can fine-tune dependency management across language boundaries, configure artifact publishing for CI/CD pipelines, and integrate with the Canton ledger APIs. The build system serves as the foundation that connects your Daml models to client applications.

When troubleshooting build issues, check the generated code in `build/generated-daml-bindings/` to verify that your Daml models are correctly translated to your target languages.

Understanding the build system can save extensive time in development efforts compared to creating custom build processes from scratch.

## Makefile Command Interface

The Makefile provides standardized commands for common operations:

make setup	Configure environment variables and dependencies
make build	Build all components (Daml, backend, frontend)
make start	Start the application stack
make console-app-provider	Access Canton console for the provider
make console-app-user	Access Canton console for the user
make shell	Start Daml Shell for interactive testing

The Makefile serves as the primary control panel for interacting with the CN QS environment.

Run `make setup` to configure environment variables in `.env` files.

`make start` applies the appropriate environment settings and orchestrates all services through Docker Compose.

When you need direct access to the Canton ledger, use `make console-app-provider` to open an interactive console session.

Makefile integrates with Gradle to trigger builds and code generation with a single command, rather than needing to map complex Gradle tasks directly. Examine `makefile` to understand all available commands to streamline common development workflows and extend with your own custom commands as your application evolves.

## Configuration Files

Customize service behavior by modifying the configuration files to match your application's requirements. Start with the Canton console configuration in `quickstart/config/canton-console/app.conf` to adjust ledger access permissions and admin operations. When you need to change network routing or add SSL certificates, edit the NGINX configurations in `quickstart/config/nginx/` directory.

Fine-tune your observability stack by modifying the configurations in `quickstart/config/o11y/` to capture application-specific metrics and create custom dashboards for monitoring your services. These files use standard formats (`HOCON` for Canton, `YAML` for Docker services, `JSON` for dashboards), making them easy to edit with standard tools.

Override configuration values by setting environment variables in your `.env` files rather than editing the configuration files directly. This approach makes it easier to incorporate upstream updates by keeping your customizations separate from the base configurations. For example, set `CANTON_ADMIN_PORT=5022` in your `.env` file to change the Canton admin API port without modifying the `app.conf` file.

When troubleshooting, examine these configuration files to understand how services are connected and what parameters control their behavior. As your application grows, create additional configuration files for your custom services following the same patterns established in the CN QS configurations.

## Utility Tools

Leverage the CN QS utility tools during development and testing workflows. Use the build utilities in `quickstart/buildSrc/` to automate common development tasks. The `UnpackTarGzTask` helps extract archive files while preserving permissions and symbolic links. The Java convention scripts standardize your application's build configuration across modules.

Configure your deployment environment by selecting the appropriate Docker Compose files in `quickstart/docker/`. Use `compose-validator.yaml` for validator nodes and adjust resource allocations with the `resource-constraints-*.yaml` files. Start the observability stack with `docker-compose -f quickstart/docker/o11y/compose.yaml` up to monitor your application's performance. The `o11y` directory integrates with Grafana dashboards defined in `quickstart/config/o11y/` to provide real-time metrics visualization.

Examine these utilities early in your development process to understand their capabilities. Extend them to match your specific requirements rather than building similar functionality from scratch. For example, add custom test cases to the existing test framework or create new deployment scripts based on the provided templates.

We recommend keeping these utilities when you replace the sample application code. They provide infrastructure that would require significant effort to recreate. Copy them to your application's directory structure during the separation phase to maintain their functionality while decoupling from the original CN QS code.

## LocalNet

LocalNet provides a self-contained Canton Network environment for development and testing. It includes all necessary components to simulate a production network on a single laptop without external dependencies.

### Network Components

The LocalNet environment consists of three core components that work together to simulate a production Canton Network. The Application Provider and User Validator nodes run Canton participant nodes to host your contracts and represent user participants. Each validator operates within its own preconfigured domain.

The Global Synchronizer acts as the network coordinator through its Super Validator (SV). It runs a Canton domain node that handles transaction ordering and conflict resolution using sequencer and mediator services. It verifies that all network participants maintain a consistent view of the distributed ledger.

A set of essential services supports these core components. PostgreSQL stores the ledger data, while Keycloak handles authentication and authorization. The Wallet Service manages digital assets and payments, and NGINX provides routing and SSL termination for secure communication between services.

### Technical Implementation

The LocalNet environment is defined in Docker Compose files:

- quickstart/compose.yaml: Main application stack
- quickstart/docker/compose-validator.yaml: Validator configuration
- quickstart/docker/compose-super-validator.yaml: SV configuration

Key configuration files:

- quickstart/.env: Environment variables for the entire stack
- quickstart/docker/localnet.env: Network-specific configuration
- quickstart/config/canton-console/app.conf: Canton node configuration

LocalNet persists data through Docker volumes. Its network topology can be modified to meet specific business requirements. Canton console provides direct ledger access for debugging.

Access service logs in terminal using

```
make logs
```

Access git logs in terminal with

```
git log
```

Most teams maintain LocalNet throughout development, even after replacing the sample application. LocalNet provides a consistent testing platform that mirrors a production CN.

## Sample Application

The CN-QS includes a complete reference application that demonstrates Canton Network application patterns. While you'll likely replace this component entirely, understanding its architecture provides valuable insights for your own application design.

### Application Components

#### Daml Models `quickstart/daml/licensing/`:

- Core business logic implemented as smart contracts
- License and AppInstall templates demonstrate multi-party workflows
- Integration with Splice

#### Backend Service `quickstart/backend/`

- Java Spring Boot application
- Ledger API integration for contract creation and exercise
- REST API exposing contract operations to frontend
- Automated code generation from Daml models

#### Frontend `quickstart/frontend/`

- React/TypeScript single-page application
- Component-based architecture with state management using React hooks
- REST API integration with backend service

### Technical Implementation

The API Design is defined in `quickstart/common/openapi.yaml`. It contains the RESTful API definitions, establishes the JSON schema for request/response objects, provides error handling conventions, and creates authentication patterns.

## Development Lifecycle

We've observed five distinct phases of the CN QS development journey. Each phase presents unique strategies for interacting with the CN QS.

## Learning Phase

(½ - 2 weeks)

Often the first interaction with the CN QS is understanding how to get the environment running. The next goal is to explore the application and develop knowledge around the architecture and its workflow. It's also important to learn how to navigate the most common observability dashboards and move between LocalNet and DevNet.

The most direct update strategy in this phase is to regularly update your local copy of the CN QS by making a `git pull` from the main branch.

```
# Initial setup
git clone https://github.com/digital-asset/cn-quickstart.git
cd cn-quickstart

# Regular updates during learning
git pull origin main

# Environment customization (only if needed)
echo 'export PARTY_HINT="company-name"' > .envrc.private
direnv allow
```

## Experimentation Phase

(1-2 weeks)

In this phase, you'll reinforce your understanding of the CN QS by experimenting with the configurations, exploring the Ledger and CN app APIs, and modify the Daml code, Java client, and Makefile to test integration patterns.

At this phase, you may want to establish upstream tracking to selectively incorporate changes.

```
# Set up upstream tracking
git remote add upstream
https://github.com/digital-asset/cn-quickstart.git

# Create a branch for experiments
git checkout -b experiments

# Periodically incorporate upstream changes
git fetch upstream
git merge upstream/main
```

## Development Phase

(2-3 weeks)

This is where you begin building your own application alongside the CN QS sample application. Many developers create their new app in parallel code directories to the CN QS application to learn from the CN QS while building their own application.

```
cn-quickstart/
└── quickstart/          # Original CN-QS code
    ├── daml/             # CN-QS Daml code
    ├── backend/           # CN-QS backend service
    └── frontend/          # CN-QS frontend

└── myapp/               # Your application code
    ├── daml/              # Your Daml models
    ├── backend/            # Your backend services
    └── frontend/           # Your frontend code
```

Developers may generate new Daml packages, new client code in languages other than Java or TypeScript, UI elements, CI/CD integration, and unit tests.

### Gradle Settings

When you develop parallel directories, remember to update your build configuration to include both structures.

```
// In settings.gradle.kts
include("quickstart:daml")
include("quickstart:backend")
include("quickstart:frontend")

include("myapp:daml")
include("myapp:backend")
include("myapp:frontend")
```

Maintain separate build files for application components.

```
// In myapp/backend/build.gradle.kts
dependencies {
    // Reference CN QS components if needed
    implementation(project(":quickstart:daml"))

    // Your specific dependencies
```

```
    implementation("your.dependency:library:1.0.0")
}
```

## Environment Variables

Use `.envrc.private` for local overrides.

```
# Override CN QS defaults
export PARTY_HINT="your-company"
export DAML_SDK_VERSION="your-version"

# Add your application-specific variables
export MY_APP_CONFIG="/path/to/config"
```

Create separate environment files for your application.

```
# In myapp/.env
MY_APP_PORT=8080
MY_APP_DB_URL=jdbc:postgresql://localhost:5432/myapp
```

## Docker Compose

Create custom compose files that extend the CN QS configuration.

```
# In myapp/compose.yaml
version: '3.8'

# Import the CN QS services
include:
  - ./quickstart/compose.yaml

# Add your services
services:
  myapp-backend:
    build: ./backend
    depends_on:
      - postgres
      - participant
    environment:
      - DB_URL=${MY_APP_DB_URL}
```

Use profiles to selectively enable groups of services.

```
# Start with CN QS and your services
docker-compose --profile quickstart --profile myapp up

# Start only your services (once they are able to run independently)
docker-compose --profile myapp up
```

## Separation Phase

Over the course of a few weeks, CN developers have gained enough experience and their new application's complexity begins to exceed that of the CN QS. At this point, the CN QS is no longer helpful and the developer is advised to cut ties with the sample application.

To remove dependence on the CN QS, delete the example application directories, adjust gradle files, change the environment variable files, and remove the upstream connection in git.

The developer's source code repository is disconnected from the CN QS repository. It is advisable to write a bridge document that maps your application components to their CN QS origins. This creates a historical development record and can make it more straightforward to incorporate future updates.

```
# Remove the CN-QS remote
git remote remove upstream

# Clean up unused directories (after backing up if needed)
rm -rf quickstart/

# Update build files to remove CN-QS references
# Edit settings.gradle.kts, build.gradle.kts, etc.
```

## Ongoing Updates

By now, your application will have outgrown the capabilities of the CN QS. However, you will likely want the ability to update the development tooling or LocalNet support. The CN QS continuously adds more tooling features and updates existing tool versions.

This process includes periodically checking into CN QS, reviewing the ChangeLog to see what is new, and then selecting components you'd like to include in your application. You'll find the CN QS to be a source for improvements, rather than a direct dependency.

We recommend establishing a regular schedule (monthly or quarterly) to review CN QS updates.

Practically speaking, your update strategy will likely include creating a temporary clone of the CN QS to review changes, manually incorporate them into your project, and then remove the temporary clone.

```
# Temporary clone to review changes
git clone https://github.com/digital-asset/cn-quickstart.git
cn-quickstart-temp
cd cn-quickstart-temp
git log --since="3 months ago" --pretty=format:"%h - %an, %ar : %s"

# After identifying useful changes, manually incorporate them into
your project
# Then remove the temporary clone
cd ..
rm -rf cn-quickstart-temp
```

Every development team's journey is unique. Adapt these strategies to fit your specific needs, team structure, and application requirements. As a CN developer, your goal is to find an approach that supports your development goals while also using the CN QS as a foundation to accelerate your development lifecycle.

## Keycloak in the CN-QS

Keycloak is an open-source Identity and Access Management (IAM) solution that provides authentication, authorization, and user management for modern applications and services. It acts as a centralized authentication server that handles user logins, session management, and security token issuance.

The CN-QS uses Keycloak to provide secure authentication across its distributed architecture. Keycloak maintains separation between authentication concerns and business logic.

### Realm Structure

The CN-QS defines two Keycloak realms that mirror its business domains. The AppProvider realm manages authentication for services and users on the provider side of the application. The AppUser realm handles authentication for the consumer side. When components like validators or participant nodes receive requests, they validate the authentication tokens against the appropriate realm.

## Keycloak Configuration

The default .env configuration includes predefined users in each realm:

- **User "Pat"** (AUTH\_APP\_PROVIDER\_WALLET\_ADMIN\_USER\_NAME=pat)
- **UUID:** 553c6754-8879-41c9-ae80-b302f5af92c9  
(AUTH\_APP\_PROVIDER\_WALLET\_ADMIN\_USER\_ID)

AppUser Realm:

- **User "Alice"** (AUTH\_APP\_USER\_WALLET\_ADMIN\_USER\_NAME=alice)
- **UUID:** 92a520cb-2f09-4e55-b465-d178c6cfe5e4  
(AUTH\_APP\_USER\_WALLET\_ADMIN\_USER\_ID)
- **Password:** abc123 (AUTH\_APP\_USER\_WALLET\_ADMIN\_USER\_PASSWORD)

## Customizing Keycloak for Business Needs

You can customize the Keycloak configuration to meet your specific business requirements.


### Accessing the Admin Console

The Keycloak Admin Console is available at:

```
http://keycloak.localhost:8082/admin/master/console/#/master
```

To log in use the default credentials:


- **Username:** `admin`
- **Password:** `admin`

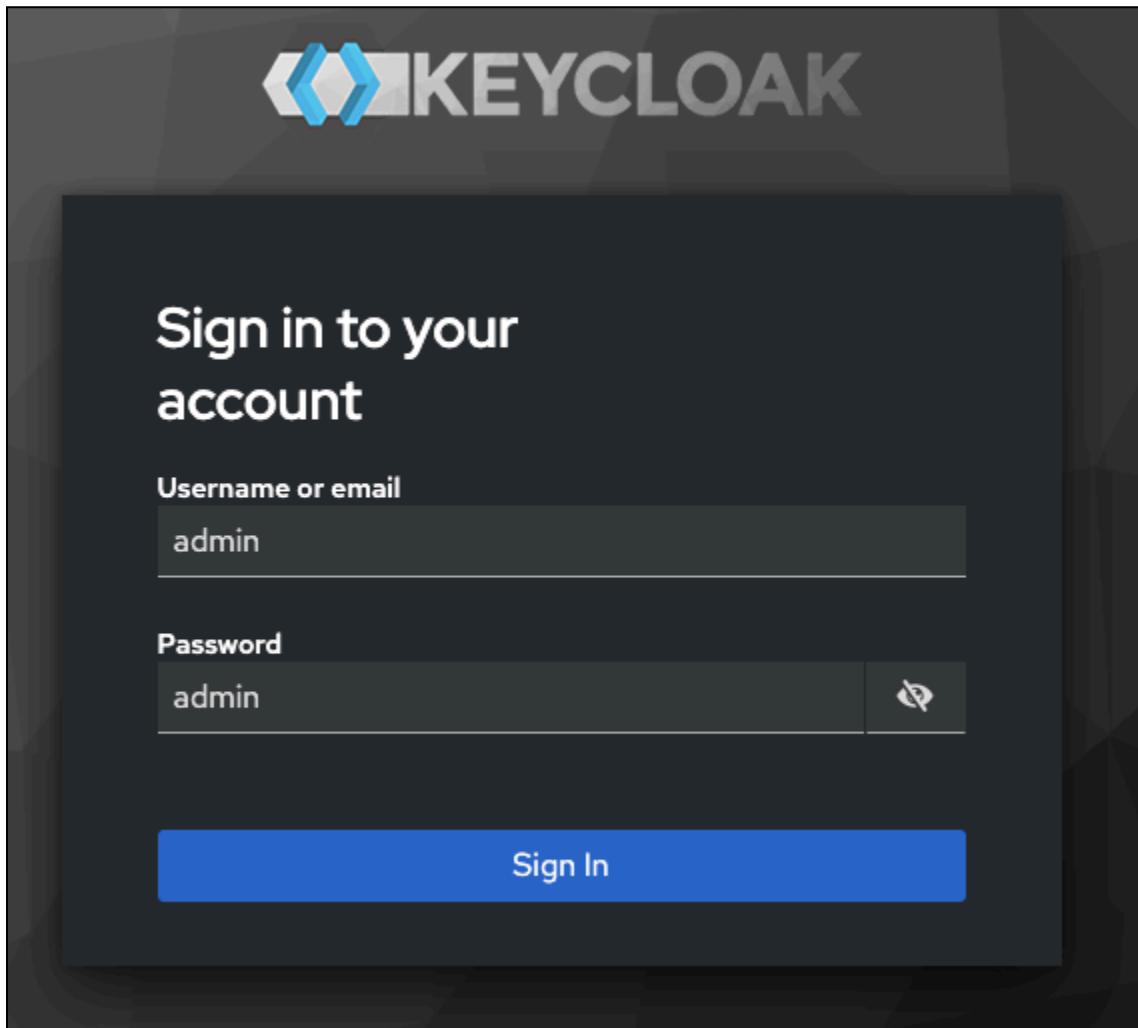


## Customization Scenarios

### Add a New User

1. Log in to the Keycloak Admin console

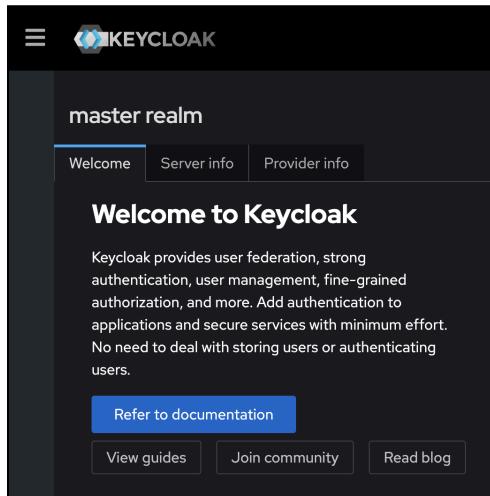


2. Select the appropriate realm (AppProvider or AppUser)

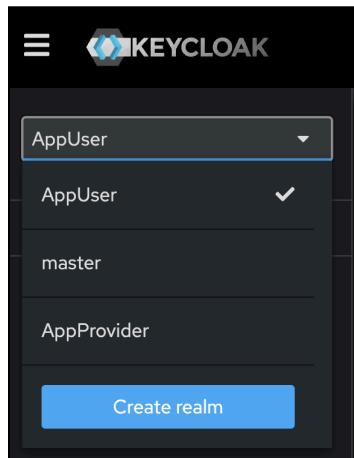

3. Navigate to the “Users” -> “Add user”

The screenshot shows the 'Users' page in Keycloak. On the left, a sidebar menu is open, showing options like 'Manage', 'Clients', 'Client scopes', 'Realm roles', 'Groups', 'Sessions', and 'Events'. The 'Users' option is selected and highlighted with a dark background. The main content area is titled 'Users' and contains a sub-section 'User list'. It features a search bar with 'Default search' and 'Search user' fields, and a blue 'Add user' button. Below the search bar is a table with columns: 'Username', 'Email', 'Last name', and 'First name'. Two users are listed: 'adrian' (Email: adrian@app-user.localhost, Last name: Doe, First name: Adrian) and 'alice' (Email: alice@app-user.localhost, Last name: the user, First name: Alice). Navigation buttons at the bottom of the table allow for page navigation.

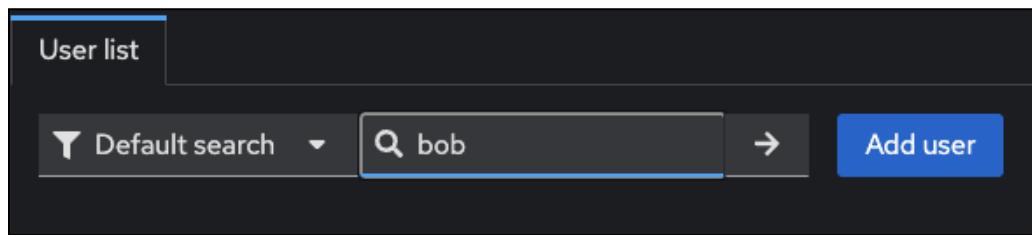

4. Fill in the user details and click **Create**

A screenshot of a user creation form titled 'General'. The form fields include: 'Username \*' with value 'bob'; 'Email' with placeholder 'Email'; 'First name' with placeholder 'First name'; 'Last name' with placeholder 'Last name'; and a 'Groups' section with a 'Join Groups' button. At the bottom are 'Create' and 'Cancel' buttons.

5. Go to the **Credentials** tab to set a password

The screenshot shows the Digital Asset interface for managing users. At the top, there's a header with the user name 'bob'. Below the header, there are several tabs: 'Details', 'Credentials' (which is highlighted in blue), 'Role mapping', 'Groups', 'Consents', 'Identity provider links', and 'Sessions'. A toggle switch labeled 'Enabled' is turned on. An 'Action' dropdown menu is open. In the main content area, there's a large plus sign icon and the text 'No credentials'. Below that, a message says 'This user does not have any credentials. You can set password for this user.' At the bottom, there's a blue 'Set password' button.

This is a modal dialog titled 'Set password for bob'. It contains two input fields: 'Password \*' with the value 'abc123' and 'Password confirmation \*' also with the value 'abc123'. Both fields have eye icon icons to the right. Below the fields is a 'Temporary' section with a toggle switch set to 'Off'. At the bottom are 'Save' and 'Cancel' buttons.

6. Save the password

This is a confirmation dialog box with the title 'Set password?'. The text inside asks 'Are you sure you want to set the password for the user bob?'. At the bottom are two buttons: a red 'Save password' button and a blue 'Cancel' button.

7. You can now sign in using the new user and their password.

- a. Click **AppUser**


## Canton Network Quickstart

# Login with OAuth 2.0

[AppProvider](#)

[AppUser](#)

AppProvider user: pat, password: abc123  
AppUser user: alice, password: abc123

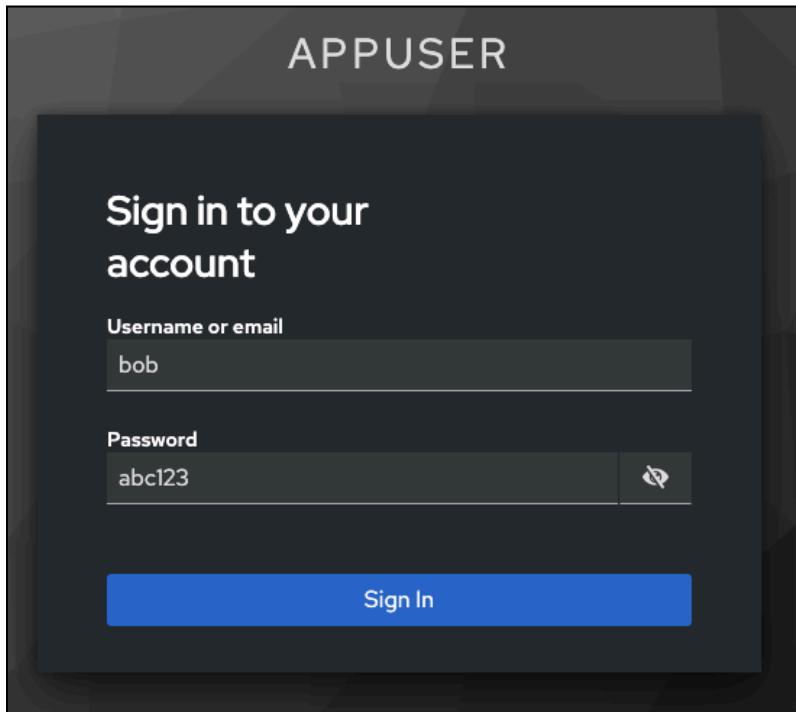

8. Bob is now a user

Canton Network Quickstart Home AppInstalls Licenses bob doe Logout

### App Installs

Note: Run `make create-app-install-request` to submit an AppInstallRequest

## Modify Client Settings

1. Select the appropriate realm
2. Navigate to **Clients** -> Select the client to modify

The screenshot shows the Keycloak admin interface for managing clients. On the left, a sidebar menu is open under the 'AppUser' realm, with 'Clients' selected. The main area is titled 'Clients' and contains a table of client configurations. The table has columns for Client ID, Name, Type, Description, and Home URL. There are 10 clients listed, all of which are OpenID Connect clients. The 'Home URL' column shows various URLs, including http://keycloak.localhost:8082/realm/AppUser/account/ and http://keycloak.localhost:8082/admin/AppUser/console/.

Client ID	Name	Type	Description	Home URL
account	client_1	OpenID Connect	-	http://keycloak.localhost:8082/realm/AppUser/account/
account	client_2	OpenID Connect	-	http://keycloak.localhost:8082/realm/AppUser/account/
admin	client_3	OpenID Connect	-	-
app	client_4	OpenID Connect	-	-
app	client_5	OpenID Connect	-	-
app	client_6	OpenID Connect	-	-
app	client_7	OpenID Connect	-	-
broker	client_8	OpenID Connect	-	-
realm	client_r	OpenID Connect	-	-
security	client_s	OpenID Connect	-	http://keycloak.localhost:8082/admin/AppUser/console/

3. Update settings per your needs

The screenshot shows the 'Clients' section of the Digital Asset management interface. A client named 'app-user-wallet' is selected, which is an 'OpenID Connect' type. The client is currently 'Enabled'. The interface includes tabs for 'Settings', 'Roles', 'Client scopes', 'Sessions', and 'Advanced'. The 'General settings' tab is active, displaying fields for 'Client ID' (app-user-wallet), 'Name' (client\_app-user-wallet), and 'Description'. An 'Always display in UI' toggle switch is set to 'Off'. The 'Access settings' tab is also visible, showing 'Root URL' and 'Home URL' fields, and a 'Valid redirect URIs' field containing 'http://wallet.localhost:2000'. A sidebar on the right lists sections: General settings, Access settings, Capability config, Login settings, and Logout settings. At the bottom are 'Save' and 'Revert' buttons.

4. Save changes

## Add a New Client

1. Select the appropriate realm
2. Navigate to “Clients” -> “Create”

The screenshot shows the 'Clients list' page. It features a navigation bar with tabs for 'Clients list', 'Initial access token', and 'Client registration'. Below the navigation bar is a search bar with the placeholder 'Search for client' and a 'Create client' button. The main area is currently empty, indicating no clients have been listed.

3. Configure the client general settings. Click **Next** for additional configuration options

The screenshot shows the 'Create client' interface. On the left, a sidebar lists three steps: 1. General settings (selected), 2. Capability config, and 3. Login settings. The main area contains fields for 'Client type' (set to 'OpenID Connect'), 'Client ID' (a placeholder field), 'Name' (a placeholder field), and 'Description' (a placeholder field). A toggle switch for 'Always display in UI' is set to 'Off'. At the bottom, there are 'Back', 'Next' (highlighted in blue), and 'Cancel' buttons.

#### 4. Configure additional settings

The screenshot shows the 'Create client' configuration interface. On the left, a sidebar lists three steps: 1. General settings, 2. Capability config (which is selected and highlighted in blue), and 3. Login settings. The main panel is titled 'Create client' and describes clients as applications and services that can request authentication of a user. Under 'Client authentication', the toggle switch is set to 'Off'. Under 'Authorization', the toggle switch is also set to 'Off'. In the 'Authentication flow' section, several options are listed: 'Standard flow' (selected with a checked checkbox), 'Implicit flow' (unchecked), 'Service accounts roles' (unchecked), 'OAuth 2.0 Device Authorization Grant' (unchecked), and 'OIDC CIBA Grant' (unchecked). At the bottom of the panel are 'Back', 'Next', and 'Cancel' buttons.

The screenshot shows the 'Create client' configuration interface. On the left, a sidebar lists three steps: 1. General settings, 2. Capability config, and 3. Login settings (which is selected and highlighted in blue). The main panel is titled 'Create client' and describes clients as applications and services that can request authentication of a user. Under 'Login settings', there are four configuration sections: 'Root URL' (input field), 'Home URL' (input field), 'Valid redirect URIs' (input field with a '+' button to add more), and 'Valid post logout redirect URIs' (input field with a '+' button to add more). There is also a 'Web origins' section (input field with a '+' button to add more). At the bottom of the panel are 'Back', 'Save' (highlighted in blue), and 'Cancel' buttons.

#### 5. Save the client

## Update Environment Variables

After making changes to Keycloak configuration, you may need to update the corresponding environment variables in the `.env` file:

1. The Keycloak user must have the same ID as the ledger user's ID.
  2. For client changes, update the corresponding client ID and secret
  3. For user changes, update the corresponding user ID and credentials
  4. Restart the services to apply the changes:

make stop && make start

## Troubleshooting

## Login Failures:

1. Verify Keycloak is running: `make status`

Find **keycloak** near **grafana** and **loki** in the list.

**Keycloak** should show as “healthy”

grafana	grafana/grafana:11.1.5	"run.sh"	grafana	30 minutes ago	Up 30 minutes	8.0.8-0.3009~3009@tcp
keycloak	quay.io/keycloak/keycloak:26.1.0	"./opt/keycloak/bin/k...ck	keycloak	30 minutes ago	Up 30 minutes (healthy)	8080/tcp, 8443/tcp, 9808/tcp
keycloak-postgres	postgres:13	"docker-entrypoint.s...tkeycloak-postgres	keycloak-postgres	30 minutes ago	Up 30 minutes	5432/tcp
loki	grafana/loki:3.1.1	"\$USER/bin/loki --con...k	loki	30 minutes ago	Up 30 minutes	3100/tcp

- ## 2. Check keycloak credentials in .env file

```
AUTH_APP_USER_ISSUER_URL_BACKEND=http://nginx-keycloak:8082/realms/AppUser
# for backend
AUTH_APP_USER_ISSUER_URL=http://keycloak.localhost:8082/realms/AppUser
# for backend, wallet-ui
AUTH_APP_PROVIDER_ISSUER_URL=http://keycloak.localhost:8082/realms/AppProvider
# for backend oidc client conf, wallet-ui
AUTH_APP_PROVIDER_ISSUER_URL_BACKEND=http://nginx-keycloak:8082/realms/AppProvider
# for backends
```

3. Check that the Keycloak user ID matches the ledger user ID

- a. App User

- i. Compare the **ID** value in Keycloak's User Details with the **AUTH\_APP\_USER\_WALLET\_ADMIN\_USER\_ID** value in `.env`.

`AUTH_APP_USER_WALLET_ADMIN_USER_ID=92a520cb-2f09-4e55-b465-d178c6cf5e4`

The screenshot shows the Keycloak User details page for a user named 'alice'. The left sidebar has 'AppUser' selected. The main panel shows the user 'alice' with an 'Enabled' toggle switch. The 'Details' tab is active, displaying the following information:

ID *	92a520cb-2f09-4e55-b465-d178c6cf5e4
Created at *	2/18/2025, 4:33:20 PM
Required user actions	Select action

b. App Provider

Compare the **ID** value in Keycloak's User Details with the

**AUTH\_APP\_PROVIDER\_WALLET\_ADMIN\_USER\_ID** value in `.env`.

`AUTH_APP_PROVIDER_WALLET_ADMIN_USER_ID=553c6754-8879-41c9-ae80-b302f5af92c9`

The screenshot shows the Keycloak User details page for a user named 'pat'. The left sidebar has 'AppProvider' selected. The main panel shows the user 'pat' with an 'Enabled' toggle switch. The 'Details' tab is active, displaying the following information:

ID *	553c6754-8879-41c9-ae80-b302f5af92c9
Created at *	2/5/2025, 11:19:20 PM
Required user actions	Select action

Learn more about using Keycloak through their documentation portal:

[Keycloak Official Documentation](#)

[Keycloak Server Administration Guide](#)

[Securing Applications with Keycloak](#)

## Next Steps

You've completed a business operation in the CN-QS and have been introduced to the basics of the Canton Console, Daml Shell, and the SV UIs.

Learn more about Daml Shell and the project structure in the [Project Structure Guide](#).