

KTAB SMP V1.4

KAPSARC Toolkit for Behavioral Analysis (KTAB): Spatial
Model of Politics GUI (SMP) User guide

Contents

Introduction	2
Spatial Model of Politics (SMP)	3
How to Install KTAB-SMP.....	3
Download the 64-bit executable (Windows)	3
Download the Mac OS X Bundle (OS X)	3
Building from source (Unix)	4
Getting started with KTAB:SMP GUI	4
Changing the Working Directory	4
Output Log Options	4
Configuring Database	4
Minimum logging.....	4
Model Parameters	5
The Affinity Matrix	9
Data Inputs.....	9
Actor data description	9
Create new actor data.....	10
Output and Results.....	13
Actor Data	13
Visualizations.....	14
D3 Visualizations	20

This document will act as a user-guide for the KTAB: Spatial Model of Politics GUI. The guide will cover the whole process of using KTAB for the SMP model, taking the user through downloading and Installing the application, running the model, and visualizing the results. This document assumes a detailed understanding of the SMP as instantiated in KTAB. For more details, see two Discussion Papers published by King Abdullah Petroleum studies and Research Center (KAPSARC)

- [*An Introduction to the KAPSARC Toolkit for Behavioral Analysis \(KTAB\)*](#), and
- [*Multidimensional Bargaining using KTAB*](#).

Introduction

KAPSARC Toolkit for behavioral analysis (KTAB) is an open source platform for building models to allow the systematic and rigorous analysis of Collective Decision-Making Processes (CDMPs). KTAB is under continual development by KAPSARC to meet the need for widely available, state-of-the-art, supported, and open source software that facilitates the modeling and analysis of collective decision making. The software libraries and source code for KTAB are released on github¹ as open source under the MIT license.

CDMPs are those in which a group of individual actors interacts to arrive at a single decision. In both general and technical parlance, CDMPs may be termed bargaining or negotiating. To avoid confusion with legacy interpretations of these words we adopt the term CDMP, but the general meaning remains the same. The deliberations of a corporate board, the internal debates of ruling parties, the voting of electorates, and the haggling between seller and buyer at a market stall can all be viewed as CDMPs, albeit with different actors operating according to different rules. KTAB is intended to support reasonable analyses of the potential outcomes of CDMPs involving a range of modeled groups. In any group, the actors hold different values, positions, and views, which they bring to the CDMP.

KTAB is intended to be a platform that contains a number of models that can simulate CDMPs. The initial model that has been instantiated in KTAB is called the Spatial Model of Politics (SMP). The class of models represented by the SMP has a long history in the academic discipline of political science. More detail on the SMP, and references to the appropriate literature, can again be found in articles available for download on the main KTAB page. The majority of the development team's current efforts are focused on producing a GUI for the SMP. The official version with a working GUI is now available for download.

¹ <http://kapsarc.github.io/KTAB/>

Spatial Model of Politics (SMP)

The initial model that has been instantiated in KTAB is called the Spatial Model of Politics (SMP).

The class of models represented by the SMP has a long history in the academic discipline of political science. The key distinguishing feature of the SMP is that the model assumes that positions can be arrayed along a linear, spatial dimension (usually a single line).

Fundamentally, this implies that differences in position, or advocacy, can be ordered along a position spectrum. Differences in actors' advocacy (their position) reflect the ordering and magnitude of the political difficulty in moving from one position to another. The "space" between two points on the line measures the level of difference between two positions.

A non-spatial approach has also been implemented in KTAB. We call this the Enumerated Model of Politics (EMP).

How to Install KTAB-SMP

Download the 64-bit executable (Windows)

Installation of the SMP application on Windows is simple:

- Download and install the Visual C++ Runtime libraries for Visual Studio 2015 or more recent, from the [Microsoft support official website](https://support.microsoft.com/en-us/help/2977003/download-and-install-the-visual-c-runtime-libraries).
- Download the latest SMP version from the KTAB official GitHub page <http://kapsarc.github.io/KTAB/>.
- Extract the contents of the .zip archive to your PC, maintaining the directory structure in the archive.

Download the Mac OS X Bundle (OS X)

Installation of SMP application for the OS X is simple:

- Download the latest SMP version for the Mac OS X from the KTAB official GitHub page <http://kapsarc.github.io/KTAB/>.
- Extract the contents of the .zip archive to your PC, maintaining the directory structure in the archive

Important note: to use the *smc* and *smpDyn* from the downloaded bundle you need to access the contents of the *KTAB_SMP* bundle. You will find both the *smc* and *smpcDyn* executables in the bundle folder *KTAB_SMP.app/Contents/MacOS/*

Building from source (Unix)

Once we have configured and installed all the dependencies. the easiest way to build KTAB on Linux is to run the scripts located in the home directory of KTAB. These are *clean.sh*, *reconfig.sh*, and *build.sh* – they should be run in this order to rebuild all the libraries and models for KTAB.

Getting started with KTAB:SMP GUI

Changing the Working Directory

The home directory will store your default model outputs. To change your home directory, go to File > Change Home Directory

Output Log Options

You can save the model log output in different ways by indicating which logging option you prefer.

- 1- Default – Records the SMP model log in a timestamp-named file.
- 2- Custom - Records the SMP model log in a specific file / location.
- 3- None - Disable output logging of the SMP model run.

Configuring Database

You can set the database configuration to either record your model output in SQLite or PostgreSQL databases from File > Configure Database or from the database icon:



Minimum logging

Minimum logging allows the user to limit database logging. Checking this disables logging except for: model / data information. You can find the Minimum Logging checkbox within the Model Parameters panel

Note: If you need complete database output for more advanced data analysis, you should keep this option unchecked.

Model Parameters

The KTAB version of the Spatial Model of Politics is highly parameterized, with many options that can be set to model collective decision-making processes based on your understanding of how actors behave. We briefly describe the parameters that users can modify without modifying the source code. These parameters can be set either in the GUI application, or stored in an xml-format input file. As previously mentioned, the following descriptions of the model parameters assume a detailed understanding of the SMP model as instantiated in KTAB.

The default value for each model parameter is highlighted in blue in the descriptions below.

VictoryProbModel controls the rate at which the probability of a coalition supporting an option winning against the coalition proposing it increases as the strength ratios increase. This is part of the Probabilistic Condorcet Election. If Binary is used, the result is the Deterministic Condorcet Winner.

VictoryProbModel	Linear	A 2:1 ratio gives a probability of 2/3 to the stronger coalition
	Square	A 2:1 ratio gives a probability of 4/5 to the stronger coalition

	Quartic	A 2:1 ratio gives a probability of 16/17 to the stronger coalition
	Octic	A 2:1 ratio gives a probability of 256/257 to the stronger coalition
	Binary	Any significant percentage difference gives a probability of 1 to the stronger coalition
ProbCondorcetElection controls the how the limiting distribution of the Markov process, for the Probabilistic Condorcet Election, is computed.		
ProbCondorcetElection	Conditional	PCE uses single-step conditional probabilities
	Markov Incentive	PCE uses a Markov process in which challenge probabilities are proportional to the influence of the initiating actor(s)
	Markov Uniform	PCE uses a Markov process in which challenge probabilities are uniform
StateTransition controls how the winning bargain in an actor's queue is chosen among all bargains; either by a Deterministic or Probabilistic Condorcet Election.		
StateTransition	Deterministic	The bargain which has the strongest coalition wins, even with a very small margin
	Stochastic	The probability of winning for each bargain is proportional to its relative coalition strength
VotingRule controls how the amount of influence an actor will exert between two options depends on the perceived difference in utilities.		
VotingRule	Prop	The vote is linearly proportional to the difference in utilities
	PropBin	The vote is proportional to the weighted average of Prop (80%) and Binary (20%)
	Binary	The actor exerts all influence, regardless of the difference in utilities
	PropCbc	The vote is proportional to the average of Prop and Cubic
	ASymProsp	Influence is exerted asymmetrically: It is proportional to the difference of utilities if negative

		(a loss in utility). It is proportional to 2/3 of the difference, if positive (a gain in utility).
	Cubic	The vote is proportional to the cubed difference in utilities
BigRAdjust controls how accurately actor i is able to estimate, relative to an anchor of its own risk attitude, the risk attitude of actor j (which is known to the model).		
BigRAdjust	OneThird	Actor i estimates actor j's risk attitude by interpolating between them, such that its estimate is closer (2/3 anchored, 1/3 adjusted) to its risk attitude
	None	Actor i judge's actor j's risk attitude as being identical to its risk attitude
	Half	Actor i estimates actor j's risk attitude by interpolating midway between its risk attitude and actor j's actual risk attitude
	TwoThirds	Actor i estimates actor j's risk attitude by interpolating between them, such that its estimate is closer (1/3 anchored, 2/3 adjusted) to actor j's risk attitude
	Full	Actor i judge's actor j's risk attitude correctly
BigRRange controls actors' risk tolerances, and hence the curvature of their utility functions.		
BigRRange	Min	Sets risk tolerances in the range [0,1] such that actors with the most probable position are perfectly risk averse (1), while actors holding the least probable position are perfectly risk tolerant (0)
	Mid	Sets risk tolerances in the range [-½,1] such that actors with the most probable position are perfectly risk averse (1), while actors holding the least probable position are somewhat risk seeking, with an aversion of -½
	Max	Sets risk tolerances in the range [-1,1] such that actors with the most probable position are perfectly

		risk averse (1), while actors holding the least probable position are perfectly risk seeking (-1)
ThirdPartyCommit controls how committed a third-party actor k is in a challenge between actors i and j.		
ThirdPartyCommit	NoCommit	No matter which coalition actor k joins (i or j), actor k never changes position
	SemiCommit	If the coalition actor joined by k loses, k must take the position of the winning coalition; otherwise it does not need to change position
	FullCommit	Actor k is fully committed to the coalition it joins, and must adopt the position of the winning coalition
InterVecBrgn controls how proposed positions are interpolated between the positions of actor i and j in a bargain.		
InterVecBrgn	S1P1	Proposed positions for each actor are computed as a weighted average of their current positions, where the weights are the products of salience and probability of success
	S2P2	Proposed positions for each actor are computed as a weighted average of their current positions, where the weights are the squared products of salience*probability of success
	S2PMax	Proposed positions for each actor are computed as asymmetric shifts from their current positions, which is a function of squared salience and truncated difference in probability of success
BargnModel controls from which actor's perspective the probability of success is used to interpolate bargains.		
BargnModel	InitOnlyInterp	Bargains are only computed from the initiating actor's perspective
	InitRcvrInterp	Bargains are computed from the perspective of both the initiating actor and receiving actor

	PWComplInterp	Bargains are computed as an effective power-weighted average of both actor's perspectives
--	---------------	---

The Affinity Matrix

The affinity matrix is currently unused in the model; it is a placeholder for intended future development of the algorithm.

Data Inputs

KTAB SMP uses two main data input formats: Comma Separated Value (CSV) files and Extensible Markup Language (XML) files. We assume in this tutorial that the user understands how to obtain appropriate data.

You can find CSV and XML templates in the “*KTAB_SMP\sample_data*” folder for the Windows release folder or you can find it in the official KTAB folder of the main GitHub repository under “*KTAB\examples\smp\doc*”. These templates show how a proper CSV or XML file input is structured for a KTAB SMP input.

The Database file .db is another type of input, holding data from a previously-run model.

Actor data description

“**Actor**” data that represents an individual, institution or group (*Note: actor must be no longer than 25 characters*).

“**Description**” A description of the actor (*Note: description must be no longer than 256 characters*).

“**Influence**” The relative power, or political clout, for the actor.

“**Position**” The stated position an actor advocates for the specified dimension; this value must be between 0 and 100.

“**Salience**” The relative importance to the actor of the specified dimension; salience across all dimensions must sum to *at most* 100.


**Note: Influence, Position, and Salience are typically numeric values ranging from 0 – 100*


“Dimensions” Each dimension represents, on a continuous spectrum between two extremes, a decision over which actors are trying to influence each other, i.e. a CDMP. By convention, dimensions are represented as the inclusive range [0, 100].

“Scenario Name” Scenario, dataset or project name.

“Scenario Description” A description of the Scenario.

Create new actor data

1. To start creating new actor data you can either;
 - Go to *File > Create New Actor Data*
 - Click on the icon  from the tool bar.
 - Or use the Keyboard shortcut “*Ctrl+N*”
2. Insert the number of dimensions for your new data-set

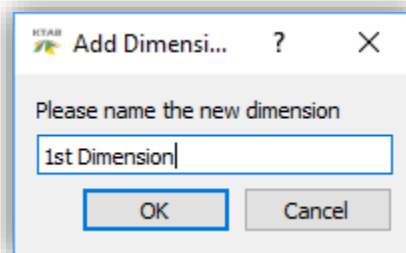

3. To start typing in your data, you will need to set the Scenario Name and Description

Input Data

+ Actors

- Actors

Sample Scenario Name

Add Dimension

Done

Sample Scenario Description

Actor Data

Affinity Matrix

	Actor	Description	Influence	Dimension Positi	Dimension Saliar
1					
2					
3					

4. You can increase or decrease the number of actors using the buttons +/- buttons.

Input Data

+ Actors - Actors Sample Scenario Name

Add Dimension Done Sample Scenario Description

Actor Data Affinity Matrix

	Actor	Description	Influence	Dimension
1				

5. You can also click on the “Add Dimension” button to add more dimensions.

Input Data

+ Actors - Actors Sample Scenario Name

Add Dimension Done Sample Scenario Description

Actor Data Affinity Matrix

	Actor	Description	Influence	Dimension Positi	Dimension Saliar
1					

6. Type in your data in the table

Input Data


+ Actors - Actors Sample Scenario Name

Add Dimension Done Sample Scenario Description

Actor Data Affinity Matrix

	Actor	Description	Influence	1st Dimension Position	1st Dimension Saliance
1	actorName1	actorDescription1	90	50	30
2	actorName2	actorDescription2	25	30	80
3	actorName3	actorDescription3	40	70	85
4	actorName4	actorDescription4	60	95	100
5	actorName5	actorDescription5	95	25	25


- You can also Add/Delete dimensions, insert new actors and rename column headers by right clicking on a column from the table.

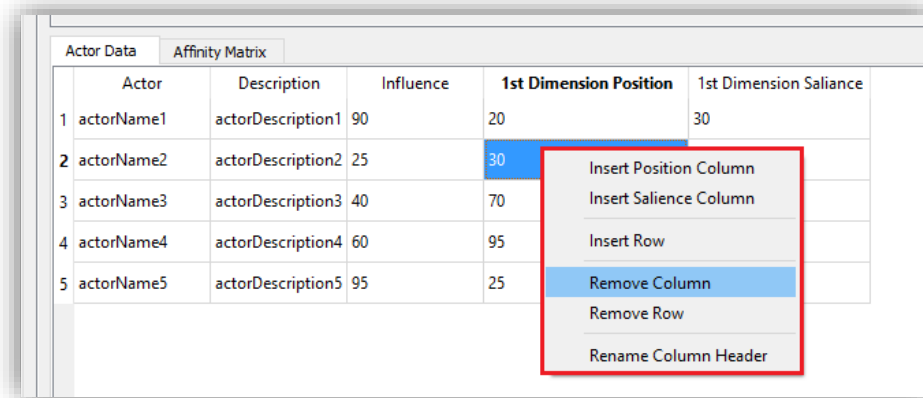

	Actor	Description	Influence	1st Dimension Position	1st Dimension Saliance
1	actorName1	actorDescription1	90	20	30
2	actorName2	actorDescription2	25	30	
3	actorName3	actorDescription3	40	70	
4	actorName4	actorDescription4	60	95	
5	actorName5	actorDescription5	95	25	


Insert Position Column
 Insert Saliance Column
 Insert Row
 Remove Column
 Remove Row
 Rename Column Header


- Once you are done creating your new data-set, click on “Done” to save the data-set on your computer.

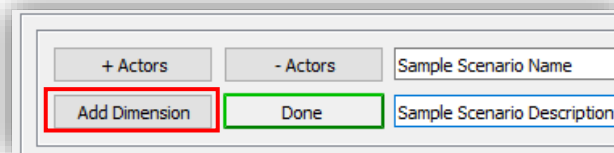


You can either save it in the CSV or XML file format.

1- Data input using a CSV file


- Go to “File > View/Modify Existing CSV File”
- Or Click on the icon  from the tool bar.
- Or use the Keyboard shortcut “Ctrl+O”
- You can then choose the CSV file that contains the data that you wish to use.



2- Data input using an XML file

- You can do this from “File > View/Modify Existing XML File”
- Click on the icon  from the tool bar.
- Or use the Keyboard shortcut “Ctrl+X”
- You can then choose the XML file that contains the data that you wish to use.

When you are done inserting your input data, the Run button will be highlighted in green for you to run the model.

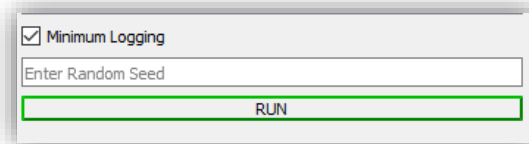

☒ Minimum Logging


Enter Random Seed

RUN

Output and Results

Actor Data

The Actor's Data table shows the current turn, actor's name and description, actor's influence, actor's salience and the position for the current turn. You can navigate through turns with the slider.

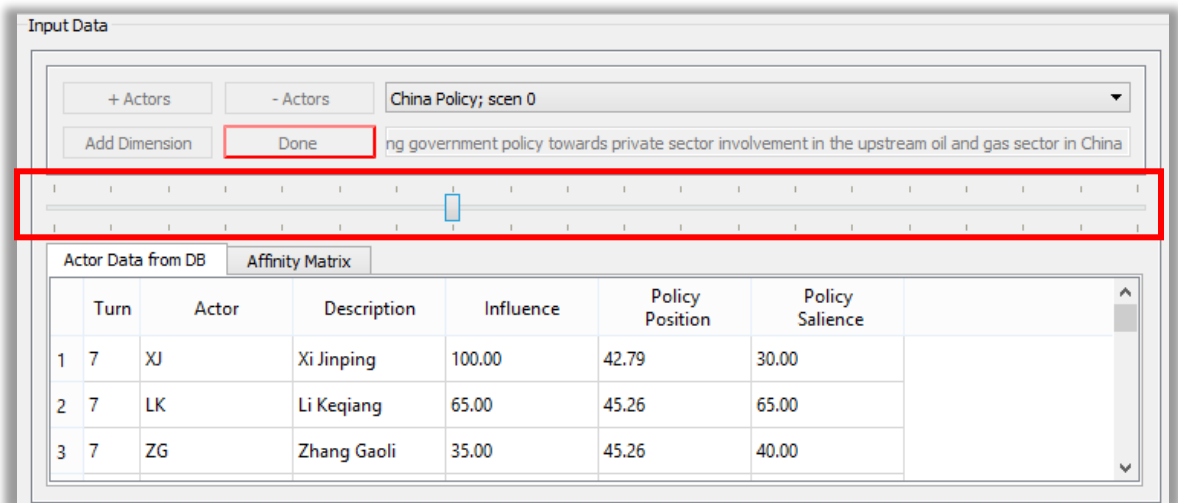

Input Data

+ Actors - Actors China Policy; scen 0

Add Dimension Done ng government policy towards private sector involvement in the upstream oil and gas sector in China


Slider: 0 1 2 3 4 5 6 7 8 9 10

Actor Data from DB Affinity Matrix

	Turn	Actor	Description	Influence	Policy Position	Policy Salience
1	7	XJ	Xi Jinping	100.00	42.79	30.00
2	7	LK	Li Keqiang	65.00	45.26	65.00
3	7	ZG	Zhang Gaoli	35.00	45.26	40.00

Visualizations

Positions by Turn (Line Chart)

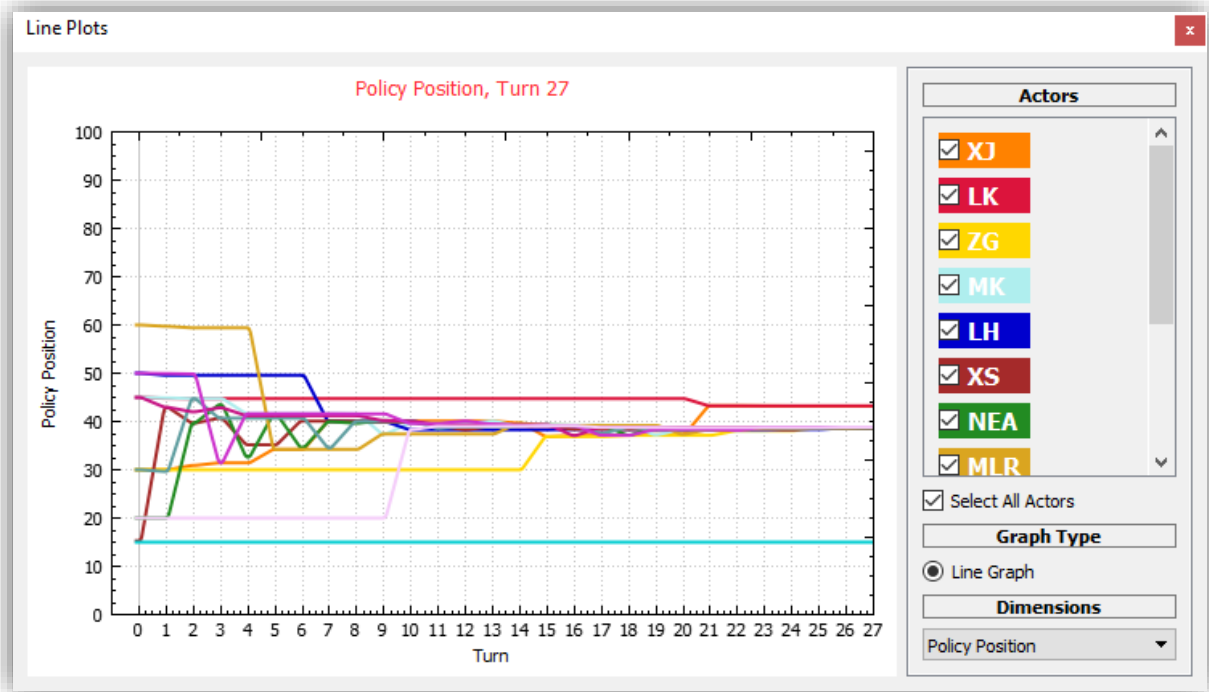


The line chart displays the change in the actors' positions over turns. Each line corresponds to an actor, hovering over a line will trigger a tooltip showing the actor's name, description, and influence.


In the actor's controls on the right, you can show/hide the lines through the checkboxes for the actor. You can also switch between dimensions from the "Dimensions" section.

On the chart, you can click on the line to toggle the name of the actor and you can also zoom in/out to change the chart scale.

When you double click on an actor's line, changing position for a specific turn, a small dialogue box will appear explaining why the actor's position changed for that turn.


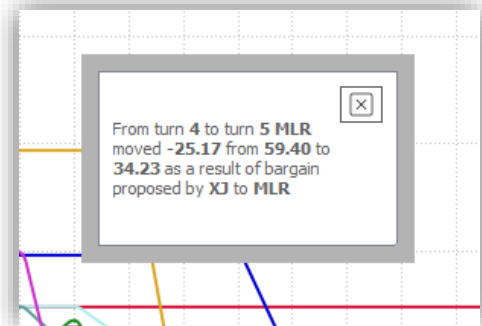


Effective Power Landscape (Stacked Bar Chart)

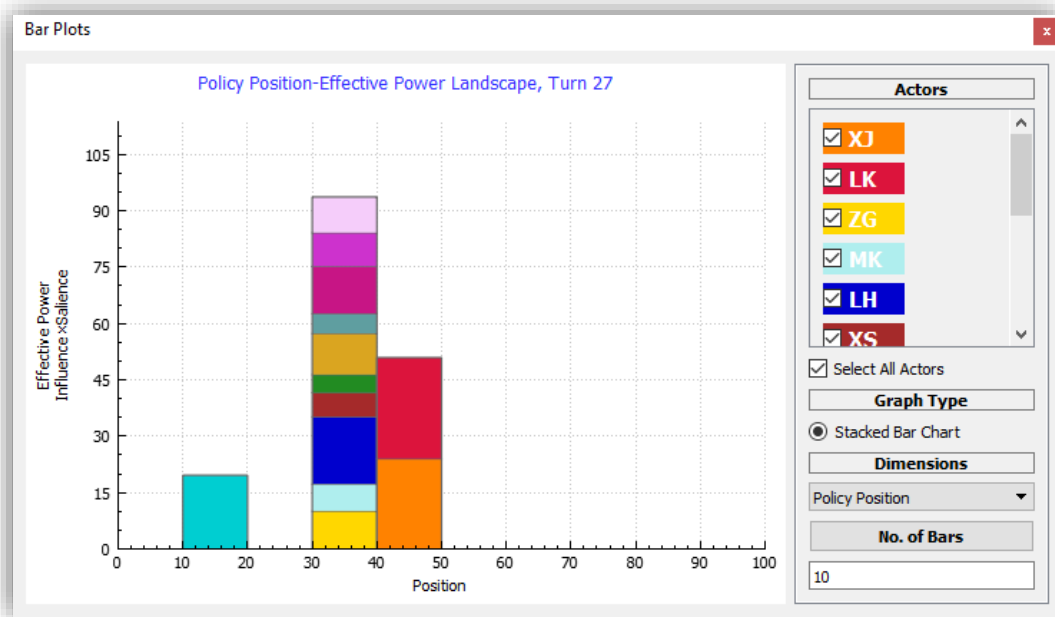

The bar chart displays the effective power landscape, showing the effective power and positions of actors for each turn.

Similar to the line chart, in the actor's controls on the right, you can focus or unfocus bars through the checkboxes for the actors. You can also switch between dimensions from the "Dimensions" section. For the stacked bar chart, you can change the number of bars displayed by modifying "No. of Bars".

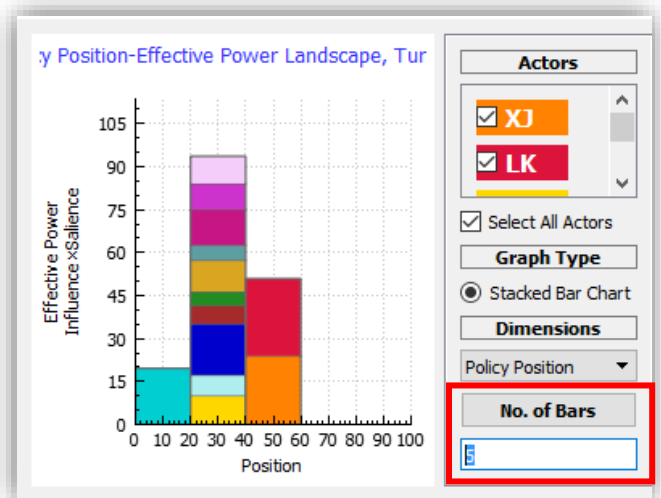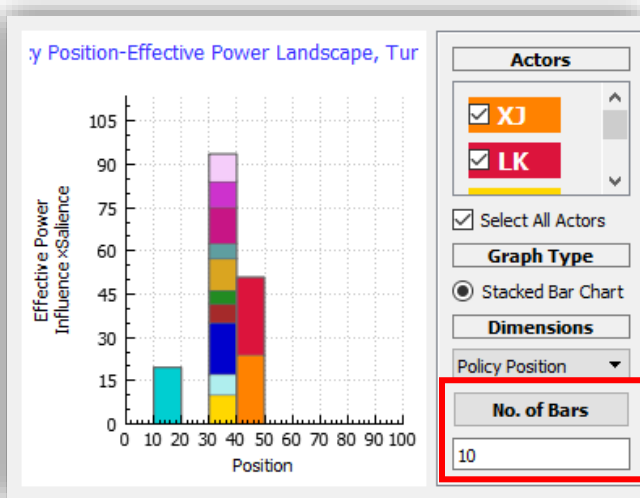


Bar chart scale options

You can change the scale options to automatic, max, or user defined.

“Automatic” is the default scaling for the bar-chart where the height of the y-axis is responsive and automatic in each turn.

The “Max” option locks the y-axis on a fixed max scale.

The “User-defined” option enables the user to define the max value for the y-axis.

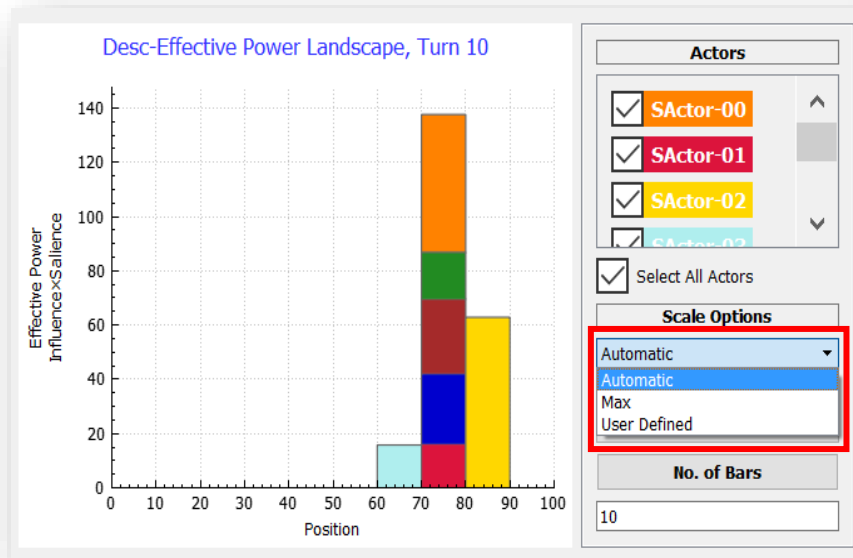

Quad Map

You can enable the Quad Map view from View > QuadMap. The Quad Map plots the change in utility to both the initiator (y-axis) and receiver (x-axis) expected as a result of a challenge from a specified initiator to at least one other actor. There are four ways to compute the perspective from which the utility changes are computed:

Initiator: All computations performed from the perspective of the initiator.

Receiver(s): All computations performed from the perspective of each receiver selected for plotting.


Objective: The utilities for the initiator are computed from their perspective, and the utilities to each receiver are computed from their own perspective.

Other: All utilities are computed from a specified third party.

Perspective

Objective	
Initiator	
Receiver(s)	
Objective	
Other	


XJ * *

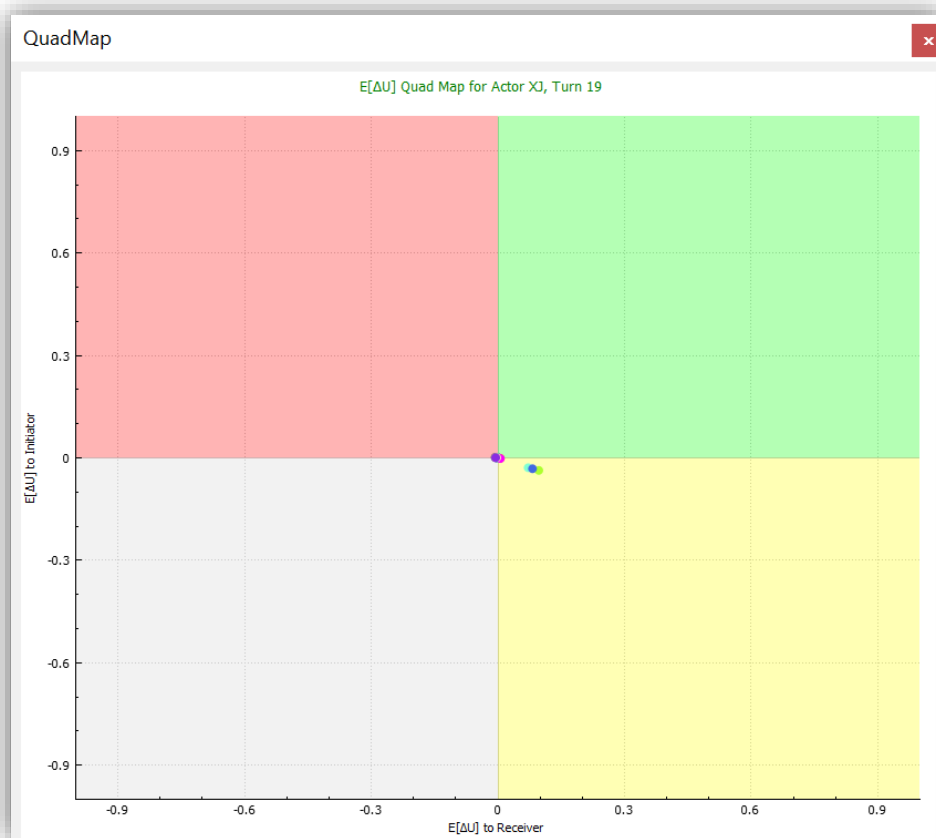

The quad map is named as such because the plane is divided into four quadrants, between which the behavior of receivers can be expected to consistently vary. In the first (green) quadrant, both the initiator and receiver can expect to gain utility from a challenge. Hence, actors in this quadrant may be expected to cooperate. The second (red) quadrant contains the cases where the initiator is expected to gain utility, while the receiver is expected to lose. There is likely to be conflict between actors in this quadrant. In the grey third quadrant, both actors would expect to lose utility from a challenge, so it's unlikely any would be made. The last


(yellow) quadrant contains cases where the initiator would be expected to lose utility, but the receiver would gain. Again, it's highly unlikely any challenge would be made.

You can check the auto-scale option to change the scaling to focus on where the actors are scattered on the Quad Map.

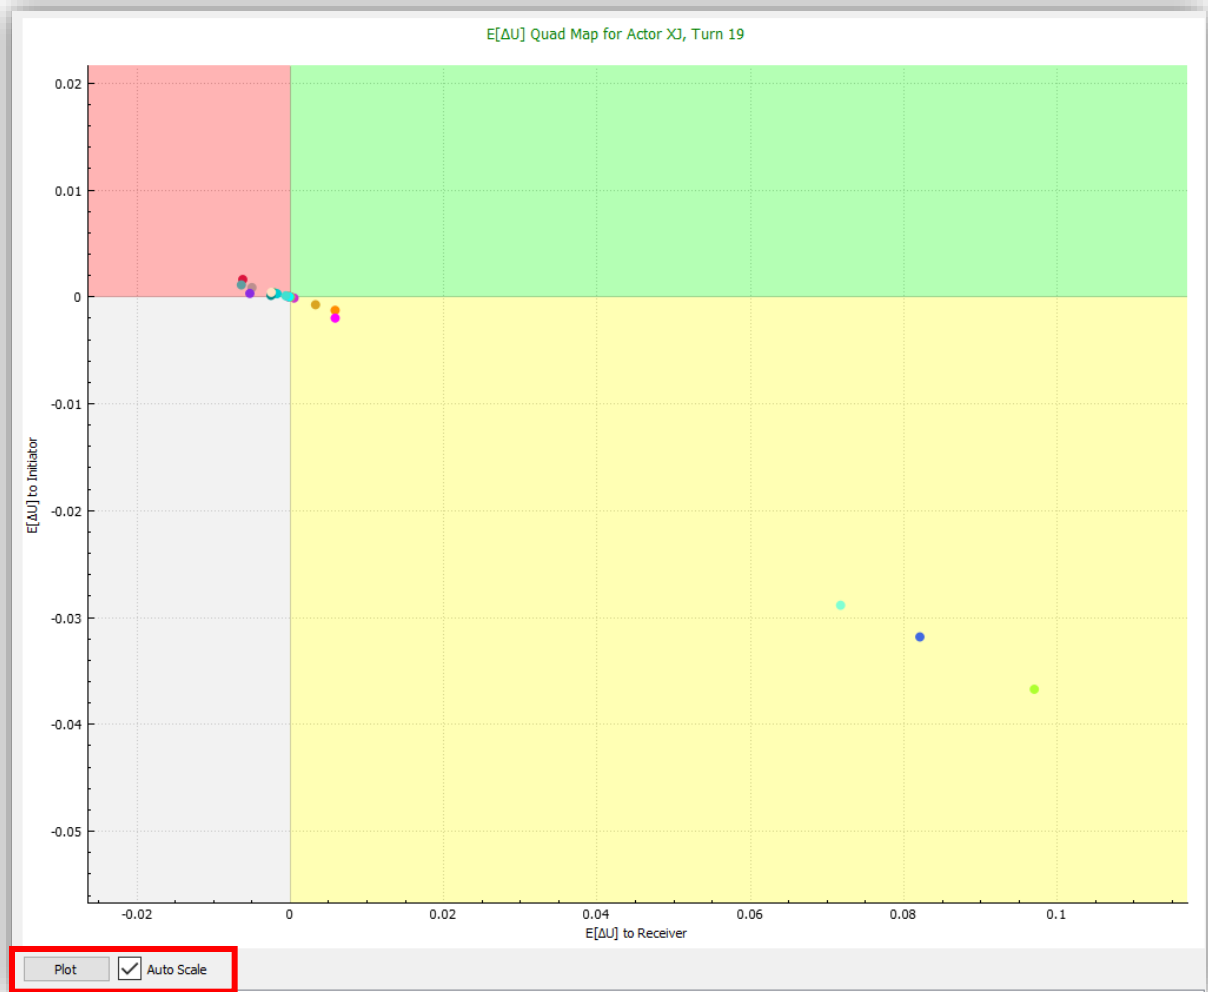

Changing Actor's Colors



To Change actors' colors displayed in the charts you can;

- Go to "Color Options > "Change Actors Color"
- Or Click on the icon  from the tool bar.

You can pick a color for each actor from the color picker widow, or you can import a color palette (which you previously designed) as a csv file from "Color Options" > "Import Actor Colors".

You can also Export a CSV color palette after modifying, so that you can use the same color map in the future, from "Color Options" > "Export Actor Colors".

Or reset the default colors for the actors. From "Color Options" > "Reset Actors Colors".

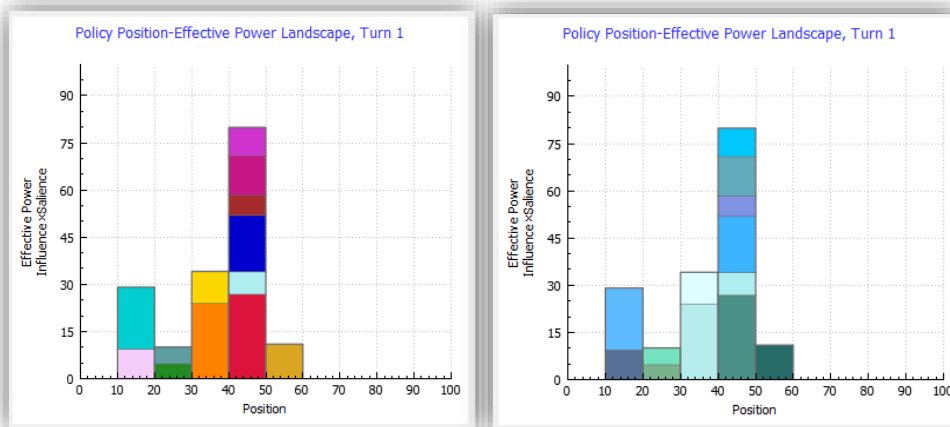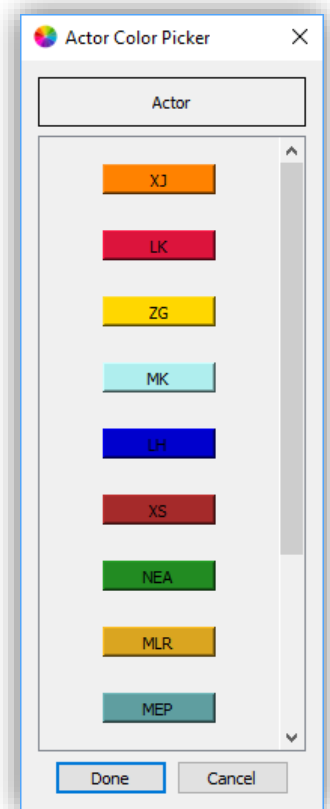

You can also Hide and View charts from the "View" option on the toolbar.


Advanced Visualizations

As of version 1.4, the SMP application includes a new visualization dashboard that opens in your favorite browser window (Chrome, Firefox, Safari). This dashboard currently includes Line and Bar plots included in the SMP application. However, the dashboard includes an additional feature for the actor movements and the Network Diagram that displays the bargains happening between the actors as a directed network diagram. We also have plans to improve the current visualizations to make them more interactive and give you more control over the look and feel. Please note that, though the visualization dashboard opens in a browser, there is no online content, and no data is sent off your computer. The plots are all drawn using the most popular and powerful open-source set of JavaScript visualization libraries, called “D3” (Data-Driven Documents).

Important Notes:

- *you will have to load a database file of a previous SMP run into the dashboard to visualize your data*
- *the database file has to be less than 1.5GB as of KTAB-SMP V1.4*
- *this dashboard is separate from the visualizations within the SMP application*


- 1- To open the visualization dashboard, you can either click on the Open Visualization menu item, or the visualization button from the tool bar

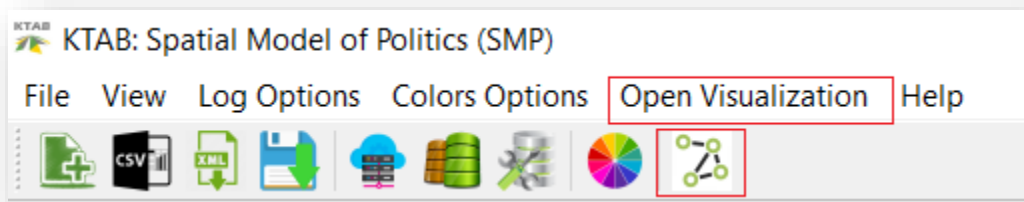

- 2- Click on the Browse button to load your database file

A dashboard will appear a few seconds after the data is loaded, showing you the currently available visualizations.


Effective Power Bar Chart

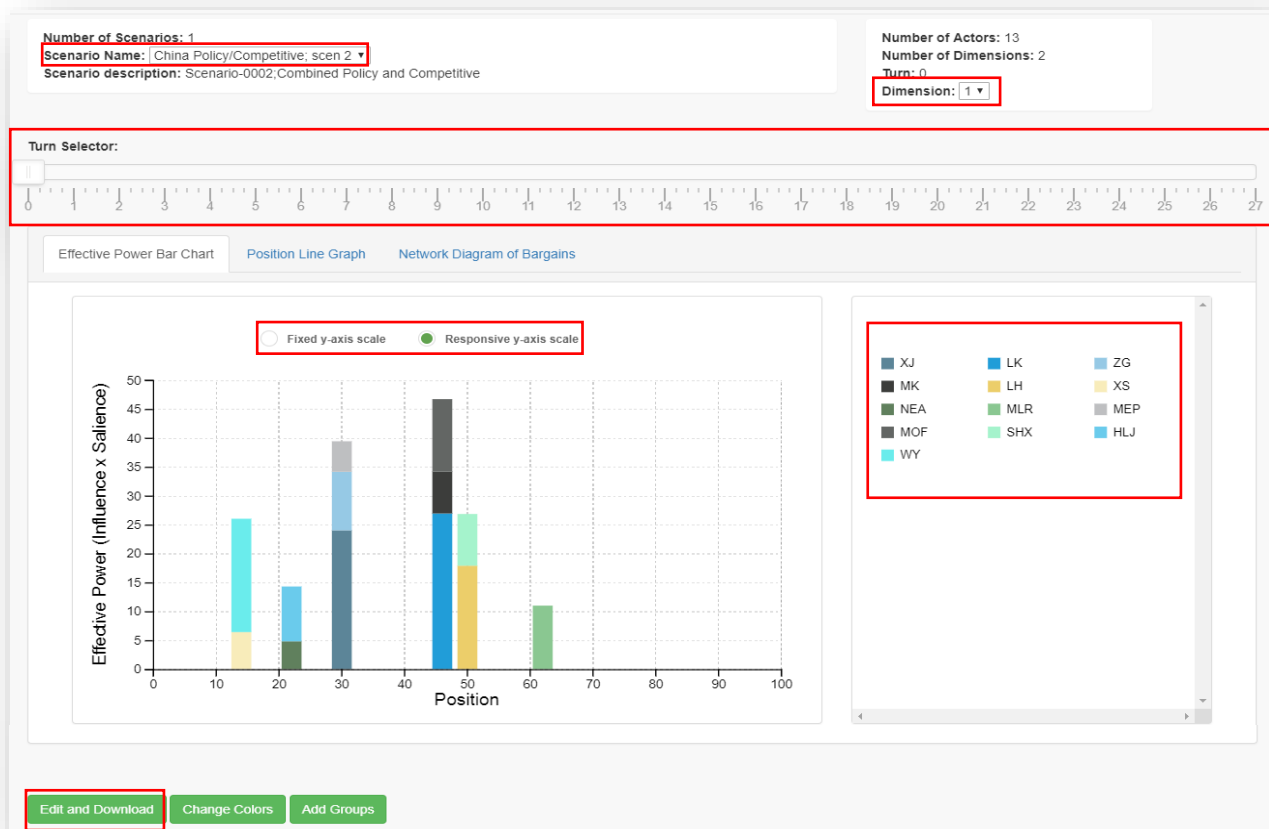

The bar chart is also like the chart embedded in the KTAB_SMP. With the controls on the bar chart you can:

- Change scenarios from the Scenario Name dropdown menu.
- Change dimensions from the Dimension dropdown menu.
- Scroll through turns from the turn selector slider.
- Hover over actors on the chart or from the interactive legend panel to trigger bar highlight and effective power tool-tip.
- Disable/Enable actors using the interactive legend panel.
- Change the number of bars from "Edit and Download" button.
- Switch between a fixed and a responsive scale for the y-axis.


Positions Line Graph

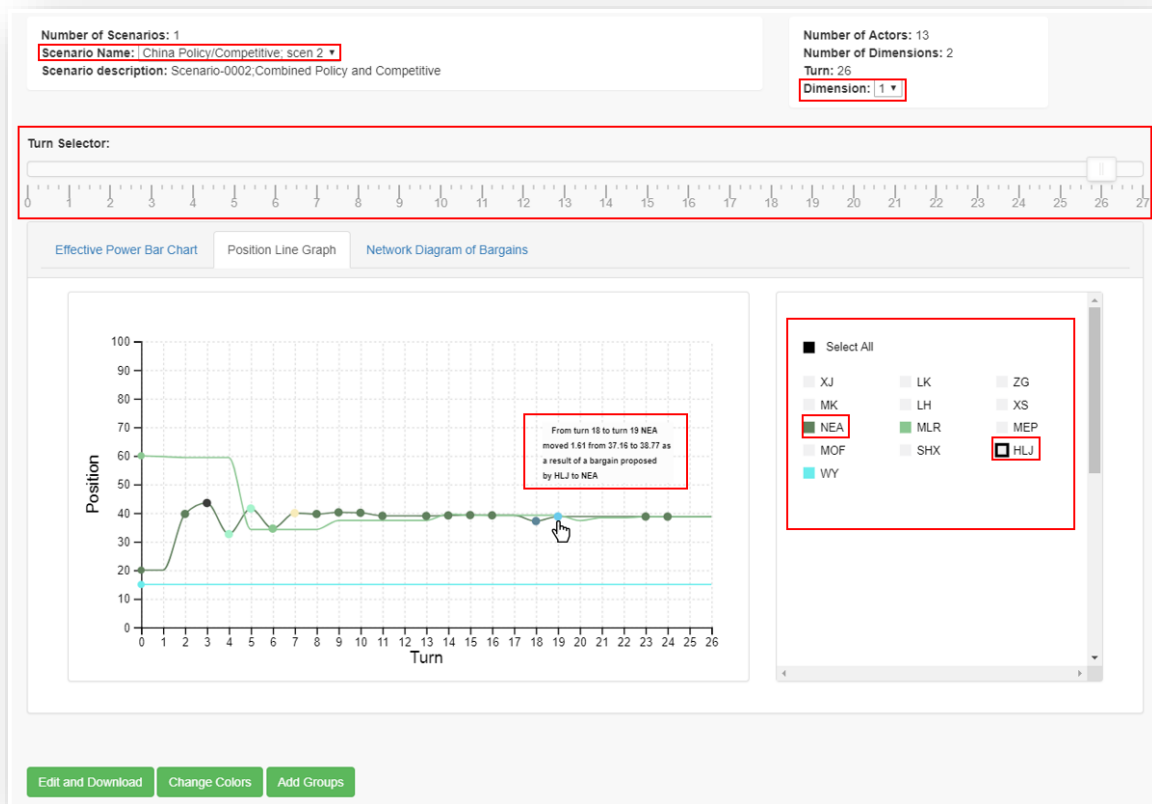

The Line chart is very similar to the chart embedded in the KTAB_SMP application. There are several controls that you can use in this chart:

- Change scenarios from the Scenario Name dropdown menu.
- Change dimensions from the Dimension dropdown menu.
- Scroll through turns from the turn selector slider.
- Disable/Enable actors using the interactive legend panel.
- Hover over actors to trigger line highlight.
- Click on an actor's name from the legend to show why actor changed position's points.
- Hover over each point to trigger a tooltip explaining why the actor's position changed at that point.

Network Diagram of Bargains

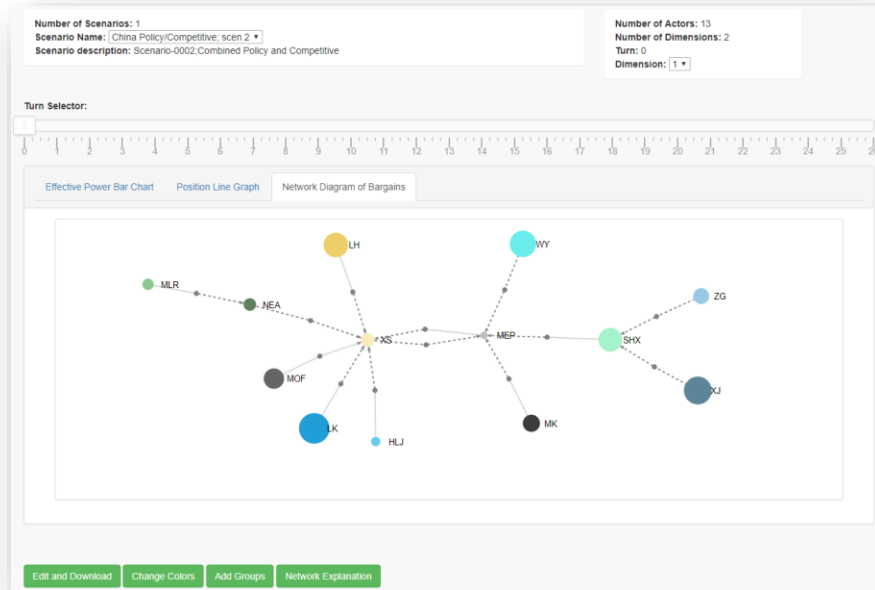

The Network Diagram is a scenario and turn specific bargains visualization. The diagram allows you to visualize the bargain proposals and acceptances for each actor in a single turn.


- Actors are represented with nodes colored according to each actor's color.
- Size of Actors' nodes represent each actor's Effective Power.
- Bargains are represented with small grey nodes.
- The edge coming to the bargain node from the actor's node represent the initiator.
- The edge coming to the actor's node from the bargain node represent the Receiver.
- All edges are directed.
- Solid-line edges represent accepted bargains, dashed edges represent rejected bargains.

Other controls for the D3 charts:


- You can switch between charts from the tabs located above the chart.



- You can also customize and download the charts, change the colors of actors and add actors to groups.




Customize Chart Size and Download as an Image

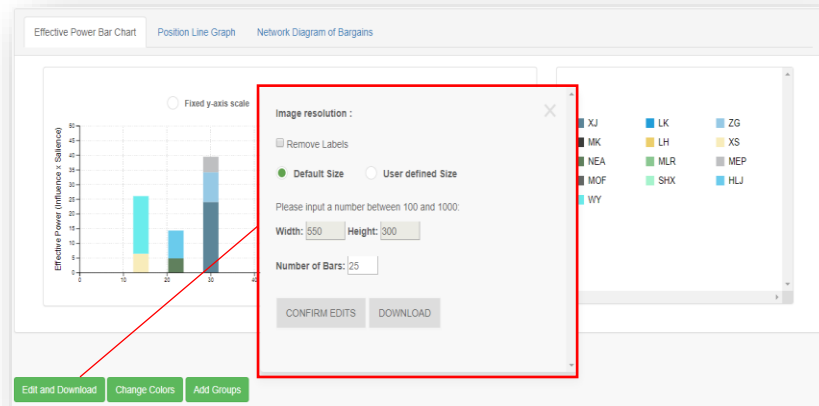

- To remove the labels from the charts simply click on the “*Remove Labels*” check box.
- To Change the resolution/size of the charts choose “*User defined Size*” from the radio button then input the width and height desired.
- After customizing the chart click on Confirm Edits, the application will take you back to the chart showing the confirmed changes.
- To download the current view simply click on “*Download*”.

Change the colors of Actors

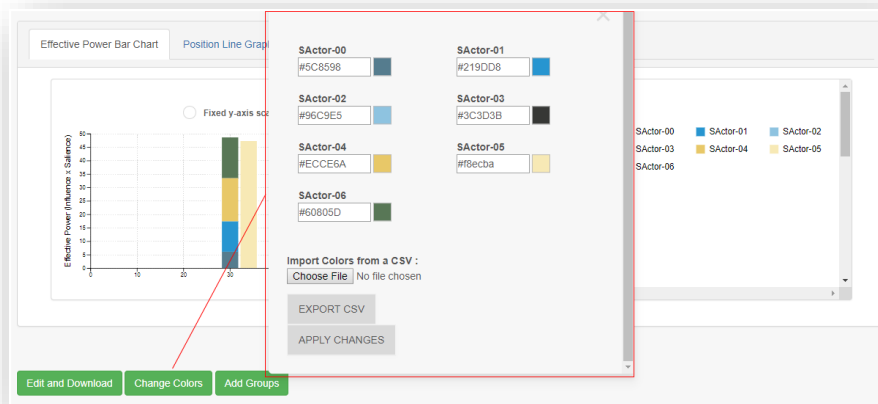


- Like the KTAB-SMP application, you can change the colors of all the actors in your view and save the selection in a CSV file.
- There are two ways to change the colors, the first method is to manually change the colors by clicking on the colored box, you will be able to choose the colors that you need from the palette. You can also input the hex code for the colors in the given boxes.
- The second method is to click on “*Choose File*” to upload a CSV file that includes all the colors desired, the colors are assigned by actor index.

*Note: if you do not have a CSV file with current format click on “*Export CSV*” to download the csv file and customize.*

Assign Groups to Actors

- You can assign groups to actors by setting a group name and a group color for a selected number of actors.
- There are two ways add groups, the first method is to manually initialize groups by selecting the number of groups desired and assigning a color to each group.
- You can export your initialized groups as a CSV file.
- The second method is to upload a pre-defined groups from a CSV file with a specific format.

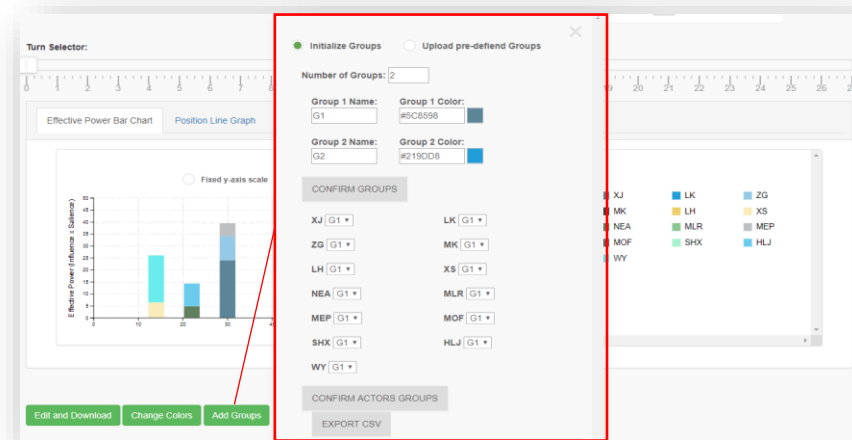

sample groups CSV file:

Index	Actor	Group	Color
0	XJ	G2	#c3d69b
1	LK	G1	#31859b
2	ZG	G2	#c3d69b
3	MK	G1	#31859b
4	LH	G1	#31859b
5	XS	G1	#31859b
6	NEA	G2	#c3d69b
7	MLR	G2	#c3d69b
8	MEP	G1	#31859b
9	MOF	G2	#c3d69b
10	SHX	G1	#31859b
11	HLJ	G1	#31859b
12	WY	G2	#c3d69b

Note: You can find sample CSV files with desired format in /sample_data folder