zany-parakeet-j44w4v5jq772p4q9-9000.app.github.dev/mcad/session/ui

MCAD Session Manager

Hybrid mode: govern sessions, objectives, data warehouses and explainability while PivotAJ remains the OLAP execution/rendering engine.

Current context

session S_0003
objective O_REAL_BEER_WA_MONTH
dw foodmart

New session

Objective
OHF_NORD — Health Food Nord 1998

Data warehouse
foodmart — FoodMart

Create & Activate | Refresh

Resume existing session

Session
S_0001 — OHF_NORD — foodmart

Resume

Last decision explainability

Explainability is provided for both ALLOW and BLOCK decisions.

BLOCK — EVAL_ERROR

name 'objective' is not defined


```
{
  "decision": "BLOCK",
  "decision_reason_code": "EVAL_ERROR",
  "decision_reason": "name 'objective' is
not defined",
  "is_redundant": false,
  "has_marginal_gain": false,
  "objective_id": "O_REAL_BEER_WA_MONTH",
  "session_id": "S_0003",
  "phi": 0,
  "threshold": 0.6,
  "sat": 0,
  "real": 0,
  "cvs3": 0,
  "explain": "MCAD eval error: name
'objective' is not defined",
  "gained_resource_ids_count": 0,
  "newly_contributed_constraints_total":
[],
  "newly_contributed_constraints_partial":
[],
  "query_fingerprint": "d3e33f3f187e09ac",
  "ts_ms": 1777414415796
}
```


Session metrics

Comparison rate	Calculability total	Calculability partial
100.0%	100.0%	0.0%
Analytic alignment score	**ALLOW rate**	**ALLOW / BLOCK**
0.000	0.0%	0 / 0

Objective graph (real-time completion state)

The graph marks total/partial calculability and indicates the causal queries behind achieved parts.

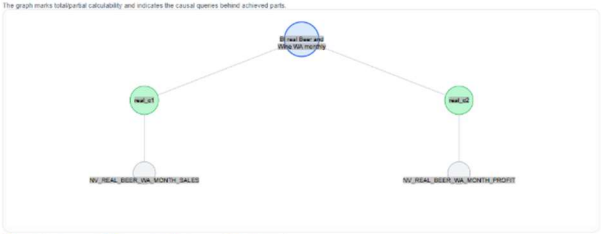

Objective | Constraint / none | Constraint / partial | Constraint / total | Covered resource

Hybrid execution area

PivotAJ is opened directly on port 8090 to avoid the redirect loop. XMLA execution still goes through the MCAD proxy.

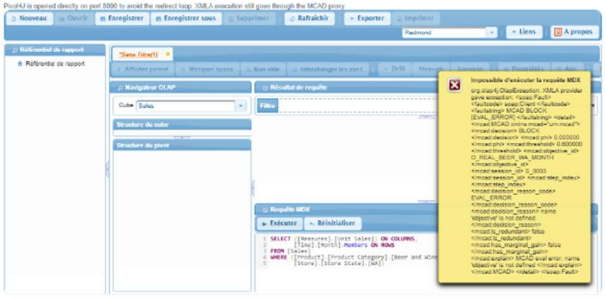

Decision history & causal trace

Step	Decision	Reason	φ	Δφ	Useful part / query

19°C مشمس جزئيًا FRA 20:23 25/04/2026

zany-parakeet-j44w4v5jq772p4q9-9000.app.github.dev/mcad/session/ui

MCAD Session Manager

Hybrid mode: govern sessions, objectives, data warehouses and explainability while Pivot4J remains the OLAP execution/rendering engine.

Current context

session S_0003
objective O_REAL_BEER_WA_MONTH
dw foodmart

New session

Objective
OHF_NORD — Health Food Nord 1998

Data warehouse
foodmart — FoodMart

Create & Activate | Refresh

Resume existing session

Session
S_0001 — OHF_NORD — foodmart

Resume

Last decision explainability

Explainability is provided for both ALLOW and BLOCK decisions.

BLOCK — EVAL_ERROR

name 'objective' is not defined


```
{
  "decision": "BLOCK",
  "decision_reason_code": "EVAL_ERROR",
  "decision_reason": "name 'objective' is
not defined",
  "is_redundant": false,
  "has_marginal_gain": false,
  "objective_id": "O_REAL_BEER_WA_MONTH",
  "session_id": "S_0003",
  "phi": 0,
  "threshold": 0.6,
  "cal": 0,
  "real": 0,
  "cval": 0,
  "explain": "MCAD eval error: name
'objective' is not defined",
  "gained_resource_ids_count": 0,
  "newly_contributed_constraints_total":
[],
  "newly_contributed_constraints_partial":
[],
  "query_fingerprint": "2ca04c4931faed4f",
  "ts_ms": 1777141360424
}
```


Session metrics

Completion rate	Calculability total	Calculability partial
100.0%	100.0%	0.0%
Analytic alignment score	**ALLOW rate**	**ALLOW / BLOCK**
0.000	0.0%	0 / 0

Objective graph (real-time completion state)

The graph marks total/partial calculability and indicates the causal queries behind achieved parts.

Hybrid execution area

Pivot4J is opened directly on port 5990 to avoid the redirect loop. XMLA execution still goes through the MCAD proxy.

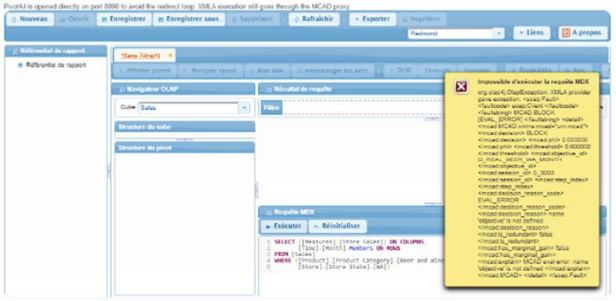

Decision history & causal trace

Step	Decision	Reason	φ	Δφ	Useful part / query

19°C مشمس جزئيًا FRA 20:22 25/04/2026

zany-parakeet-j44w4v5jq772p4q9-9000.app.github.dev/mcad/session/ui

MCAD Session Manager

Hybrid mode: govern sessions, objectives, data warehouses and explainability while Pivot4J remains the OLAP execution/rending engine.

Current context

session S_0003
objective O_REAL_BEER_WA_MONTH
dw foodmart

New session

Objective
OHF_NORD — Health Food Nord 1998

Data warehouse
foodmart — FoodMart

Create & Activate | Refresh

Resume existing session

Session
S_0001 — OHF_NORD — foodmart

Resume

Last decision explainability

Explainability is provided for both ALLOW and BLOCK decisions.

BLOCK — EVAL_ERROR

name 'objective' is not defined


```
{
  "decision": "BLOCK",
  "decision_reason_code": "EVAL_ERROR",
  "decision_reason": "name 'objective' is
not defined",
  "is_redundant": false,
  "has_marginal_gain": false,
  "objective_id": "O_REAL_BEER_WA_MONTH",
  "session_id": "S_0003",
  "phi": 0,
  "threshold": 0.6,
  "lat": 0,
  "real": 0,
  "crval": 0,
  "replaib": "MCAD eval error: name
'objective' is not defined",
  "gained_resource_ids_count": 0,
  "newly_contributed_constraints_total":
[],
  "newly_contributed_constraints_partial":
[],
  "query_fingerprint": "dcc960ebf1e1213a",
  "ts_ms": 1777141293416
}
```


Session metrics

Completion rate	Calculability total	Calculability partial
100.0%	100.0%	0.0%

Analytic alignment score	ALLOW rate	ALLOW / BLOCK
0.000	0.0%	0 / 0

Objective graph (real-time completion state)

The graph marks total/partial calculability and indicates the causal queries behind achieved parts.

Objective | Constraint / none | Constraint / partial | Constraint / total | Covered resource

Hybrid execution area

Pivot4J is opened directly on port 9090 to avoid the redirect loop. XMLA execution still goes through the MCAD proxy.

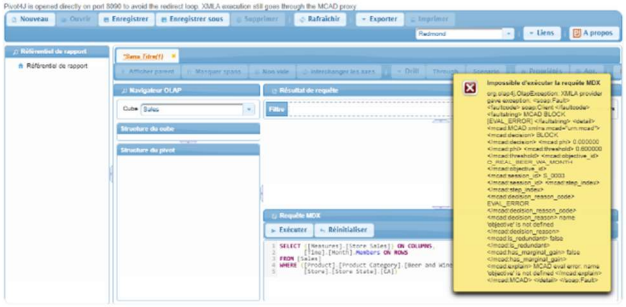

Decision history & causal trace

Step	Decision	Reason	φ	Δφ	Useful part / query

19°C مشمس جزئيًا FRA 20:21 25/04/2026

zany-parakeet-j44w4v5jq772p4q9-9000.app.github.dev/mcad/session/ui

MCAD Session Manager

Hybrid mode: govern sessions, objectives, data warehouses and explainability while Pivot4J remains the OLAP execution/rendering engine.

Current context

session S_0003
objective O_REAL_BEER_WA_MONTH
dw foodmart

New session

Objective
OHF_NORD — Health Food Nord 1998

Data warehouse
foodmart — FoodMart

Create & Activate | Refresh

Resume existing session

Session
S_0001 — OHF_NORD — foodmart

Resume

Last decision explainability

Explainability is provided for both ALLOW and BLOCK decisions.

BLOCK — EVAL_ERROR

name 'objective' is not defined


```
{
  "decision": "BLOCK",
  "decision_reason_code": "EVAL_ERROR",
  "decision_reason": "name 'objective' is
not defined",
  "is_redundant": false,
  "has_marginal_gain": false,
  "objective_id": "O_REAL_BEER_WA_MONTH",
  "session_id": "S_0001",
  "phi": 0,
  "threshold": 0.6,
  "sat": 0,
  "real": 0,
  "coval": 0,
  "replale": "MCAD eval error: name
'objective' is not defined",
  "gained_resource_ids_count": 0,
  "newly_contributed_constraints_total":
[],
  "newly_contributed_constraints_partial":
[],
  "query_fingerprint": "73a1d657576f8d8e",
  "ts_ms": 1777141243472
}
```


Session metrics

Connection rate	Calculability total	Calculability partial
100.0%	100.0%	0.0%
Annotation alignment score	**ALLOW rate**	**ALLOW / BLOCK**
0.000	0.0%	0 / 0

Objective graph (real-time completion state)

The graph marks total/partial calculability and indicates the causal queries behind achieved parts.

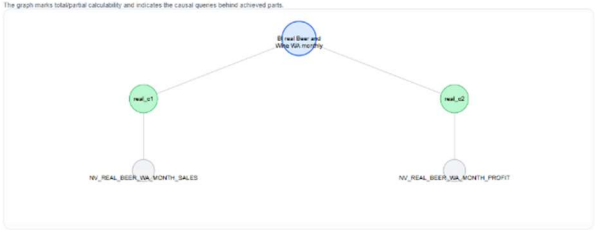

Objective · Constraint / none · Constraint / partial · Constraint / total · Covered resource

Hybrid execution area

Pivot4J is opened directly on port 8090 to avoid the redirect loop. XMLA execution still goes through the MCAD proxy.

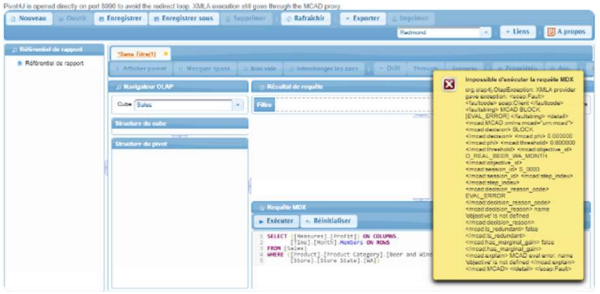

Decision history & causal trace

Step	Decision	Reason	φ	Δφ	Useful part / query

19°C مشمس جزئيًا FRA 20:20 25/04/2026

zany-parakeet-j44w4v5jq772p4q9-9000.app.github.dev/mcad/session/ui

MCAD Session Manager

Hybrid mode: govern sessions, objectives, data warehouses and explainability while Pivot4J remains the OLAP execution/rendering engine.

Current context

session S_0001
objective O_REAL_BEER_WA_MONTH
dw foodmart

New session

Objective
OHF_NORD — Health Food Nord 1998

Data warehouse
foodmart — FoodMart

Create & Activate | Refresh

Resume existing session

Session
S_0001 — O_REAL_BEER_WA_MONTH — foo

Resume

UI status

refreshing...

Last decision explainability

Explainability is provided for both ALLOW and BLOCK decisions.

BLOCK — EVAL_ERROR

name 'objective' is not defined


```
{
  "decision": "BLOCK",
  "decision_reason_code": "EVAL_ERROR",
  "decision_reason": "name 'objective' is
not defined",
  "is_redundant": false,
  "has_marginal_gain": false,
  "objective_id": "O_REAL_BEER_WA_MONTH",
  "session_id": "S_0001",
  "phi": 0,
  "threshold": 0.6,
  "set": 0,
  "real": 0,
  "eval": 0,
  "explain": "MCAD eval error: name
'objective' is not defined",
  "gained_resource_ids_count": 0,
  "newly_contributed_constraints_total":
[],
  "newly_contributed_constraints_partial":
[],
  "query_fingerprint": "2ce04c491bfee011",
  "ts_ms": 1777507373/65
}
```


Session metrics

Conversion rate	Calculability total	Calculability partial
50.0%	50.0%	0.0%
Analytic alignment score	**ALLOW rate**	**ALLOW / BLOCK**
0.000	0.0%	0 / 0

Objective graph (real-time completion state)

The graph marks total/partial calculability and indicates the causal queries behind achieved parts.

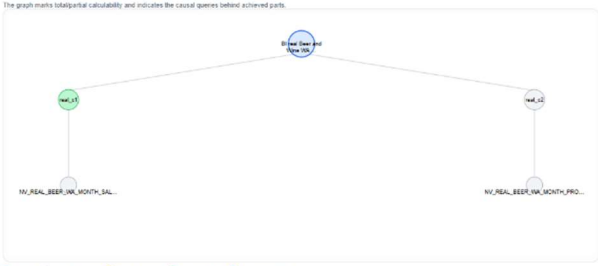

Objective | Constraint / none | Constraint / partial | Constraint / total | Covered resource

Hybrid execution area

Pivot4J is opened directly on port 8090 to avoid the redirect loop. XMLA execution still goes through the MCAD proxy.

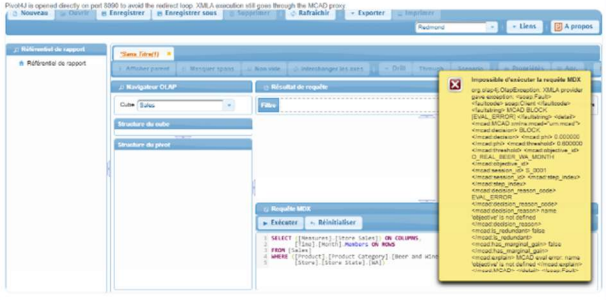

Decision history & causal trace

Step	Decision	Reason	φ	Δφ	Useful part / query

17°C غائم غالبًا FRA 10:57 25/04/2026

zany-parakeet-j44w4v5jq772p4q9-9000.app.github.dev/mcad/session/ui

MCAD Session Manager

Hybrid mode: govern sessions, objectives, data warehouses and explainability while Pivot4J remains the OLAP execution/rending engine.

Current context

session S_0003
objective O_REAL_BEER_WA_MONTH
dw foodmart

New session

Objective
OHF_NORD — Health Food Nord 1998

Data warehouse
foodmart — FoodMart

Create & Activate | Refresh

Resume existing session

Session
S_0001 — OHF_NORD — foodmart

Resume

Last decision explainability

Explainability is provided for both ALLOW and BLOCK decisions.

BLOCK — EVAL_ERROR

name 'objective' is not defined


```
{
  "decision": "BLOCK",
  "decision_reason_code": "EVAL_ERROR",
  "decision_reason": "name 'objective' is
not defined",
  "is_redundant": false,
  "has_marginal_gain": false,
  "objective_id": "O_REAL_BEER_WA_MONTH",
  "session_id": "S_0003",
  "phi": 0,
  "threshold": 0.6,
  "sat": 0,
  "real": 0,
  "eval": 0,
  "replay": "MCAD eval error: name
'objective' is not defined",
  "gained_resource_ids_count": 0,
  "newly_contributed_constraints_total":
[],
  "newly_contributed_constraints_partial":
[],
  "query_fingerprint": "93cf5f057d315765",
  "ts_ms": 1777141491535
}
```


Session metrics

Completion rate	Calculability total	Calculability partial
100.0%	100.0%	0.0%
Analytic alignment score	**ALLOW rate**	**ALLOW / BLOCK**
0.000	0.0%	0 / 0

Objective graph (real-time completion state)

The graph marks total/partial calculability and indicates the causal queries behind achieved parts.

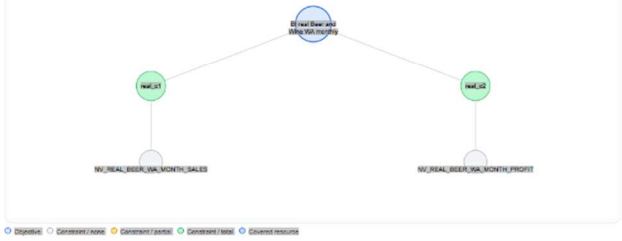

Hybrid execution area

Pivot4J is opened directly on port 8090 to avoid the redirect loop. XMLA execution still goes through the MCAD proxy.

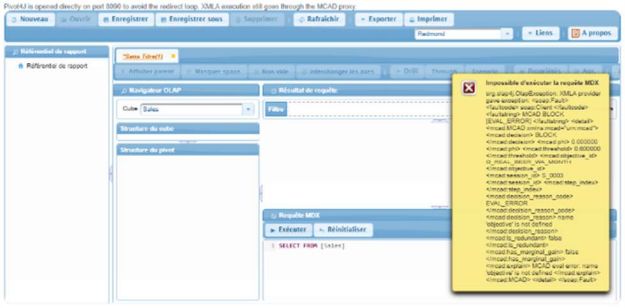

Decision history & causal trace

Step	Decision	Reason	φ	Δφ	Useful part / query

19°C مشمس جزئيًا FRA 20:25 25/04/2026