



CASE-1:

Inputs:

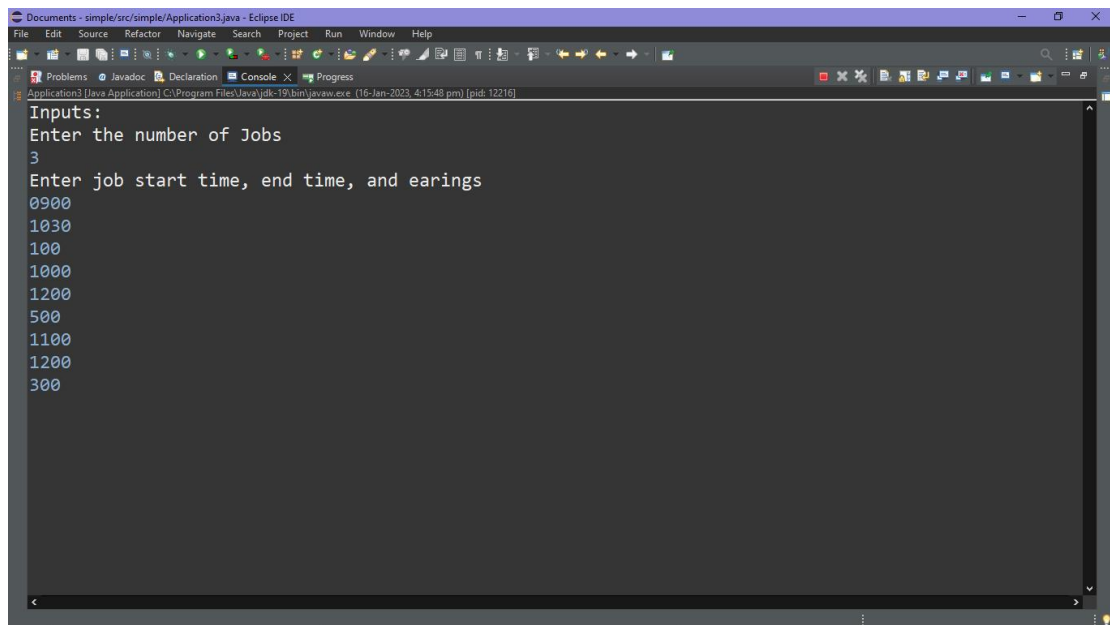

```
Documents - simple/src/simple/Application3.java - Eclipse IDE
File Edit Source Refactor Navigate Search Project Run Window Help
Application3 [Java Application] C:\Program Files\Java\jdk-19\bin\javaw.exe (16-Jan-2023, 4:15:48 pm) [pid: 12216]
Inputs:
Enter the number of Jobs
3
Enter job start time, end time, and earnings
0900
1030
100
1000
1200
500
1100
1200
300
```


Output:

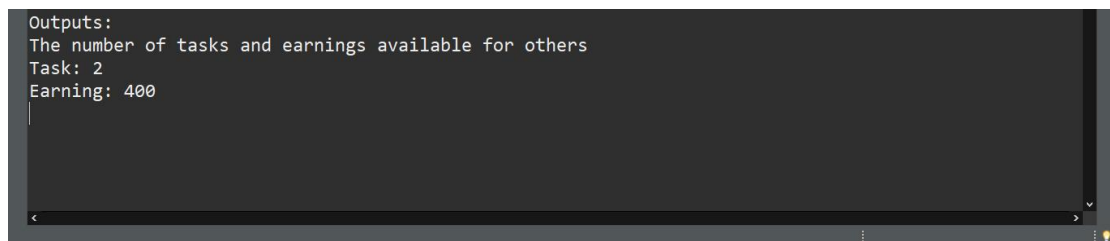

```
Outputs:
The number of tasks and earnings available for others
Task: 2
Earning: 400
```

CASE-2:


Inputs:

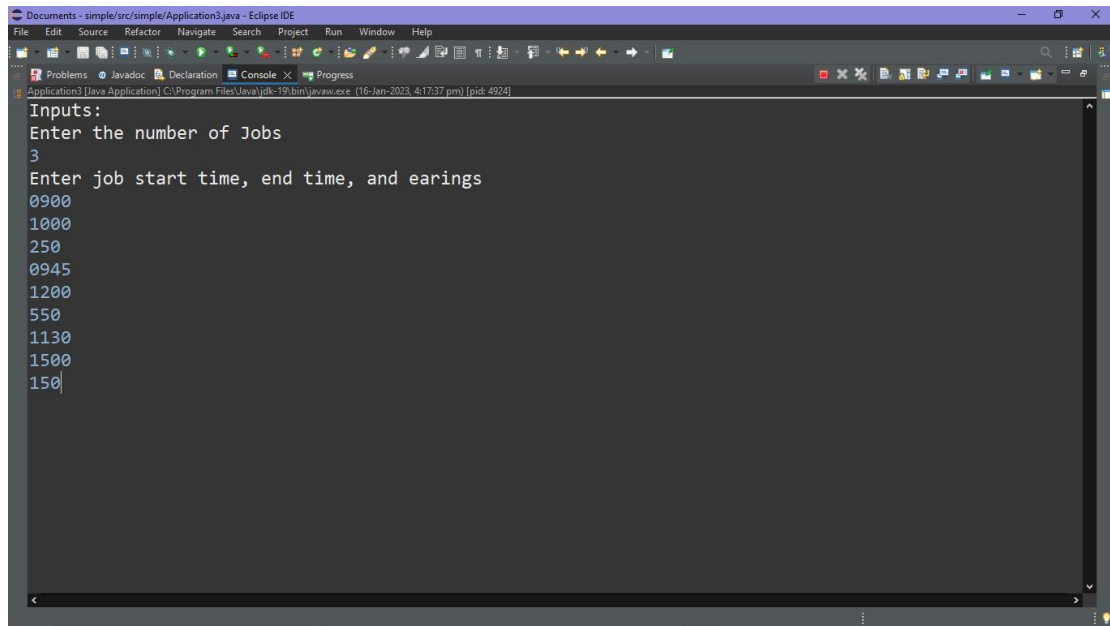

The screenshot shows the Eclipse IDE interface with the console window active. The console displays the following text:

```
Inputs:
Enter the number of Jobs
3
Enter job start time, end time, and earnings
0900
1000
250
0945
1200
550
1130
1500
150
```

Output:

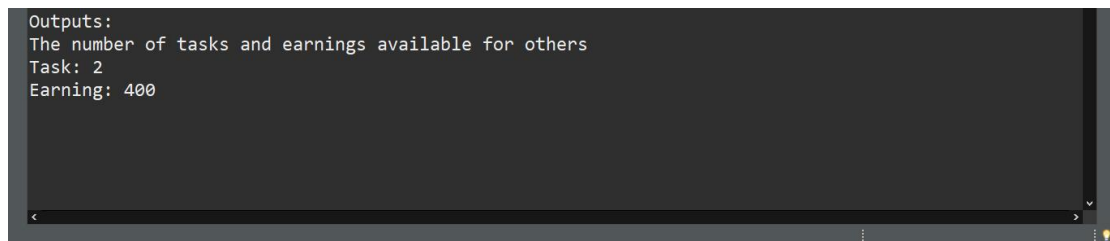


The screenshot shows the Eclipse IDE interface with the console window active. The console displays the following text:

```
Outputs:
The number of tasks and earnings available for others
Task: 2
Earning: 400
```

CASE-3:


Inputs:

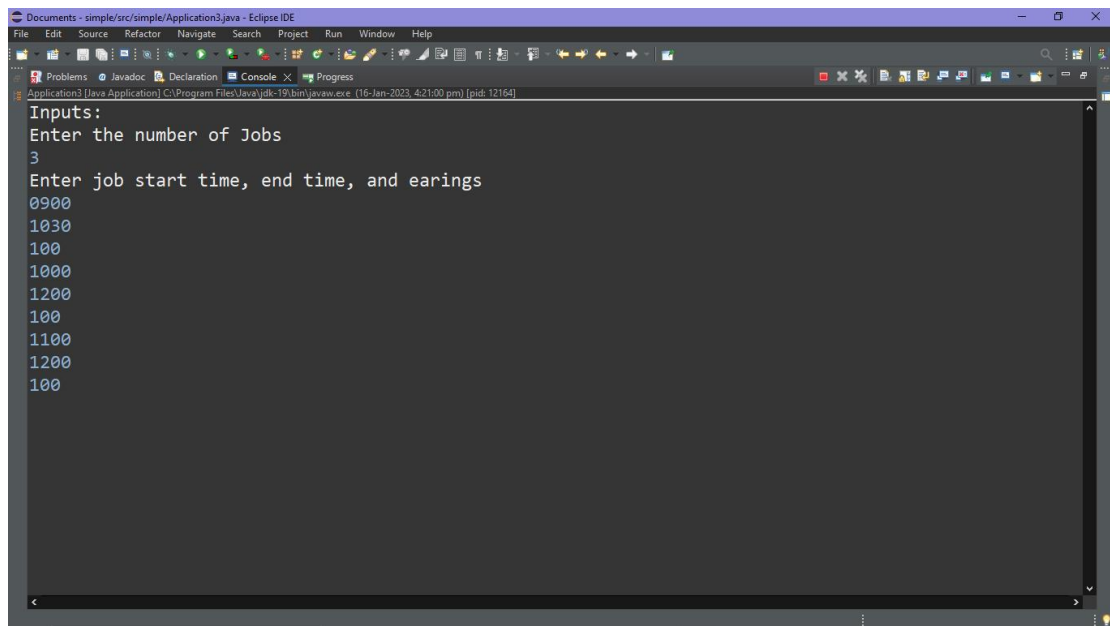

The screenshot shows the Eclipse IDE interface with the 'Console' tab selected. The console displays the following text:

```
Inputs:
Enter the number of Jobs
3
Enter job start time, end time, and earnings
0900
1030
100
1000
1200
100
1100
1200
100
```

Output:

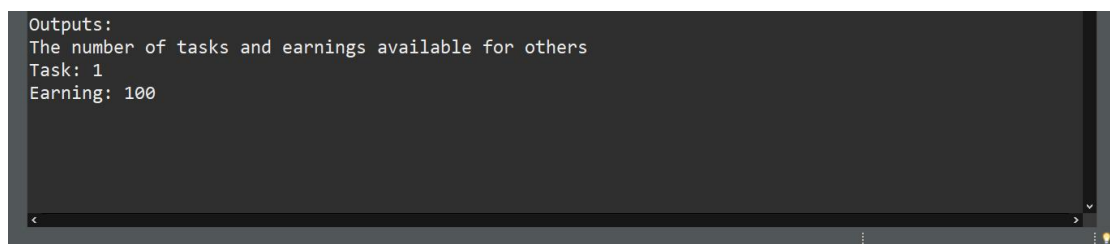

The screenshot shows the Eclipse IDE interface with the 'Console' tab selected. The console displays the following text:

```
Outputs:
The number of tasks and earnings available for others
Task: 1
Earning: 100
```