

1. BUSINESS RULES

1. User – Address:

- A user can have multiple delivery addresses.
- Each address belongs to exactly one user. (One address per user can be marked as the default.)

2. User – Brand:

- A user (with vendor or admin role) can register multiple tea brands.
- Each brand is created by exactly one user and must be approved by an admin before its products become visible.

3. User – Cart:

- A user can have one active cart at a time.
- Each cart belongs to exactly one user.

4. User – Order:

- A user can place multiple orders over time.
- Each order belongs to exactly one user.

5. User – Review:

- A user can write multiple product reviews.
- Each review is written by exactly one user and is associated with exactly one product.

6. Address – Order:

- An address can be used across multiple orders.
- Each order is delivered to exactly one address selected by the user at checkout.

7. Brand – Product:

- A brand can list multiple tea products.
- Each product belongs to exactly one brand.

8. Category – Product:

- A category can contain multiple products.
- Each product belongs to exactly one category (e.g., Green Tea, Herbal Tea, Black Tea).

9. Cart – Cart Item:

- A cart can contain multiple cart items.
- Each cart item belongs to exactly one cart.

10. Product – Cart Item:

- A product can appear in multiple carts across different users.
- Each cart item references exactly one product.

11. Order – Order Item:

- An order can contain multiple order items.
- Each order item belongs to exactly one order.

12. Product – Order Item:

- A product can be included in multiple orders.
- Each order item references exactly one product, and captures the unit price at the time of purchase.

13. Product – Review:

- A product can receive multiple reviews.
- Each review is about exactly one product.

2. NORMALIZATION

UNF

Customer (

user_id, full_name, email, password_hash, phone, role, is_active, created_at,

{ address_id, street, city, state, postal_code, country, is_default },

{ cart_id, cart_created_at,

{ product_id, product_name, category_id, category_name, category_slug,
brand_id, brand_name, origin_district, brand_description, logo_url,
is_approved, vendor_id, vendor_name,
price, stock_quantity, weight_grams, image_url, is_available,
cart_quantity }

},

{ order_id, total_amount, order_status, payment_method, payment_status, ordered_at,
delivery_street, delivery_city, delivery_country,

{ product_id, product_name, brand_id, brand_name, category_id, category_name,
order_quantity, unit_price }

},

{ review_id, product_id, product_name, rating, comment, review_created_at }

)

1NF

User (user_id, full_name, email, password_hash, phone, role, is_active, created_at)

User_Address (user_id*, address_id, street, city, state, postal_code, country, is_default)

User_Cart (user_id*, cart_id, cart_created_at, product_id, product_name, category_id,
category_name, category_slug, brand_id, brand_name, origin_district,
brand_description, logo_url, is_approved, vendor_id, vendor_name,
price, stock_quantity, weight_grams, image_url, is_available, cart_quantity)

User_Order (user_id*, order_id, total_amount, order_status, payment_method,
payment_status,
ordered_at, delivery_street, delivery_city, delivery_country,
product_id, product_name, category_id, category_name, brand_id, brand_name,
order_quantity, unit_price)

User_Review (user_id*, review_id, product_id, product_name, rating, comment, review_created_at)

2NF

User (user_id, full_name, email, password_hash, phone, role, is_active, created_at)

Address (address_id, user_id*, street, city, state, postal_code, country, is_default)

Cart (cart_id, user_id*, cart_created_at)

Cart_Item (cart_id*, product_id*, cart_quantity, product_name, category_id, category_name, category_slug, brand_id, brand_name, origin_district, brand_description, logo_url, is_approved, vendor_id, price, stock_quantity, weight_grams, image_url, is_available)

Order (order_id, user_id*, total_amount, order_status, payment_method, payment_status, ordered_at, delivery_street, delivery_city, delivery_country)

Order_Item (order_id*, product_id*, order_quantity, unit_price, product_name, category_id, category_name, brand_id, brand_name)

Review (review_id, user_id*, product_id, product_name, rating, comment, review_created_at)

3NF

User (user_id, full_name, email, password_hash, phone, role, is_active, created_at)

Address (address_id, user_id*, street, city, state, postal_code, country, is_default)

Brand (brand_id, brand_name, origin_district, description, logo_url, is_approved, created_by*)

Category (category_id, category_name, slug, description)

Product (product_id, brand_id*, category_id*, product_name, description, price, stock_quantity, weight_grams, image_url, is_available, created_at)

Cart (cart_id, user_id*, created_at)


Cart_Item (cart_id*, product_id*, quantity)

Order (order_id, user_id*, address_id*, total_amount, status, payment_method, payment_status, ordered_at)


Order_Item (order_id*, product_id*, quantity, unit_price)

Review (review_id, user_id*, product_id*, rating, comment, created_at)

3. ERD

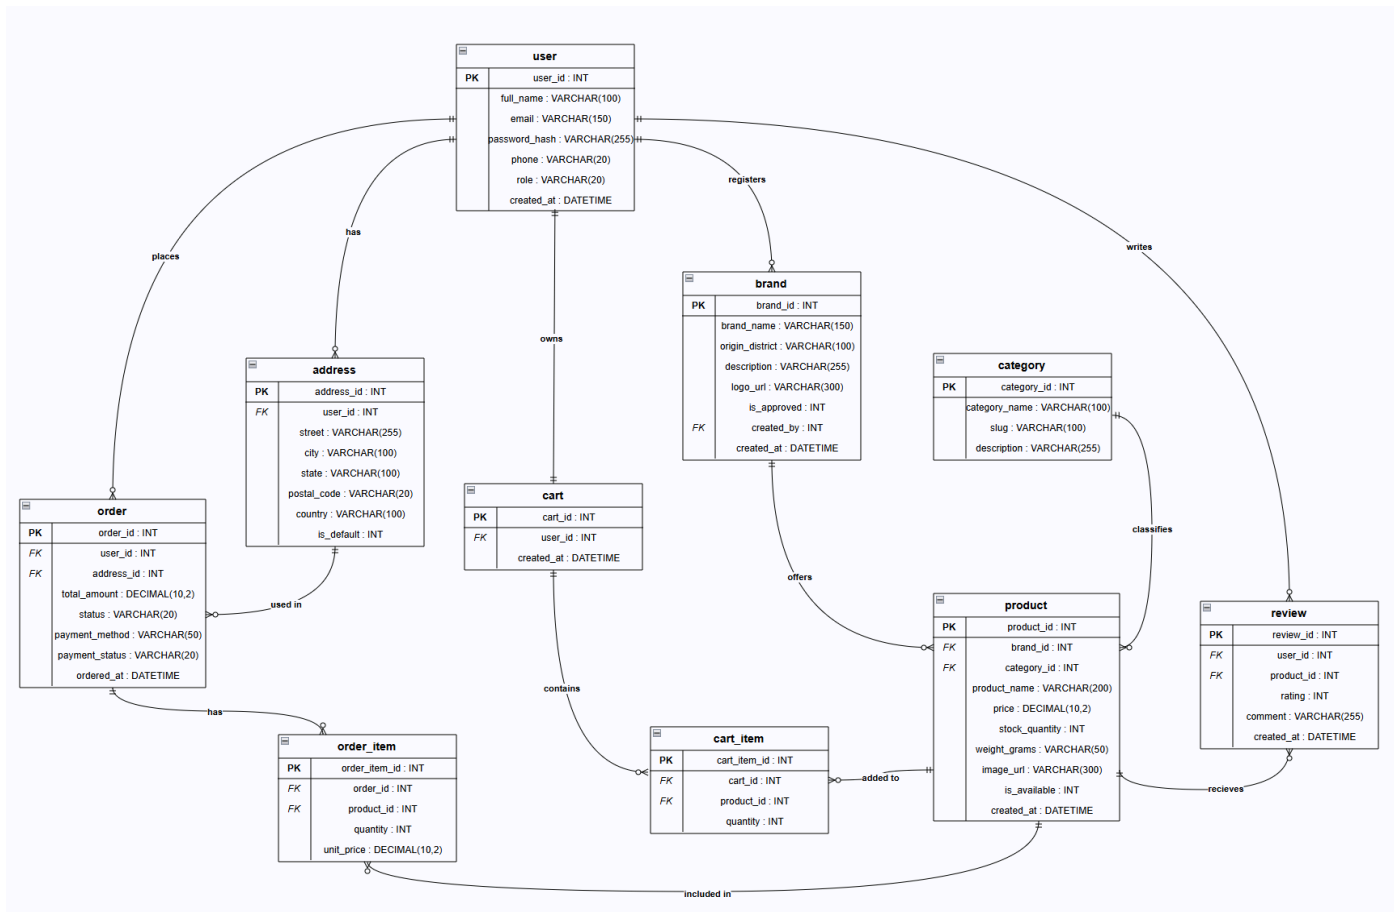

4. DATABASE SCHEMA

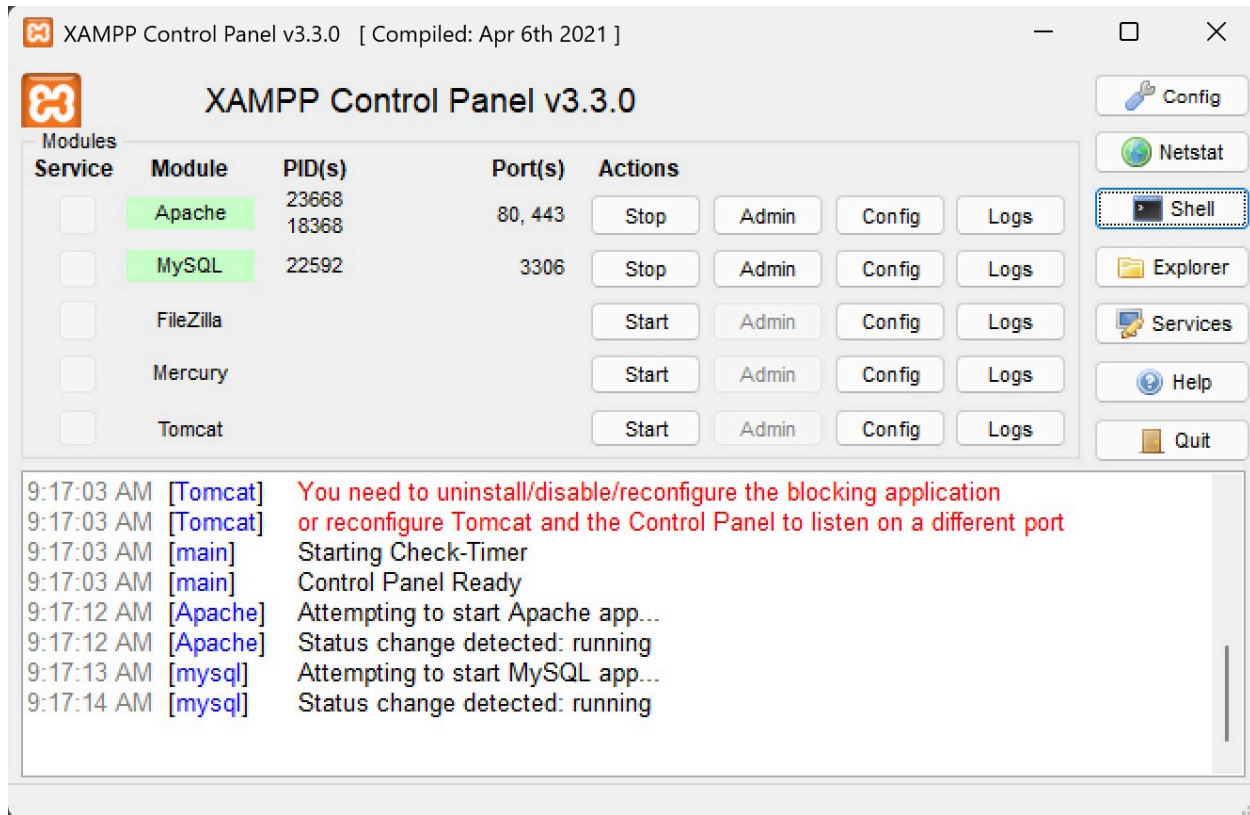

XAMPP Control Panel v3.3.0 [Compiled: Apr 6th 2021]

XAMPP Control Panel v3.3.0

Service	Module	PID(s)	Port(s)	Actions
☐	Apache	23668 18368	80, 443	Stop Admin Config Logs
☐	MySQL	22592	3306	Stop Admin Config Logs
☐	FileZilla			Start Admin Config Logs
☐	Mercury			Start Admin Config Logs
☐	Tomcat			Start Admin Config Logs

9:17:03 AM [Tomcat] You need to uninstall/disable/reconfigure the blocking application or reconfigure Tomcat and the Control Panel to listen on a different port

9:17:03 AM [main] Starting Check-Timer


9:17:03 AM [main] Control Panel Ready

9:17:12 AM [Apache] Attempting to start Apache app...

9:17:12 AM [Apache] Status change detected: running

9:17:13 AM [mysql] Attempting to start MySQL app...

9:17:14 AM [mysql] Status change detected: running

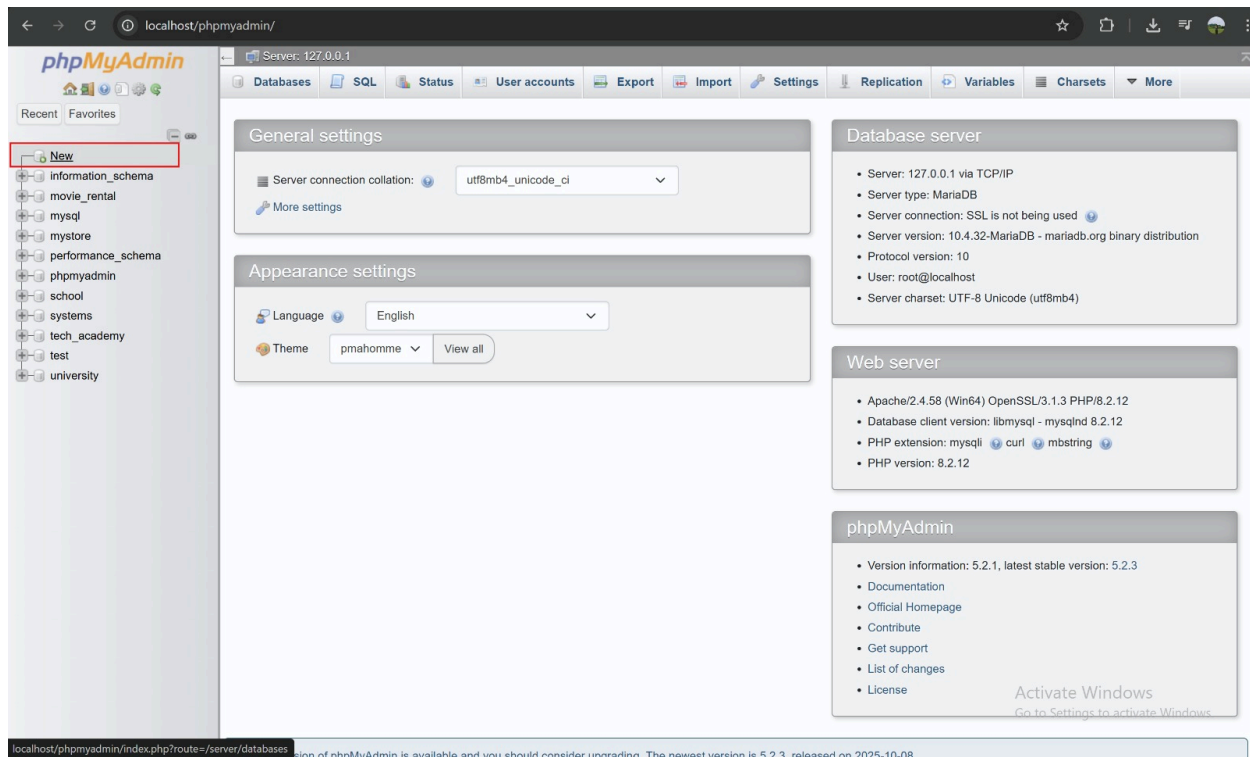

localhost/phpmyadmin/

Server: 127.0.0.1

General settings

Server connection collation: utf8mb4_unicode_ci

More settings

Appearance settings

Language: English

Theme: pmahomme View all

Database server

- Server: 127.0.0.1 via TCP/IP
- Server type: MariaDB
- Server connection: SSL is not being used
- Server version: 10.4.32-MariaDB - mariadb.org binary distribution
- Protocol version: 10
- User: root@localhost
- Server charset: UTF-8 Unicode (utf8mb4)

Web server

- Apache/2.4.58 (Win64) OpenSSL/3.1.3 PHP/8.2.12
- Database client version: libmysql - mysqlnd 8.2.12
- PHP extension: mysqli curl mbstring
- PHP version: 8.2.12

phpMyAdmin

- Version information: 5.2.1, latest stable version: 5.2.3
- Documentation
- Official Homepage
- Contribute
- Get support
- List of changes
- License

Activate Windows
Go to Settings to activate Windows

localhost/phpmyadmin/index.php?route=/server/databases

phpMyAdmin

Recent Favorites

New

- information_schema
- movie_rental
- mysql
- mystore
- performance_schema
- phpmyadmin
- school
- systems
- tech_academy
- test
- university

Server: 127.0.0.1

Databases SQL Status User accounts Export Import Settings Replication Variables Charsets Engines

Databases

Create database

hiroma_db utf8mb4_unicode_ci Create

☐ Check all

Database	Collation	Action
☐ information_schema	utf8_general_ci	Check privileges
☐ movie_rental	utf8mb4_general_ci	Check privileges
☐ mysql	utf8mb4_general_ci	Check privileges
☐ mystore	utf8mb4_general_ci	Check privileges
☐ performance_schema	utf8_general_ci	Check privileges
☐ phpmyadmin	utf8_bin	Check privileges
☐ school	utf8mb4_general_ci	Check privileges
☐ systems	utf8mb4_general_ci	Check privileges
☐ tech_academy	utf8mb4_general_ci	Check privileges
☐ test	latin1_swedish_ci	Check privileges
☐ university	utf8mb4_general_ci	Check privileges

Total: 11

Note: Enabling the database statistics here might cause heavy traffic between the web server and the MySQL server.

Enable statistics

Activate Windows
Go to Settings to activate Windows.

Console

phpMyAdmin

Recent Favorites

New

- hiroma_db
- information_schema
- movie_rental
- mysql
- mystore
- performance_schema
- phpmyadmin
- school
- systems
- tech_academy
- test
- university

Server: 127.0.0.1 Database: hiroma_db

Structure SQL Search Query Export Import Operations Privileges Routines Events Triggers Tracking

No tables found in database.

Create new table

Table name Number of columns

Create

Activate Windows
Go to Settings to activate Windows.

Console

phpMyAdmin

Server: 127.0.0.1 > Database: hiroma_db

Structure SQL Search Query Export Import Operations Privileges Routines Events Triggers Tracking More

Recent Favorites

New

- hiroma_db
 - New
 - user
- information_schema
- movie_rental
- mysql
- mystore
- performance_schema
- phpmyadmin
- school
- systems
- tech_academy
- test
- university

```
1 CREATE TABLE `user` (  
2   user_id INT AUTO_INCREMENT PRIMARY KEY,  
3   full_name VARCHAR(100) NOT NULL,  
4   email VARCHAR(150) NOT NULL UNIQUE,  
5   password_hash VARCHAR(255) NOT NULL,  
6   phone VARCHAR(20),  
7   role VARCHAR(20) NOT NULL DEFAULT 'customer',  
8   is_active INT NOT NULL DEFAULT 1,  
9   created_at DATETIME NOT NULL DEFAULT CURRENT_TIMESTAMP  
10 );
```

Clear Format Get auto-saved query

☐ Bind parameters

Bookmark this SQL query:

Delimiter: ☐ Show this query here again ☐ Retain query box ☐ Rollback when finished ☒ Enable foreign key checks

MySQL returned an empty result set (i.e. zero rows). (Query took 0.0006 seconds.)

`CREATE TABLE `user` (user_id INT AUTO_INCREMENT PRIMARY KEY, full_name VARCHAR(100) NOT NULL, email VARCHAR(150) NOT NULL UNIQUE, password_hash VARCHAR(255) NOT NULL, phone VARCHAR(20), role VARCHAR(20) NOT NULL DEFAULT 'customer', is_active INT NOT NULL DEFAULT 1, created_at DATETIME NOT NULL DEFAULT CURRENT_TIMESTAMP);`

[\[Edit inline \]](#) [\[Edit \]](#) [\[Create PHP code \]](#)

[Go to Settings to activate Windows.](#)

phpMyAdmin

Server: 127.0.0.1 > Database: hiroma_db

Structure SQL Search Query Export Import Operations Privileges Routines Events Triggers Tracking More

Recent Favorites

New

- hiroma_db
 - New
 - address
 - user
- information_schema
- movie_rental
- mysql
- mystore
- performance_schema
- phpmyadmin
- school
- systems
- tech_academy
- test
- university

```
1 CREATE TABLE address (  
2   address_id INT AUTO_INCREMENT PRIMARY KEY,  
3   user_id INT NOT NULL,  
4   street VARCHAR(255) NOT NULL,  
5   city VARCHAR(100) NOT NULL,  
6   state VARCHAR(100),  
7   postal_code VARCHAR(20),  
8   country VARCHAR(100) NOT NULL DEFAULT 'Nepal',  
9   is_default INT NOT NULL DEFAULT 0,  
10  FOREIGN KEY (user_id) REFERENCES `user` (user_id)  
11 );
```

Clear Format Get auto-saved query

☐ Bind parameters

Bookmark this SQL query:

Delimiter: ☐ Show this query here again ☐ Retain query box ☐ Rollback when finished ☒ Enable foreign key checks

MySQL returned an empty result set (i.e. zero rows). (Query took 0.0007 seconds.)

`CREATE TABLE address (address_id INT AUTO_INCREMENT PRIMARY KEY, user_id INT NOT NULL, street VARCHAR(255) NOT NULL, city VARCHAR(100) NOT NULL, state VARCHAR(100), postal_code VARCHAR(20), country VARCHAR(100) NOT NULL DEFAULT 'Nepal', is_default INT NOT NULL DEFAULT 0, FOREIGN KEY (user_id) REFERENCES `user` (user_id));`

[\[Edit inline \]](#) [\[Edit \]](#) [\[Create PHP code \]](#)

[Go to Settings to activate Windows.](#)

phpMyAdmin

Server: 127.0.0.1 » Database: hiroma_db

Structure SQL Search Query Export Import Operations Privileges Routines Events Triggers Tracking More

Recent Favorites

New

hiroma_db

New

address

category

user

information_schema

movie_rental

mysql

mystore

performance_schema

phpmyadmin

school

systems

tech_academy

test

university

```
1 CREATE TABLE category (
2   category_id INT AUTO_INCREMENT PRIMARY KEY,
3   category_name VARCHAR(100) NOT NULL,
4   slug VARCHAR(100) NOT NULL UNIQUE,
5   description VARCHAR(255)
6 );
```

Clear Format Get auto-saved query

☐ Bind parameters

Bookmark this SQL query:

Delimiter ; ☐ Show this query here again ☐ Retain query box ☐ Rollback when finished ☒ Enable foreign key checks Go

Hide query box

MySQL returned an empty result set (i.e. zero rows). (Query took 0.0006 seconds.)

```
CREATE TABLE category ( category_id INT AUTO_INCREMENT PRIMARY KEY, category_name VARCHAR(100) NOT NULL, slug VARCHAR(100) NOT NULL UNIQUE, description VARCHAR(255) );
```

[Edit inline] [Edit] [Create PHP code]

Activate Windows
Go to Settings to activate Windows.

phpMyAdmin

Server: 127.0.0.1 » Database: hiroma_db

Structure SQL Search Query Export Import Operations Privileges Routines Events Triggers Tracking More

Recent Favorites

New

hiroma_db

New

address

brand

category

user

information_schema

movie_rental

mysql

mystore

performance_schema

phpmyadmin

school

systems

tech_academy

test

university

```
1 CREATE TABLE brand (
2   brand_id INT AUTO_INCREMENT PRIMARY KEY,
3   brand_name VARCHAR(150) NOT NULL,
4   origin_district VARCHAR(100),
5   description VARCHAR(255),
6   logo_url VARCHAR(300),
7   is_approved INT NOT NULL DEFAULT 0,
8   created_by INT NOT NULL,
9   created_at DATETIME NOT NULL DEFAULT CURRENT_TIMESTAMP,
10  FOREIGN KEY (created_by) REFERENCES `user` (user_id)
11 );
```

Clear Format Get auto-saved query

☐ Bind parameters

Bookmark this SQL query:

Delimiter ; ☐ Show this query here again ☐ Retain query box ☐ Rollback when finished ☒ Enable foreign key checks Go

Hide query box

MySQL returned an empty result set (i.e. zero rows). (Query took 0.0005 seconds.)

```
CREATE TABLE brand ( brand_id INT AUTO_INCREMENT PRIMARY KEY, brand_name VARCHAR(150) NOT NULL, origin_district VARCHAR(100), description VARCHAR(255), logo_url VARCHAR(300), is_approved INT NOT NULL DEFAULT 0, created_by INT NOT NULL, created_at DATETIME NOT NULL DEFAULT CURRENT_TIMESTAMP, FOREIGN KEY (created_by) REFERENCES `user` (user_id) );
```

[Edit inline] [Edit] [Create PHP code]

Activate Windows
Go to Settings to activate Windows.

phpMyAdmin Server: 127.0.0.1 Database: hiroma_db

Structure SQL Search Query Export Import Operations Privileges Routines Events Triggers Tracking More

Recent Favorites

New

- hiroma_db
 - New
 - address
 - brand
 - category
 - product
 - user
 - information_schema
 - movie_rental
 - mysql
 - mystore
 - performance_schema
 - phpmyadmin
 - school
 - systems
 - tech_academy
 - test
 - university

```
1 CREATE TABLE product (  
2   product_id INT AUTO_INCREMENT PRIMARY KEY,  
3   brand_id INT NOT NULL,  
4   category_id INT NOT NULL,  
5   product_name VARCHAR(200) NOT NULL,  
6   description VARCHAR(255),  
7   price DECIMAL(10,2) NOT NULL,  
8   stock_quantity INT NOT NULL DEFAULT 0,  
9   weight_grams VARCHAR(50),  
10  image_url VARCHAR(300),  
11  is_available INT NOT NULL DEFAULT 1,  
12  created_at DATETIME NOT NULL DEFAULT CURRENT_TIMESTAMP,  
13  FOREIGN KEY (brand_id) REFERENCES brand(brand_id),  
14  FOREIGN KEY (category_id) REFERENCES category(category_id)  
15 );
```

Clear Format Get auto-saved query

☐ Bind parameters

Bookmark this SQL query:

Delimiter: ; ☐ Show this query here again ☐ Retain query box ☐ Rollback when finished ☒ Enable foreign key checks Go

Hide query box

MySQL returned an empty result set (i.e. zero rows). (Query took 0.0009 seconds.)

```
CREATE TABLE product ( product_id INT AUTO_INCREMENT PRIMARY KEY, brand_id INT NOT NULL, category_id INT NOT NULL, product_name VARCHAR(200) NOT NULL, description VARCHAR(255), price DECIMAL(10,2) NOT NULL, stock_quantity INT NOT NULL DEFAULT 0, weight_grams VARCHAR(50), image_url VARCHAR(300), is_available INT NOT NULL DEFAULT 1, created_at DATETIME NOT NULL DEFAULT CURRENT_TIMESTAMP, FOREIGN KEY (brand_id) REFERENCES brand(brand_id), FOREIGN KEY (category_id) REFERENCES category(category_id) );
```

[\[Edit inline\]](#) [\[Edit\]](#) [\[Create PHP code\]](#)

Go to Settings to activate Windows.

phpMyAdmin Server: 127.0.0.1 Database: hiroma_db

Structure SQL Search Query Export Import Operations Privileges Routines Events Triggers Tracking More

Recent Favorites

New

- hiroma_db
 - New
 - address
 - brand
 - cart
 - category
 - product
 - user
 - information_schema
 - movie_rental
 - mysql
 - mystore
 - performance_schema
 - phpmyadmin
 - school
 - systems
 - tech_academy
 - test
 - university

```
1 CREATE TABLE cart (  
2   cart_id INT AUTO_INCREMENT PRIMARY KEY,  
3   user_id INT NOT NULL,  
4   created_at DATETIME NOT NULL DEFAULT CURRENT_TIMESTAMP,  
5   FOREIGN KEY (user_id) REFERENCES `user`(user_id)  
6 );
```

Clear Format Get auto-saved query

☐ Bind parameters

Bookmark this SQL query:

Delimiter: ; ☐ Show this query here again ☐ Retain query box ☐ Rollback when finished ☒ Enable foreign key checks Go

Hide query box

MySQL returned an empty result set (i.e. zero rows). (Query took 0.0005 seconds.)

```
CREATE TABLE cart ( cart_id INT AUTO_INCREMENT PRIMARY KEY, user_id INT NOT NULL, created_at DATETIME NOT NULL DEFAULT CURRENT_TIMESTAMP, FOREIGN KEY (user_id) REFERENCES `user`(user_id) );
```

[\[Edit inline\]](#) [\[Edit\]](#) [\[Create PHP code\]](#)

Activate Windows
Go to Settings to activate Windows.

phpMyAdmin Server: 127.0.0.1 Database: hiroma_db

Structure SQL Search Query Export Import Operations Privileges Routines Events Triggers Tracking More

Recent Favorites

New

- hiroma_db
 - New
 - address
 - brand
 - cart
 - cart_item
 - category
 - product
 - user
- information_schema
- movie_rental
- mysql
- mystore
- performance_schema
- phpmyadmin
- school
- systems
- tech_academy
- test
- university

```
1 CREATE TABLE cart_item (  
2   cart_item_id INT AUTO_INCREMENT PRIMARY KEY,  
3   cart_id INT NOT NULL,  
4   product_id INT NOT NULL,  
5   quantity INT NOT NULL DEFAULT 1,  
6   FOREIGN KEY (cart_id) REFERENCES cart(cart_id),  
7   FOREIGN KEY (product_id) REFERENCES product(product_id)  
8 );
```

Clear Format Get auto-saved query

☐ Bind parameters

Bookmark this SQL query:

Delimiter ; ☐ Show this query here again ☐ Retain query box ☐ Rollback when finished ☒ Enable foreign key checks Go

Hide query box

MySQL returned an empty result set (i.e. zero rows). (Query took 0.0006 seconds.)

`CREATE TABLE `cart_item` ( `cart_item_id` INT AUTO_INCREMENT PRIMARY KEY, `cart_id` INT NOT NULL, `product_id` INT NOT NULL, `quantity` INT NOT NULL DEFAULT 1, FOREIGN KEY (`cart_id`) REFERENCES `cart`(`cart_id`), FOREIGN KEY (`product_id`) REFERENCES `product`(`product_id`));`

[Edit inline] [Edit] [Create PHP code]

Activate Windows
Go to Settings to activate Windows.

phpMyAdmin Server: 127.0.0.1 Database: hiroma_db

Structure SQL Search Query Export Import Operations Privileges Routines Events Triggers Tracking More

Recent Favorites

New

- hiroma_db
 - New
 - address
 - brand
 - cart
 - cart_item
 - category
 - order
 - product
 - user
- information_schema
- movie_rental
- mysql
- mystore
- performance_schema
- phpmyadmin
- school
- systems
- tech_academy
- test
- university

```
1 CREATE TABLE `order` (  
2   order_id INT AUTO_INCREMENT PRIMARY KEY,  
3   user_id INT NOT NULL,  
4   address_id INT NOT NULL,  
5   total_amount DECIMAL(10,2) NOT NULL,  
6   status VARCHAR(20) NOT NULL DEFAULT 'pending',  
7   payment_method VARCHAR(50) NOT NULL DEFAULT 'COD',  
8   payment_status VARCHAR(20) NOT NULL DEFAULT 'unpaid',  
9   ordered_at DATETIME NOT NULL DEFAULT CURRENT_TIMESTAMP,  
10  FOREIGN KEY (user_id) REFERENCES `user` (user_id),  
11  FOREIGN KEY (address_id) REFERENCES address(address_id)  
12 );
```

Clear Format Get auto-saved query

☐ Bind parameters

Bookmark this SQL query:

Delimiter ; ☐ Show this query here again ☐ Retain query box ☐ Rollback when finished ☒ Enable foreign key checks Go

Hide query box

MySQL returned an empty result set (i.e. zero rows). (Query took 0.0007 seconds.)

`CREATE TABLE `order` ( `order_id` INT AUTO_INCREMENT PRIMARY KEY, `user_id` INT NOT NULL, `address_id` INT NOT NULL, `total_amount` DECIMAL(10,2) NOT NULL, `status` VARCHAR(20) NOT NULL DEFAULT 'pending', `payment_method` VARCHAR(50) NOT NULL DEFAULT 'COD', `payment_status` VARCHAR(20) NOT NULL DEFAULT 'unpaid', `ordered_at` DATETIME NOT NULL DEFAULT CURRENT_TIMESTAMP, FOREIGN KEY (`user_id`) REFERENCES `user` (`user_id`), FOREIGN KEY (`address_id`) REFERENCES `address` (`address_id`));`

[Edit inline] [Edit] [Create PHP code]

Go to Settings to activate Windows.

phpMyAdmin

Server: 127.0.0.1 > Database: hiroma_db

Structure SQL Search Query Export Import Operations Privileges Routines Events Triggers Tracking More

Recent Favorites

New

- hiroma_db
 - New
 - address
 - brand
 - cart
 - cart_item
 - category
 - order
 - order_item
 - product
 - user
- information_schema
- movie_rental
- mysql
- mystore
- performance_schema
- phpmyadmin
- school
- systems
- tech_academy
- test
- university

```
1 CREATE TABLE order_item (  
2     order_item_id INT AUTO_INCREMENT PRIMARY KEY,  
3     order_id INT NOT NULL,  
4     product_id INT NOT NULL,  
5     quantity INT NOT NULL,  
6     unit_price DECIMAL(10,2) NOT NULL,  
7     FOREIGN KEY (order_id) REFERENCES `order` (order_id),  
8     FOREIGN KEY (product_id) REFERENCES product(product_id)  
9 );
```

Clear Format Get auto-saved query

☐ Bind parameters

Bookmark this SQL query:

Delimiter ; ☐ Show this query here again ☐ Retain query box ☐ Rollback when finished ☒ Enable foreign key checks

MySQL returned an empty result set (i.e. zero rows). (Query took 0.0050 seconds.)

```
CREATE TABLE `order_item` ( `order_item_id` INT AUTO_INCREMENT PRIMARY KEY, `order_id` INT NOT NULL, `product_id` INT NOT NULL, `quantity` INT NOT NULL, `unit_price` DECIMAL(10,2) NOT NULL, FOREIGN KEY (`order_id`) REFERENCES `order` (`order_id`), FOREIGN KEY (`product_id`) REFERENCES product(`product_id`));
```

[Edit inline] [Edit] [Create PHP code]

Activate Windows
Go to Settings to activate Windows.

phpMyAdmin

Server: 127.0.0.1 > Database: hiroma_db

Structure SQL Search Query Export Import Operations Privileges Routines Events Triggers Tracking More

Recent Favorites

New

- hiroma_db
 - New
 - address
 - brand
 - cart
 - cart_item
 - category
 - order
 - order_item
 - product
 - review
 - user
- information_schema
- movie_rental
- mysql
- mystore
- performance_schema
- phpmyadmin
- school
- systems
- tech_academy
- test
- university

```
1 CREATE TABLE review (  
2     review_id INT AUTO_INCREMENT PRIMARY KEY,  
3     user_id INT NOT NULL,  
4     product_id INT NOT NULL,  
5     rating INT NOT NULL,  
6     comment VARCHAR(255),  
7     created_at DATETIME NOT NULL DEFAULT CURRENT_TIMESTAMP,  
8     FOREIGN KEY (user_id) REFERENCES `user` (user_id),  
9     FOREIGN KEY (product_id) REFERENCES product(product_id)  
10 );
```

Clear Format Get auto-saved query

☐ Bind parameters

Bookmark this SQL query:

Delimiter ; ☐ Show this query here again ☐ Retain query box ☐ Rollback when finished ☒ Enable foreign key checks

MySQL returned an empty result set (i.e. zero rows). (Query took 0.0008 seconds.)

```
CREATE TABLE `review` ( `review_id` INT AUTO_INCREMENT PRIMARY KEY, `user_id` INT NOT NULL, `product_id` INT NOT NULL, `rating` INT NOT NULL, `comment` VARCHAR(255), `created_at` DATETIME NOT NULL DEFAULT CURRENT_TIMESTAMP, FOREIGN KEY (`user_id`) REFERENCES `user` (`user_id`), FOREIGN KEY (`product_id`) REFERENCES product(`product_id`));
```

[Edit inline] [Edit] [Create PHP code]

Activate Windows
Go to Settings to activate Windows.

phpMyAdmin

Recent

Favorites

New

hiroma_db

New

address

brand

cart

cart_item

category

order

order_item

product

review

user

information_schema

movie_rental

mysql

mystore

performance_schema

phpmyadmin

school

systems

tech_academy

test

university

Server: 127.0.0.1 » Database: hiroma_db

StructureSQLSearchQueryExportImportOperationsPrivilegesRoutinesEventsTriggersTracking

Filters

Containing the word:

Table	Action	Rows	Type	Collation	Size	Overhead
☐ address		0	InnoDB	utf8mb4_general_ci	32.0 KiB	-
☐ brand		0	InnoDB	utf8mb4_general_ci	32.0 KiB	-
☐ cart		0	InnoDB	utf8mb4_general_ci	32.0 KiB	-
☐ cart_item		0	InnoDB	utf8mb4_general_ci	48.0 KiB	-
☐ category		0	InnoDB	utf8mb4_general_ci	32.0 KiB	-
☐ order		0	InnoDB	utf8mb4_general_ci	48.0 KiB	-
☐ order_item		0	InnoDB	utf8mb4_general_ci	48.0 KiB	-
☐ product		0	InnoDB	utf8mb4_general_ci	48.0 KiB	-
☐ review		0	InnoDB	utf8mb4_general_ci	48.0 KiB	-
☐ user		0	InnoDB	utf8mb4_general_ci	32.0 KiB	-
10 tables	Sum		0 InnoDB	utf8mb4_general_ci	400.0 KiB	0 B

☐ Check all

With selected:

Print

Data dictionary

Create new table

Table name

Number of columns

4

Create

Activate Windows

Go to Settings to activate Windows.