```
3 rows in set (0.00 sec)

mysql> CREATE TABLE STUD2 (
    ->     RegNo INT,
    ->     Name VARCHAR(20),
    ->     CourseNo VARCHAR(10),
    ->     Marks INT,
    ->     FacultyId INT,
    ->     Assessments INT
    -> );
Query OK, 0 rows affected (0.07 sec)

mysql> desc stud2;
+-------------+-------------+------+-----+---------+-------+
| Field       | Type        | Null | Key | Default |       |
+-------------+-------------+------+-----+---------+-------+
| RegNo       | int         | YES  |     | NULL    |       |
| Name        | varchar(20) | YES  |     | NULL    |       |
| CourseNo    | varchar(10) | YES  |     | NULL    |       |
| Marks       | int         | YES  |     | NULL    |       |
| FacultyId   | int         | YES  |     | NULL    |       |
| Assessments | int         | YES  |     | NULL    |       |
+-------------+-------------+------+-----+---------+-------+
6 rows in set (0.00 sec)

mysql> INSERT INTO STUD2 VALUES
    -> (1234, 'nantu', 'C001', 50, 2001, 5),
    -> (1254, 'ramu', 'C001', 50, 2002, 4),
    -> (1235, 'ravi', 'C002', 80, 2001, 2);
Query OK, 3 rows affected (0.01 sec)
Records: 3  Duplicates: 0  Warnings: 0

mysql> select*from stud2;
+-------+-------+----------+-------+-----------+-------------+
| RegNo | Name  | CourseNo | Marks | FacultyId | Assessments |
+-------+-------+----------+-------+-----------+-------------+
|  1234 | nantu | C001     |    50 |      2001 |           5 |
|  1254 | ramu  | C001     |    50 |      2002 |           4 |
|  1235 | ravi  | C002     |    80 |      2001 |           2 |
+-------+-------+----------+-------+-----------+-------------+
3 rows in set (0.00 sec)

mysql> INSERT INTO FACULTY VALUES
    -> ('F01', 'chaithu', 'm', '2000-01-01',
    -> '2000-01-01', 2147483647, 'cse');
ERROR 1136 (21S01): Column count doesn't match value count at row 1
mysql> create table faculty2;
ERROR 4028 (HY000): A table must have at least one visible column.
mysql> create table faculty2( FacNo VARCHAR(10),
    ->     FacultyName VARCHAR(20),
    ->     Gender CHAR(1),
```

```
    DOB DATE' at line 1
mysql> create table faculty2 ( FacNo VARCHAR(10),
    ->     FacultyName VARCHAR(20),
    ->     Gender CHAR(1),
    ->     DOB DATE,
    ->     DOJ DATE,
    ->     MobileNo BIGINT,
    ->     DeptNo VARCHAR(10)
    -> );
Query OK, 0 rows affected (0.07 sec)

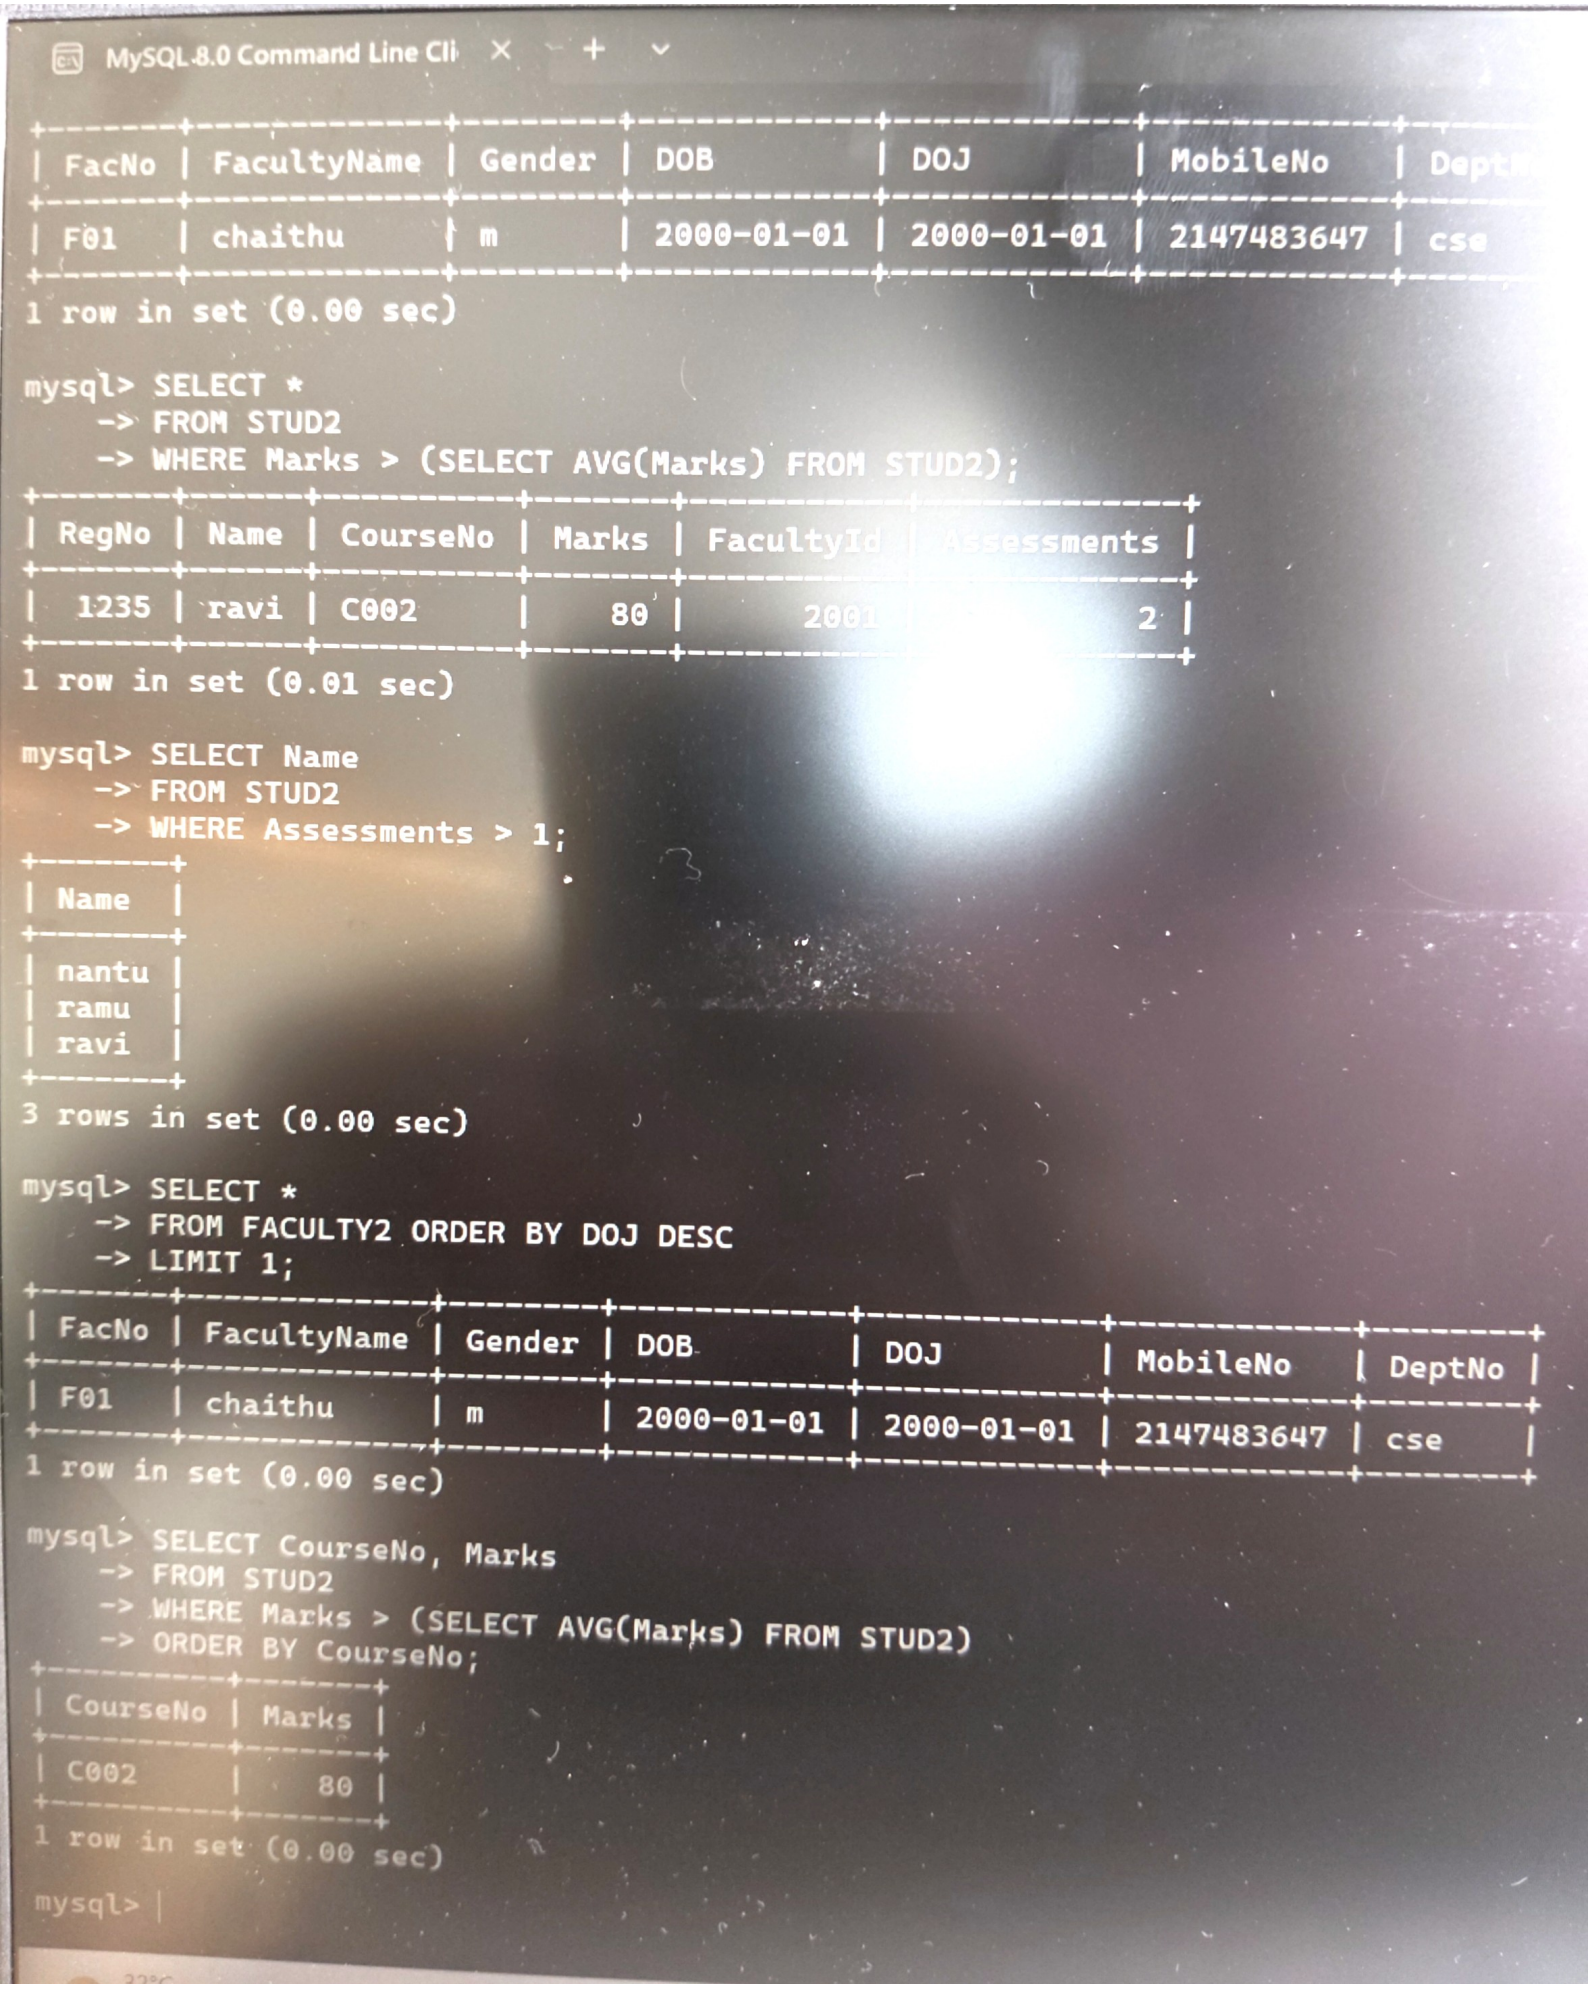
mysql> desc faculty2;
+-------------+-------------+------+-----+---------+-------+
| Field       | Type        | Null | Key | Default | Extra |
+-------------+-------------+------+-----+---------+-------+
| FacNo       | varchar(10) | YES  |     | NULL    |       |
| FacultyName | varchar(20) | YES  |     | NULL    |       |
| Gender      | char(1)     | YES  |     | NULL    |       |
| DOB         | date        | YES  |     | NULL    |       |
| DOJ         | date        | YES  |     | NULL    |       |
| MobileNo    | bigint      | YES  |     | NULL    |       |
| DeptNo      | varchar(10) | YES  |     | NULL    |       |
+-------------+-------------+------+-----+---------+-------+
7 rows in set (0.00 sec)

mysql> insert into faculty2 values ('F01', 'chaithu', 'm', '2000-01-01'
    ->  '2000-01-01', 2147483647, 'cse');
Query OK, 1 row affected (0.01 sec)

mysql> select * from faculty2;
+-------+-------------+--------+------------+------------+------------+
| FacNo | FacultyName | Gender | DOB        | DOJ        | MobileNo   |
+-------+-------------+--------+------------+------------+------------+
| F01   | chaithu     | m      | 2000-01-01 | 2000-01-01 | 2147483647 |
+-------+-------------+--------+------------+------------+------------+
1 row in set (0.00 sec)

mysql> SELECT *
    -> FROM STUD2
    -> WHERE Marks > (SELECT AVG(Marks) FROM STUD2);
+-------+------+----------+-------+-----------+-------------+
| RegNo | Name | CourseNo | Marks | FacultyId | Assessments |
+-------+------+----------+-------+-----------+-------------+
|  1235 | ravi | C002     |    80 |      2001 |           2 |
+-------+------+----------+-------+-----------+-------------+
1 row in set (0.01 sec)

mysql> SELECT Name
    -> FROM STUD2
```


MySQL 8.0 Command Line Cli
| FacNo | FacultyName | Gender | DOB | DOJ | MobileNo | Dept
| F01 | chaithu | m | 2000-01-01 | 2000-01-01 | 2147483647 | cse
1 row in set (0.00 sec)
mysql> SELECT *
-> FROM STUD2
-> WHERE Marks > (SELECT AVG(Marks) FROM STUD2);
| RegNo | Name | CourseNo | Marks | FacultyId | Assessments |
| 1235 | ravi | C002 | 80 | 2001 | 2 |
1 row in set (0.01 sec)
mysql> SELECT Name
-> FROM STUD2
-> WHERE Assessments > 1;
| Name |
| nantu |
| ramu |
| ravi |
3 rows in set (0.00 sec)
mysql> SELECT *
-> FROM FACULTY2 ORDER BY DOJ DESC
-> LIMIT 1;
| FacNo | FacultyName | Gender | DOB | DOJ | MobileNo | DeptNo |
| F01 | chaithu | m | 2000-01-01 | 2000-01-01 | 2147483647 | cse |
1 row in set (0.00 sec)
mysql> SELECT CourseNo, Marks
-> FROM STUD2
-> WHERE Marks > (SELECT AVG(Marks) FROM STUD2)
-> ORDER BY CourseNo;
| CourseNo | Marks |
| C002 | 80 |
1 row in set (0.00 sec)
mysql>