

# RDS


(relational database service )

Step 1: Create an RDS, like MariaDB, in full configuration and create an instance like test-rds and add in the rds creation

note-in instace we also have to create a port so  
rds-3360

test-rds->security->security group->edit inbound rules-> add rule->mysql/aurora & anywhere then save

after all the settings will create it and then

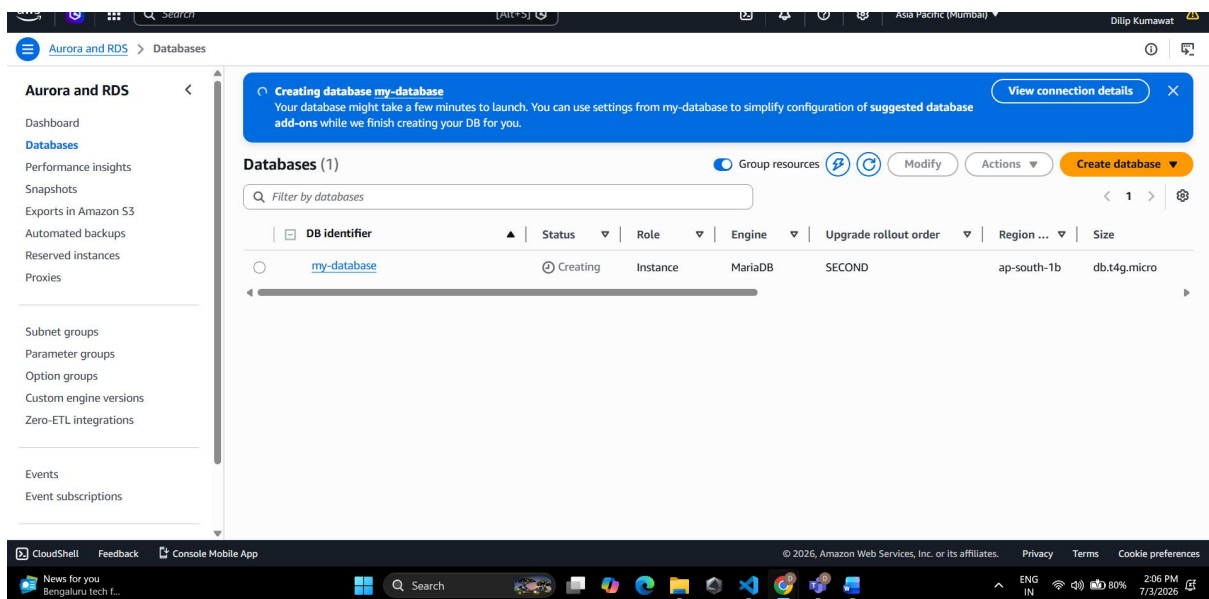

step 2:-

we will open the created instance on the powershell

In powershell

first we connect to the instance

then

cmd1→ sudo -i (change into root)

cmd2-> hostnamectl set-hostname RDS.service

cmd3- >bash

Cmd4→dnf install -y mariadb-server

cmd5-> systemctl status mariadb

Cmd6-> systemctl enable --now mariadb

```
[root@RDS ~]# mysql -u root
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 6
Server version: 10.11.18-MariaDB MariaDB Server

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> |
```

note :-

Basically we connect ec2 to rds

how→

first we have to install the engine in ec2 which we have in rds like mariadb  
then it was working

then in rds also work the mariadb

Q. how to make connection between ec2 and rds

Ans→ Endpoint->

to connect to the rds we can use endpoint and then we use  
the cmd

Cmd→ mysql -h my-database.cra8a86y40pg.ap-south-1.rds.amazonaws.com

-u admin -p

-p refer to the password

-u refer to the user name

```

[root@RDS ~]# mysql -u root
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 8
Server version: 10.11.18-MariaDB MariaDB Server

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> show databases
-> ;
+-----+
| Database |
+-----+
| college |
| information_schema |
| mysql |
| performance_schema |
| sys |
+-----+
5 rows in set (0.000 sec)

MariaDB [(none)]> |

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> clear
MariaDB [(none)]> show databases;
+-----+
| Database |
+-----+
| information_schema |
| innodb |
| mysql |
| performance_schema |
| sys |
+-----+
5 rows in set (0.001 sec)

MariaDB [(none)]> mysql -h my-database.cra8a86y40pg.ap-south-1.rds.amazonaws.com -u admin -p|

```

they bboth are different

rds → `mysql -h my-database.cra8a86y40pg.ap-south-1.rds.amazonaws.com -u admin -p`

local → `mysql -u root`

(thank you)