

1 Towards Practical First-Order Model Counting

2 **Ananth K. Kidambi** ✉

3 Indian Institute of Technology Bombay, Mumbai, India


4 **Guramrit Singh** ✉

5 Indian Institute of Technology Bombay, Mumbai, India

6 **Paulius Dilkas** ✉ 🏠 

7 University of Toronto, Toronto, Canada

8 Vector Institute, Toronto, Canada

9 **Kuldeep S. Meel** ✉ 🏠 

10 University of Toronto, Toronto, Canada

11 — Abstract —

12 First-order model counting (FOMC) is the problem of counting the number of models of a sentence in
13 first-order logic. Since lifted inference techniques rely on reductions to variants of FOMC, the design
14 of scalable methods for FOMC has attracted attention from both theoreticians and practitioners over
15 the past decade. Recently, a new approach based on first-order knowledge compilation was proposed.
16 This approach, called CRANE, instead of simply providing the final count, generates definitions of
17 (possibly recursive) functions that can be evaluated with different arguments to compute the model
18 count for any domain size. However, this approach is not fully automated, as it requires manual
19 evaluation of the constructed functions. The primary contribution of this work is a fully automated
20 compilation algorithm, called GANTRY, which transforms the function definitions into C++ code
21 equipped with arbitrary-precision arithmetic. These additions allow the new FOMC algorithm to
22 scale to domain sizes over 500,000 times larger than the current state of the art, as demonstrated
23 through experimental results.

24 **2012 ACM Subject Classification** Theory of computation → Automated reasoning; Theory of
25 computation → Logic and verification; Mathematics of computing → Combinatorics

26 **Keywords and phrases** first-order model counting, knowledge compilation, lifted inference

27 **Funding** *Ananth K. Kidambi*: TODO: funding

28 *Guramrit Singh*: TODO: funding

29 *Paulius Dilkas*: TODO: funding

30 *Kuldeep S. Meel*: TODO: funding

31 **Acknowledgements** Part of the research was conducted while all authors were at the National
32 University of Singapore.

For the entire paper:

- Finish adding DOIs or URLs to (non-book) references (and reformatting indentation)
(and check reference formatting) (is the part about non-book references correct?
Check previous proceedings) (maybe one more exception (graded logics)?) (I might
be done)
- Sentence vs formula: be consistent and not confusing
- 15 pages excluding references
- Go through the rest of formatting instructions (in GTD)
- Make sure all the references (e.g., to examples are still valid)
- Maybe add extra references to subsections

1 Introduction

- We would like to clarify that the main contribution of this work consists of everything needed to complement recursive function definitions with the necessary base cases. This process includes identifying the base cases and their corresponding formulas, transforming them (including applying a new smoothing procedure), and recursively reusing Crane. C++ code generation, although relatively straightforward, is crucial for the usability of the algorithm.
- Focus more on current work

First-order model counting (FOMC) is the task of determining the number of models for a sentence in first-order logic over a specified domain. The weighted variant, WFOMC, computes the total weight of these models, linking logical reasoning with probabilistic frameworks [31]. It builds upon earlier efforts in weighted model counting for propositional logic [4] and broader attempts to bridge logic and probability [15, 17, 20]. WFOMC is central to *lifted inference*, which enhances the efficiency of probabilistic calculations by exploiting symmetries [12]. Lifted inference continues to advance, with applications extending to constraint satisfaction problems [24] and probabilistic answer set programming [1]. Moreover, WFOMC has proven effective at reasoning over probabilistic databases [8] and probabilistic logic programs [18]. FOMC algorithms have also facilitated breakthroughs in discovering integer sequences [22] and developing recurrence relations for these sequences [6]. Recently, these algorithms have been extended to perform sampling tasks [32].

The complexity of FOMC is generally measured by *data complexity*, with a formula classified as *liftable* if it can be solved in polynomial time relative to the domain size [10]. While all formulas with up to two variables are known to be liftable [28, 30], Beame et al. [3] demonstrated that liftability does not extend to all formulas, identifying an unliftable formula with three variables. Recent work has further extended the liftable fragment with additional axioms [23, 27] and counting quantifiers [13], expanding our understanding of liftability.

FOMC algorithms are diverse, with approaches ranging from *first-order knowledge compilation* (FOKC) to cell enumeration [26], local search [16], and Monte Carlo sampling [7]. Among these, FOKC-based algorithms are particularly prominent, transforming formulas into structured representations such as circuits or graphs. Even when multiple algorithms are able to solve the same instance, FOKC algorithms are known to find polynomial-time solutions, where the polynomial has a lower degree compared to other approaches [6]. The recently developed ability of a FOKC algorithm to formulate solutions in terms of recursive functions [6] is also noteworthy as the only other proposed alternative is to guess recursive relations [2]. Notable examples of FOKC algorithms include FORCLIFT [31] and its successor CRANE [6].

The CRANE algorithm marked a significant step forward, expanding the range of formulas handled by FOMC algorithms. However, it had notable limitations: it required manual evaluation of function definitions to compute model counts and introduced recursive functions without proper base cases, making it more complex to use. To address these shortcomings, we present GANTRY, a fully automated FOMC algorithm that overcomes the constraints of its predecessor. GANTRY can handle domain sizes over 500,000 times larger than previous algorithms and simplifies the user experience by automatically handling base cases and compiling function definitions into efficient C++ programs.

In Section 2, we cover some preliminaries, and in Section 3, we detail all our technical contributions. Finally, in Section 4, we present our experimental results, demonstrating GANTRY’s performance compared to other FOMC algorithms, and, in Section 5, we conclude

the paper by discussing promising avenues for future work.

2 Preliminaries

- Adjust the introduction to the new structure (with more subsections)
- If I need more space elsewhere, shortening the preliminaries to two pages could work (I could expand the introduction by 0.5 page)

In Section 2.1, we summarise the basic principles of first-order logic. Then, in Section 2.2, we formally define (W)FOMC and discuss the distinctions between three variations of first-order logic used for FOMC. Finally, in Section 2.5, we introduce the terminology used to describe the output of the original CRANE algorithm, i.e., functions and equations that define them.

Notation

We use \mathbb{N}_0 to represent the set of non-negative integers. In both algebra and logic, we write $S\sigma$ to denote the application of a *substitution* σ to an expression S , where $\sigma = [x_1 \mapsto y_1, x_2 \mapsto y_2, \dots, x_n \mapsto y_n]$ signifies the replacement of all instances of x_i with y_i for all $i = 1, \dots, n$.

Additionally, for any variable n and $a, b \in \mathbb{N}_0$, let $[a \leq n \leq b] := \begin{cases} 1 & \text{if } a \leq n \leq b \\ 0 & \text{otherwise} \end{cases}$.

2.1 First-Order Logic

In this section, we will review the basic concepts of first-order logic as they are used in FOKC algorithms. We begin by introducing the format used internally by FORCLIFT and its descendants. Afterwards, we provide a high-level description of how an arbitrary sentence in first-order logic is transformed into this internal format.

A *term* can be either a variable or a constant. An *atom* can be either $P(t_1, \dots, t_m)$ (i.e., $P(\mathbf{t})$) for some predicate P and terms t_1, \dots, t_m or $x = y$ for some terms x and y . The *arity* of a predicate is the number of arguments it takes, i.e., m in the case of the predicate P mentioned above. We write P/m to denote a predicate along with its arity. A *literal* can be either an atom (i.e., a *positive* literal) or its negation (i.e., a *negative* literal). An atom is *ground* if it contains no variables, i.e., only constants. A *clause* is of the form $\forall x_1 \in \Delta_1. \forall x_2 \in \Delta_2 \dots \forall x_n \in \Delta_n. \phi(x_1, x_2, \dots, x_n)$, where ϕ is a disjunction of literals that only contain variables x_1, \dots, x_n (and any constants). We say that a clause is a (*positive*) *unit clause* if there is only one literal with a predicate, and it is a positive literal. Finally, a *formula* is a conjunction of clauses. Throughout the paper, we will use set-theoretic notation, interpreting a formula as a set of clauses and a clause as a set of literals.

► **Remark.** Conforming with previous work [31], the definition of a clause includes universal quantifiers for all variables within. While it is possible to rewrite the entire formula with all quantifiers at the front [9], the format we describe has proven itself convenient to work with.

2.2 The Three Logics of FOMC

There are three first-order logics commonly used in FOMC: FO, C^2 , and $UFO^2 + CC$. First, FO is the input format for FORCLIFT* and its extensions CRANE† and GANTRY. Second, C^2 is often used in the literature on FASTWFOMC‡ and related methods [13, 14]. Finally, $UFO^2 + CC$ is the input format supported by the most recent implementation of FASTWFOMC [25]. All three logics are function-free, and domains are always assumed to be finite. As usual, we presuppose the *unique name assumption*, which states that two constants are equal if and only if they are the same constant [19].

In FO, each term is assigned to a *sort*, and each predicate P/n is assigned to a sequence of n sorts. Each sort has its corresponding domain. These assignments to sorts are typically left implicit and can be reconstructed from the quantifiers. For example, $\forall x, y \in \Delta. P(x, y)$ implies that variables x and y have the same sort. On the other hand, $\forall x \in \Delta. \forall y \in \Gamma. P(x, y)$ implies that x and y have different sorts, and it would be improper to write, for example, $\forall x \in \Delta. \forall y \in \Gamma. P(x, y) \vee x = y$. FO is also the only logic to support constants, formulas with more than two variables, and the equality predicate. While we do not explicitly refer to sorts in subsequent sections of this paper, the many-sorted nature of FO is paramount to the algorithms presented therein.

► **Remark.** In the case of FORCLIFT and its extensions, support for a formula as valid input does not imply that the algorithm can compile the formula into a circuit or graph suitable for lifted model counting. However, it is known that FORCLIFT compilation is guaranteed to succeed on any FO formula without constants and with at most two variables [28, 30].

Compared to FO, C^2 and $UFO^2 + CC$ lack support for constants, the equality predicate, multiple domains, and formulas with more than two variables. The advantage that C^2 brings over FO is the inclusion of *counting quantifiers*. That is, alongside \forall and \exists , C^2 supports $\exists=^k$, $\exists \leq^k$, and $\exists \geq^k$ for any positive integer k . For example, $\exists=^1 x. \phi(x)$ means that there exists *exactly one* x such that $\phi(x)$, and $\exists \leq^2 x. \phi(x)$ means that there exist *at most two* such x . $UFO^2 + CC$, on the other hand, does not support any existential quantifiers but instead incorporates (*equality*) *cardinality constraints*. For example, $|P| = 3$ constrains all models to have *precisely three positive literals with the predicate P* .

2.3 First-Order Model Counting

In this section, we will formally define FOMC and its weighted variant. Note that, although this work focuses on FOMC, for sentences with existential quantifiers, computing the FOMC using GANTRY requires the use of WFOMC. For such sentences, preprocessing (described in Section 2.4) introduces predicates with non-unary weights that must be accounted for to compute the correct model count.

► **Definition 1** (Structure, model). *Let ϕ be a formula in FO. For each predicate P/n in ϕ , let $(\Delta_i^P)_{i=1}^n$ be a list of the corresponding domains. Let σ be a map from the domains of ϕ to their interpretations as finite sets such that the sets are pairwise disjoint, and the constants in ϕ are included in the corresponding domains. A structure of ϕ is a set M of ground literals defined by adding to M either $P(\mathbf{t})$ or $\neg P(\mathbf{t})$ for every predicate P/n in ϕ and n -tuple $\mathbf{t} \in \prod_{i=1}^n \sigma(\Delta_i^P)$. A structure is a model if it makes ϕ valid.*

* <https://github.com/UCLA-StarAI/Forclift>

† <https://doi.org/10.5281/zenodo.8004077>

‡ <https://github.com/jan-toth/FastWFOMC.jl>

148 ► **Example 2** (Counting bijections). Let us consider the following formula (previously examined
 149 by Dilkas and Belle [6]) that defines predicate P as a bijection between two domains Γ and
 150 Δ :

$$\begin{aligned}
 & (\forall x \in \Gamma. \exists y \in \Delta. P(x, y)) \wedge \\
 & (\forall y \in \Delta. \exists x \in \Gamma. P(x, y)) \wedge \\
 & (\forall x \in \Gamma. \forall y, z \in \Delta. P(x, y) \wedge P(x, z) \Rightarrow y = z) \wedge \\
 & (\forall x, z \in \Gamma. \forall y \in \Delta. P(x, y) \wedge P(z, y) \Rightarrow x = z).
 \end{aligned} \tag{1}$$

152 Let σ be defined as $\sigma(\Gamma) := \{1, 2\}$, and $\sigma(\Delta) := \{a, b\}$. Then Formula (1) has two models:

$$\{P(1, a), P(2, b), \neg P(1, b), \neg P(2, a)\} \quad \text{and} \quad \{P(1, b), P(2, a), \neg P(1, a), \neg P(2, b)\}.$$

154 ► **Remark.** The distinctness of domains is important in two ways. First, in terms of
 155 expressiveness, a clause such as $\forall x \in \Delta. P(x, x)$ is valid if predicate P is defined over two
 156 copies of the same domain and invalid otherwise. Second, having more distinct domains
 157 makes the problem more decomposable for the FOKC algorithm. With distinct domains, the
 158 algorithm can make assumptions or deductions about, e.g., the first domain of predicate P
 159 without worrying how (or if) they apply to the second domain.

160 ► **Definition 3** (WFOMC instance). A WFOMC instance comprises: a formula ϕ in FO, two
 161 (rational) weights $w^+(P)$ and $w^-(P)$ assigned to each predicate P in ϕ , and σ as described
 162 in Definition 1. Unless specified otherwise, we assume all weights to be equal to 1.

163 ► **Definition 4** (WFOMC [31]). Given a WFOMC instance (ϕ, w^+, w^-, σ) as in Definition 3,
 164 the (symmetric) weighted first-order model count (WFOMC) of ϕ is

$$\sum_{M \models \phi} \prod_{P(\mathbf{t}) \in M} w^+(P) \prod_{\neg P(\mathbf{t}) \in M} w^-(P), \tag{2}$$

166 where the sum is over all models of ϕ .

167 2.4 Crane and First-Order Knowledge Compilation

168 Make sure the distinction between function definitions and equations is clear.

169 As our work builds on CRANE, in this section we will briefly outline the steps CRANE
 170 goes through to compile an FO formula into a set of function definitions. We divide the inner
 171 workings of the algorithm into two stages: preprocessing and compilation.

172 2.4.1 Preprocessing

173 The goal of this stage is to transform an arbitrary FO formula into the format described in
 174 Section 2.1, most importantly by eliminating existential quantifiers. For example, the first
 175 conjunct of Formula (1), i.e.,

$$\forall x \in \Gamma. \exists y \in \Delta. P(x, y) \tag{3}$$

177 is transformed into

$$\begin{aligned}
 & (\forall x \in \Gamma. Z(x)) \wedge \\
 & (\forall x \in \Gamma. \forall y \in \Delta. Z(x) \vee \neg P(x, y)) \wedge \\
 & (\forall x \in \Gamma. S(x) \vee Z(x)) \wedge \\
 & (\forall x \in \Gamma. \forall y \in \Delta. S(x) \vee \neg P(x, y)),
 \end{aligned} \tag{4}$$

where $Z/1$ and $S/1$ are two new predicates with $w^-(S) = -1$. One can check that the WFOMC of Formulas (3) and (4) is the same.

2.4.2 Compilation

At this stage, the preprocessed formula is compiled into the set \mathcal{E} of equations and two auxiliary maps \mathcal{F} and \mathcal{D} . \mathcal{F} maps function names to formulas, and \mathcal{D} maps function names and argument indices to domains. \mathcal{E} can contain any number of functions, one of which (which we will always denote by f) represents the solution to the FOMC problem. To compute the FOMC for particular domain sizes, f must be evaluated with those domain sizes as arguments. \mathcal{D} records this correspondence between function arguments and domains.

► **Example 5.** CRANE compiles Formula (1) for bijection counting into

$$\mathcal{E} = \left\{ \begin{array}{l} f(m, n) = \sum_{l=0}^n \binom{n}{l} (-1)^{n-l} g(l, m), \\ g(l, m) = \sum_{k=0}^m [0 \leq k \leq 1] \binom{m}{k} g(l-1, m-k) \end{array} \right\};$$

$$\mathcal{D} = \{ (f, 1) \mapsto \Gamma, (f, 2) \mapsto \Delta, (g, 1) \mapsto \Delta^\top, (g, 2) \mapsto \Gamma \},$$

where Δ^\top is a newly introduced domain. (We omit the definition of \mathcal{F} as the formulas can get quite verbose.) To compute the number of bijections between two sets of cardinality 3, one would evaluate $f(3, 3)$, however, the definition of g is incomplete: g is a recursive function presented without any base cases. \mathcal{D} encodes that in $f(m, n)$, m and n represent $|\Gamma|$ and $|\Delta|$, respectively. Similarly, in $g(l, m)$, l represents $|\Delta^\top|$, and m represents $|\Gamma|$.

Compilation is performed primarily by applying (*compilation*) *rules* to formulas. CRANE has two modes depending on how the algorithm chooses which compilation rule to apply to a formula (in case several alternatives are available). The first option is to use greedy search: there is a list of rules, and the first applicable rule is the one that gets used, disregarding all the others. The second option is to use a combination of greedy and *breadth-first search* (BFS). That is, each compilation rule is identified as either greedy or non-greedy. Greedy rules are applied as soon as possible at any stage of the compilation process. BFS is executed over all applicable non-greedy rules, identifying the solution that can be constructed using the smallest number of such rules.

2.5 Algebra

In this paper, we use both logical and algebraic constructs. While the rest of Section 2 focused on the former, this section describes the latter. We write **expr** for an arbitrary algebraic expression. In the context of algebra, a *constant* is a non-negative integer. Likewise, a *variable* can either be a parameter of a function or a variable introduced through summation, such as i in the expression $\sum_{i=1}^n \mathbf{expr}$. A *function call* is $f(x_1, \dots, x_n)$ (or $f(\mathbf{x})$ for short), where f is an n -ary function, and each x_i is an algebraic expression consisting of variables and constants. A (function) *signature* is function call that contains only variables. Given two function calls $f(\mathbf{x})$ and $f(\mathbf{y})$, we say that $f(\mathbf{y})$ *matches* $f(\mathbf{x})$ if $x_i = y_i$ whenever $x_i, y_i \in \mathbb{N}_0$. An *equation* is $f(\mathbf{x}) = \mathbf{expr}$, where $f(\mathbf{x})$ is a signature.

► **Definition 6** (Base case). *Let $f(\mathbf{x})$ be a function call where each x_i is either a constant or a variable. Then function call $f(\mathbf{y})$ is a base case of $f(\mathbf{x})$ if $f(\mathbf{y}) = f(\mathbf{x})\sigma$, where σ is a substitution that replaces one or more x_i with a constant.*

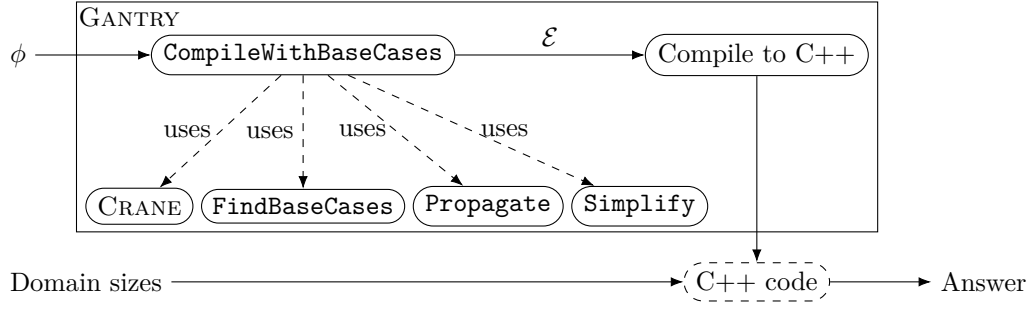


Figure 1 The outline of using GANTRY to compute the model count of a formula ϕ . First, the formula is compiled into a set of equations, which are then used to create a C++ program. This program can be executed with different command line arguments to calculate the model count of ϕ for different domain sizes. To accomplish this, the `CompileWithBaseCases` procedure makes use of the FOKC algorithm of CRANE, algebraic simplification techniques (denoted as `Simplify`), and two other auxiliary procedures.

► **Example 7.** In equation $f(m, n) = f(m - 1, n) + nf(m - 1, n - 1)$, the only constant is 1, and the variables are m and n . The equation contains three function calls: one on the left-hand side (LHS), and two on the right-hand side (RHS). The function call on the LHS is a signature. Function calls such as $f(4, n)$, $f(m, 0)$, and $f(8, 1)$ are all considered base cases of $f(m, n)$ (only some of which are useful).

3 Technical Contributions

- The algorithm's recursive nature and its interaction with CRANE could be explained more clearly
- More emphasis on the motivation for each part of GANTRY (e.g., how `FindBaseCases` addresses key issues in CRANE) would add depth to the contribution
- this section should be expanded by 1 page ("a clear discussion of the innovation aspect and technical parts")

Figure 1 provides an overview of GANTRY's workflow. Section 3.1 describes the main algorithm for completing the definitions of recursive functions with a sufficient set of base cases. Sections 3.2 and 3.3 describe subsidiary algorithms for constructing a set of base cases and their corresponding logical formulas. Section 3.4 explains the post-processing techniques for ensuring accurate model counting. Additionally, Section 3.5 explains the process of compiling equations into C++ code, greatly expanding upon the range of formulas that could previously be handled by similar approaches [11].

Somewhere: Recall that each equation is either the definition (did I define what a definition is?) of a function or the definition of a base case of a function. (I could put this in the preliminaries as definitions and then reference them below)

3.1 Completing the Definitions of Functions

Connect this with the preliminaries?

Algorithm 1 presents our overall approach for compiling a formula into equations that include the necessary base cases. To begin, we use the FOKC algorithm of the original

■ **Algorithm 1** `CompileWithBaseCases(ϕ)`

Input: formula ϕ
Output: set \mathcal{E} of equations

```

1  $(\mathcal{E}, \mathcal{F}, \mathcal{D}) \leftarrow \text{CRANE}(\phi);$ 
2  $\mathcal{E} \leftarrow \text{Simplify}(\mathcal{E});$ 
3 foreach base case  $f(\mathbf{x}) \in \text{FindBaseCases}(\mathcal{E})$  do
4    $\psi \leftarrow \mathcal{F}(f);$ 
5   foreach index  $i$  such that  $x_i \in \mathbb{N}_0$  do  $\psi \leftarrow \text{Propagate}(\psi, \mathcal{D}(f, i), x_i);$ 
6    $\mathcal{E} \leftarrow \mathcal{E} \cup \text{CompileWithBaseCases}(\psi);$ 

```

CRANE to compile the formula into the three components: \mathcal{E} , \mathcal{F} , and \mathcal{D} . After some algebraic simplification, \mathcal{E} is passed to the `FindBaseCases` procedure (see Section 3.2). For each base case $f(\mathbf{x})$, we retrieve the logical formula $\mathcal{F}(f)$ associated with the function name f and simplify it using the `Propagate` procedure (explained in detail in Section 3.3). We do this by iterating over all indices of \mathbf{x} , where x_i is a constant, and using `Propagate` to simplify ψ by assuming that domain $\mathcal{D}(f, i)$ has size x_i . Finally, on line 6, `CompileWithBaseCases` recurses on these simplified formulas and adds the resulting base case equations to \mathcal{E} . Example 2 below provides more detail.

► **Remark.** Although `CompileWithBaseCases` starts with a call to `CRANE`, the proposed algorithm is not just a post-processing step for FOKC because Algorithm 1 is recursive and can issue more calls to `CRANE` on various derived formulas.

The example below builds on Section 2.4. Shorten it.

► **Example 8.** Let us examine the first solution returned by GANTRY for the bijection-counting problem in Example 2. After line 2, we have

$$\mathcal{E} = \left\{ \begin{array}{l} f(m, n) = \sum_{l=0}^n \binom{n}{l} (-1)^{n-l} g(l, m), \\ g(l, m) = g(l-1, m) + mg(l-1, m-1) \end{array} \right\};$$

$$\mathcal{D} = \{ (f, 1) \mapsto \Gamma, (f, 2) \mapsto \Delta, (g, 1) \mapsto \Delta^\top, (g, 2) \mapsto \Gamma \},$$

where Δ^\top is a new domain. (We omit the definition of \mathcal{F} as the formulas can get a bit verbose.) Then `FindBaseCases` identifies two base cases: $g(0, m)$ and $g(l, 0)$. In both cases, `CompileWithBaseCases` recurses on the formula $\mathcal{F}(g)$ simplified by assuming that one of the domains is empty. In the first case, we recurse on the formula $\forall x \in \Gamma. S(x) \vee \neg S(x)$, where S is a predicate introduced by preprocessing with weights $w^+(S) = 1$ and $w^-(S) = -1$. Hence, we obtain the base case $g(0, m) = 0^m$. In the case of $g(l, 0)$, `Propagate`($\psi, \Gamma, 0$) returns an empty formula, resulting in $g(l, 0) = 1$.

It is worth noting that these base cases overlap when $l = m = 0$ but remain consistent since $0^0 = 1$. Generally, let ϕ be a formula with two domains Γ and Δ , and let $n, m \in \mathbb{N}_0$. Then the FOMC of `Propagate`(ϕ, Δ, n) assuming $|\Gamma| = m$ is the same as the FOMC of `Propagate`(ϕ, Γ, m) assuming $|\Delta| = n$.

Finally, the main responsibility of the `Simplify` procedure is to handle the algebraic pattern $\sum_{m=0}^n [a \leq m \leq b] f(m)$. Here: n is a variable, $a, b \in \mathbb{N}_0$ are constants, and f is an expression that may depend on m . `Simplify` transforms this pattern into $f(a) +$

Algorithm 2 FindBaseCases(\mathcal{E})

Input: set \mathcal{E} of equations**Output:** set \mathcal{B} of base cases

```

1  $\mathcal{B} \leftarrow \emptyset$ ;
2 foreach function call  $f(\mathbf{y})$  on the RHS of an equation in  $\mathcal{E}$  do
3    $\mathbf{x} \leftarrow$  the parameters of  $f$  in its definition;
4   foreach  $y_i \in \mathbf{y}$  do
5     if  $y_i \in \mathbb{N}_0$  then  $\mathcal{B} \leftarrow \mathcal{B} \cup \{f(\mathbf{x})[x_i \mapsto y_i]\}$ ;
6     else if  $y_i = x_i - c_i$  for some  $c_i \in \mathbb{N}_0$  then
7       for  $j \leftarrow 0$  to  $c_i - 1$  do  $\mathcal{B} \leftarrow \mathcal{B} \cup \{f(\mathbf{x})[x_i \mapsto j]\}$ ;

```

267 $f(a+1) + \dots + f(\min\{n, b\})$. For instance, in the case of Example 8, **Simplify** transforms
 268 $g(l, m) = \sum_{k=0}^m [0 \leq k \leq 1] \binom{m}{k} g(l-1, m-k)$ into $g(l, m) = g(l-1, m) + mg(l-1, m-1)$.

269 Check if the above is still clear given all the changes.

3.2 Identifying a Sufficient Set of Base Cases

270 Prove correctness?

271 Algorithm 2 summarises the implementation of **FindBaseCases**. It considers two types
 272 of arguments when a function f calls itself recursively: constants and arguments of the form
 273 $x_i - c_i$. Here, c_i is a constant, and x_i is the i -th argument of the signature of f . When the
 274 argument is a constant c_i , a base case with c_i is added. In the second case, a base case is
 275 added for each constant from 0 up to (but not including) c_i .
 276

277 **► Example 9.** Consider the recursive function g from Example 8. **FindBaseCases** iterates
 278 over two function calls: $g(l-1, m)$ and $g(l-1, m-1)$. The former produces the base case
 279 $g(0, m)$, while the latter produces both $g(0, m)$ and $g(l, 0)$.

280 It can be shown that the base cases identified by **FindBaseCases** are sufficient for the
 281 algorithm to terminate.⁴ For the remainder of this section, let \mathcal{E} denote the equations
 282 returned by **CompileWithBaseCases**.

283 **► Theorem 10 (Termination).** *Let f be an n -ary function in \mathcal{E} and $\mathbf{x} \in \mathbb{N}_0^n$. Then the*
 284 *evaluation of $f(\mathbf{x})$ terminates.*

285 We prove Theorem 10 using double induction. First, we apply induction to the number
 286 of functions in \mathcal{E} . Then, we use induction on the arity of the ‘last’ function in \mathcal{E} according to
 287 some topological ordering. We begin with a few observations that stem from previous [6, 31]
 288 and this work.

289 **► Observation 11.** *For each function f , there is precisely one equation $e \in \mathcal{E}$ with $f(\mathbf{x})$*
 290 *on the LHS where all x_i ’s are variables (i.e., e is not a base case). We refer to e as the*
 291 *definition of f .*

⁴ Note that characterising the fine-grained complexity of the solutions found by GANTRY or other FOMC algorithms is an emerging area of research. These questions have been partially addressed in previous work [6, 25] and are orthogonal to the goals of this section.

► **Observation 12.** *There is a topological ordering of all functions $(f_i)_i$ in \mathcal{E} such that equations in \mathcal{E} with f_i on the LHS do not contain function calls to f_j with $j > i$. This condition prevents mutual recursion and other cyclic scenarios.*

► **Observation 13.** *For each equation $(f(\mathbf{x}) = \text{expr}) \in \mathcal{E}$, the evaluation of expr terminates when provided with the values of all relevant function calls.*

► **Corollary 14.** *If f is a non-recursive function with no function calls on the RHS of its definition, then the evaluation of any function call $f(\mathbf{x})$ terminates.*

► **Observation 15.** *For each equation $(f(\mathbf{x}) = \text{expr}) \in \mathcal{E}$, if \mathbf{x} contains only constants, then expr cannot include any function calls to f .*

Additionally, we introduce an assumption about the structure of recursion.

► **Assumption 16.** *For each equation $(f(\mathbf{x}) = \text{expr}) \in \mathcal{E}$, every recursive function call $f(\mathbf{y}) \in \text{expr}$ satisfies the following:*

- *Each y_i is either $x_i - c_i$ or c_i for some constant c_i .*
- *There exists i such that $y_i = x_i - c_i$ for some $c_i > 0$.*

Finally, we assume a particular order of evaluation for function calls using the equations in \mathcal{E} . Specifically, we assume that base cases are considered before the recursive definition. The exact order in which base cases are considered is immaterial.

► **Assumption 17.** *When multiple equations in \mathcal{E} match a function call $f(\mathbf{x})$, preference is given to an equation with the most constants on its LHS.*

With the observations and assumptions mentioned above, we are ready to prove Theorem 10. For readability, we divide the proof into several lemmas of increasing generality.

► **Lemma 18.** *Assume that \mathcal{E} consists of just one unary function f . Then the evaluation of a function call $f(x)$ terminates for any $x \in \mathbb{N}_0$.*

Proof. If $f(x)$ is captured by a base case, then its evaluation terminates by Corollary 14 and Observation 15. If f is not recursive, the evaluation of $f(x)$ terminates by Corollary 14.

Otherwise, let $f(y)$ be an arbitrary function call on the RHS of the definition of $f(x)$. If y is a constant, then there is a base case for $f(y)$. Otherwise, let $y = x - c$ for some $c > 0$. Then there exists $k \in \mathbb{N}_0$ such that $0 \leq x - kc \leq c - 1$. So, after k iterations, the sequence of function calls $f(x), f(x - c), f(x - 2c), \dots$ will be captured by the base case $f(x \bmod c)$. ◀

► **Lemma 19.** *Generalising Lemma 18, let \mathcal{E} be a set of equations for one n -ary function f for some $n \geq 1$. Then the evaluation of $f(\mathbf{x})$ terminates for any $\mathbf{x} \in \mathbb{N}_0^n$.*

Proof. If f is non-recursive, the evaluation of $f(\mathbf{x})$ terminates by previous arguments. We proceed by induction on n , with the base case of $n = 1$ handled by Lemma 18. Assume that $n > 1$. Any base case of f can be seen as a function of arity $n - 1$, since one of the parameters is fixed. Thus, the evaluation of any base case terminates by the inductive hypothesis. It remains to show that the evaluation of the recursive equation for f terminates, but that follows from Observation 13. ◀

Proof of Theorem 10. We proceed by induction on the number of functions n . The base case of $n = 1$ is handled by Lemma 19. Let $(f_i)_{i=1}^n$ be some topological ordering of these $n > 1$ functions. If $f = f_j$ for $j < n$, then the evaluation of $f(\mathbf{x})$ terminates by the inductive hypothesis since f_j cannot call f_n by Observation 12. Using the inductive hypothesis that all function calls to f_j (with $j < n$) terminate, the proof proceeds similarly to the Proof of Lemma 19. ◀

■ **Algorithm 3** $\text{Propagate}(\phi, \Delta, n)$

Input: formula ϕ , domain Δ , $n \in \mathbb{N}_0$
Output: formula ϕ'

```

1  $\phi' \leftarrow \emptyset$ ;
2 if  $n = 0$  then
3   foreach  $\text{clause } C \in \phi$  do
4     if  $\Delta \notin \text{Doms}(C)$  then  $\phi' \leftarrow \phi' \cup \{C\}$ ;
5     else
6        $C' \leftarrow \{l \in C \mid \Delta \notin \text{Doms}(l)\}$ ;
7       if  $C' \neq \emptyset$  then
8          $l \leftarrow \text{an arbitrary literal in } C'$ ;
9          $\phi' \leftarrow \phi' \cup \{C' \cup \{\neg l\}\}$ ;
10 else
11    $D \leftarrow \text{a set of } n \text{ new constants in } \Delta$ ;
12   foreach  $\text{clause } C \in \phi$  do
13      $(x_i)_{i=1}^m \leftarrow \text{the variables in } C \text{ with domain } \Delta$ ;
14     if  $m = 0$  then  $\phi' \leftarrow \phi' \cup \{C\}$ ;
15     else  $\phi' \leftarrow \phi' \cup \{C[x_1 \mapsto c_1, \dots, x_m \mapsto c_m] \mid (c_i)_{i=1}^m \in D^m\}$ ;

```

3.3 Propagating Domain Size Assumptions

Algorithm 3, called **Propagate**, modifies the formula ϕ based on the assumption that $|\Delta| = n$. When $n = 0$, some clauses become vacuously satisfied and can be removed. When $n > 0$, partial grounding is performed by replacing all variables quantified over Δ with constants. (None of the formulas examined in this work had $n > 1$.) Algorithm 3 handles these two cases separately. For a literal or a clause C , the set of corresponding domains is denoted as $\text{Doms}(C)$.

In the case of $n = 0$, there are three types of clauses to consider:

1. those that do not mention Δ ,
2. those in which every literal contains variables quantified over Δ , and
3. those that have some literals with variables quantified over Δ and some without.

Clauses of Type 1 are transferred to the new formula ϕ' without any changes. For clauses of Type 2, C' is empty, so these clauses are filtered out. As for clauses of Type 3, a new kind of smoothing is performed, which will be explained in Section 3.4.

In the case of $n > 0$, n new constants are introduced. Let C be an arbitrary clause in ϕ , and let $m \in \mathbb{N}_0$ be the number of variables in C quantified over Δ . If $m = 0$, C is added directly to ϕ' . Otherwise, a clause is added to ϕ' for every possible combination of replacing the m variables in C with the n new constants.

► **Example 20.** Let $C \equiv \forall x \in \Gamma. \forall y, z \in \Delta. \neg P(x, y) \vee \neg P(x, z) \vee y = z$. Then $\text{Doms}(C) = \text{Doms}(\neg P(x, y)) = \text{Doms}(\neg P(x, z)) = \{\Gamma, \Delta\}$, and $\text{Doms}(y = z) = \{\Delta\}$. A call to

355 `Propagate`($\{C\}, \Delta, 3$) would result in the following formula with nine clauses:

$$\begin{aligned}
 356 \quad & (\forall x \in \Gamma. \neg P(x, c_1) \vee \neg P(x, c_1) \vee c_1 = c_1) \wedge \\
 357 \quad & (\forall x \in \Gamma. \neg P(x, c_1) \vee \neg P(x, c_2) \vee c_1 = c_2) \wedge \\
 358 \quad & \vdots \\
 359 \quad & (\forall x \in \Gamma. \neg P(x, c_3) \vee \neg P(x, c_3) \vee c_3 = c_3).
 \end{aligned}$$

360 Here, c_1 , c_2 , and c_3 are the new constants.

361 **3.4 Smoothing the Base Cases**

362 *Smoothing* modifies a circuit to reintroduce eliminated atoms, ensuring the correct model
 363 count [5, 31]. In this section, we describe a similar process performed on lines 7–9 of
 364 Algorithm 3. Line 7 checks if smoothing is necessary, and lines 8 and 9 execute it. If the
 365 condition on line 7 is not satisfied, the clause is not smoothed but omitted.

366 Suppose `Propagate` is called with arguments $(\phi, \Delta, 0)$, i.e., we are simplifying the formula
 367 ϕ by assuming that the domain Δ is empty. Informally, if there is a predicate P in ϕ unrelated
 368 to Δ , smoothing preserves all occurrences of P even if all clauses with P become vacuously
 369 satisfied.

370 ► **Example 21.** Let ϕ be

$$371 \quad (\forall x \in \Delta. \forall y, z \in \Gamma. Q(x) \vee P(y, z)) \wedge \tag{5}$$

$$372 \quad (\forall y, z \in \Gamma'. P(y, z)), \tag{6}$$

373 where $\Gamma' \subseteq \Gamma$ is a domain introduced by a compilation rule. It should be noted that P , as a
 374 relation, is a subset of $\Gamma \times \Gamma$.

375 Now, let us reason manually about the model count of ϕ when $\Delta = \emptyset$. Predicate Q can
 376 only take one value, $Q = \emptyset$. The value of P is fixed over $\Gamma' \times \Gamma'$ by Clause (6), but it can vary
 377 freely over $(\Gamma \times \Gamma) \setminus (\Gamma' \times \Gamma')$ since Clause (5) is vacuously satisfied by all structures. Therefore,
 378 the correct FOMC should be $2^{|\Gamma|^2 - |\Gamma'|^2}$. However, without line 9, `Propagate` would simplify
 379 ϕ to $\forall y, z \in \Gamma'. P(y, z)$. In this case, P is a subset of $\Gamma' \times \Gamma'$. This simplified formula has
 380 only one model: $\{P(y, z) \mid y, z \in \Gamma'\}$. By including line 9, `Propagate` transforms ϕ to

$$381 \quad (\forall y, z \in \Gamma. P(y, z) \vee \neg P(y, z)) \wedge (\forall y, z \in \Gamma'. P(y, z)),$$

382 which retains the correct model count.

383 It is worth mentioning that the choice of l on line 8 of Algorithm 3 is inconsequential
 384 because any choice achieves the same goal: constructing a tautological clause that retains
 385 the literals in C' .

386 **3.5 Generating C++ Code**

387 In this section, we will describe the final step of `GANTRY` as outlined in Figure 1, i.e.,
 388 translating the set of equations \mathcal{E} into C++ code. Recall that this step is crucial for the
 389 usability of the algorithm, otherwise function definitions would remain purely mathematical,
 390 with no convenient way to compute the model count for particular domain sizes. Once a
 391 C++ program is produced, it can be executed with different command-line arguments to
 392 compute the model count of the formula for various domain sizes.

■ **Algorithm 4** A sketch of the C++ program for the equations in Example 8, particularly highlighting the recursive definition of function g .

```

1 initialise  $\text{Cache}_{g(0,m)}$ ,  $\text{Cache}_{g(l,0)}$ ,  $\text{Cache}_g$ , and  $\text{Cache}_f$ ;
2 Function  $g_{0,m}(m)$ : ...
3 Function  $g_{l,0}(l)$ : ...
4 Function  $g(l, m)$ :
5   if  $(l, m) \in \text{Cache}_g$  then return  $\text{Cache}_g(l, m)$ ;
6   if  $l = 0$  then return  $g_{0,m}(m)$ ;
7   if  $m = 0$  then return  $g_{l,0}(l)$ ;
8    $r \leftarrow g(l-1, m) + mg(l-1, m-1)$ ;
9    $\text{Cache}_g(l, m) \leftarrow r$ ;
10  return  $r$ ;
11 Function  $f(m, n)$ : ...
12 Function Main:
13    $(m, n) \leftarrow \text{ParseCommandLineArguments}()$ ;
14   return  $f(m, n)$ ;

```

See Algorithm 4 for the typical structure of a generated C++ program. Each equation in \mathcal{E} is compiled into a C++ function, along with a separate cache for memoisation. Hence, Algorithm 4 has a function and a cache for $f(\cdot, \cdot)$, $g(\cdot, \cdot)$, $g(\cdot, 0)$, and $g(0, \cdot)$. The implementation of an equation consists of three parts. First (on line 5), we check if the arguments are already present in the corresponding cache. If so, we simply return the cached value. Second (on lines 6 and 7), for each base case, we check if the arguments match the base case (as defined in Section 2.5). If so, the arguments are redirected to the C++ function for that base case. Finally, if none of the above cases apply, we evaluate the arguments based on the expression on the RHS of the equation, store the result in the cache, and return it.

4 Experimental Evaluation

Experiments could be expanded by 1 page (“a more thorough and independent practical assessment”)

Our empirical evaluation sought to compare the runtime performance of GANTRY with the current state of the art, namely FASTWFOMC and FORCLIFT. It is worth remarking that FORCLIFT does not support arbitrary precision, and returns error for cases that requires arbitrary precision reasoning. Our experiments involve two versions of GANTRY: GANTRY-GREEDY and GANTRY-BFS. Like its predecessor, GANTRY has two modes for applying compilation rules to formulas: one that uses a greedy search algorithm similar to FORCLIFT and another that combines greedy and BFS.

The experiments were conducted using an Intel Skylake 2.4 GHz CPU with 188 GiB of memory and CentOS 7. C++ programs were compiled using the Intel C++ Compiler 2020u4. FASTWFOMC ran on Julia 1.10.4, while the other algorithms were executed on the Java Virtual Machine 1.8.0_201.

4.1 Benchmarks

- More benchmarks from NOT my work
- Make sure it's clear what the 'raw' instances are
- Don't emphasise that the benchmarks come from my previous work
- Integrate the example below into the text, possibly moving irrelevant details (such as the formulas in other logics) to supplementary material

► **Example 22 (Counting functions).** To define predicate P as a function from a domain Δ to itself, in \mathbf{C}^2 one would write $\forall x \in \Delta. \exists^1 y \in \Delta. P(x, y)$. In $\mathbf{UFO}^2 + \mathbf{CC}$, the same could be written as

$$(\forall x, y \in \Delta. S(x) \vee \neg P(x, y)) \wedge (|P| = |\Delta|), \quad (7)$$

where $w^-(S) = -1$. Although Formula (7) has more models compared to its counterpart in \mathbf{C}^2 , the negative weight $w^-(S) = -1$ makes some of the terms in Equation (2) cancel out.

Equivalently, in \mathbf{FO} we would write

$$(\forall x \in \Gamma. \exists y \in \Delta. P(x, y)) \wedge (\forall x \in \Gamma. \forall y, z \in \Delta. P(x, y) \wedge P(x, z) \Rightarrow y = z). \quad (8)$$

The first clause asserts that each x must have at least one corresponding y , while the second statement adds the condition that if x is mapped to both y and z , then y must equal z . It is important to note that Formula (8) is written with two domains instead of just one. However, we can still determine the correct number of functions by assuming that the sizes of Γ and Δ are equal. This formulation, as observed by Dilkas and Belle [6], can prove beneficial in enabling FOKC algorithms to find efficient solutions.

We compare these algorithms using three benchmarks from previous studies. The first benchmark is the function-counting problem from Example 22, previously examined by Dilkas and Belle [6]. The second benchmark is a variant of the well-known 'Friends and Smokers' Markov logic network [21, 29]. In \mathbf{C}^2 , \mathbf{FO} , and $\mathbf{UFO}^2 + \mathbf{CC}$, this problem can be formulated as

$$(\forall x, y \in \Delta. S(x) \wedge F(x, y) \Rightarrow S(y)) \wedge (\forall x \in \Delta. S(x) \Rightarrow C(x))$$

or, equivalently, in conjunctive normal form as

$$(\forall x, y \in \Delta. S(y) \vee \neg S(x) \vee \neg F(x, y)) \wedge (\forall x \in \Delta. C(x) \vee \neg S(x)).$$

Finally, we include the bijection-counting problem previously utilised by Dilkas and Belle [6]. Its formulation in \mathbf{FO} is described in Example 2. The equivalent formula in \mathbf{C}^2 is

$$(\forall x \in \Delta. \exists^1 y \in \Delta. P(x, y)) \wedge (\forall y \in \Delta. \exists^1 x \in \Delta. P(x, y)).$$

Similarly, in $\mathbf{UFO}^2 + \mathbf{CC}$ the same formula can be written as

$$(\forall x, y \in \Delta. R(x) \vee \neg P(x, y)) \wedge (\forall x, y \in \Delta. S(x) \vee \neg P(y, x)) \wedge (|P| = |\Delta|),$$

where $w^-(R) = w^-(S) = -1$.

Shrink/restructure to fit into the margins

The three benchmark families cover a wide range of possibilities. The 'friends' benchmark stands out as it uses multiple predicates and can be expressed in \mathbf{FO} using just two variables without cardinality constraints or counting quantifiers. The 'functions' benchmark, on the

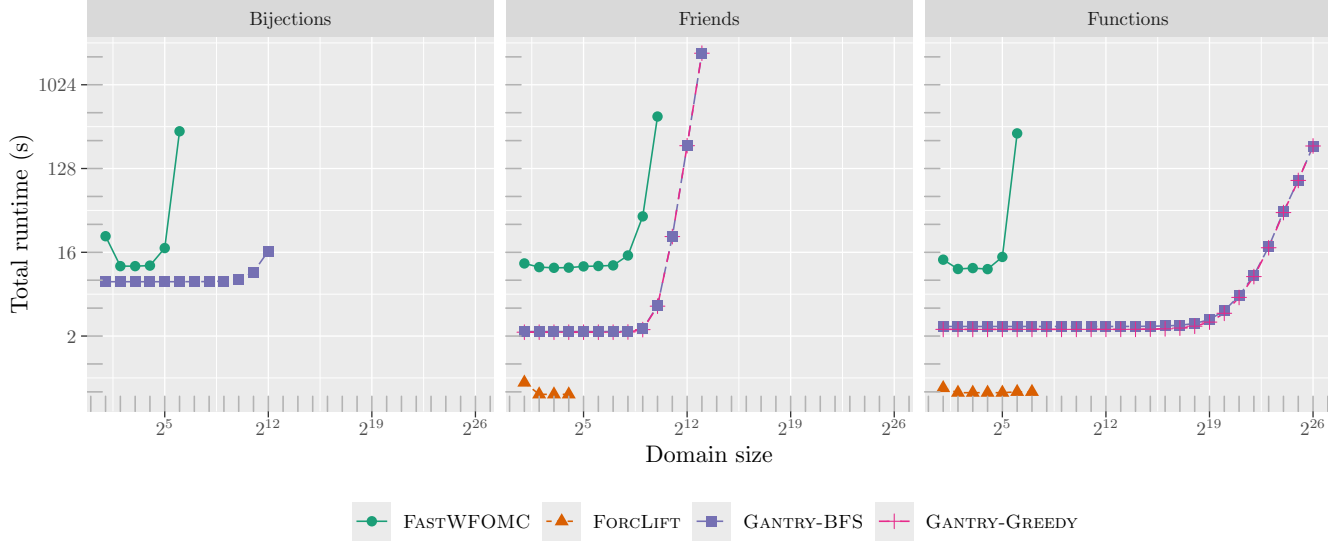


Figure 2 The runtime of the algorithms as a function of the domain size. Note that both axes are on a logarithmic scale.

other hand, can still be handled by all the algorithms, but it requires cardinality constraints, counting quantifiers, or more than two variables. Lastly, the ‘bijections’ benchmark is an example of a formula that FASTWFOMC can handle but FORCLIFT cannot.

For evaluation purposes, we ran each algorithm on each benchmark using domains of sizes $2^1, 2^2, 2^3$, and so on, until an algorithm failed to handle a domain size due to timeout, out of memory error, or out of precision errors. While we separately measured compilation and inference time, we primarily focus on total runtime, dominated by the latter.

4.2 Results

- On the ‘friends’ and ‘functions’ benchmarks, FORCLIFT runs until the model count exceeds $2^{31} - 1$.
- We are not aware of any formulas on which GANTRY scales worse compared to either FORCLIFT or FASTWFOMC. The one advantage that FASTWFOMC has over GANTRY is its support for counting quantifiers.
- Regarding programming languages and accuracy, we verified that the answers match for smaller domain sizes. Also, although written in different languages, both GANTRY and FASTWFOMC use the GNU Multiple Precision Arithmetic Library.

Figure 2 presents a summary of the experimental results. Only FASTWFOMC and GANTRY-BFS could handle the bijection-counting problem. For this benchmark, the largest domain sizes these algorithms could accommodate were 64 and 4096, respectively. On the other two benchmarks, FORCLIFT had the lowest runtime. However, due to its finite precision, it only scaled up to domain sizes of 16 and 128 for ‘friends’ and ‘functions’, respectively. FASTWFOMC outperformed FORCLIFT in the case of ‘friends’, but not ‘functions’, as it could handle domains of size 1024 and 64, respectively. Furthermore, both GANTRY-BFS and GANTRY-GREEDY performed similarly on both benchmarks. Similarly to the ‘bijections’ benchmark, GANTRY significantly outperformed the other two algorithms, scaling up to

domains of size 8192 and 67,108,864, respectively.

Another aspect of the experimental results that deserves separate discussion is compilation. Both Julia and Scala use just-in-time (JIT) compilation, which means that FASTWFOMC and FORCLIFT take longer to run on the smallest domain size, where most JIT compilation occurs. In the case of GANTRY, it is only run once per benchmark, so the JIT compilation time is included in its overall runtime across all domain sizes. Additionally, while FORCLIFT’s compilation is generally faster than that of GANTRY, neither significantly affects overall runtime. Specifically, FORCLIFT compilation typically takes around 0.5s, while GANTRY compilation takes around 2.3s.

Based on our experiments, which algorithm should be used in practice? If the formula can be handled by FORCLIFT and the domain sizes are reasonably small, FORCLIFT is likely the fastest algorithm. In other situations, GANTRY is expected to be significantly more efficient than FASTWFOMC regardless of domain size, provided both algorithms can handle the formula.

5 Conclusion and Future Work

In this work, we have presented a scalable automated FOKC-based approach to FOMC. Our algorithm involves completing the definitions of recursive functions and subsequently translating all function definitions into C++ code. Empirical results demonstrate that GANTRY can scale to larger domain sizes than FASTWFOMC while supporting a wider range of formulas than FORCLIFT. The ability to efficiently handle large domain sizes is particularly crucial in the weighted setting, as illustrated by the ‘friends’ example discussed in Section 4, where the model captures complex social networks with probabilistic relationships. Without this scalability, the practical usefulness of these models would be limited.

Future directions for research include conducting a comprehensive experimental comparison of FOMC algorithms to better understand their comparative performance across various formulas. The capabilities of GANTRY could also be characterised theoretically, e.g. by proving completeness for specific logic fragments like C^2 . Additionally, the efficiency of FOMC algorithms can be further analysed using fine-grained complexity, which would provide more detailed insights into the computational demands of different formulas.

References

- 1 Damiano Azzolini and Fabrizio Riguzzi. Lifted inference for statistical statements in probabilistic answer set programming. *Int. J. Approx. Reason.*, 163:109040, 2023. doi:10.1016/J.IJAR.2023.109040.
- 2 Jáchym Barvínek, Timothy van Bremen, Yuyi Wang, Filip Zelezný, and Ondrej Kuželka. Automatic conjecturing of p-recursions using lifted inference. In *ILP*, volume 13191 of *Lecture Notes in Computer Science*, pages 17–25. Springer, 2021. doi:10.1007/978-3-030-97454-1\2.
- 3 Paul Beame, Guy Van den Broeck, Eric Gribkoff, and Dan Suciu. Symmetric weighted first-order model counting. In *PODS*, pages 313–328. ACM, 2015. doi:10.1145/2745754.2745760.
- 4 Mark Chavira and Adnan Darwiche. On probabilistic inference by weighted model counting. *Artif. Intell.*, 172(6-7):772–799, 2008. doi:10.1016/J.ARTINT.2007.11.002.
- 5 Adnan Darwiche. On the tractable counting of theory models and its application to truth maintenance and belief revision. *Journal of Applied Non-Classical Logics*, 11(1-2):11–34, 2001. doi:10.3166/JANCL.11.11–34.
- 6 Paulius Dilkas and Vaishak Belle. Synthesising recursive functions for first-order model counting: Challenges, progress, and conjectures. In *KR*, pages 198–207, 2023. doi:10.24963/KR.2023/20.

- 512 7 Vibhav Gogate and Pedro M. Domingos. Probabilistic theorem proving. *Commun. ACM*,
513 59(7):107–115, 2016. doi:10.1145/2936726.
- 514 8 Eric Gribkoff, Dan Suciu, and Guy Van den Broeck. Lifted probabilistic inference: A
515 guide for the database researcher. *IEEE Data Eng. Bull.*, 37(3):6–17, 2014. URL: [http://
516 sites.computer.org/debull/A14sept/p6.pdf](http://sites.computer.org/debull/A14sept/p6.pdf).
- 517 9 Peter G. Hinman. *Fundamentals of mathematical logic*. CRC Press, 2018.
- 518 10 Manfred Jaeger and Guy Van den Broeck. Liftability of probabilistic inference: Upper
519 and lower bounds. In *StarAI@UAI*, 2012. URL: [https://starai.cs.kuleuven.be/2012/
520 accepted/jaeger.pdf](https://starai.cs.kuleuven.be/2012/accepted/jaeger.pdf).
- 521 11 Seyed Mehran Kazemi and David Poole. Knowledge compilation for lifted probabilistic
522 inference: Compiling to a low-level language. In *KR*, pages 561–564. AAAI Press, 2016. URL:
523 <http://www.aaai.org/ocs/index.php/KR/KR16/paper/view/12861>.
- 524 12 Kristian Kersting. Lifted probabilistic inference. In *ECAI*, volume 242 of *Frontiers
525 in Artificial Intelligence and Applications*, pages 33–38. IOS Press, 2012. doi:10.3233/
526 978-1-61499-098-7-33.
- 527 13 Ondrej Kuželka. Weighted first-order model counting in the two-variable fragment with
528 counting quantifiers. *J. Artif. Intell. Res.*, 70:1281–1307, 2021. doi:10.1613/JAIR.1.12320.
- 529 14 Sagar Malhotra and Luciano Serafini. Weighted model counting in FO2 with cardinality
530 constraints and counting quantifiers: A closed form formula. In *AAAI*, pages 5817–5824. AAAI
531 Press, 2022. doi:10.1609/AAAI.V36I5.20525.
- 532 15 Nils J. Nilsson. Probabilistic logic. *Artif. Intell.*, 28(1):71–87, 1986. doi:10.1016/
533 0004-3702(86)90031-7.
- 534 16 Feng Niu, Christopher Ré, AnHai Doan, and Jude W. Shavlik. Tuffy: Scaling up statistical
535 inference in Markov logic networks using an RDBMS. *Proc. VLDB Endow.*, 4(6):373–384,
536 2011. doi:10.14778/1978665.1978669.
- 537 17 Vilém Novák, Irina Perfilieva, and Jiri Mockor. *Mathematical principles of fuzzy logic*, volume
538 517. Springer Science & Business Media, 2012.
- 539 18 Fabrizio Riguzzi, Elena Bellodi, Riccardo Zese, Giuseppe Cota, and Evelina Lamma. A
540 survey of lifted inference approaches for probabilistic logic programming under the distribution
541 semantics. *Int. J. Approx. Reason.*, 80:313–333, 2017. doi:10.1016/J.IJAR.2016.10.002.
- 542 19 Stuart Russell and Peter Norvig. *Artificial Intelligence: A Modern Approach (4th Edition)*.
543 Pearson, 2020.
- 544 20 Dragan Z. Šaletić. Graded logics. *Interdisciplinary Description of Complex Systems: INDECS*,
545 22(3):276–295, 2024.
- 546 21 Parag Singla and Pedro M. Domingos. Lifted first-order belief propagation. In *AAAI*, pages
547 1094–1099. AAAI Press, 2008. URL: [http://www.aaai.org/Library/AAAI/2008/aaai08-173.
548 php](http://www.aaai.org/Library/AAAI/2008/aaai08-173.php).
- 549 22 Martin Svatos, Peter Jung, Jan Tóth, Yuyi Wang, and Ondrej Kuželka. On discovering
550 interesting combinatorial integer sequences. In *IJCAI*, pages 3338–3346. ijcai.org, 2023.
551 doi:10.24963/IJCAI.2023/372.
- 552 23 Jan Tóth and Ondrej Kuželka. Lifted inference with linear order axiom. In *AAAI*, pages
553 12295–12304. AAAI Press, 2023. doi:10.1609/AAAI.V37I10.26449.
- 554 24 Pietro Totis, Jesse Davis, Luc De Raedt, and Angelika Kimmig. Lifted reasoning for combina-
555 torial counting. *J. Artif. Intell. Res.*, 76:1–58, 2023. doi:10.1613/JAIR.1.14062.
- 556 25 Jan Tóth and Ondřej Kuželka. Complexity of weighted first-order model counting in the
557 two-variable fragment with counting quantifiers: A bound to beat, 2024. URL: [https:
558 /arxiv.org/abs/2404.12905](https://arxiv.org/abs/2404.12905), arXiv:2404.12905.
- 559 26 Timothy van Bremen and Ondrej Kuželka. Faster lifting for two-variable logic using cell
560 graphs. In *UAI*, volume 161 of *Proceedings of Machine Learning Research*, pages 1393–1402.
561 AUAI Press, 2021. URL: <https://proceedings.mlr.press/v161/bremen21a.html>.
- 562 27 Timothy van Bremen and Ondrej Kuželka. Lifted inference with tree axioms. *Artif. Intell.*,
563 324:103997, 2023. doi:10.1016/J.ARTINT.2023.103997.

- 564 **28** Guy Van den Broeck. On the completeness of first-order knowledge compilation for lifted
565 probabilistic inference. In *NIPS*, pages 1386–1394, 2011. URL: [https://proceedings.neurips.
566 cc/paper/2011/hash/846c260d715e5b854ffad5f70a516c88-Abstract.html](https://proceedings.neurips.cc/paper/2011/hash/846c260d715e5b854ffad5f70a516c88-Abstract.html).
- 567 **29** Guy Van den Broeck, Arthur Choi, and Adnan Darwiche. Lifted relax, compensate and then
568 recover: From approximate to exact lifted probabilistic inference. In *UAI*, pages 131–141.
569 AUAI Press, 2012. URL: [https://dslpitt.org/uai/displayArticleDetails.jsp?mmnu=1&
570 smnu=2&article_id=2349&proceeding_id=28](https://dslpitt.org/uai/displayArticleDetails.jsp?mmnu=1&smnu=2&article_id=2349&proceeding_id=28).
- 571 **30** Guy Van den Broeck, Wannes Meert, and Adnan Darwiche. Skolemization for weighted
572 first-order model counting. In *KR*. AAAI Press, 2014. URL: [http://www.aaai.org/ocs/
573 index.php/KR/KR14/paper/view/8012](http://www.aaai.org/ocs/index.php/KR/KR14/paper/view/8012).
- 574 **31** Guy Van den Broeck, Nima Taghipour, Wannes Meert, Jesse Davis, and Luc De Raedt. Lifted
575 probabilistic inference by first-order knowledge compilation. In *IJCAI*, pages 2178–2185.
576 IJCAI/AAAI, 2011. doi:10.5591/978-1-57735-516-8/IJCAI11-363.
- 577 **32** Yuanhong Wang, Juhua Pu, Yuyi Wang, and Ondrej Kuželka. Lifted algorithms for symmetric
578 weighted first-order model sampling. *Artif. Intell.*, 331:104114, 2024. doi:10.1016/J.ARTINT.
579 2024.104114.