IT342 Phase 3 Submission: Web Application

Name: Dillan Marquin Ycoy

Project: OrderFlow

1. GitHub Link

Repository: `https://github.com/dillandeluxe/IT342-Ycoy-OrderFlow.git`

2. Final Commit

Message: `IT342 Phase 3 – Web Main Feature Completed`
Link:
`https://github.com/dillandeluxe/IT342-Ycoy-OrderFlow/commit/06cba00b07897342dc50131e68983abfc887f79b`

3. Screenshots

A. Main Feature Page/Screen

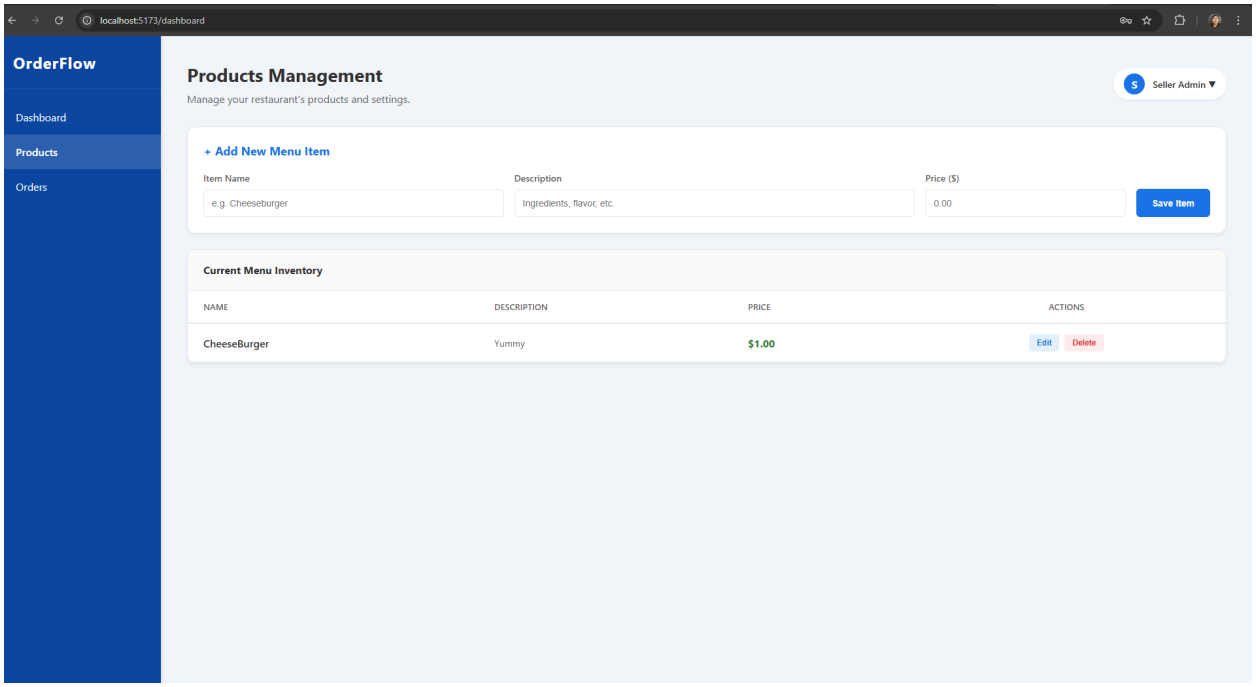

B. Adding or Using the Main Feature

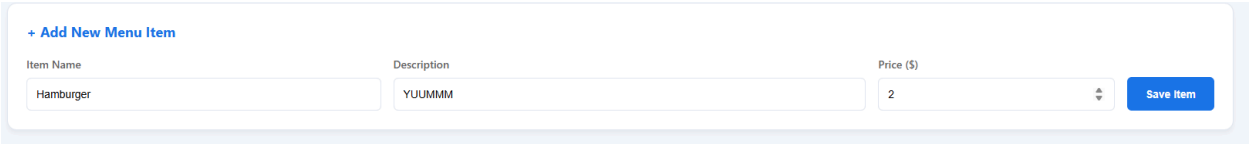

C. Successful Output/Result

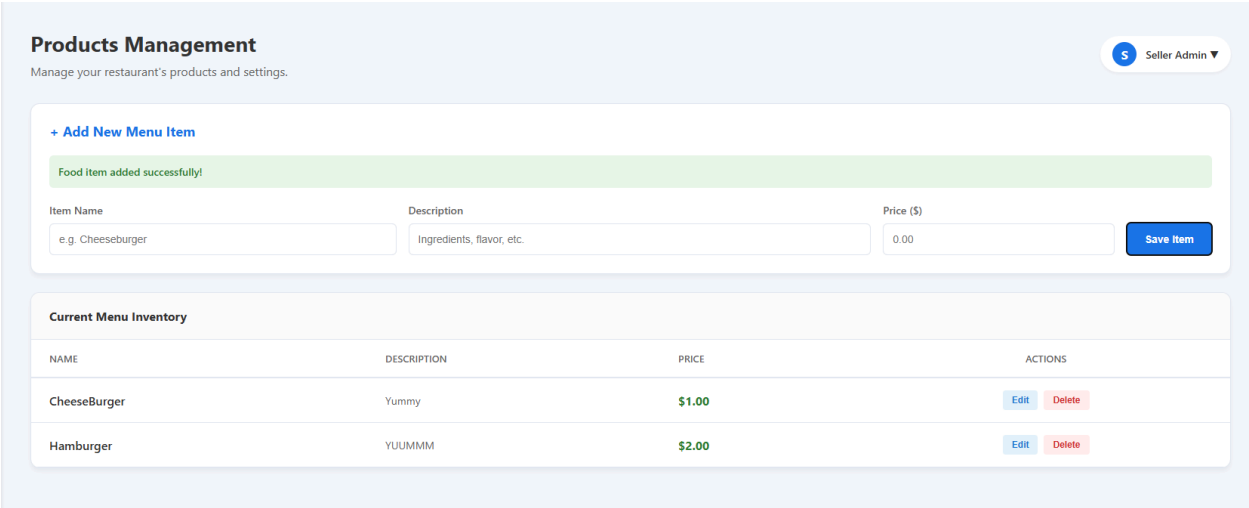

D. Database Record

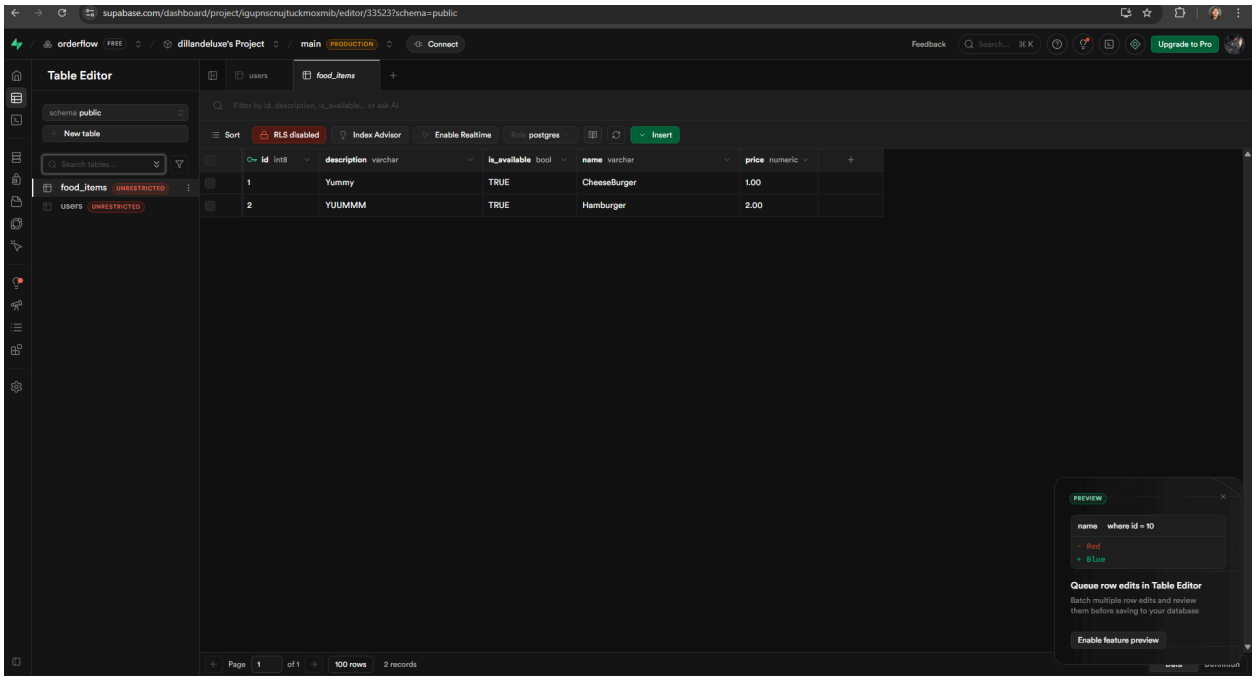

---

4. Short Summary

Description of the main feature: The main feature developed for the Phase 3 Web Application is the Seller Dashboard and Menu Management System. In accordance with the project's Software Design Document (SDD), the web interface is dedicated to restaurant administrators (Sellers) to manage their inventory, which serves as the core data engine for the buyer-facing mobile application.

Inputs and validations used: The system accepts three primary inputs: `name` (text string), `description` (text string), and `price` (decimal/numeric). Frontend validation utilizes strict HTML5 constraints (`required` and `step="0.01"`) to prevent null submissions. Before transmission, the React application parses the price input into a strict float to ensure data type integrity matches the backend `BigDecimal` requirements.

How the feature works: The frontend is built with React, utilizing `useState` to bind form inputs and `useEffect` to trigger data fetching on load. Upon form submission, an Axios instance (configured with request/response interceptors) sends the payload to the Spring Boot backend. The backend uses Spring Data JPA to persist the `FoodItem` entity into the Supabase PostgreSQL database. Upon a successful HTTP 200 response, the React state is cleared, a success message is rendered, and a subsequent GET request automatically refreshes the UI table with the updated inventory.

API endpoints used:

- `POST /api/food` (Creates a new menu item)
- `GET /api/food` (Retrieves the full menu inventory)
- `POST /api/auth/register` & `POST /api/auth/login` (Admin access routes)

Database table/s involved:

- `food_items`