

Migratory Birds

Given an array of bird sightings where every element represents a bird type id, determine the id of the most frequently sighted type. If more than 1 type has been spotted that maximum amount, return the smallest of their ids.

Example

`arr = [1, 1, 2, 2, 3]`

There are two each of types **1** and **2**, and one sighting of type **3**. Pick the lower of the two types seen twice: type **1**.

Function Description

Complete the `migratoryBirds` function in the editor below.

`migratoryBirds` has the following parameter(s):

- `int arr[n]`: the types of birds sighted

Returns

- `int`: the lowest type id of the most frequently sighted birds

Input Format

The first line contains an integer, `n`, the size of `arr`.
The second line describes `arr` as `n` space-separated integers, each a type number of the bird sighted.

Constraints

- $5 \leq n \leq 2 \times 10^5$
- It is guaranteed that each type is 1, 2, 3, 4, or 5.

Sample Input 0

```
6
1 4 4 4 5 3
```

Sample Output 0


```
4
```

Explanation 0

The different types of birds occur in the following frequencies:

- Type **1**: 1 bird
- Type **2**: 0 birds

`return num_birds_type.index(max(num_birds_type)) + 1`

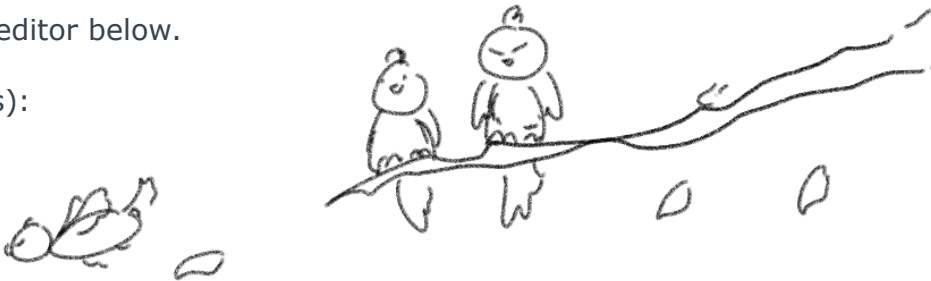

`num_birds_type = 5 * [0]`
`counter = 0`

`for i in range(n):`
 `if arr[i] == 1:`
 `num_birds_type[0] += 1`

`elif arr[i] == 2:`
 `num_birds_type[1] += 1`

`...`
`elif arr[i] == 5:`

- Type **3**: **1** bird
- Type **4**: **3** birds
- Type **5**: **1** bird

The type number that occurs at the highest frequency is type **4**, so we print **4** as our answer.

Sample Input 1

```
11
1 2 3 4 5 4 3 2 1 3 4
```

Sample Output 1

```
3
```

Explanation 1

The different types of birds occur in the following frequencies:

- Type **1**: **2**
- Type **2**: **2**
- Type **3**: **3**
- Type **4**: **3**
- Type **5**: **1**

Two types have a frequency of **3**, and the lower of those is type **3**.