

Paragraphs

- The **<p>** tag in HTML defines a paragraph. These have both opening and closing tags. So anything mentioned within **<p>** and **</p>** is treated as a paragraph.
- Most browsers read a line as a paragraph even if we don't use the closing tag i.e, **</p>**, but this may raise unexpected results. So, it is a good convention, and we **must** use the closing tag.

Syntax:

```
<p> Content </p>
```

Example:

```
<p>This is first paragraph.</p>  
<p>This is second paragraph.</p>  
<p>This is third paragraph.</p>
```

Output:

```
This is first paragraph.  
  
This is second paragraph.  
  
This is third paragraph.
```

❖ Key Points:

- As already mentioned, the **<p>** tag automatically adds space before and after any paragraph, which is basically margins added by the browser.

- If a user adds multiple spaces, the browser reduces them to a single space.
- If a user adds multiple lines, the browser reduces them to a single line.
- By default, the display of the Paragraph element is set to “block” which you can change using CSS. This means that if you add another paragraph to the webpage the next paragraph will be inserted in the next line on the webpage.

❖ Space inside HTML Paragraph

If you put a lot of spaces inside the HTML p tag, browser removes extra spaces and extra line while displaying the page. The browser counts number of spaces and lines as a single one.

Example:

```
<p>
I am
going to provide
you a tutorial on HTML
and hope that it will
be very beneficial for you.
</p>
<p>
Look, I put here a lot
of spaces          but          I know, Browser will ignore it.

</p>
<p>
ou cannot determine the display of HTML</p>
<p>because resized windows may create different result.
</p>
```

Output:

I am going to provide you a tutorial on HTML and hope that it will be very beneficial for you.

Look, I put here a lot of spaces but I know, Browser will ignore it.

You cannot determine the display of HTML

because resized windows may create different result.

❖ **
 tag**

There is a way to let the HTML know where the browser needs to change the lines by using the **
** tag. These tags do not have any closing tag. So, just a single opening tag will change the line.

Syntax:


```
<br>
```

Example:

```
<!DOCTYPE html>
<html>
  <head>
  </head>
  <body>
    <h2> Use of line break with paragraph tag</h2>
    <p><br>Papa and mama, and baby and Dot,
    <br>Willie and me?the whole of the lot
      <br>Of us all went over in Bimberlie's sleigh,
      <br>To grandmama's house on Christmas day.
```

```
</p>  
</body>  
</html>
```

Output:

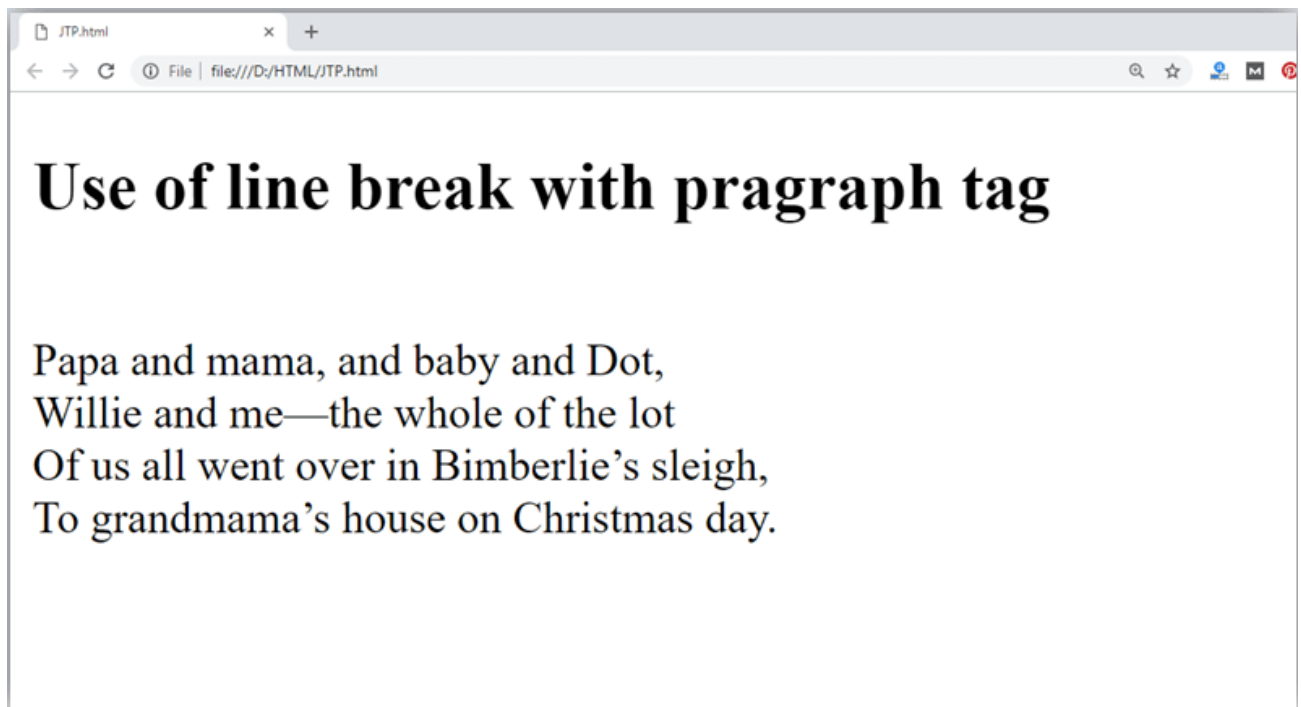

❖ <hr> tag

An HTML <hr> tag is used to apply a horizontal line between two statements or two paragraphs. Following is the example which is showing use of <hr> tag with paragraph.

Example:

```
<!DOCTYPE html>  
<html>  
  <head>  
    </head>  
  <body>
```

```
<h2> Example to show a horizontal line with paragraphs</h2>  
<p> An HTML hr tag draw a horizontal line and separate two paragraphs with that line <hr> it will start a new paragraph.  
</p>  
</body>  
</html>
```

Output:

