



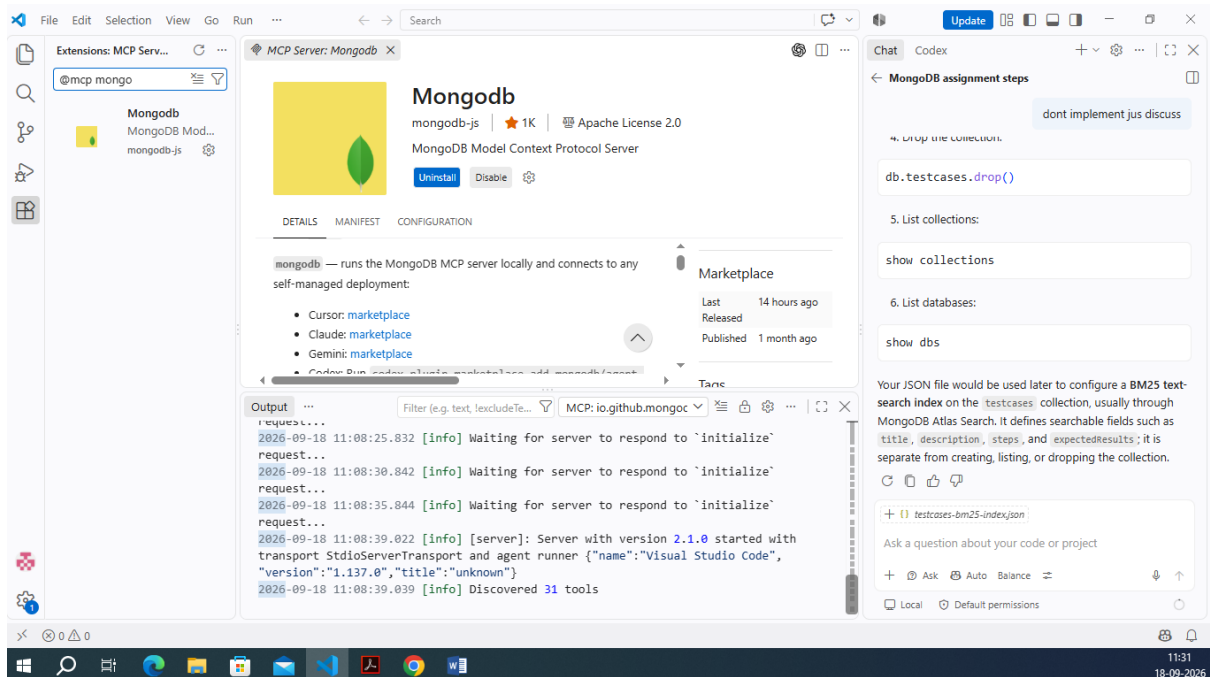

Additional step implemented for not revealing the connection string which have the user and password of mongo db connection.
Where we can enter the string on terminal only.

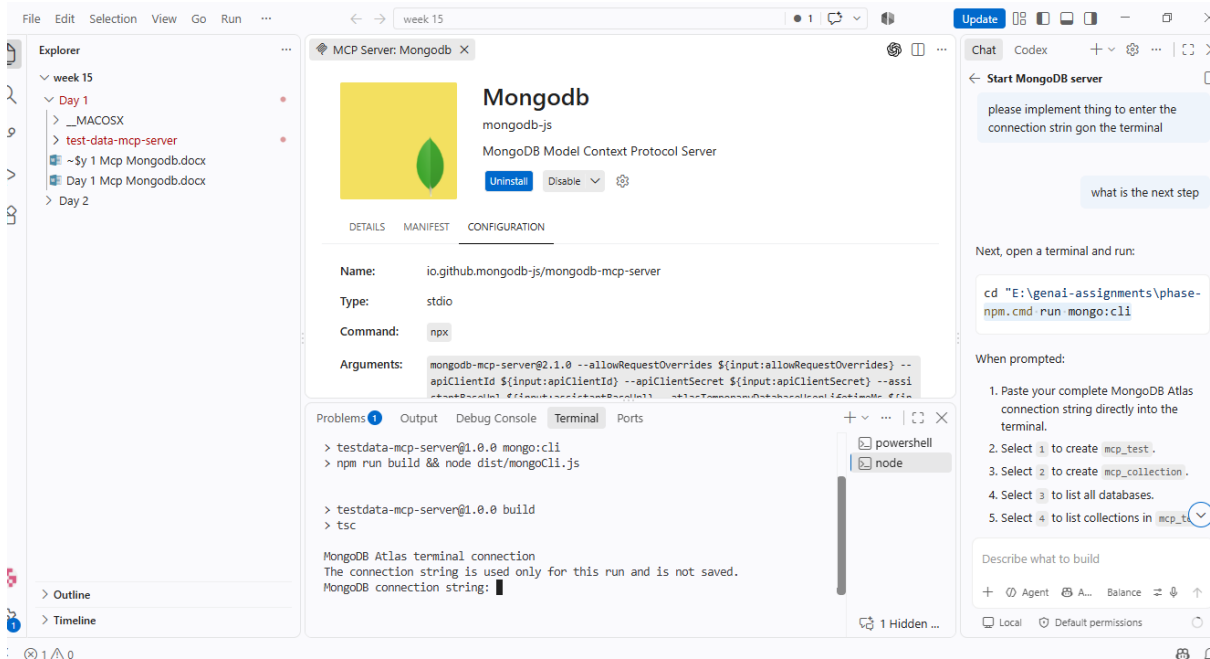

Connected To DB:

The screenshot shows the Visual Studio Code interface with the MongoDB MCP Server extension installed. The Explorer pane on the left shows the project structure. The main editor displays the 'Mongodb' extension details, including its name, type, command, and arguments. The terminal pane at the bottom shows the command to run the server and the resulting connection string.

Mongodb
mongodb-js
MongoDB Model Context Protocol Server

Uninstall Disable

DETAILS MANIFEST CONFIGURATION

Name: io.github.mongodb-js/mongodb-mcp-server
Type: stdio
Command: npx
Arguments: mongodb-mcp-server@2.1.0 --allowRequestOverrides \${input:allowRequestOverrides} --apiClientId \${input:apiClientId} --apiClientSecret \${input:apiClientSecret} --assistantName \${input:assistantName} --assistantRole \${input:assistantRole} --assistantCapabilities \${input:assistantCapabilities}

Problems Output Debug Console Terminal Ports

```
> npm run build && node dist/mongoCli.js
```

```
> testdata-mcp-server@1.0.0 build
```

```
> tsc
```

MongoDB Atlas terminal connection
The connection string is used only for this run and is not saved.
MongoDB connection string: mongodb+srv://knrchemcare_db_user:yf7jEFNr7pGhGu1j@di
neshdb.dyu3c38.mongodb.net

Created collection -mcp-test1

The screenshot shows the MongoDB Data Explorer interface. The left sidebar shows the 'Data Explorer' view with the 'mcp_test1' collection selected. The main pane displays a table of databases and collections.

Data Explorer

My Queries
Data Modeling

CLUSTERS (1)

Search clusters

DineshDB

admin
compliance_coverage_age...
db_stories_tests
local
mcp_test1
multimodal-embedding

DineshDB

View monitoring Visualize your data Create database Refresh

Database name	Storage size	Data size	Collections	Indexes
admin	0 B	0 B	0	0
compliance_coverage_agent	3.79 MB	3.42 MB	1	1
db_stories_tests	62.34 MB	93.89 MB	2	2
local	-	-	1	-
mcp_test1				
multimodal-embedding	217.09 kB	191.07 kB	1	1

Alert System Status: All Good

Listing the collection

The screenshot shows the VS Code interface with the MCP Server: MongoDB configuration panel open. The configuration details are as follows:

Property	Value
Name	io.github.mongodb-js/mongodb-mcp-server
Type	stdio
Command	npm
Arguments	mongodb-mcp-server@2.1.0 --allowRequestOverrides \${input:allowRequestOverrides} --apiClientId \${input:apiClientId} --apiClientSecret \${input:apiClientSecret} --apiSecretKey \${input:apiSecretKey}

The terminal output shows the command being run and the resulting MongoDB connection string and collections:

```

> testdata-mcp-server@1.0.0 build
> tsc

MongoDB connection string: mongodb+srv://knrcemcare_db_user:yf7jEfNw7pGwGu1j@di
neshdb.dyuic38.mongodb.net
Collections in mcp_test1 (1):
init
PS E:\genai-assignments\phase-2\week 15\Day 1\test-data-mcp-server>
  
```

The right sidebar shows the Chat window with the message "can you list the collection here?" and the response "Collections in mcp_test1 (1): - init".

Listing db

The screenshot shows the VS Code interface with the MCP Server: MongoDB configuration panel open. The configuration details are as follows:

Property	Value
Name	io.github.mongodb-js/mongodb-mcp-server
Type	stdio
Command	npm
Arguments	mongodb-mcp-server@2.1.0 --allowRequestOverrides \${input:allowRequestOverrides} --apiClientId \${input:apiClientId} --apiClientSecret \${input:apiClientSecret} --apiSecretKey \${input:apiSecretKey}

The terminal output shows the command being run and the resulting MongoDB connection string and databases:

```

MongoDB connection string: mongodb+srv://knrcemcare_db_user:yf7jEfNw7pGwGu1j@di
neshdb.dyuic38.mongodb.net
Databases (6):
- compliance_coverage_agent
- db_stories_tests
- mcp_test1
- multimodal-embedding
- admin
- local
PS E:\genai-assignments\phase-2\week 15\Day 1\test-data-mcp-server>
  
```

The right sidebar shows the Chat window with the message "list the database" and the response "Databases (6): - compliance_coverage_agent - db_stories_tests - mcp_test1 - multimodal-embedding - admin - local".

Dropped the collection : First drop sub folder - Init

The screenshot shows the VS Code interface with the MCP Server: MongoDB configuration panel open. The configuration details are as follows:

Property	Value
Name	io.github.mongodb-js/mongodb-mcp-server
Type	stdio
Command	npm
Arguments	mongodb-mcp-server@2.1.0 --allowRequestOverrides \${input:allowRequestOverrides} --apiClientId \${input:apiClientId} --apiClientSecret \${input:apiClientSecret} --apiSecretKey \${input:apiSecretKey}

The terminal output shows the command being run and the resulting MongoDB connection string and collections:

```

collection name [mcp_test1]: init
Dropped init from mcp_test1: true
1. Create mcp_test database
2. Create a collection in a database
3. List all databases
4. List collections in mcp_test
5. Drop a collection
6. Exit
Choose an action: []
  
```

The right sidebar shows the Chat window with the message "list the database" and the response "Databases (6): - compliance_coverage_agent - db_stories_tests - mcp_test1 - multimodal-embedding - admin - local".