## **SKEDGE**

# Smarter course scheduling for our University of Rochester

Dan Hassin

Supervised by Professor Philip Guo

Department of Computer Science University of Rochester Rochester, New York

April 13, 2016

submitted in partial fulfillment of the requirements for the degree honors bachelor of science

and as an open letter addressed to the information technology staff at the university of rochester

## Contents

Al	ostra	ct	i			
1	Intr	roduction	1			
	1.1	Overview of CDCS	1			
	1.2	Overview of Skedge	1			
2	Design in reaction to CDCS					
	2.1	Modernity	4			
	2.2	Usability	8			
	2.3	Search friendliness	12			
	2.4	Peer connectivity	18			
3	Tec	hnical overview	24			
	3.1	System architecture	24			
	3.2	Data storage	24			
	3.3	Usage data collection	24			
4	Dat	a analytics	<b>25</b>			
	4.1	Usage	25			
	4.2	Effectiveness	33			
	4.3	Complexity of users' searches over time	36			
5	Con	Conclusion 3				
	5.1	Proposal to the University	38			
	5.2	Resources	39			
	5.3	Acknowledgments	39			
Bi	bliog	graphy	40			

# List of Figures

1.1	CDCS and Better CDCS in their current states	2
1.2	Skedge, with the search query ${\tt csc}$ and the user's current schedule on the right .	3
2.1	CDCS in July 2, 2010, virtually unchanged from today, courtesy of $Archive.org$ .	5
2.2	CDCS and Skedge running on a mobile device	6
2.3	Section and subsection presentation in CDCS and Skedge	9
2.4	Hoverable and clickable course mention in the $Prerequisites$ field of a course	10
2.5	Exporting to Google Calendar (note the other export options on the top right) .	11
2.6	Two philosophies of search method	12
2.7	Mapping from CDCS's form-based search to SkedgeQL	13
2.8	Comparison of sharing schedules on Facebook	18
2.9	Skedge's per-schedule share page	19
2.10	Skedge Social landing page (http://skedgeur.com/social) for a user whose	
	account has not yet been integrated with Facebook. Skedge Social appears in the	
	context of the ordinary Skedge interface, and is accessible with the globe icon to	
	the right of the searchbar	20
2.11	Skedge Social's schedule feed (the default of four tabs) for a user who has inte-	
	grated their Skedge account with Facebook. The user can toggle between a peer's	
	schedule and the list of their <i>liked</i> courses	21
2.12	Skedge Social integrating into a course search result	22
2.13	Notifications: none, one, or both of them can adorn the Skedge Social logo	23
4.1	Searches over time, with major relevant calendar events annotated	26
4.2	Breakdown of search queries by type of search	27
4.3	Other metrics of Skedge usage over time	30
4.4	Hovering over a course block in Skedge's side-schedule shows at-a-glance infor-	
	mation about it; clicking on it navigates the user to that course	32
4.5	Etc	33
4.6	Etc	34
4.7	$\operatorname{Etc} \ldots \ldots \ldots \ldots \ldots \ldots$	35
4.8	Etc	37

#### Abstract

In this paper I present Skedge, a web application for students to comfortably and effectively engage with the University's course catalog. Skedge matches and surpasses the capabilities of the existing University tool for this purpose, "Course Description / Course Schedule" (CDCS) and presents its information in a more visually appealing way. As a result, Skedge boasts strong user-retention rates, long session durations, and high student adoption despite having virtually no advertisement. Through collected usage data, I demonstrate that a) Skedge's differences from and additions to CDCS are usable and have real-world need, b) the three major use-cases associated with course scheduling—direct search, exploratory search, and peer recommendation—are effectively accommodated by Skedge, and c) Skedge's novel search mechanism is user-friendly and self-teaches to users over time.

## Chapter 1

## Introduction

This paper will begin by

### 1.1 Overview of CDCS

CDCS is the University's official tool for

#### 1.1.1 "Better CDCS"

### 1.2 Overview of Skedge

Skedge is a website I developed in 2014 and have been maintaining and developing since.

Bookmarks

Students, parents, department coordinators, and faculty can all benefit from such tool improvements.

user accounts are lightweight, no login, cookie (browser) based

1.2



(a) CDCS, with the search query csc



(b) Better CDCS, a separate browser extension that embeds buttons into the CDCS course results interface, allowing users to add courses to a locally-stored schedule

Figure 1.1: CDCS and Better CDCS in their current states



Figure 1.2: Skedge, with the search query csc and the user's current schedule on the right

## Chapter 2

## Design in reaction to CDCS

From its very inception, Skedge's functionality and visual design were driven by the shortcomings of CDCS. Skedge is built bottom-up, not top-down—every aspect of the application was either made as a reaction to a particular grievance in CDCS or as the natural evolution of an existing feature. Skedge is thus rooted in usability derived from real need, not mere conjecture along the question "what could students want?". Its success with students, shown in Chapter 4, demonstrates that this usability extends beyond my own standard and can fulfill the various discovered use-cases of students in general.

In this chapter, I invite the reader along on a tour of these grievances and their remedies.

### 2.1 Modernity

CDCS is an old system, relatively speaking, and its development on user-facing features has been almost entirely stagnant. It launched in 2009, seven years ago, and has hardly changed since. Figure 2.1 shows CDCS in July 2010, which, besides the addition of a few search fields, is identical to its current version. Yet, since its introduction in 2009, we have seen the rise of mobile devices into ubiquity, a boom in "hacker culture" and public APIs, and the capability for standalone web applications to be as sophisticated and dynamic as desktop-class applications without the aid of browser extensions. With this in mind, Skedge brings course scheduling to the modern era.



Figure 2.1: CDCS in July 2, 2010, virtually unchanged from today, courtesy of Archive.org

#### 2.1.1 AJAX vs. GET requests

CDCS makes an AJAX request with every submitted search, meaning that the server receives the request and returns a response all without any page navigation (i.e. the URL stays the same and no new page is loaded as the search results are displayed). Skedge, however, makes a GET request for every search submission, meaning that the user's browser loads a new page that contains the results and whose URL reflects the search query. This simple technical design decision substantially increases usability for two reasons:

- 1. Page navigations allow users to leverage their browser history as it was designed—after making several searches, CDCS users who use the back button on their browsers will be brought to the page loaded before the very first use of CDCS, possibly losing time spent in crafting sophisticated searches. Skedge users can go backwards and forwards through their search histories and scroll locations using native browser functionality.
- 2. Every search query has a unique URL (e.g. http://skedgeur.com/?q=csc for csc), so users are able to send links to a specific course or search result to others. With CDCS, the URL remains https://cdcs.ur.rochester.edu throughout the duration of the session.

#### 2.1.2 Mobile

According to Mary Meeker's 2015 Mobile Technology Trends from Kleiner Perkins Caufield & Byers(1), in 2014, 51% of adult time spent per day on the Internet was from a mobile device, versus 42% spent on a desktop computer or laptop. Time spent on the Internet with mobile devices reached three hours per day in 2014, compared to less than one hour in 2010 (when there was 12% mobile vs. 75% desktop/laptop time share).

Undeniably, supporting mobile devices and tablets in web applications is crucial for usability nowadays. Note how Skedge responds to the device form-factor in Figure 2.2b, compared with CDCS's lack of mobile support in Figure 2.2a. CDCS on mobile requires the user to pinch and drag around both to read results and to make new searchs, while Skedge adapts content to the device's screen and fixes the search bar to the top of the screen for easy access while browsing.

Moreover, since no major mobile browser currently supports browser extensions (and if one did, the extensions themselves would most likely need to be re-architected), CDCS on a mobile device loses all scheduling functionality, unlike Skedge.



Figure 2.2: CDCS and Skedge running on a mobile device

#### 2.1.3 Public API

With the increasing number of attendees at University of Rochester's hackathons, it is clear that the University's "hacker culture" is growing—more students are collaborating to build side-projects that integrate resources and services often benefitting the student community. Open-source and open-information services greatly help to foster such innovation, and having public APIs is essential toward this end.(2)(3)

Skedge provides a public JSON API at the root URL http://www.skedgeur.com/api/, made at the request of a student that was interested in using its course data, and the API has already been used in projects by several other student groups. The endpoints included are /api/courses?q=query (Skedge's query language—described in detail in section 2.3—is supported here), /api/departments?q=optional\_query, and /api/instructors?q=optional\_query.

#### 2.1.4 Built-in scheduler

As explained in the introduction, Skedge offers users a course schedule right in the page, unlike CDCS which requires the Better CDCS browser extension for this functionality. Having a schedule native in the application has several advantages:

- 1. Besides some CDCS users possibly not even knowing about Better CDCS, not requiring a browser extension provides for a faster and more seamless user onboarding, especially when building schedules on public computers when extensions can't always be installed.
- 2. Skedge accommodates a schedule into its design, whereas Better CDCS has to work around an interface that wasn't designed with one. As a result, Better CDCS has lower usability, requiring the user to toggle between search results and their schedule. Skedge, conversely, gives users immediate visual feedback on how a course would fit into their schedule.
- 3. Schedule data is centralized on Skedge's servers as opposed to locally in a browser cache, meaning that it can synchronize across a user's devices or in sessions on public computers, persists browser resets, and can be easily publicly shared to other users.
- 4. Extensions like Better CDCS have limited browser support. Internet Explorer and mobile browsers are unsupported, for example.

### 2.2 Usability

#### 2.2.1 Visual presentation

Skedge offers several improvements over CDCS in the quality of its data presentation:

- 1. Displaying information in a rigid, tabular way, CDCS does not leverage fonts and styling to adhere to typographical standards. Instead of using larger or bolder type, for instance, course titles are listed entirely in uppercase (e.g. "INTRO TO PROGRAMMING"), which has been shown to be less readable than lower-case text (4). This problem is compounded when users browse through possibly hundreds of courses. Skedge displays properly capitalized titles styled with large type that helps users to quickly group and locate them.
- 2. While possibly not a fault of the CDCS system itself, there are very frequently typos or missing spaces in the "comments" section of courses, which Skedge corrects.
- 3. CDCS displays all course times in 24-hour time, which, despite being concise and unambiguous, is not what most US students are used to. Skedge displays 12-hour time with AM/PM, and prevents ambiguities through the course-in-schedule visualization on hover.

#### 2.2.2 Section display

Often, courses are offered at multiple timeslots, sometimes taught by different instructors and in different rooms. These are called *sections* of a course. CDCS displays each section in a discrete "section box" (all of which are nondistinct and have equal size), even if two sections pertain to the same course. (In this regard, CDCS should really be *SDSS*, "*Section* Description / *Section* Scheduler", because it operates on the level of sections, not courses.) As a result, course descriptions (which can be lengthy), titles, prerequisites, comments, etc. are all repeated for every section of the course.

To make matters worse, many courses in the University course catalog include what I call subsections—secondary sections associated with a course that must be registered for separately. Namely, these are labs, lab lectures, workshops, and recitations. Once again, CDCS displays all of these as separate "section boxes" by default, and the course description is yet again repeated for each subsection (which, this time can be tens of times), wasting valuable page space.

Collapsing subsections within courses can result in massive improvements in filtering the data most relevant to the user. For instance, the search csc for Fall 2016 on CDCS results in 147 "section boxes", while Skedge only shows 45 "course boxes", with subsections collapsed within their respective course. This triage reduces the data (noise, more correctly) displayed by 70%, and is even higher for departments with more abundant labs and workshops, such as Physics (Skedge: 35 vs. CDCS: 226, an 85% reduction), or Chemistry (Skedge: 25 vs. CDCS: 171, an 86% reduction).

Skedge can reduce the amount of data to scroll through—and thus the time taken to do so—by six- or seven-fold (and possibly more, counting the attention users otherwise have to pay to distinguish course from subsections), so this design decision has a large usability payoff.

Additionally, some Physics courses (for instance) follow the "A / B" subsection structure, where a student registered for an "A Section" (as opposed to the "B Section") must also register for an "A Lab" and "A Workshop". Skedge organizes subsections for these cases to help sort the two out, which get mixed up in CDCS's linear output.

Note that in Figure 2.3a (CDCS), the first two boxes are sections for the same course, and the next two are labs for that course. Four more lab sections and *twenty* more workshop sessions for that same course follow below the truncated screenshot. Figure 2.3b (Skedge) demonstrates how this information can be conveyed more concisely.



(a) Ungrouped sections in CDCS

Figure 2.3: Section and subsection presentation in CDCS and Skedge

#### 2.2.3 Course reference

Course mentions will often appear in the prequisites, crosslists, comments, or description fields of a course (e.g. "Prerequisites: CSC 171 or equivalent; MTH 150 is REQUIRED"). Users frequently want to find out more information about mentioned courses (frequency shown in Chapter 4). In CDCS, because course mentions are displayed as ordinary plaintext, users have to scroll back up, make a search for that course, and lose their current search context as a result.

Skedge solves this by linking each course mention to its search query, in the style of Wikipedia. Moreover, it prevents context-switches by displaying a popover containing information on that course when the user hovers their cursor over the course mention (see Figure 2.4).



Figure 2.4: Hoverable and clickable course mention in the *Prerequisites* field of a course

#### 2.2.4 Multiple schedule support

With an active schedule still in use, students often want to plan their next semester's schedule. This is impossible with the Better CDCS extension, which instead adds courses from both terms to the same schedule, sometimes causing non-existent conflicts. A CDCS user must clear their entire schedule out before scheduling a new one. On Skedge, however, when a user adds a section of a term for which they do not yet have a schedule, a new one will automatically be created for that term. Users are also able to access their old schedules.

Additionally, a common feature request for Skedge is the implementation of multiple schedules per term, allowing users to experiment with different schedule possibilities.<sup>1</sup>

<sup>&</sup>lt;sup>1</sup>Currently under development, but simple to implement given the existing schedule management structure.

#### 2.2.5 Schedule export

Better CDCS provides two ways for users to export their schedule—as image or to Google calendar—except that the Google Calendar export feature is completely non-functional, telling users that "This export tool will only work properly for the Spring of 2015" only after they authorized the tool to access their Google account.

Notably missing as an export option is the iCalendar file format (extension .ics), which can be imported into many calendar software products. It is the only format the Mac OS and iOS Calendar applications can accept, to offer one example of very popular products that are therefore unsupported by Better CDCS.

Skedge provides the option for users to export their own or another user's schedule directly to Google Calendar (even allowing users to choose a calendar—or create a new one for Skedge—to insert their courses into), as an *image* (JPEG, PNG, or SVG), or in .ics format (see Figure 2.5). The .ics and Google Calendar exports include course codes, titles, locations, and properly repeat courses until the end of the current semester.

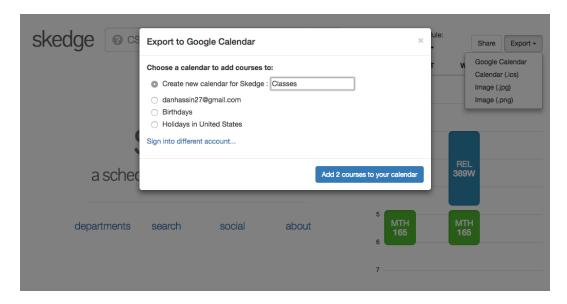



Figure 2.5: Exporting to Google Calendar (note the other export options on the top right)

### 2.3 Search friendliness

The most important usability concern of all for a course explorer/scheduler is being able to effectively  $find\ courses$ . In this section, I will present SkedgeQL, a domain-specific query language that is free-form and based on natural language. Next, I will demonstrate how Skedge leverages SkedgeQL to handle the three search criteria students have for finding courses better than CDCS does.

#### 2.3.1 Natural language search

In the spirit of this chapter's theme, Skedge's search method was, again, primarily designed as a reaction to CDCS's. CDCS's search method is a 15-field form (see Figure 2.6a), of which I only found myself regularly using two (one of them being the required "Year/Term" field). This prompted me to closely examine the fields to a) determine redundancies between them and b) find how to make some of the valuable filter fields more usable. From this came Skedge's unified, natural language based search method, which I call the Skedge Query Language, or SkedgeQL. Figure 2.6b is a list of example possible searches shown to users as they type.

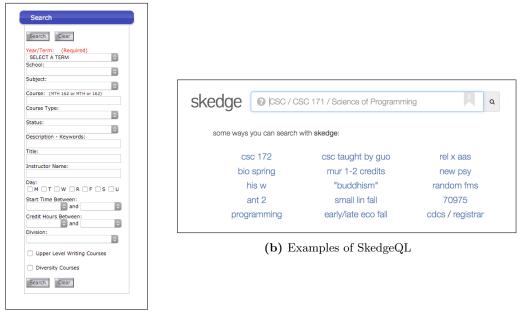

(a) Form-based search in CDCS

Figure 2.6: Two philosophies of search method



Figure 2.7: Mapping from CDCS's form-based search to SkedgeQL

Figure 2.7 is a mapping of each CDCS field to an element of SkedgeQL or its unified search. Dashed lines that end abruptly are fields that were deemed unnecessary or redundant due to a Skedge-unique feature. To briefly sum up my rationale for each field:

#### Removed fields

- 1. School (e.g. "College of Arts, Sciences, & Engineering", "Eastman School of Music", etc.) was removed in favor of always searching all schools, as is the default on CDCS. Searching by department codes (which are unique across schools) designates a school regardless.
- 2. Course Type (e.g. "Main Course", "Lab", "Workshop" etc.) was removed because Skedge already embeds subsections into courses.
- 3. Status (i.e. "Open", "Closed", or "Cancelled") was removed because it is often useful to see closed courses if there is possibility of the instructor letting in more students, and searching for cancelled courses did not seem useful.
- 4. *Division* (i.e. "Humanities", "Social Sciences", etc.) was removed because it seems too broad to be useful, but it could be added to SkedgeQL if there is demand.

#### Unified Search (left side)

The *unified search* components can be entered directly into the single Skedge search field, along with SkedgeQL. It includes the CDCS fields:

- 1. Subject (department)
- 2. Course (department code and/or course number, e.g. "csc 171")
- 3. Title (course title)

#### SkedgeQL (right side)

SkedgeQL is enterable using special keywords and, optionally, qualifiers for those keywords. It includes the CDCS fields:

- 1. Year/term, which is no longer required. It maps to the keywords {spring,fall,summer,winter} and a four-digit year to specify term and year, and defaults to the current year and term.
- 2. Description, which is specified by surrounding the query in quotes (e.g. ""buddhism"").
- 3. *Instructor name*, which is specified with the keyword taught by and given the instructor name as a qualifier (e.g. "taught by Guo").
- 4. Day, which can be specified with the keywords {m,t,w,r,f,s,u} for filtering by specific days of the week (e.g. "mwf" for Monday-Wednesday-Friday classes only).
- 5. Start time between is replaced by the keywords {early,late} which sort (ascending and descending, respectively) the results by start time.
- 6. Credit hours between is replaced by the keyword credits, qualified with a number or range (e.g. "dan 1-2 credits" for Dance classes with 1-2 credits).
- 7. Upper level writing is replaced by the single-letter keyword w (e.g. "his w" for History upper-level writing courses).

As noted in Figure 2.7, many use-cases for the *Day* and *Start time between* fields can be obsoleted with an *autofit* feature that will be described later in the next subsection.

#### Advantages of SkedgeQL

The main advantage of Skedge's search system is in its reduction of 15 fields to a single one. I hypothesize that since the vast majority of searches fit the department code / course number pattern (this hypothesis later supported in Chapter 4), the time required to force the user to select a term and then find the correct box to enter this query is wasted.

It has been shown that once learned, natural language based query languages can be faster, more intuitive, and more usable than traditional form-based methods (5). WolframAlpha's hugely successful online free-form search is a notable pioneer in this field (6).

Lastly, SkedgeQL is more easily extendable as new search features are invented. For CDCS, the more form fields that are added to the sidebar, the less usable its user interface becomes. For Skedge, while it may take longer for users to learn a bigger query language, there is no issue with crowding user interface real estate.

#### Disadvantages of SkedgeQL

One disadvantage of SkedgeQL is the possible grammatical ambiguity of some queries. For instance, the query "Fall of the Roman Empire" could be searching for courses with that as the title, or searching for courses in the *fall term* with the title "of the Roman Empire". Unless multiple queries are run and more complex natural language processing is done, the system would have a hard time disambiguating between the two. This could also be solved with a "did you mean?" feature, which disambiguates a query into every possible SkedgeQL breakup.

Another notable disadvantage of SkedgeQL is having to know it, and it having a possibly steep learning curve for some users. However, the argument will be made in Chapter 4 that simply by using the site over time, users will self-learn Skedge. One of the ways this is possible is thanks to Skedge's search system being multi-purposed. Hyperlinks around the site—instructor names (which link to "taught by <name>"), course references, or schedule course blocks for example—all direct the user to an ordinary search results page with the search field populated, signalling to the user that such a search is possible.

#### 2.3.2 Course selection criteria

I have identified *three* use-cases for course searching (the existence of and distinction between these cases will be demonstrated with collected usage data in Chapter 4). The three cases are **requirements**, **electives**, and **peer recommendations**. SkedgeQL and other application features offer substantial improvements over CDCS for each of these cases.

#### Requirements

These are courses that are required for a student to complete their degree, and are typically searched for directly. The functionality required here is simple and is mostly satisfied by CDCS, but Skedge offers the following improvements to the process:

- 1. Crosslisted courses: For students with more than one major and/or minor, searching for courses that are crosslisted between departments can be valuable in reducing their requirement load. This search filter is unsupported by CDCS, and is supported by Skedge using the operator "x" (e.g. "csc x ece" for courses listed under both Computer Science and Electrical & Computer Engineering departments).
- 2. Clusters: Skedge already stores a users' previously taken courses, so it can intelligently suggest either already-completed clusters or courses that would complete clusters that are missing one or two courses. For students with many degree requirements already, this could greatly reduce time spent navigating the University's Cluster Search Engine (for which I also have a long list of grievances, but that lies outside the scope of this paper.)<sup>2</sup>
- 3. CRN: Surprisingly, search by Course Reference Number is unsupported by CDCS. It is supported by Skedge by just searching the 5-digit number.

#### Electives

Elective courses can either be courses that are required for a major or minor, but are chosen by the student, or they can be courses of particular interest to students who have the flexibility to take them. For this use-case, Skedge offers search, filter, and sorting features that substantially aid users in browsing through courses and discovering ones they might want to take. Note that none of the following features are supported by CDCS.

SkedgeQL includes the "new" keyword, which qualifies an accompanying search by only
displaying the courses that were not offered the previous year for that term. For instance,
searching "new csc" today (Fall 2016) would show Fall Computer Science courses that
have been added to the catalog or changed since Fall 2015.

<sup>&</sup>lt;sup>2</sup>This feature is under development and is not currently live. It was, incidentally, requested by a Skedge user.

- SkedgeQL could include an "autofit" keyword, which would take into account the user's current schedule, and only show sections that would not conflict with any already scheduled times.<sup>3</sup>
- 3. SkedgeQL includes the "random" keyword, which displays a single random course matching the accompanying query. For instance, "random csc" would show a random course in Computer Science for the current term. Used in conjunction with "autofit", it can a powerful way to find interesting new classes that are available for users to try.
- 4. SkedgeQL includes sorting by class size—useful for students trying to find smaller, discussion based classes—or by class starting time—for students with preferences of morning or afternoon/evening classes.
- 5. Instructor names appearing in courses automatically link to searches for more courses taught by that instructor, which is easier than having to use the CDCS "instructor" field to make a separate search.

#### Peer Recommendations


CDCS currently has no support at all for peer course recommendation, a highly undervalued resource for course finding. Skedge implements peer recommendations through Skedge Social, a system detailed in the next section.

<sup>&</sup>lt;sup>3</sup>This feature is under development and is not currently live.

### 2.4 Peer connectivity

The question "what are you taking this semester?" may possibly be the most common phrase uttered in campus smalltalk within the first few weeks of a semester. But college students' social lives do not solely exist in person—lately they are dominated largely by social media, most especially Facebook (7). The "what are you taking" question typically translates to social media in the form of the schedule image exported from Better CDCS posted to Facebook (e.g. Figure 2.8a). There are several limitations to this model.





- (a) Sharing a static schedule image generated by Better CDCS on Facebook
- (b) Sharing a Skedge schedule on Facebook, linked to the live and dynamic schedule share page on Skedge

Figure 2.8: Comparison of sharing schedules on Facebook

#### 2.4.1 Limitations of the Facebook model, remedied by Skedge

#### Static image vs. live site

As mentioned above, the schedules generated with Better CDCS cannot be shared publicly, and therefore students can only post a static image of their schedule at the time of posting. This excludes the possibility of edits to the schedule being reflected in the same post to their friends. Moreover, referencing courses (i.e. looking up more information on a course a friend is taking) is not very usable under this model as it requires a manual search.

Skedge allows users to generate a public link (of the format http://skedgeur.com/1234, with the last four digits being a random ID for that schedule) to a view-only, larger version of their schedules (see Figure 2.9a). If a user visiting others' share pages also has their schedule saved on Skedge, the option to "overlay" the user's schedule ontop of the share page's schedule is available, making it easier for friends to find common free time (see Figure 2.9b).

When this link is posted on Facebook, Skedge will include a rendered image of the schedule in the post, maintaining the element of visual bait with posting a static image (see Figure 2.8b).



(a) Skedge's schedule "share" page. Hovering over a course shows information about it, and clicking searches for it.



(b) The "overlay" feature enabled, superimposing the user's schedule over the share page's schedule.

Figure 2.9: Skedge's per-schedule share page

#### Robustness of finding courses taken by peers

The Facebook model stimies users from finding courses peers are taking in several ways. It

- 1. requires that a) peers share their schedules on Facebook publicly and b) the user incidentally checks Facebook while that post is still deemed relevant via Facebook's algorithms.
- 2. is unorganized, as schedules are spread across space and time (different posts and profiles).
- 3. is only effective for the *current semester*. It can be very difficult for students seeking advice (or even academic help) for a specific class to find others who had taken it before.
- 4. is *schedule*-oriented, not *search*-oriented. Course discovery can only happen from seeing peers' schedules, not from browsing and finding classes that their peers may be taking.

Solving these issues requires platform infrastructure external to Facebook, but Facebook's ubiquity is invaluable. Since Skedge already saves and archives users' schedules and Facebook has an integration API, building this platform into Skedge was the natural solution.

#### 2.4.2 Skedge Social

The Skedge Social platform aims to leverage existing social media paradigms (e.g. news feed, likes, and requests) to more seamlessly give users answers to the questions alluded to earlier—"what are my friends taking?" and "what do my friends recommend?". Skedge Social currently only supports Facebook, which can be integrated with a single click (see Figure 2.10).



Figure 2.10: Skedge Social landing page (http://skedgeur.com/social) for a user whose account has not yet been integrated with Facebook. Skedge Social appears in the context of the ordinary Skedge interface, and is accessible with the globe icon to the right of the searchbar.



**Figure 2.11:** Skedge Social's schedule feed (the default of four tabs) for a user who has integrated their Skedge account with Facebook. The user can toggle between a peer's schedule and the list of their *liked* courses.

#### Schedule feed

Immediately after logging in, the user will see the "schedule feed," the list of the user's peers' current schedules (see Figure 2.11). This takes from a familiar paradigm of the *feed* in social networks, which is routinely scrolled for updates.[1] For each schedule, the user can visualize their own schedule side-by-side (using with the same "overlay" mechanic explained earlier), access the Facebook profile of the schedule's owner, and see the list of courses that user likes.

This has the advantage of organizing and persisting peers' schedules, solving the first three issues of the "Facebook post" model listed above.

#### Search result integration

Skedge Social also integrates into course search results, showing the user any other peers on the platform who are taking, have taken, or *liked* courses in the results list (see Figure 2.12). This has several advantages, which solve the last "Facebook post" model issue listed above:



Figure 2.12: Skedge Social integrating into a course search result

- It enhances the user's social engagement and allows them to better keep up with peers.
- It promotes and facilitates communication for users either seeking or soliciting advice regarding courses (sending a Facebook message is merely two clicks away).
- It brings attention to courses which are particularly popular or liked among the user's community of peers, increasing the chances of serendipitous course discovery.

#### Personal schedule synchronization

In Section 2.1.4, discussing the disadvantages of Better CDCS's decentralized schedule store, I mentioned the possibility of synchronizing a user's schedules across their devices. Skedge leverages a user's Facebook integration to provide this synchronization. Upon signing into Skedge with Facebook from another device, that device's browser will automatically update with all of the user's data. Modification from any device will propagate changes to the rest.

For this purpose, implementation of a simple login system (either in-house or using NetID, for instance) could easily replace the reliance on Facebook integration. This is currently unsupported, but is a space to explore in the near future.

#### Privacy and share requests

Skedge offers users two privacy options:

- 1. "Share my schedule and likes with all my friends" (Public)<sup>4</sup>
- 2. "Share my schedule and likes only with friends I approve" (Private)

To implement privacy option #2, Skedge Social includes a basic share request/approval system. The main interface has tabs *Share requests* and *Non-sharing friends* (visible in Figure 2.11) for displaying pending share requests for approval, and for sending share requests to the user's Facebook friends on Skedge that have the private setting enabled, respectively.

#### Notifications

Skedge Social provides notifications for any pending share requests described above (Figure 2.13a), as well as for any Facebook friends that have joined the platform since the user's last visit to Skedge Social (Figure 2.13b).

Skedge users therefore do not have to seek out peer schedules—the schedules come to them. Social network notifications are an established, successful model that have been shown to be highly important for social networks' users and levels of engagement (8). The hope is that Skedge Social's notifications will evoke the almost Pavlovian "click-and-check" response in users, reminding them of the course network they are a part of and promoting a stronger sense of academic community.





- (a) Pending share requests notification
- (b) New friends notification

Figure 2.13: Notifications: none, one, or both of them can adorn the Skedge Social logo

<sup>&</sup>lt;sup>4</sup>Note that even the "public" option is not truly public, as it only grants view permissions to people who are already friends with the user on Facebook.

## Chapter 3

## Technical overview

### 3.1 System architecture

nginx, unicorn, Ruby on Rails, PostgreSQL, React.js,

### 3.2 Data storage

cookies, likes not on fb

### 3.3 Usage data collection

As the saying goes, "if it's not monitored, it's not in production" (9) (how else would we know that it was?) anonymous, *Ahoy* and Google Analytics.

## Chapter 4

## Data analytics

In this chapter I propose three hypotheses. They are:

- 1. Skedge's differences from and additions to CDCS are usable and have real need.
- 2. Skedge's navigations-per-add demonstrate the effectiveness of its search features for each of the following three user search paradigms:
  - (a) direct search,
  - (b) exploratory search, and
  - (c) peer-guided search
- 3. SkedgeQL is user-friendly; users learn how to make more sophisticated search queries over time simply by using it.

In the following sections I will present my analysis on collected usage data since November 3rd 2015, which will serve to validate each hypothesis.

### 4.1 Usage

From November 3, 2015 to April 11, 2016 (a period of 159 days), Skedge has seen...

4,713 users that have added or bookmarked at least one course 5,256 schedules 17,124 sessions<sup>1</sup>, 75% of which are from returning visitors 107 sessions averaged per day 5.4 pages viewed averaged per session

6 minutes spent averaged per session

In this section, I will address many of the features listed in Chapter 2 (Design) and demonstrate their usability.

#### 4.1.1 Search

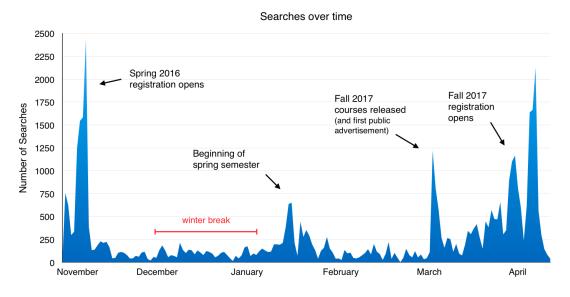


Figure 4.1: Searches over time, with major relevant calendar events annotated

Figure 4.1 shows user search submissions over the time, and makes the periodicity of Skedge usage extremely apparent. Although it only shows a bit more than one "phase," the cycle of events—semester begins (students check course times, room locations, etc. while they get accustomed to the semester), next semester's course catalog released (students explore the courses offered and build possible schedules), next semester registration opens (cross-checking and officially registering each course with the Registrar)—clearly drives the majority of site traffic.

What this means is that Skedge is not seen as an experiment or a proof of concept that is not production-ready. Rather, its traffic patterns show that it is consistenly *relied upon* by students and used for its intended purpose in times of biggest course scheduling need.

It should also be noted that before March, the majority of the userbase as I knew it consisted of seniors, as the majority of people that I knew personally and shared Skedge with belonged to my class. The latest two major events reported in the graph above thus very impressively consist of *very few seniors*, who have no courses left to schedule. March also marked the very first time I publicly advertised Skedge, although not very strongly. It was sent out to all students in the Computer Science mailing list as well as posted to two class-wide Facebook groups.

The usability of and user satisfaction with a tool is hard to measure when it holds a monopoly. Considering that Skedge is an *optional alternative* to CDCS, such consistent usage data (especially with 75% of sessions being from returning users) undeniably prove its measures of usability and user satisfaction relative to CDCS.

#### Search types

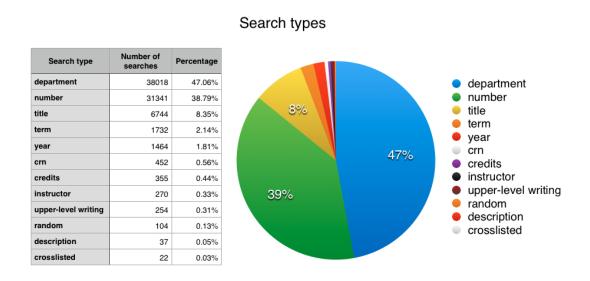


Figure 4.2: Breakdown of search queries by type of search

Figure 4.8 validates the hypothesis made in Section 2.3 regarding the search interface design, demonstrating that the *department code* and *course number* search modes dominate user

searches, accounting for over 85% of all searches on Skedge. Bringing the nondistinct field for this in CDCS into prominence is thus a design choice that accommodates empirical usage behavior.

#### **Empty searches**

Of the total 45,466 searches on Skedge logged since November 2nd 2015, 89.4% (40,625) of searches produce nonempty search results, whereas 10.6% (4,841) of searches come up empty.

This already is evidence of an effective search mechanism, but of those empty searches, the vast majority (92%) contain typos or are for courses that simply don't exist. The other significant portion of searches include instructor names without the requisite "taught by" for SkedgeQL to pick it up as an instructor search, and such a fix could easily be made.

This type of analysis can powerfully indicate holes in the query language (i.e. searches intuitive for users) that ought to be fixed, which is the same method WolframAlpha describes its team using to improve their freeform input system (10). Table 4.1 lists a few notable examples of this nature. (Table 4.2 lists a few funny queries I came across.)

#### 4.1.2 Exports

In Section 2.2.5 (on the design of Skedge's schedule exporting), a major usability improvement claimed was the ability to export schedules to the .ics format, a widely used format for many calendar applications, as well as offering functional Google Calendar export. Figure 4.3a shows usage of the export functions over time, demonstrating its consistent and healthy use (traffic surges once again in line with major scheduling events.) This data confirms that there is strong demand for exporting to .ics—it is even more common than Google Calendar export.

#### 4.1.3 "Link-searches"


Figure 4.3b shows the amount of clicks on the Wikipedia-style embedded links throughout Skedge (instructor names link to other courses they are teaching, prerequisite and crosslist course mentions link to those courses). The number of manual instructor searches is also included for comparison, which can be seen to be vastly less usable than the analogous link-click, which doesn't exist in CDCS. Additionally, link-clicks also possibly offer a different functionality (e.g. in the course browsing paradigm).

"Prereq 280" "has-Prereq: 280"	Course dependencies
"tuesday 3:25-4:40" "m/w" "classes tuesdays and thursdays between 11:05 and 12:20" "weekend summer 2016"	Better day-of-the-week handling
"2 credits natural science"	Search by division (although there were very few)
"religion and classics" "studio art"	Search by full department name
"new csc courses"	The word "courses" stimies the query here (somewhat common with advanced query types)
"curriculum change"	Alternative for "new" keyword
"guo"	Instructor without "taught by" (very common)
"stt212 vs mth201" "stt212 OR mth201" "csc 2{4,8}2" "csc 242 282"	Searching multiple queries at the same time
"crosslisted csc lin"	Probably a more reasonable syntax than the current SkedgeQL one ("csc x lin")
"place: hubbell" "hubbell friday"	Search by location, although motives unclear
"MTH 2*" "csc 2xx"	Using "*" or "x" instead of an omission (e.g. searching "MTH 2" would work for this purpose)


**Table 4.1:** Example of search queries that produced no results but that indicate demand for added search features. The corresponding features that currently lack in SkedgeQL are described on the right.

"Larry david"	"taught by seligman"	"cool stuff"	
"game of thrones"	"interesting courses"	"fun classes in csc"	
"easy A"	"flute birdman"	"how do i make a new schedule"	

Table 4.2: Humorous search submissions

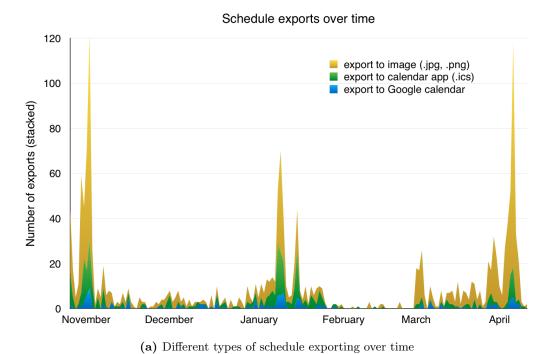

(1)

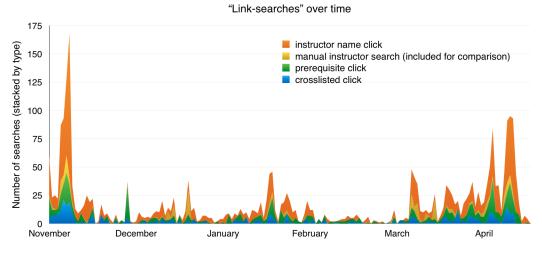

(b) Different types of "link-search" clicks over time, with manual instructor search included for comparison with clicking on an instructor's name

Figure 4.3: Other metrics of Skedge usage over time

#### 4.1.4 Mobile

Making the case for usability superior to CDCS's in the space of mobile support is easy, given that CDCS does not have a mobile-responsive website. But to illustrate the importance of ensuring good user experience on mobile devices, consder that 11.54% of all Skedge sessions are from mobile devices, which is very substantial. On average, 2.74 pages viewed are viewed and 2 minutes are spent per session on mobile devices.

The nature of the content also makes Skedge commonly accessed on the go—quickly looking up room numbers while heading to class, for instance, or checking a friend's schedule on Skedge Social to meet them after a class, etc. There is still work to be done to determine the usability of Skedge's mobile site in particular. Surveys could be a good indicator, but I didn't have the chance to administer any.

#### 4.1.5 Social

Since March 1st (40 days), based on 963 sessions on /social, Skedge Social has seen...

141 users have linked Skedge to Facebook

10,242 page views (256 page views/day)

10 pages/session (users cycle through tabs and go back to it)

a 5% bounce rate (users interact with it)

67% of visits being were returning visitors

284 overlays onto friends' schedules (2 per user)

Although the feature is too young for in-depth data analysis, these initial reports show promise, especially in the rate of adoption (around 3.5 users per day on average), its level of interaction, and the rate of *returning* users to Skedge Social.

#### 4.1.6 Course blocks

As a user adds courses to their schedule, the courses appear as timeblocks on the schedule to the side of the search results. The blocks only display the course code (i.e. department code, course number, and if it is a subsection such as a lab or workshop), but hovering over them displays more useful information like the course title, location, and the exact start and end times.



**Figure 4.4:** Hovering over a course block in Skedge's side-schedule shows at-a-glance information about it; clicking on it navigates the user to that course

Interestingly, the only course information that is gained by clicking on courses is the description, instructor, and perhaps minor details like course comments, prerequisites, etc. Yet, of 12,944 sessions of users with schedules, 40% of those sessions had at least one block-click. Those sessions with block clicks averaged 5.12 block-clicks per session, a strikingly high number considering its limited functional use! How do we explain this?

I hypothesize that a combination of Skedge's presentation of information, its highly interactive user interface, and its concern for quality of user experience contribute to a sense of enjoyment regarding course scheduling. Clicking an average of five times *per session* corresponds to clicking on the blocks for each of his or her courses, glancing over the details, and perhaps reading over the course description. This enamorment with one's course selection is a large component of Skedge's mission. It may seem trivial to state, but I believe the courses one takes in college are paramount to one's personal development and outlook on life. I believe ensuring that students are excited about their course selection and can also freely explore what more knowledge their university has to offer them is key to a well-balanced college experience.

The above could only be confirmed with involved user studies, which I do not have any data for. At the very least, the average block-clicks per session is a strong case for Skedge's usability over CDCS for the simple reason that Better CDCS does not even allow users to click on their schedule blocks, and this usage data shows that there is clearly a desire to do so.

#### 4.2 Effectiveness

#### 4.2.1 Definitions

A navigation is defined as a search, or a click on an instructor's name, or a click on a crosslisted or prerequisite course link

The navigations-per-add measure is the number of navigations a user took (within one session) until a course was added, bookmarked

#### **4.2.2** Trends

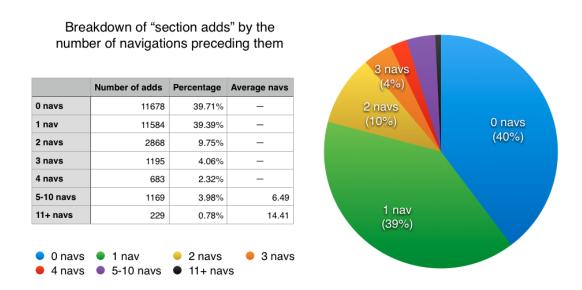


Figure 4.5: Etc

#### 4.2.3 Breaking them apart

behavioral patterns Direct search for specific course Discovery, browsing, exploring

#### Direct searches

Why would 0-navs be so common with direct searches? 64% of them subsections!

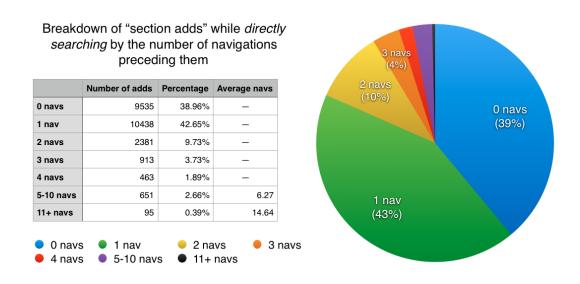


Figure 4.6: Etc

#### **Browse**

As expected, the 0-navs were mostly main courses (62%) Effective++

#### Social

90 users have linked Skedge to Facebook Since March 1st, 4,000+ visits (200 visits/day) 60% of visits to /social were returning visitors 90 overlays onto friends' schedules 10 clicks to Facebook profiles :( - get stats from the fb dashboard

success?????

Breakdown of "section adds" while *browsing* by the number of navigations preceding them

	Number of adds	Percentage	Average navs
	rramper or adde	rorountage	Arerage nave
0 navs	3464	52.15%	_
1 nav	2442	36.76%	_
2 navs	485	7.30%	_
3 navs	149	2.24%	_
4 navs	62	0.93%	_
5+ navs	41	0.62%	5.88
● 0 navs ■ 1 nav ■ 2 navs			

4 navs

3 navs




Figure 4.7: Etc

5+ navs

### 4.3 Complexity of users' searches over time


#### 4.3.1 Definitions

Points for search by (omits number and dept.):
description credits crosslisted CRN instructor title year term 'random' upper-level writing
"CSC" 0 "MTH 165" 0 "taught by hema" 1 (2 searches) "random mur 1-2 credits" 2 (1 search)

#### **4.3.2** Trends

First increase 69.4% of users), with a median of 2 searches. Note that starting at search complexity one or greater counts as a "searches before first increase value" of 0.

Second increase (7.9% of users) Median: 8 searches Average: 17.52 searches DSQL++

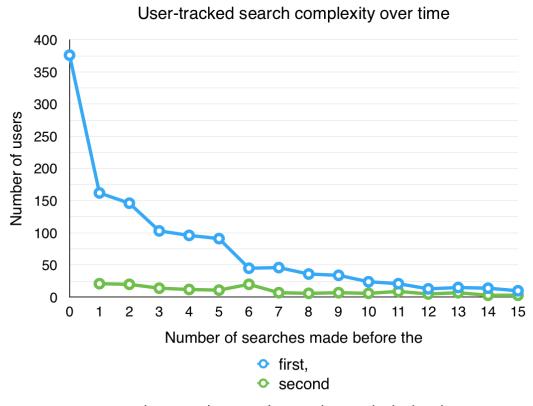

	First increase	Second increase	No increase	Total users sampled
Count	1311	239	339	1889
Percent	69.40%	12.65%	17.95%	
Median	2	10		
Average	4.66	18.31		

Figure 4.8: Etc

## Chapter 5

## Conclusion

### 5.1 Proposal to the University

On behalf of myself and the roughly *one-thousand* students who regularly and voluntarily choose to use Skedge, I urge the University to consider adopting it as an official replacement to CDCS.

Given the excellence of the University's inspiring faculty and academic programs, I know that I am not alone in my disappointment with what I consider a low regard for usability in many student tools, as well as the lack of communication channels with students to improve them. Throughout the course of this paper, I have shown that the space of course scheduling holds vast potential for innovation, and that CDCS barely scratches that surface. An officially adopted Skedge—or an otherwise substantial overhaul of CDCS—would demonstrate that the University pays attention to its students and to how they use the tools it provides them.

While I am aware that such matters are not extremely pressing, they nevertheless degrade student experience on campus and discolor perception of the administration's care for students, especially when modern, relevant, and engaging tools are within arm's reach, and *most* especially at a time when University of Rochester's very high tuition rates continue to rise year-to-year.

As a graduating senior, I cannot commit to continuing the upkeep of server costs and system maintenance for Skedge in the long term, and certainly not indefinitely. For the sake of the University's students, parents, faculty, and staff, I hope that my efforts with Skedge were not in vain and can lead to a substantial refresh of University tools that, most crucially, **involves** a dialogue between the administration, students, and staff. Thank you for reading.

(The views expressed in this section are entirely my own and were not reviewed by my thesis advisor or any others.)

#### 5.2 Resources

#### Source code

The source code for Skedge is available online under an open source license: https://github.com/RocHack/skedge.

#### Live site

The site can be found at http://skedgeur.com or http://skedge.org (very recently acquired, simply redirects to the former).

### 5.3 Acknowledgments

I would like to give my foremost thanks to Dr. Philip Guo, who very thoughtfully reached out to me about using Skedge for research, and whose deep care and support for the project has since reignited and bloomed its development. I also want to give enormous thanks to Ani and Mark Gabrellian for their generous Mesrob Mashtots Innovation Grant donation which funded Skedge's development in the summer of 2015. Finally, a huge thanks to all those students and my close friends who reported bugs, gave feedback, and in general supported, promoted, got excited about, and complained about Skedge!

## Bibliography

- [1] M. Meeker, "Internet trends 2015," Kleiner, Perkins, Caufield and Byers (KPCB), 2015.
- [2] K. Milberry and S. Anderson, "Open sourcing our way to an online commons: Contesting corporate impermeability in the new media ecology," *Journal of Communication Inquiry*, vol. 33, no. 4, pp. 393–412, 2009.
- [3] S. Bratus, "Hacker curriculum: How hackers learn networking," *IEEE Distributed Systems Online*, vol. 8, no. 10, 2007.
- [4] C. Wheildon, "Type and layout: How typography and design can get your message across or get in the way.," *Strathmoor Press*, p. 62, 1995.
- [5] K. Elbedweihy, S. N. Wrigley, F. Ciravegna, D. Reinhard, and A. Bernstein, *The Semantic Web: ESWC 2012 Satellite Events: May 27-31, 2012*, ch. Evaluating Semantic Search Systems to Identify Future Directions of Research, pp. 152–162. Berlin, Heidelberg: Springer, 2015.
- [6] "WolframAlpha: computational knowledge engine." http://www.wolframalpha.com/. Accessed: 2016-04-12.
- [7] S. A. Golder, D. M. Wilkinson, and B. A. Huberman, Communities and Technologies 2007: Proceedings of the Third Communities and Technologies Conference, Michigan State University 2007, ch. Rhythms of Social Interaction: Messaging Within a Massive Online Network, pp. 41–66. London: Springer, 2007.
- [8] S. Bouraga, I. Jureta, and S. Faulkner, "An empirical study of notifications' importance for online social network users," *Social Network Analysis and Mining*, vol. 5, no. 1, pp. 1–34, 2015.
- [9] G. Gheorghiu (griggheo), "It's not in production until it's monitored and graphed," *Twitter*, 2011.
- [10] "Wolfram Alpha officially launched." https://www.wolframalpha.com/media/pressreleases/wolframalpha-launch.html, 2009.

## Appendix