

(a) Main benchmark: the same measurements on the estimate and on the true stem

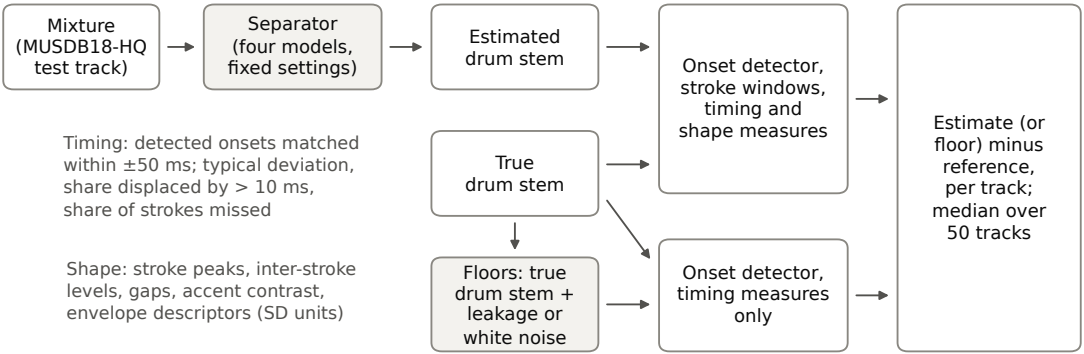

(b) Experiment 2: a fixed 5-s passage R, cut from the mixture in different ways

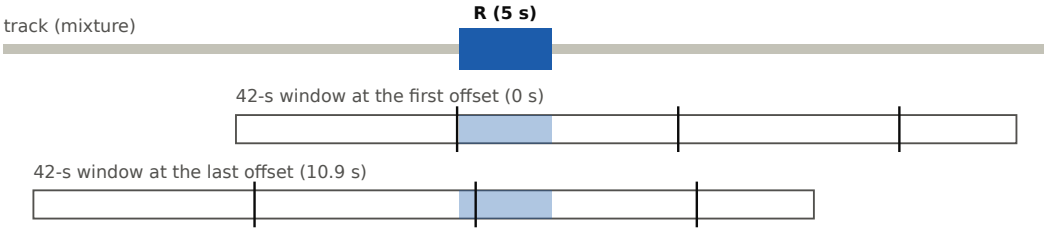

Black ticks: chunk boundaries, anchored at the window's start; shown for Spleeter's 11.9-s chunks without overlap. The 12 offsets (0 to 10.9 s) move R through one Spleeter chunk and at least one full period of each other model's chunk grid.

Chunk position: 12 offsets of k × 11.9/12 s (k = 0, ..., 11)
Sub-frame shift: the window at the first offset, shifted by 1/3 and 2/3 of the model's STFT hop
Excerpt first: R separated alone (5 s) and in 10-s and 20-s windows; compared with the full-track output
Overlap swap: overlaps exchanged: BS-RoFormer at 75 % (native 50 %), SCNet-XL at 50 % (native 75 %)
Randomness: HT-Demucs seeded in every condition, and two unseeded runs at the package defaults