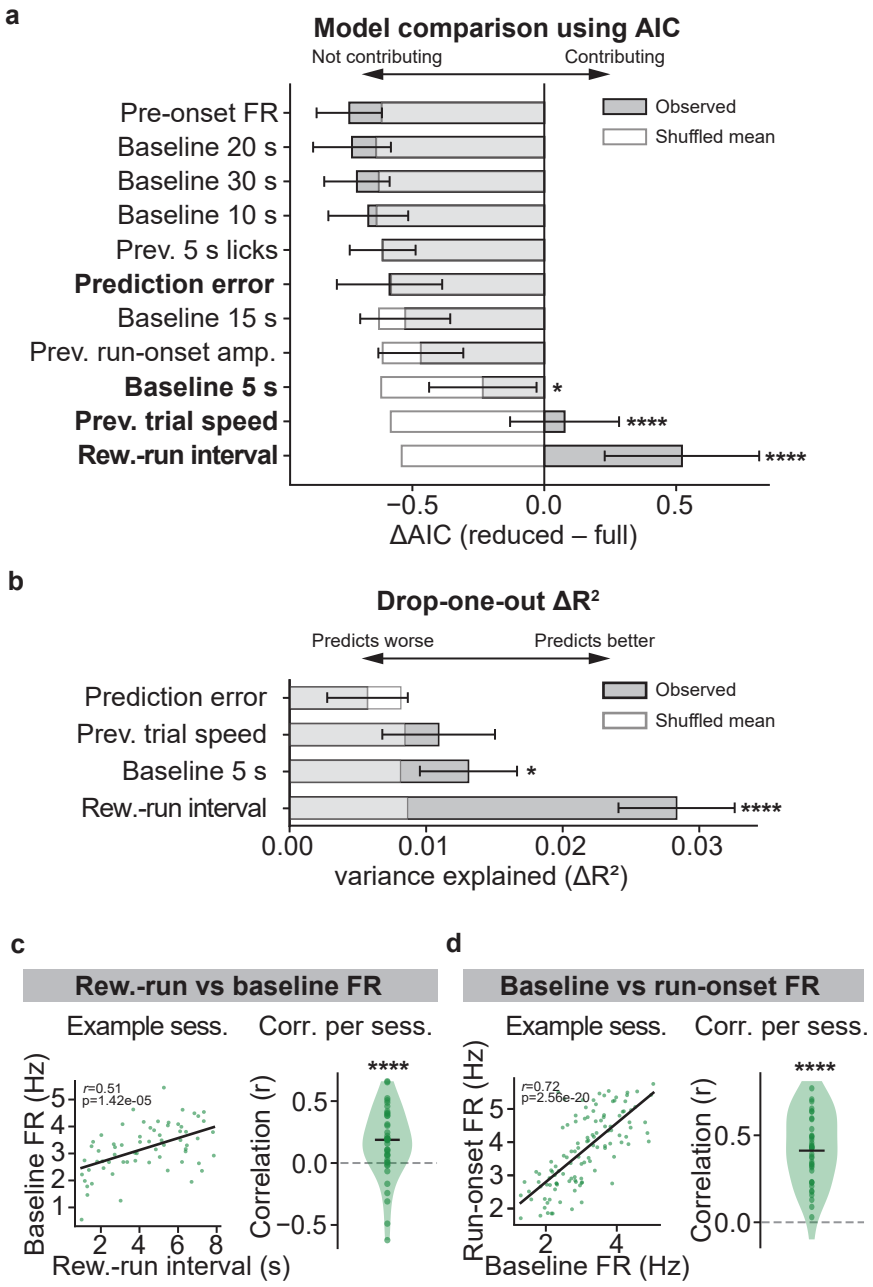
a
Model comparison using AIC
Not contributing
Contributing
Observed
Shuffled mean
Pre-onset FR
Baseline 20 s
Baseline 30 s
Baseline 10 s
Prev. 5 s licks
Prediction error
Baseline 15 s
Prev. run-onset amp.
Baseline 5 s
Prev. trial speed
Rew.-run interval
*
****
****
−0.5
0.0
0.5
ΔAIC (reduced – full)
b
Drop-one-out ΔR²
Predicts worse
Predicts better
Observed
Shuffled mean
Prediction error
Prev. trial speed
Baseline 5 s
Rew.-run interval
*
****
0.00
0.01
0.02
0.03
variance explained (ΔR²)
c
Rew.-run vs baseline FR
Example sess.
Corr. per sess.
r=0.51
p=1.42e-05
Baseline FR (Hz)
Rew.-run interval (s)
Correlation (r)
****
d
Baseline vs run-onset FR
Example sess.
Corr. per sess.
r=0.72
p=2.56e-20
Run-onset FR (Hz)
Baseline FR (Hz)
Correlation (r)
****