# Scope before Reuse: Risk-Controlled Admission of Reusable Code Changes

ANONYMOUS AUTHOR(S)

An agent that learns a code change once and reuses it everywhere is efficient until the change runs where it does not belong. The failure is functional, not a permission violation: an authorized change whose replay tests pass on its source can implement the wrong behaviour for the target, and two changes that are each beneficial can be jointly harmful. We formulate risk-controlled admission relative to a declared scope family and give Gatekeeper, which admits a change in a scope only when paired trials on that scope certify a benefit margin. We prove an anytime-valid guarantee that holds over a whole library, over adaptively chosen cells, over compositions and over re-admission after the environment changes, through a per-cell error ledger; we show that its shift term is necessary and tight, characterise composition risk exactly, and bound every executed set through an execution rule. Every statement is checked numerically. Pre-registered experiments, negative results included, show where such a gate matters. On 14 real skill-reuse targets harm was frequent and a simple gate with target evidence sufficed, while replay plus fingerprints admitted all four harmful cells. On 1,531 autofix cells of the Ruff linter over the 60 most-downloaded PyPI projects, Gatekeeper admitted no harmful fix while replay of the documented example and an LLM judge admitted 9 and 6 of 11, and it kept 2.2 times as many safe fixes as Ruff's own *safe* label; replay on every other package where the rule was used (a strong B6) still admitted 2. On the next 140 projects, a pre-registered replication with 29 harmful cells, it again admitted none, while every rule that runs no trials admitted at least 3. A 20-draw smoke test did as well there, because that harm was blatant, but not on 693 resolved SWE-bench agent patches with rare partial harm: passing the tests admitted all 44 harmful patches, the smoke test 10, Gatekeeper none, at the price of keeping fewer harmless patches than an unguaranteed always-retest gate. Letting a model apply the change directly was 26 to 87 times as expensive and changed behaviour in 9 to 11 cells, whether the model was cheap or strong. In a simulated library built on our implementation, admitting skills one by one ran a harmful composition in 28% of libraries, and composite cells with the execution rule in none; on a twelve-family library over 16 real repositories, footprints read off the original code missed a real interaction between two rewrites, which the execution rule now catches. In 205 plausible LLM patches, the test census admitted all 16 with partial behavioural differences and the statistical gates none, yet a manual check traced most of those differences to inputs the developers' fix also rejects; on SWE-bench Verified the measured harm rate changes by a factor of about four with its definition.

Additional Key Words and Phrases: code reuse, coding agents, e-processes, anytime-valid inference, software engineering

## 1 Introduction

Coding agents increasingly package what they learn as reusable procedures (skills) and apply them again elsewhere: a library of learned edits that fixed a bug once is replayed on the next repository [16, 21]. Reuse is efficient until a procedure runs where it does not belong. The failure is not a permission violation: an authorized skill that edits only files it may edit [9] can still implement the wrong behaviour for this repository, this dependency version, or this combination with another skill. Replay of the skill's own tests on its source repository [21] cannot see the target, and re-running the target's whole test suite before every reuse removes the reason to have skills. In our own experiments the target's suite missed harm that a skill caused on 87–100% of relevant inputs (Section 7.3).

We formulate *risk-controlled admission*: a change may execute in a declared scope only when paired evidence gathered in that scope certifies that it helps by at least a margin, with an error budget that holds over the whole library, over adaptively chosen cells, over compositions and over re-admission after the environment changes.

*Contributions.*

- **Formulation.** Selective transfer risk relative to a declared scope family, cells for single skills and for compositions, and an execution rule that ties per-cell certificates to what actually runs (Section 3).
- **Theory.** An anytime-valid, library-wide admission guarantee with a per-cell error ledger that covers compositions and re-admission (Theorem 5.3); a proof that its $2\xi$ shift term is necessary and tight (Proposition 5.7); an exact characterisation of composition risk, $\sup \mathrm{STR}(S_1 \circ S_2) = 1 + \min(a, b)$ (Theorem 5.8); and a bound on every executed set under a stated non-interaction assumption (Corollary 5.9). Every statement is checked numerically in the artifact.
- **Gatekeeper.** An implementation with scope screening, an abstaining AST binder, paired trials in isolated workers, betting e-processes, a per-cell ledger and the execution rule (Section 6).
- **Evidence**, pre-registered and including negative results (Section 7): where simple gates fail; library-level control of compositions in a simulation built on the implementation, and a census of a twelve-family skill library on 16 real repositories that found an interaction footprints from the original code miss; skill reuse on 14 real targets against replay-plus-fingerprint and always-retest baselines; market skills (every Ruff autofix rule) on the 60 most-downloaded PyPI projects against the practitioners' rules: Ruff's own safety label, replay of the documented example, an LLM judge, smoke, fixed-sample and always-retest gates; partial harm in 205 plausible LLM patches; and, on SWE-bench Verified, how much of the measured "harm" depends on its definition.

*What we do not claim.* We claim no new statistics, no advantage in statistical power over a fixed-sample test at the same number of trials (Section 7.1), no distribution-free guarantee on unseen repositories, and no results on large learned skill libraries: our skills are rule-based rewrites (two hand-written families, twelve library families and Ruff's autofix rules), not changes an agent learned from its own trajectories.

## 2 Motivating Example

Consider an *illustrative* skill $S_1$ that wraps database calls in a bounded retry. It was learned on a repository whose client has at-least-once semantics; on a target whose client is exactly-once, the retry duplicates writes under partial failure. The skill is authorized (it edits application code only), its replay tests pass on the source, and the target's environment fingerprint can agree on every recorded variable while differing in the one that matters, delivery semantics, which nobody recorded. Only evidence gathered on the target can reveal the problem. Now add a skill $S_2$ that turns the call into a coroutine. If $S_1$ wraps the call before it is awaited, its retry "succeeds" on the coroutine object and the real failure is never raised: each skill is beneficial alone, the pair is harmful. Theorem 5.8 shows that nothing about the two individual risks prevents this, which is why compositions are cells of their own and why the execution rule refuses to run overlapping skills together until their composite is admitted.

## 3 Problem Formulation

*Skills, scopes and cells.* A skill is $S = \langle \pi, \mathcal{D}, \mathcal{I}, \mathcal{P}, \mathcal{K} \rangle$: a procedure $\pi$ (a parameterised edit program), dependency and environment fingerprints $\mathcal{D}$, input assumptions $\mathcal{I}$ (executable predicates on the target), observed postconditions $\mathcal{P}$ with the contexts they were observed in, and an interaction footprint $\mathcal{K}$, the code regions and behavioural properties that $\pi$ reads or writes. A context $x$ is a (repository, revision, environment, task) tuple. A scope family $\mathbb{S} = \{s_1, \ldots, s_L\}$ is a finite partition

of contexts declared before any trial. We call a pair $c = (S, s)$ a *cell*; for a set of skills that form a connected component of the adjacency graph of Section 5, their composition, applied together in scope $s$ in one canonical order fixed in advance (registration order), is a cell of its own (for two skills, $(S \circ S', s)$). A set of skills therefore defines at most one composite cell, and the certificate covers that order, which matters when one rewrite enables another.

*Loss and selective transfer risk.* For a task $x$, $\ell(x, \pi) \in [0, 1]$ is its functional loss with the skill applied and $\ell(x, \varnothing)$ the loss without it. In the experiments a task is one *draw*: an input from a generator that the scope's oracle owns, and $\ell \in \{0, 1\}$ records whether the oracle judges the run on that input a failure, so $Z \in \{-1, 0, 1\}$; this is the only quantity the e-processes consume. For whole test-suite runs we also report one minus the pass rate plus 0.5 per regression, clipped at 1, which never enters a decision (Section 6). In general $\ell \in [0, 1]$ and the paired difference is $Z = \ell(x, \pi) - \ell(x, \varnothing) \in [-1, 1]$.

*Definition 3.1 (Selective transfer risk).* For a cell $c = (S, s)$ and a distribution $D$ over the contexts of scope $s$, $\mathrm{STR}_D(c) = \mathbb{E}_{x \sim D}\big[\ell(x, \pi) - \ell(x, \varnothing)\big]$. With $P_s$ the distribution trials are drawn from and $Q_s$ the deployment distribution, a cell is *admissible* if $\mathrm{STR}_P(c) \le -\theta$ for a benefit margin $\theta > 0$, and *harmful* if $\mathrm{STR}_Q(c) > 0$. After a retirement (Section 5) the environment may have changed; epoch $k$ of a cell then has its own $P_s^{(k)}, Q_s^{(k)}$, and every statement below is per epoch.

The definition is an excess over the no-skill baseline, so a skill that neither helps nor harms is not admissible, and it is relative to a declared scope; Proposition 5.7 shows why it cannot be otherwise.

*Assumptions.*

Assumption 1 (Paired trials). *For every cell $c$ there is an infinite sequence of tasks $x_1^c, x_2^c, \ldots$ drawn i.i.d. from $P_s$ (in practice, drawn* with replacement *from the target's task set; without replacement the conditional mean of the next draw drifts and Lemma 5.1 needs a finite-population e-process instead); each task is run with and without the skill on the same snapshot and seed. Different cells may depend on each other.*

Assumption 2 (Bounded shift). *Deployment contexts of scope $s$ follow $Q_s$ with* $\mathrm{TV}(P_s, Q_s) \le \xi_s$, *where* $\mathrm{TV}(P, Q) = \sup_A |P(A) - Q(A)|$.

*Execution rule.* Skills that are executed together form a set $E$. Split $E$ into the connected components of its footprint-overlap graph (two skills are adjacent when their footprints intersect, or when applying one creates or removes sites of the other, which we detect by applying both in either order). We execute $E$ only if every component is an admitted cell: a single admitted skill, or the admitted composite of exactly that component; a skill whose composite with an already admitted skill is still undecided is not executed together with it. This closes the gap between per-cell certificates and what actually runs.

*Admission problem.* Given a library, a validation budget and a pre-allocated error budget $\alpha$, decide which cells may execute, such that $\Pr[\exists \text{ an admitted cell } c : \mathrm{STR}_Q(c) > 0] \le \alpha$ over the whole library, over adaptively chosen cells and over re-admissions after retirement, and such that, under the execution rule, no executed set is harmful except on that event. Theorem 5.3 and Corollary 5.9 give this whenever $2\xi_s \le \theta$ for every scope; for coarser scopes they give the weaker, explicit statement $\mathrm{STR}_Q(c) \le -\theta + 2\xi_s$.

## 4 Approach: Gatekeeper

Figure 1 summarises the pipeline. For a skill $S$ and a target context, Gatekeeper proceeds as follows.

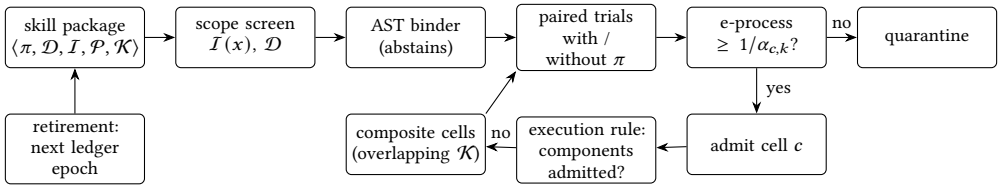



Fig. 1. Gatekeeper. "No" at the e-process means the trial budget was spent. Evidence comes from paired trials on the target scope; each cell (single skill or composite) has its own entry in a pre-allocated error ledger; overlapping skills run together only when their composite cell is admitted; a fingerprint change retires an admission and re-admission draws the next ledger entry.

(1) **Scope screen.** Evaluate the input assumptions $\mathcal{I}$ and compare the fingerprints $\mathcal{D}$; missing information means OutOfScope. A pass is necessary, not sufficient: the motivating example passes it.
(2) **Bind.** Apply $\pi$ with an AST binder that abstains on ambiguity (no match, several matches, an existing guard, a shadowed built-in, a missing symbol) instead of guessing.
(3) **Paired trials.** Draw tasks of the target scope with replacement; run each with and without the skill on the same snapshot and seed, in a fresh worker process; record $Z = \ell(x, \pi) - \ell(x, \varnothing)$.
(4) **Certify.** Update the betting e-process of the cell (Lemma 5.1); admit when it reaches $1/\alpha_{c,k}$, the cell's entry in the pre-allocated ledger; quarantine when the budget is spent. A harm alarm (an e-process for a high harm rate) rejects early when harm is frequent.
(5) **Compositions.** When an admitted skill's footprint overlaps another's, the composite is enqueued as its own cell; until it is admitted, the execution rule keeps the two from running together.
(6) **Retirement.** When the fingerprint of an admitted scope changes, admission is revoked; re-admission draws the next entry of the cell's ledger ($6/(\pi^2(k+1)^2)$ of its share at epoch $k$), so revocations cannot inflate the error budget.

Capability approval is consumed as a precondition and never merged into the functional decision; the two verdicts and their evidence are stored separately.

## 5 Theory

We claim no new statistics: the guarantee is assembled from betting e-processes [20], Ville's inequality [13] and a union bound. What is new is the estimand, the per-cell ledger that covers compositions and re-admission, the proof that the shift term is unavoidable, and the exact characterisation of composition risk.

### 5.1 Per-cell evidence

Lemma 5.1 (Betting e-process). *Let $Y_1, Y_2, \ldots$ take values in $[y_{\min}, y_{\max}]$ with $y_{\min} < \theta$, and suppose $\mathbb{E}[Y_i \mid \mathcal{F}_{i-1}] \leq \theta$ for all $i$ (the null $H_0$). The process $K_0 = 1$, $K_n = \prod_{i \leq n}\big(1 + \lambda_i(Y_i - \theta)\big)$ with predictable $\lambda_i \in [0, 1/(\theta - y_{\min}))$ satisfies $\Pr[\exists n : K_n \geq 1/\beta] \leq \beta$ for every $\beta \in (0,1)$. For admission, $Y_i = -Z_i \in [-1, 1]$ and $H_0^c$ is $\mathbb{E}[Y] \leq \theta$ (the cell is not admissible), so $\lambda_i < 1/(1+\theta)$.*

Proof. Since $Y_i \geq y_{\min}$, every factor is at least $1 - \lambda_i(\theta - y_{\min}) > 0$. By the null and predictability, $\mathbb{E}[K_i \mid \mathcal{F}_{i-1}] = K_{i-1}\big(1 + \lambda_i(\mathbb{E}[Y_i] - \theta)\big) \leq K_{i-1}$, so $(K_n)$ is a nonnegative supermartingale with $K_0 = 1$, and Ville's inequality gives the claim. □

The bound holds at any data-dependent stopping time, including the end of the validation budget, which is why a fixed-sample interval would not do. Under Assumption 1 the trials are i.i.d., so the null on the conditional mean reduces to $\mathbb{E}[Y] \le \theta$.

Proposition 5.2 (Harm certificate used in the experiments). *Let $H_i \in \{0,1\}$ indicate a harmful draw, $\eta \in (0,1)$ a tolerated harm rate and $c \in (0,1)$. Under the null $\Pr[H_i = 1 \mid \mathcal{F}_{i-1}] \ge \eta$, the process $C_n = \prod_{i \le n}(1 + \lambda(\eta - H_i))$ with $\lambda = c/(1-\eta)$ satisfies $\Pr[\exists n : C_n \ge 1/\beta] \le \beta$. If the draws are i.i.d. with harm rate $\Pr[H_i = 1] = h$, $\log C_n/n \to (1-h)\log(1+\lambda\eta) + h\log(1-c)$, which is positive iff $h < h^\star = \log(1+\lambda\eta)/(\log(1+\lambda\eta) - \log(1-c))$; and $C_n \ge 1/\beta$ after $n$ clean draws iff $n \ge \log(1/\beta)/\log(1+\lambda\eta)$. For $c = 0.9$, $\eta = 5\%$: $h^\star \approx 0.39\eta$, and $\beta = 0.1/16$ needs 110 clean draws.*

Proof. Put $Y_i = 1 - H_i \in [0,1]$ and $\theta = 1 - \eta$; then $Y_i - \theta = \eta - H_i$, the null is $\mathbb{E}[Y_i \mid \mathcal{F}_{i-1}] \le \theta$, $y_{\min} = 0$ and $\lambda = c/(1-\eta) < 1/(\theta - y_{\min})$ because $c < 1$, so Lemma 5.1 applies. A clean draw multiplies $C$ by $1+\lambda\eta$ and a harmful one by $1-\lambda(1-\eta) = 1-c$; the growth rate follows from the strong law of large numbers, and the clean-draw count from $(1+\lambda\eta)^n \ge 1/\beta$. With $\lambda\eta = 0.9 \cdot 0.05/0.95$, $h^\star = 0.0197$ and $\lceil \log 160/\log(1+\lambda\eta) \rceil = 110$. Theorem 5.3 applies with "harm rate at least $\eta$" in place of "not admissible". □

## 5.2 Library-wide admission guarantee

Theorem 5.3 (Admission over a declared scope family). *Let $C$ be the countable set of all cells that could ever be formed, compositions included, and let a ledger $\alpha_{c,k} \ge 0$ be fixed in advance, as a function of the cell's identity, for every cell $c$ and epoch $k \ge 0$ (epoch $k \ge 1$ is the $k$-th re-admission after retirement), with $\sum_{c \in C} \sum_{k \ge 0} \alpha_{c,k} \le \alpha$; for instance $\alpha_{c,k} = \alpha_c \cdot 6/(\pi^2(k+1)^2)$ with $\sum_c \alpha_c \le \alpha$. Our implementation splits $\alpha$ into per-scope budgets $\alpha_s$ with $\sum_s \alpha_s \le \alpha$ and, within scope $s$ with a declared library capacity $N$, fixes $\alpha_c$ by the cell's size alone: $\alpha_s\,\sigma/N$ for a single skill and $\alpha_s(1-\sigma)\,6/(\pi^2(m-1)^2)/\binom{N}{m}$ for a composite of $m \ge 2$ skills ($\sigma$ the singles' share), which sums to at most $\alpha_s$ (Lemma 5.4) and does not change as skills are added. The factor $1/\binom{N}{m}$ makes large composites expensive to certify (the threshold grows with $\log\binom{N}{m}$); this is acceptable because the execution rule only creates composites for footprint-connected components, which Study R2 found to be rare and small (Section 7.2). A library that grows is covered as long as the share of every future cell is fixed by the same rule. Suppose that in each epoch the task sequence of every cell is i.i.d. from $P_s^{(k)}$ given the decision to open the epoch (fresh tasks suffice; re-using task inputs is allowed when, as with our fingerprint-triggered retirement, that decision does not depend on their outcomes), and that $c$ is admitted only when its e-process (Lemma 5.1) reaches $1/\alpha_{c,k}$, while the choice of cells, their order and the stopping times may depend on all data. Under Assumptions 1 and 2,*

$$\Pr\big[\exists\ \text{admitted } (c,k) :\ \mathrm{STR}_{Q^{(k)}}(c) > -\theta + 2\xi_{s(c)}\big] \le \alpha,$$

*where $P^{(k)}, Q^{(k)}$ are the trial and deployment distributions of epoch $k$. In particular, if $2\xi_s \le \theta$ for every scope, the probability of admitting any harmful cell is at most $\alpha$.*

Proof. For every $(c,k)$ let $O_{c,k}$ be the event that epoch $k$ of cell $c$ is opened, and $A_{c,k} = O_{c,k} \cap \{\sup_n K_n^{c,k} \ge 1/\alpha_{c,k}\}$, with the e-process run on the whole infinite task sequence of that epoch. Conditionally on the information at the opening, that sequence is i.i.d. from $P_s^{(k)}$ by assumption, so Lemma 5.1 applied conditionally gives $\Pr[A_{c,k}] \le \alpha_{c,k}\Pr[O_{c,k}] \le \alpha_{c,k}$ when $H_0^c$ holds in epoch $k$. An admission of $(c,k)$ implies $A_{c,k}$; adaptive selection and stopping can only forgo admissions. Hence the event that some cell with $H_0^c$ true is admitted is contained in $\bigcup_{(c,k):H_0^c} A_{c,k}$, whose probability is at most $\sum \alpha_{c,k} \le \alpha$ by the union bound, which needs no independence across cells. Finally, by Lemma 5.6, $\mathrm{STR}_{Q^{(k)}}(c) > -\theta + 2\xi_s$ implies $\mathrm{STR}_{P^{(k)}}(c) > -\theta$, that is, $H_0^c$ for that epoch. If $2\xi_s \le \theta$, then $\mathrm{STR}_Q(c) > 0$ implies $\mathrm{STR}_Q(c) > -\theta + 2\xi_s$. □

Lemma 5.4 (Library ledger). *For a scope with budget $\alpha_s$, capacity $N$ and singles' share $\sigma \in (0,1]$, the shares $\alpha_{c,k} = \alpha_c\, 6/(\pi^2(k+1)^2)$ with $\alpha_c = \alpha_s\sigma/N$ for $|c| = 1$ and $\alpha_c = \alpha_s(1-\sigma)\, 6/(\pi^2(m-1)^2)/\binom{N}{m}$ for $|c| = m \geq 2$ sum, over all subsets of the $N$ skills and all epochs, to at most $\alpha_s$.*

Proof. Each subset of skills defines one composite cell (its canonical order, Section 3), so there are $N$ singles and $\binom{N}{m}$ composites of size $m$, and the sum over cells is $\alpha_s\left[\sigma + (1-\sigma)\sum_{m=2}^{N} 6/(\pi^2(m-1)^2)\right] \leq \alpha_s[\sigma + (1-\sigma)] = \alpha_s$, because $\sum_{j\geq 1} 6/(\pi^2 j^2) = 1$; the epoch factors sum to 1 for the same reason. □

Proposition 5.5 (Fixed families: e-Holm, as used in the experiments). *For a fixed family of $K$ cells at epoch 0, let $e_c = \min(K^{\mathrm{ben}}_{c,\tau_c}, C_{c,\tau_c})$, the benefit e-process (Lemma 5.1) and the harm certificate (Proposition 5.2) read at the cell's stopping time $\tau_c$ with respect to that cell's own trial filtration: the first draw at which this minimum reaches $K/\alpha$ or a harm alarm fires, and otherwise the end of a finite budget; set $e_c = 0$ if the alarm fired. Then (a) $\mathbb{E}[e_c] \leq 1$ under the union null "not admissible or harm rate at least $\eta$"; (b) e-Holm, the closed testing procedure whose local test of an intersection $\bigcap_{i\in I} H_i$ rejects iff $|I|^{-1}\sum_{i\in I} e_i \geq 1/\alpha$, has family-wise error at most $\alpha$ under arbitrary dependence; (c) it admits every cell with $e_c \geq K/\alpha$. The running maximum of an e-process is not an e-value; $e_c$ is the value* at $\tau_c$.

Proof. (a) $\tau_c$ is a bounded stopping time, so by optional stopping for nonnegative supermartingales $\mathbb{E}K^{\mathrm{ben}}_{\tau_c} \leq 1$ when the cell is not admissible and $\mathbb{E}C_{\tau_c} \leq 1$ when its harm rate is at least $\eta$; the minimum is at most whichever of the two is a supermartingale under the true null, and setting it to 0 only lowers it. (b) Under $\bigcap_{i\in I} H_i$ the mean $|I|^{-1}\sum_{i\in I} e_i$ has expectation at most 1, so by Markov's inequality the local test has level $\alpha$ whatever the dependence; closed testing [15] then controls the family-wise error. For a cell $c$ and each size $j+1$, the intersection containing $c$ with the smallest mean adds the $j$ smallest other e-values, which is what the implementation checks. (c) If $e_c \geq K/\alpha$, every $I \ni c$ has mean at least $e_c/|I| \geq K/(\alpha|I|) \geq 1/\alpha$. □

*Remark 1 (Data-dependent budgets).* The ledger above is fixed in advance, which is what makes the union bound free of any independence assumption. A budget that depends on data (for example, $\alpha_c$ proportional to an estimated reuse frequency) remains valid if (i) the total is at most $\alpha$ almost surely and (ii) for every cell and epoch $(c,k)$ the trial sequence of that epoch is independent of the information used to set $\alpha_{c,k}$: then $\Pr[A_{c,k} \mid \alpha_{c,k}] \leq \alpha_{c,k}$ by Lemma 5.1 applied conditionally, so $\Pr[\bigcup A_{c,k}] \leq \sum \mathbb{E}[\Pr[A_{c,k} \mid \alpha_{c,k}]] \leq \mathbb{E}\sum \alpha_{c,k} \leq \alpha$. Without (ii), for instance when two cells share tasks, a data-dependent budget can break the guarantee.

Lemma 5.6 (Shift). *If $f$ takes values in an interval of length $b$, then $|\mathbb{E}_Q f - \mathbb{E}_P f| \leq b \cdot \mathrm{TV}(P,Q)$. Since $Z \in [-1,1]$, $|\mathrm{STR}_Q(c) - \mathrm{STR}_P(c)| \leq 2\,\mathrm{TV}(P_s,Q_s) \leq 2\xi_s$, and the constant 2 is attained.*

Proof. Centre $f$ so that $|g| \leq b/2$; then $|\mathbb{E}_Q g - \mathbb{E}_P g| = |\int g\, d(Q-P)| \leq (b/2)\,|Q-P|(\mathcal{X}) = b\,\mathrm{TV}(P,Q)$, since the total variation norm of the signed measure $Q-P$ is $2\,\mathrm{TV}(P,Q)$. For attainment, take task types $u$ with $Z=1$ and $d$ with $Z=-1$, $P(u)=0.1$, $Q(u)=0.2$: then TV $= 0.1$ and the risks differ by 0.2. □

*Why the budget is per cell.* Allocating one $\alpha_s$ per *scope* and letting every skill in the scope use the threshold $1/\alpha_s$ does not control the family-wise error: with ten skills at the null boundary, $\theta = \alpha = 0.1$ and 300 trials, the family-wise false admission rate of our e-process is 0.45, against 0.05 with the per-cell budget $\alpha/10$ (Section 5.6).

### 5.3 Scope and shift are necessary

Assumption 3 (Rich target class). *For every value of the features a procedure observes (fingerprints, predicates, trial outcomes on the observed repositories), there is a repository with those features whose task losses are arbitrary in* $[0,1]$.

Proposition 5.7 (No guarantee without target evidence or bounded shift). (a) *Let a procedure decide from data of observed repositories $\mathcal{R}_{\text{obs}}$ only, and admit a skill $S$ with positive probability. Under Assumption 3 there is a repository $R^\dagger \notin \mathcal{R}_{\text{obs}}$ with $\text{STR}_{D^\dagger}((S,s)) = 1$ for every distribution $D^\dagger$ over the contexts of $R^\dagger$ on which the admission probability is unchanged.* (b) *For every $\theta \in (0,1)$, $\delta > 0$ with $\theta + \delta < 1$, $\xi \in (0, 1/2]$ and every procedure, there are $P, Q$ with $\text{TV}(P,Q) = \xi$ and a cell $c$ with $\text{STR}_P(c) = -\theta - \delta$ and $\text{STR}_Q(c) = \text{STR}_P(c) + 2\xi$, whose admission probability does not depend on $Q$.*

Proof. (a) By Assumption 3, take $R^\dagger$ that has the same values of every feature the procedure reads (the data of $\mathcal{R}_{\text{obs}}$ and the target's own fingerprints and predicates) and has $\ell(x,\pi) = 1$, $\ell(x,\varnothing) = 0$ for every task. The procedure's input, hence its admission probability, is unchanged, and $Z \equiv 1$ on $R^\dagger$. (b) Take task types $u$ ($Z = 1$) and $d$ ($Z = -1$), both realizable with $\ell \in \{0,1\}$ ($u$: the run passes without the skill and fails with it; $d$: the reverse), with $P(d) = (1+\theta+\delta)/2 > 1/2 \geq \xi$ and $P(u) = (1-\theta-\delta)/2 > 0$, so that $\text{STR}_P = P(u) - P(d) = -\theta - \delta$, and obtain $Q$ by moving mass $\xi$ from $d$ to $u$. The procedure only reads tasks drawn from $P$. □

Part (b) shows that no procedure that learns only from $P$ can certify $Q$-risk better than $\text{STR}_P + 2\xi$, so the shift term of Theorem 5.3 cannot be removed or reduced; this is why the guarantee is relative to a declared scope family and why coarse scopes make it weak.

### 5.4 Composition

Theorem 5.8 (Composition risk is not controlled by individual risks). *Under Assumption 3, for $a, b \in [-1, 0)$, with the supremum over pairs of skills and task distributions of the scope,*

$$\sup\{\text{STR}(S_1 \circ S_2) : \ \text{STR}(S_1) = a, \ \text{STR}(S_2) = b\} = 1 + \min(a,b),$$

*and the supremum is attained. In particular, two skills that each meet the margin $-\theta$ can compose to excess risk $1 - \theta > 0$, and no bound on the composite risk improves on the trivial one implied by $\ell \in [0,1]$.*

Proof. Upper bound, for any skills: $\text{STR}(S_1 \circ S_2) = \mathbb{E}\ell(\pi_1 \circ \pi_2) - \mathbb{E}\ell(\varnothing) \leq 1 - \mathbb{E}\ell(\varnothing)$; since $\mathbb{E}\ell(\pi_1) = \mathbb{E}\ell(\varnothing) + a \geq 0$ and likewise for $b$, $\mathbb{E}\ell(\varnothing) \geq \max(-a,-b) = -\min(a,b)$, so $\text{STR}(S_1 \circ S_2) \leq 1 + \min(a,b)$. Attainment, with losses realizable by Assumption 3: constant losses $\ell(\varnothing) = -\min(a,b)$, $\ell(\pi_1) = \ell(\varnothing) + a$, $\ell(\pi_2) = \ell(\varnothing) + b$, $\ell(\pi_1 \circ \pi_2) = 1$. With losses in $\{0,1\}$ (as in the experiments), say $a \leq b$: let $\ell(\varnothing) = 1$ on a set of tasks of mass $-a$ and 0 elsewhere, $\ell(\pi_1) = 0$ everywhere, $\ell(\pi_2) = 1$ on a part of mass $b - a \leq -a$ of that set and 0 elsewhere, and $\ell(\pi_1 \circ \pi_2) = 1$ everywhere; then the risks are $a$, $b$ and $1 + a$. □

Theorem 5.8 says nothing about footprints. Screening only pairs whose footprints overlap is therefore sound only under an additional assumption, which we state and test rather than presume.

Call two skills *adjacent* if their footprints intersect or if applying one creates or removes sites of the other (the enabling edges of the execution rule).

Assumption 4 (Non-interaction of non-adjacent skills). *For sets of skills $A, B$ with no adjacent pair $a \in A$, $b \in B$, and every task $x$: (i) swapping two consecutive skills $a \in A$, $b \in B$ in any application order does not change the loss on $x$; and (ii) $\ell(x, \pi_A \circ \pi_B) - \ell(x,\varnothing) = [\ell(x,\pi_A) - \ell(x,\varnothing)] + [\ell(x,\pi_B) - \ell(x,\varnothing)]$.*

Part (i) is the semantic counterpart of the enabling edges, which link every pair that does not commute syntactically; with losses in $\{0,1\}$, part (ii) says in particular that no task's outcome is changed by both $A$ and $B$.

Corollary 5.9 (What actually runs). *Under Assumption 4 and the execution rule of Section 3, outside the event of Theorem 5.3 (probability at most $\alpha$), every executed set $E$ in scope $s$ whose adjacency graph has $m$ connected components satisfies* $\mathrm{STR}_Q(E) \le m(-\theta + 2\xi_s)$*; in particular no executed set is harmful when $2\xi_s \le \theta$. Only components with two or more skills need a composite cell: with mean adjacency degree $\bar{d}$ there are $|\mathcal{L}_s|\,\bar{d}/2$ adjacent pairs per scope.*

Proof. Let $E_1, \dots, E_m$ be the components. The canonical order of $E$ may interleave components, but any two consecutive skills from different components are non-adjacent, so by part (i) a finite sequence of such swaps, none of which changes the loss, reorders it into $E_1, \dots, E_m$, each in its own canonical order. No skill of $E_1 \cup \cdots \cup E_j$ is adjacent to a skill of $E_{j+1}$, so part (ii) of Assumption 4 applied with $A = E_1 \cup \cdots \cup E_j$, $B = E_{j+1}$ for $j = 1, \dots, m-1$ gives, for every task, $\ell(x, \pi_E) - \ell(x, \varnothing) = \sum_j [\ell(x, \pi_{E_j}) - \ell(x, \varnothing)]$; taking expectations under $Q$ gives $\mathrm{STR}_Q(E) = \sum_j \mathrm{STR}_Q(E_j)$. By the execution rule each $E_j$ is an admitted cell (a single skill, or the composite of exactly $E_j$), so outside the event of Theorem 5.3 each term is at most $-\theta + 2\xi_s$. □

Assumption 4 is strong: two edits in different functions can still interact through shared state that no footprint records. Footprints read off the original code alone would miss a change that creates sites for another: Study R2 found such a pair on real code (Section 7.2), which is why adjacency includes enabling edges. The assumption is then needed only for pairs that commute and share no function; among the 80 such file pairs of Study R2 none interacted syntactically, but a syntactic check cannot exclude interaction through shared state, so it remains an assumption.

### 5.5 The value of pairing

Proposition 5.10 (Pairing). *Let $V_\pi = \mathrm{Var}\,\ell(x, \pi)$, $V_\varnothing = \mathrm{Var}\,\ell(x, \varnothing)$ and $C = \mathrm{Cov}(\ell(x, \pi), \ell(x, \varnothing))$ on the same task. Estimating* STR *from $n$ paired tasks has variance $(V_\pi + V_\varnothing - 2C)/n$; from two independent arms of $n$ tasks each it has variance $(V_\pi + V_\varnothing)/n$. Both designs cost $2n$ runs, so pairing reduces the number of tasks needed for a given precision by $R = (V_\pi + V_\varnothing)/(V_\pi + V_\varnothing - 2C)$. Under the additive variance model $\ell(\varnothing) = T$, $\ell(\pi) = T + S$ with independent $T, S$ (an illustration of the variance structure, which ignores the clipping of losses to $[0, 1]$), $R = 1 + 2\sigma_T^2/\sigma_S^2$.*

Proof. Direct computation of the two variances; $V_\pi, V_\varnothing$ include any run-to-run noise, and only the shared task component enters $C$. Under the additive model $V_\pi + V_\varnothing = 2\sigma_T^2 + \sigma_S^2$ and $C = \sigma_T^2$. □

### 5.6 Numerical checks

Every statement above is checked numerically by a script in the artifact, using the e-process of our implementation: per-cell validity, the failure of a per-scope budget, the attained constant 2 in Lemma 5.6, the bound of Theorem 5.8 on random instances, the pairing ratio, the convergence of the ledger, and the failure of re-admission without a ledger (re-testing a retired cell with the full $\alpha$ at every epoch), the harm certificate of Proposition 5.2, the library ledger's total (Lemma 5.4), and the exact decision rule of Studies D–H (Proposition 5.5) at both null boundaries, where its family-wise false admission rate was 2.4% and 7.3% (16 cells, $\alpha = 0.1$).

## 6 Implementation

Gatekeeper is about 4,800 lines of Python using only the standard library: the pipeline (screen, binder, paired-trial harness, e-processes, ledger, baselines B2, B6-R and B8, retirement) and the extensions used in the studies (function-level oracles, gates, the contract classifier and the execution rule). Paired trials run in per-draw worker processes started from a common snapshot; re-running 2,400 recorded draws in shuffled order with fresh workers reproduced every outcome. The loss is one minus the held-out pass rate plus 0.5 per regression, clipped at 1. Decisions consume

the per-test paired outcomes and the labels the set of new failures; the regression penalty only enters the reported suite loss. Recomputing all 7,200 recorded draws of the skill studies and re-running the demonstration suites with penalties from 0 to 5 changed no decision and no label (a one-test suite's clipped loss does not depend on the penalty at all). The benefit e-process bets $\lambda_i = \min\big(\max(0, g_i/(v_i + g_i^2)),\ 0.5/(1+\theta)\big)$, where $g_i = \bar{Y}_{i-1} - \theta$ uses the running mean of past draws shrunk towards 0.5 by one pseudo-observation and $v_i$ their sample variance (0.25 before two draws; a plug-in Kelly bet, capped at half the bound of Lemma 5.1); it depends only on past draws, hence is predictable. The harm certificate bets the constant $\lambda = 0.9/(1-\eta)$ of Proposition 5.2, and the harm alarm the constant $\mu = \min((0.5-\eta)/(\eta(1-\eta)),\ 0.95/\eta)$. The execution rule uses module-qualified footprints (file and function, module-level code included) and the enabling edges of Section 7.2. A conformance check labels each configuration with the guarantee it actually has: options of the frozen pipeline such as consuming priority tasks first, keeping only tasks that reach the edit, a sign test on discordant pairs, or e-BH give a weaker guarantee than Theorem 5.3 (no guarantee, sign only, sign only, FDR), and no reported study uses them. Every theorem and remark is checked numerically on the code that the studies ran (Section 5.6), including the exact decision rule of Studies D–H.

Every study is pre-registered by a workflow that hashes its protocol, configuration and tools; the seed is drawn from the public drand beacon after the freeze; amendments re-hash the study and keep the seed. Each result is produced by a workflow and committed with its raw records; a checker recomputes every number quoted in this paper from those records, and a separate script checks every theoretical statement numerically. The test suite has more than 350 tests.

## 7 Evaluation

We ask four questions. **RQ1** Does the certificate behave as the theory predicts, where do simple gates fail, and does the library-level guarantee hold for what actually runs? (Sections 7.1 and 7.2) **RQ2** On real skill reuse, how does admission compare with replay plus fingerprints and with always-retest, and with the rules practitioners use on market skills? (Sections 7.3 and 7.4) **RQ3** Does partial harm occur in plausible LLM patches, and which gates catch it? (Section 7.5) **RQ4** How much of the measured harm depends on how harm is defined? (Sections 7.6 and 7.7)

All studies were pre-registered. For the trial studies (D, E, G, H, P, Q) protocol, configuration and tools were hashed before any outcome was seen and seeds were drawn from the public drand beacon after the freeze; the census and composition studies (R2, S) are deterministic, and their protocols were committed before they ran. Amendments are recorded and labelled, and results analysed after seeing data are marked as such. Every number below is produced by a workflow in the artifact. Table 1 summarises the studies. The baselines are *unrestricted reuse* (B2: admit whenever the skill binds), *replay plus fingerprints* (B6-R: the skill reproduces its recorded fix on its source and the target's environment fingerprints match, the guard of GSE-style skill libraries), and *always-retest* (B8: admit only if no draw and no test of the target's suite regresses, at full cost). Studies P and Q apply the same certificate to single patches: a patch is a one-cell library whose scope is the edited function, and a draw is one generated input on which the patch and the developers' fix are run.

### 7.1 Where simple gates fail: the phase diagram

For a patch that always helps, Table 2 gives the probability that each gate admits it as a function of the true harm rate $h$ ($\eta = 5\%$, $\alpha = 0.1$; exact for the smoke, zero-tolerance and fixed-sample gates, Monte Carlo for the sequential rules). A zero-tolerance gate with 300 draws keeps fewer than half of the acceptable patches once $h > 0.23\%$; a 20-draw smoke test still admits more than 10% of inadmissible patches until $h \approx 11\%$. Outside the band $[3/n,\ 1 - 0.1^{1/20}] \approx [0.75\%, 10.9\%]$ ($n = 400$) a

Table 1. Studies, in the order of the research questions. "Draw": one input from a generator owned by the scope's oracle.

| Study | RQ | Subjects | Trials, oracle and main result |
|---|---|---|---|
| H | 1 | constructed rare-harm target, 6 harm rates | draws, hand-written oracle; the certificate controls admission of rare harm, a smoke test does not |
| Simulation | 1 | 1,000 synthetic libraries per setting | synthetic paired trials; one-by-one admission runs harmful compositions, the rule does not |
| R2 | 1 | 12 rewrite families, 16 repositories | AST census; overlap is rare; one real enabling interaction |
| S | 1 | real functions touched by two families | generated inputs, difference from the original; compositions additive |
| D, E, G | 2 | 2 frozen families, 14 targets | 300 draws plus the target's test suite; B6-R admits every harmful cell, the certificate none |
| P | 3 | 205 plausible LLM patches | function-level draws against the developers' fix; partial harm |
| Q (Q-A1) | 4 | 694 resolved SWE-bench Verified patches | function-level draws against the fix; harm rate depends on its definition |

Table 2. Probability that a gate admits an always-helpful patch, by true harm rate $h$ ($h \geq \eta$: admitting is an error).

| $h$ | smoke 20 | zero-tol. 300 | fixed 300 | certificate, 300 | mixture, 1000 |
|---|---|---|---|---|---|
| 0.3% | 0.94 | 0.41 | 1.00 | 1.00 | 1.00 |
| 1% | 0.82 | 0.05 | 1.00 | 0.95 | 1.00 |
| 2% | 0.67 | 0.00 | 0.92 | 0.65 | 1.00 |
| 3% | 0.54 | 0.00 | 0.59 | 0.36 | 0.78 |
| 5% (error) | 0.36 | 0.00 | 0.06 | 0.10 | 0.10 |
| 10% (error) | 0.12 | 0.00 | 0.00 | 0.01 | 0.00 |

simple gate suffices. At the same number of draws a fixed-sample test is as safe as the sequential certificate and *more* powerful (0.92 versus 0.65 at $h = 2\%$, 300 draws). What the sequential rule buys is validity at data-dependent stopping and early stopping (110 clean draws in a 16-cell family), not power. On synthetic targets with rare harm (Study H, 50 repetitions per cell, 300 draws), the certificate admitted 0/100 cells with $\rho \geq \eta$, while a 5-draw smoke test admitted 38/50 and 27/50 at $\rho = 5\%$ and 10%, and replay plus fingerprints admitted every cell.

### 7.2 Library-level control (simulation)

The libraries of Studies D–G have no overlapping skills, so we first test the library-level parts of the design (composite cells, the per-cell ledger and the execution rule) on synthetic libraries built with the implementation's own e-process, ledger and execution rule. Each library has 12 skills in one scope (70% beneficial, STR $= -0.3$; the rest not admissible), each touching one of 8 code regions; every overlapping pair is, with probability $q$, the harmful construction of Theorem 5.8 (STR $= +0.5$ when applied together), and risks otherwise add (1,000 libraries, 300 trials per cell, $\theta = \alpha = 0.1$). Admitting skills one by one and running every admitted skill together executed a harmful footprint component in 27.9% of the libraries at $q = 0.3$ (9.9% at $q = 0.1$, 42.4% at $q = 0.5$). With composite cells, the ledger and the execution rule this never happened (0/1,000 at every $q$, consistent with

Corollary 5.9). The price is reuse: 3.59 instead of 4.48 beneficial skills executed per library, because undecided or rejected composites keep overlapping skills apart, and 8% more trials. Measured on the executed set as a whole, one-by-one admission looked harmful in only 5.4% of libraries: benefits elsewhere masked the harmful component, which is why the guarantee is stated per component.

*A twelve-family library on real code (Study R2).* To see what the library-level rules meet on real code, we built a library of twelve families of reusable code changes: the two frozen families of Section 7.3 and ten linter-style rewrites (Table 3), each behaviour-preserving on ordinary inputs and behaviour-changing on some (every family has a unit test with such a witness input). A pre-registered census (AST analysis only) over all 16 target repositories at their pinned revisions (655 non-test files) found 59 single-skill cells, 3.7 per repository, touching 467 functions, of which 21 are touched by two or more families. Of the 136 family pairs that meet in some repository, 18 overlap, and the execution rule requires 6 composite cells. Applying every two families that bind in the same file in both orders, all 21 such pairs that share a function commute. Two pairs with *disjoint* footprints do not: rewriting `type(x) is not int` to `not isinstance(x, int)` admits `bool` and creates a site for the `bool` guard in a function the guard did not touch, so the result depends on the order. In `pydal` the original-code footprints put the two families in different components, and the execution rule would have run them together without a composite certificate. Footprints taken from the original code therefore miss *enabling* interactions; the implementation now also links every non-commuting or site-changing pair (post hoc amendment R2-A1), which merges the two components. Re-running the simulation on the 13 measured libraries with two or more cells (enabling edges included; benefits and harms synthetic as above), one-by-one admission executed a harmful component in 7.1% of libraries at $q = 0.3$ (14.5% when every overlapping pair is harmful), ours in 0/1,000, at the cost of 1.64 instead of 1.96 beneficial skills executed. Real libraries overlap less than the synthetic ones, so both the risk of one-by-one admission and the cost of the rule are smaller; neither vanishes.

*Do real compositions behave like their parts? (Study S).* We called each of the 23 functions that two families touch, or where one enables the other, on 200 signature-generated inputs in five versions: the original, each rewrite alone, and both in either order. As registered only 2 of 23 could be called, because methods need a receiver. Five post hoc amendments, each written before its run, fixed the harness: receivers built from constructor signatures (12 usable, S-A1), integer arguments replaced by booleans with probability 1/4 (a valid subtype, S-A2), every version run twice (S-A3), a fixed hash seed (S-A4), and an installation bug of our harness that had given every dependency built from source a placeholder version (S-A5). In the final run 16 functions were usable and 7 could not be called. No composition changed behaviour where both of its parts kept it, none masked a change of a part, and none depended on the order; an apparent order dependence on one input of `pydal`'s `QueryBuilder.parse` in S-A2 did not survive the repetition, as our pre-stated rule required, and is counted as noise. The `bool` guard alone changed `pydal`'s `IS_STRONG.validate` on 29 of 200 inputs and both of its compositions did the same. With the harm certificate and e-Holm over all 64 cells, the gate rejected exactly the 3 cells that contain that guard and admitted the other 61; no function had both singles admitted and a composite rejected. On these functions overlapping rewrites composed additively, consistent with Assumption 4; the evidence is limited to 16 functions and generated inputs, so the theorem's warning stands.

### 7.3 Skill reuse on real targets

Two skill families, both frozen AST rewrites (excluding `bool` from `int` checks, learned from one PySStuBs fix, and `== None`→`is None`), were applied to 14 real targets in three pre-registered studies (28 cells). *Study D* (8 targets, 16 cells): ground truth from 300 draws plus the target's full test

Table 3. The Study R2 library: families, the inputs on which each rewrite changes behaviour, and the number of the 16 target repositories where it binds. The first two are the frozen families of Studies D–G.

| Rewrite | Changes behaviour when | Repos |
|---|---|---|
| `isinstance(x, int)` → … `and not isinstance(x, bool)` | $x$ is a `bool` | 15 |
| `x == None` → `x is None` | `__eq__` overridden | 3 |
| `type(x) == T` → `isinstance(x, T)` | $x$ is an instance of a subclass | 4 |
| `x == True` → `x is True` | $x$ is 1, a numpy bool | 2 |
| `x is 1000` → `x == 1000` | equal, non-identical values | 0 |
| `len(x) == 0` → `not x` | `__bool__` and `__len__` disagree | 8 |
| `k in d.keys()` → `k in d` | `__contains__` and `keys()` disagree | 3 |
| `def f(a=[])` → `a=None` + guard | callers rely on shared state | 5 |
| `except:` → `except Exception:` | `KeyboardInterrupt`, `SystemExit` | 5 |
| `raise e` → `raise` (in its handler) | the traceback is inspected | 4 |
| `open(p)` → `open(p, encoding="utf-8")` | non-UTF-8 locale or file | 10 |
| `yaml.load(s)` → `yaml.safe_load(s)` | Python-specific tags | 0 |

Table 4. Cells admitted by each comparator on real skill-reuse targets, by ground truth from 300 draws plus the target's test suite. Study G's second cell (no change in draws, a census regression) is omitted.

| Comparator | Study D beneficial (of 3) | Study D unchanged (of 9) | Study E unchanged (of 7) | Studies E, G harmful (of 4) |
|---|---|---|---|---|
| B2 unrestricted reuse | 3 | 9 | 7 | 4 |
| B6-R replay + fingerprints | 3 | 9 | 7 | 4 |
| B8 always-retest | 3 | 9 | 7 | 0 |
| Gatekeeper (certificate) | 2 | 0 | 0 | 0 |

suite gave 3 beneficial, 9 unchanged, 4 out-of-scope and 0 harmful cells. B2, replay plus fingerprints (B6-R) and always-retest (B8) each admitted 12 cells, the 3 beneficial ones and all 9 unchanged ones; the certificate (the smaller of the benefit e-process and the harm certificate where the cell stopped, with e-Holm over the 16 cells, Proposition 5.5, family-wise $\alpha = 0.1$) admitted 2 cells, both beneficial, after 110 draws each, and missed the third, whose mean benefit ($-0.11$) is smaller than the margin $\theta = 0.2$. It used 3,220 trial runs against 3,600 for B8. *Studies E and G*: on the four harmful cells (`pyyaml`, `packaging`, `databricks`: harm on 87–100% of inputs; `pydal`: 81/300), B2 and B6-R admitted all four and the certificate rejected all four, within two draws for the first three. The targets' own test suites (1,287, 51,524 and 130 tests) showed *no* new regression in Study E; in Study G they did (21 new failures). Re-running 2,400 recorded draws in shuffled order with fresh workers reproduced every paired outcome, so the draws behave as independent, as Assumption 1 requires. Table 4 summarises the decisions.

### 7.4 Market skills at scale (Study T)

To compare admission with the rules practitioners use, on skills that are on the market and targets nobody picked by hand, Study T takes every stable autofix rule of the Ruff linter (version 0.17.3), whose fixes Ruff itself labels *safe* or *unsafe*, plus the twelve families of Study R2, and applies each to the 60 most-downloaded pure-Python PyPI projects (boto3, requests, pydantic, pytest, jinja2, …; selected by a rule fixed in advance). The census found 2,578 cells (235 skills). Each cell was tried on the functions it changes with two independent streams of signature-generated inputs: 200 *gate* draws that the decision rules see, and 200 *reference* draws that only the ground truth sees (a cell is harmful if the change alters behaviour on at least $\eta = 5\%$ of reference draws); 1,559 cells

Table 5. Study T: decisions on 1,531 Ruff autofix cells of 60 PyPI projects (11 harmful, 1,520 safe by the reference draws). Pre-registered criteria: W1 fewer harmful admissions than every rule that does not run trials; W2 at least as many safe admissions as Ruff's own label; W3 cost at most 70% of always-retest; W4 no rule better on both columns.

| Decision rule | harmful admitted | safe admitted | draws per cell |
|---|---|---|---|
| Apply every fix (`--unsafe-fixes`) | 11 | 1,520 | 0 |
| Ruff's *safe* label (`ruff --fix`) | 0 | 677 | 0 |
| Replay of the rule's documented example (B6-R) | 9 | 996 | 0 |
| Replay on all other packages (B6-strong, post hoc) | 2 | 1,256 | 0 |
| LLM judge reading the diff | 6 | 1,128 | 0 |
| Smoke test, 20 draws | 0 | 1,518 | 20 |
| Fixed-sample test, 199 draws | 0 | 1,492 | 199 |
| Always-retest (B8), 200 draws | 0 | 1,506 | 200 |
| Gatekeeper | 0 | 1,512 | 198.5 |

were usable (1,531 Ruff cells) and 12 were harmful. Two fairness corrections were written before any trial ran: the fixed-sample test uses 199 draws, the smallest number at which any method can certify zero harm for 2,578 cells; and Gatekeeper uses e-Holm over all census cells. Table 5 gives the decisions on the Ruff cells.

Gatekeeper admitted no harmful cell; unrestricted reuse admitted all 11, replay of the documented example 9 and the LLM judge 6, so Gatekeeper beat both on both columns, which is the criterion of the original proposal (B6 at equal retention). Because replay on a documented example is weaker than the original B6, which replays a skill on the repositories it was used on, we added (post hoc, written before it was computed) B6-strong: a rule is admitted on a package only if it changed no behaviour on any other package of the study. It admitted 2 harmful cells and kept 1,256 safe ones: evidence from dozens of real source repositories still let target-specific harm through while rejecting safe reuse, which is the selective-transfer argument of this paper. Ruff's own label also admitted no harmful cell, so W1 is *lost* as stated, but the label is conservative: Gatekeeper kept 1,512 safe fixes against 677, and admitted 771 of the 788 cells Ruff labels unsafe, at zero harm (W2 won). Among the rules that run trials, Gatekeeper kept more safe fixes than the fixed-sample test and always-retest at the same zero harm. Two criteria are lost and we report them as such: W3, because harm was so rare (11 of 1,531) that certification used almost the whole budget (198.5 draws per cell against 200); and, although no rule beat Gatekeeper on both columns (W4 won), a 20-draw smoke test matched its harm count, kept 1,518 safe fixes and cost a tenth. On these lint fixes harm, when present, was blatant (at least 5% of inputs, and above 30% in 8 of the 11 cells), the situation in which Section 7.1 already showed that a simple gate suffices; the certificate pays off for rare partial harm (Study H), not here. 1,019 cells were unusable (no callable function, or too few stable inputs), and one shard of three projects needed a memory cap after the runner was shut down twice (amendment T-A3).

*Replication on the next* 140 *projects (Study T2).* Study T2, registered after Study T and before any of its trials, repeats it unchanged on the projects ranked after Study T's (download ranks 61–200), with 240 draws per stream so that the fixed-sample test can certify (218 draws for 6,839 cells), and with e-BH (G-FDR) registered as a second Gatekeeper variant. Trial records exist for 131 of the 140 projects; the others are being re-run after their runners were shut down by processes the target code started (amendments T2-A2, T2-A3). Of 3,426 usable cells, 29 were harmful (20 of them Ruff cells). Gatekeeper admitted none, in both variants. On the Ruff cells, Ruff's *safe* label admitted 3, B6-strong 4, the LLM judge 10, replay of the documented example 17 and the smoke test 1,

so W1, lost in Study T because of Ruff's label, holds here. Gatekeeper kept 3,309 safe Ruff cells, always-retest 3,312; G-FDR kept 3,320, more than always-retest at zero harm, which confirms on a pre-registered study what Study U found post hoc. Pooling Studies T and T2, Gatekeeper admitted none of 41 harmful cells (Wilson 95% upper bound 8.6%).

*Rare partial harm in agent patches (Study U)..* Where harm is rare the picture changes. Study U reuses the function-level records of the 693 resolved SWE-bench Verified patches of Study Q (written by LLM coding agents; every one passes the benchmark's tests), splitting each patch's inputs at random into gate and reference halves; a patch is harmful if it has a contract regression on at least 5% of its reference inputs (44 patches, 33 of them between 5% and 20%). Passing the tests admitted all 44, and the 20-draw smoke test admitted 10, all in the 5–20% band; Gatekeeper, the fixed-sample test and always-retest admitted none. The price of the guarantee over 693 cells is retention: Gatekeeper kept 303 of 649 harmless patches, the fixed-sample test 299, and always-retest, which has no error guarantee, 621; many patches had too few stable inputs (about 149 on average) to reach the certification threshold. Two of the three pre-registered criteria held (fewer harmful admissions than smoke and than the tests, also in the rare band) and the third, retention at least that of always-retest, did not. For screening, where a false-discovery guarantee is the usual target, the same e-values with e-BH at $q = 0.1$ (post hoc) kept 626 harmless patches and still admitted no harmful one.

*Letting the model apply the change (B9).* The original proposal's co-primary question is whether admission beats spending the budget on direct repair by a model. On 150 Study T cells (all 11 harmful ones and 139 drawn at random) a model (gemini-3.8-flash) applied each rule to the touched functions itself, and its output was tried with the same harness and reference inputs. It changed behaviour on at least 5% of inputs in 10 of 148 evaluable cells, 2 of them cells where Ruff's own fix is harmless, and 6 of its replies did not parse; Gatekeeper admitted no harmful cell. The model cost 0.0080 USD and 16.9 seconds per cell, Gatekeeper's trials 2.3 seconds of a hosted runner (0.0003 USD). Stronger models did not help (amendment T-A7, same cells): with high reasoning effort the same model changed behaviour in 9 of 123 evaluable cells (52 replies did not parse, most likely because reasoning used up the output budget) at 0.0246 USD per cell, and the strongest model available to us (gemini-4-argon) in 11 of 148, 2 of them harmless under Ruff's fix, at 0.0147 USD per cell. A model that applies a change faithfully has no evidence about the target, which is what admission supplies.

*Reading.* On these targets harm was frequent and deterministic, so a simple gate with target evidence suffices; the certificate's distinctive behaviour is refusing changes that are not beneficial, not catching rare harm.

### 7.5 Partial harm in LLM patches

Study P drew fresh repository changes from a pre-registered frame of 3,562 candidates; for each usable instance a light model generated one patch, and 205 patches were plausible (they pass the hidden tests). With a function-level oracle (400 inputs per patch), $16/205 = 7.8\%$ (Wilson 4.9–12.3%) had an estimated regression rate inside the partial-harm band. The test-based census admitted all 16 patches with $\hat{\theta} > 5\%$, a 20-draw smoke test admitted 2, and the zero-tolerance, fixed-sample and sequential gates admitted none. A pre-registered manual check (RQ5) then found that 97.5% of the "regression" inputs were inputs the developers' fix also rejects; counting only regressions on inputs the fix accepts left 1 of 205 patches as planned, 3 when deliberate rejections that the patch skips are added (after seeing data), and at most 6 when non-reproducible patches are counted.

### 7.6 Naive differences versus contract regressions on SWE-bench Verified

Study Q tested the RQ5 finding on an independent, widely used benchmark. Its unit of the confirmatory hypothesis HQ1 is an *instance* whose patches show a naive difference (some input on which a patch and the fix behave differently); HQ1 predicted that in most such instances none of the differences is a contract regression. For 469 SWE-bench Verified instances with at least one public resolved patch, up to three distinct resolved patches were scored in the official Docker images (245 instances usable, 694 patches). 43.1% of patches behaved differently from the developers' fix on some input; 11.1% (Wilson 9.0–13.6%) had a *contract regression*, an input on which the fix returns a value and the patch does not, or the fix rejects on purpose and the patch accepts. The confirmatory hypothesis, that most naive differences are not contract regressions, was *not* supported: only 6/55 (10.9%, Wilson 5.1–21.8%; one-sided $p \approx 1$) of these instances had no contract regression. (The patch-level shares above and this instance-level share answer different questions: one instance with several differing patches counts once.) A manual review added after the result (labelled as such) re-ran the 55 units with outputs kept: 36 reproduced exactly (the cohort run had not stored its model-written input generator; re-generating it gave a different program for 17 of the other 19 units), and two independent raters agreed on 87.7% of 154 items. 8/36 (22.2%, Wilson 11.7–38.1%) units had no regression confirmed by both raters; excluding three units whose inputs are model-built stand-in objects gives 11/36 (18.0–46.9%). A third rater, a different model, was added afterwards; both model raters coded all 20 items of a calibration set with known codes correctly, so they do separate behaviour from representation, and both coded every review item as a behaviour difference. With the majority of the three raters, 5/36 (13.9%, Wilson 6.1–28.7%) units have no confirmed regression. The result does not hinge on one repository (post hoc): leaving out any one of the twelve repositories keeps the HQ1 share between 8.2% and 16.7% (largest Wilson upper bound 31.9%, without `sympy`) and the contract-regression share between 8.2% and 14.0%, although Django contributes 215 of the 469 instances. The RQ5 conclusion therefore does not generalise: on SWE-bench Verified most naive differences are real, observable behaviour differences from the fix. Whether they are *wrong* is a separate question that a reference implementation cannot answer. The orders of magnitude agree with PatchDiff [19], which found 29.6% of plausible SWE-bench Verified patches behaving differently from the fix with differential tests and judged 28.6% of those certainly incorrect; our function-level inputs find more differences (43.1%), and our contract classification is a cheaper, automatic proxy for their manual judgement.

### 7.7 Who defines harm

On 14 measurable targets of Studies D, E and G, a model-written input generator agreed with the authors' hand-written oracles on 11/14 detection decisions (Cohen's $\kappa = 0.57$), a signature-based generator on 8/14 ($\kappa = 0.19$). In one disagreement the generated inputs were right: on `cerberus` the skill rewrote two functions other than the intended one; the hand-written oracle, which checks the intended region, saw nothing, while generated inputs changed behaviour on 24–56 of 200 inputs. An oracle written from the author's intent misses side effects outside that intent, which is the scope problem this paper is about.

## 8 Threats to Validity

*Assumptions of the guarantee.* Theorem 5.3 assumes i.i.d. trials drawn with replacement (Assumption 1); we checked that the harness is stateless (2,400 re-run draws, 0 differences) but not that real task streams are identically distributed. The shift bound $\xi_s$ (Assumption 2) is declared, not estimated; the guarantee excludes harmful admissions only when $2\xi_s \leq \theta$, and Proposition 5.7 shows that no procedure learning from trials alone can do better. Screening only footprint-overlapping pairs

relies on Assumption 4, which *we have not tested*: two edits in different functions can still interact through state no footprint records. The execution rule is a design constraint that a deployment must enforce.

*Construct validity.* "Harm" is a difference from a reference: a hand-written oracle (Studies D–H), or the developers' fix (Studies P, Q). A difference from the fix is not necessarily a defect: in the manual review some patches arguably behaved better than the fix. Classifying an input as valid because the fix returns a value overestimates contract regressions when generated inputs are stand-in objects (three of 31 reviewed units); the sensitivity analysis keeps the conclusion. Hand-written oracles check the author's intent and miss side effects outside it (`cerberus`).

*Internal validity.* The second and third raters are models of the family that wrote the input generator; they were checked on a calibration set with known codes, but they see outputs and the patch's diff, not the inputs. The three raters disagree on 19 items (the first rater coded them as representation differences), so the Q-A1 share depends on who decides them (8/36 with both of the first two raters, 5/36 with the majority of three). 19/55 re-run units did not reproduce, 17 of them because the model-written generator, not stored by the cohort run, changed; they enter as bounds. The model-written generator sees the fix's diff, so inputs concentrate near the changed region. Four Study Q instances failed for a tool limitation (patches that create files) and count as unusable. The Study Q analysis script defined the inflation ratio differently from the protocol; we report both.

*Simulation.* The library-level results (Section 7.2) come from synthetic libraries whose interaction model satisfies Assumption 4 by construction; they show what the design guarantees and costs under that model, not how often real skills interact. The library census (Study R2) covers twelve rule-based families on 16 repositories and detects interaction only syntactically (order dependence and created or removed sites), pairwise only (an interaction of three rewrites that no pair shows would be missed), at a cost quadratic in the number of families that bind in a file; larger or learned libraries concentrate on popular code and may overlap and interact more. Skills mined by an agent from its trajectories would enter the same formulation: $\pi$ is their edit program, $\mathcal{K}$ the sites the binder reports, and a procedure that does not bind by AST (a prompt or a script) has to declare its footprint, for which our binder offers no check. The enabling-edge rule was added after the census had found the case (amendment R2-A1). Study S observes real compositions only on 16 callable functions with signature-generated inputs, after five post hoc amendments of the harness and inputs (S-A1 to S-A5, each written before its run); the registered run had 2 usable functions.

*External validity.* The skills are rule-based rewrites (two hand-written families on 14 targets; Ruff's autofix rules and twelve families on 60 PyPI projects, where harm is measured as behaviour change on signature-generated inputs and 40% of the cells could not be tested); we make no claim about learned skill libraries at scale, compositions in the wild, or retirement beyond a constructed demonstration. In Study P half of the in-band cases come from repositories that look like student assignments; Study Q covers public resolved submissions to one benchmark.

## 9 Related Work

### 9.1 Skill libraries and experience reuse

Voyager established the skill-library pattern [16]. GSE learns globally reusable skills for coding agents, models inter-skill relations, consolidates skills and guards them with replay verification [21]; it is the closest work and our replay-plus-fingerprint baseline (B6-R) is a reconstruction of that kind of guard. Replay asks whether a skill still works on its source; admission asks whether it should

run on this target, which only target evidence answers. Structured experience memories for code agents [5, 17] reuse development experience and face the same scope question.

### 9.2 Capability and authority

Formal verification of agent skills [9] and privilege control for agents [4, 11] decide what a change may touch. That predicate is different from whether the change is functionally right for the target, and we keep the two decisions apart.

### 9.3 Patch correctness

Plausible patches that pass the tests can still be wrong: automated repair overfits weak test suites [12], and on SWE-bench Verified [7] PatchDiff exposed behavioural differences from the developers' fix in 29.6% of plausible patches [19]. We measure the same kind of difference with function-level inputs and show that how "harm" is defined (any difference versus a contract regression) changes the measured rate by a factor of about four.

### 9.4 Sequential testing in deployment

Always-valid inference lets online experiments be monitored continuously without inflating error [8]. Admission is the same kind of decision applied to a reusable code change, with three differences we address: the decision is relative to a declared scope that may shift (Proposition 5.7), it must hold over a growing library with re-admission, and compositions are decisions of their own (Theorem 5.8).

### 9.5 Risk control, e-processes and multiple testing

Conformal prediction [14], conformal risk control [2] and Learn-Then-Test [1] give distribution-free guarantees under exchangeability. Skill transfer violates exchangeability across repositories, so our guarantee is relative to a declared scope family (Proposition 5.7). For sequential evidence we use betting e-processes [20] and Ville's inequality [13], which make an admission valid at any data-dependent stopping time [6, 10]. Simultaneous control over the library is family-wise (FWER) and comes from a union bound over cells; it requires no independence. A false-discovery-rate variant is available through e-BH [18], at the price of a weaker, FDR-type guarantee; Benjamini–Hochberg [3] is used only for the secondary comparisons of the evaluation.

## 10 Conclusion

A reusable code change can be authorized, pass its replay tests and still be wrong for the repository it is about to run on, and two changes that are each beneficial can be jointly harmful. We gave an admission rule whose error budget holds over a whole library, over compositions and over re-admission; proved that its shift term cannot be removed and that individual risks say nothing useful about composite risk; and tied certificates to what actually runs through an execution rule. Pre-registered experiments, negative results included, show where such a gate matters and where it does not: on our real skill targets harm was frequent and a simple gate with target evidence sufficed, the certificate's distinctive behaviour being its refusal of changes that do not help; in LLM patches partial harm exists but depends strongly on how harm is defined.

## Data Availability

The artifact contains the implementation, every study's frozen protocol and hashes, the workflows that produced each result, the raw per-instance records, the number checker for this paper and the numerical checks of the theory.

## Data Availability

An anonymous replication package is available at https://anonymous.4open.science/r/gatekeeper-artifact (link to be activated at submission). It contains the implementation (Section 6), every study's protocol, frozen configuration and amendments, the recorded trials and result files from which every number in this paper is computed, the scripts that compute them, and the workflow definitions that ran them. Four commands, without network access or cost, re-run the unit tests, the numerical checks of Section 5.6 and the recomputation of every quoted number; studies that call language models or clone third-party repositories can be re-run from their workflows, and their recorded outputs are included so that no number depends on a re-run.

## References


[1] Anastasios N. Angelopoulos, Stephen Bates, Emmanuel J. Candès, Michael I. Jordan, and Lihua Lei. 2021. Learn then Test: Calibrating Predictive Algorithms to Achieve Risk Control. arXiv:2110.01052.

[2] Anastasios N. Angelopoulos, Stephen Bates, Adam Fisch, Lihua Lei, and Tal Schuster. 2024. Conformal Risk Control. In *International Conference on Learning Representations (ICLR)*.

[3] Yoav Benjamini and Yosef Hochberg. 1995. Controlling the False Discovery Rate: A Practical and Powerful Approach to Multiple Testing. *Journal of the Royal Statistical Society Series B* 57, 1 (1995), 289–300.

[4] Edoardo Debenedetti, Ilia Shumailov, Tianqi Fan, Jamie Hayes, Nicholas Carlini, Daniel Fabian, Christoph Kern, Chongyang Shi, Andreas Terzis, and Florian Tramèr. 2025. Defeating Prompt Injections by Design. arXiv:2503.18813.

[5] Yi-Xuan Deng, Xiaoqin Liu, Yi Zhang, Guo-Wei Yang, and Shuojin Yang. 2026. Your Code Agent Can Grow Alongside You with Structured Memory. arXiv:2603.13258.

[6] Steven R. Howard, Aaditya Ramdas, Jon McAuliffe, and Jasjeet Sekhon. 2021. Time-Uniform, Nonparametric, Nonasymptotic Confidence Sequences. *The Annals of Statistics* 49, 2 (2021), 1055–1080.

[7] Carlos E. Jimenez, John Yang, Alexander Wettig, Shunyu Yao, Kexin Pei, Ofir Press, and Karthik Narasimhan. 2024. SWE-bench: Can Language Models Resolve Real-World GitHub Issues?. In *International Conference on Learning Representations (ICLR)*.

[8] Ramesh Johari, Pete Koomen, Leonid Pekelis, and David Walsh. 2022. Always Valid Inference: Continuous Monitoring of A/B Tests. *Operations Research* 70, 3 (2022), 1806–1821. doi:10.1287/opre.2021.2135

[9] Alfredo Metere. 2026. Methods for Formal Verification of Agent Skills: Three Layers Toward a Mechanically Checkable Capability-Containment Proof. arXiv:2605.23951.

[10] Aaditya Ramdas, Peter Grünwald, Vladimir Vovk, and Glenn Shafer. 2023. Game-Theoretic Statistics and Safe Anytime-Valid Inference. *Statist. Sci.* 38, 4 (2023), 576–601.

[11] Tianneng Shi, Jingxuan He, Zhun Wang, Linyu Wu, Hongwei Li, Wenbo Guo, and Dawn Song. 2025. Progent: Programmable Privilege Control for LLM Agents. arXiv:2504.11703.

[12] Edward K. Smith, Earl T. Barr, Claire Le Goues, and Yuriy Brun. 2015. Is the Cure Worse than the Disease? Overfitting in Automated Program Repair. In *Proceedings of the 10th Joint Meeting on Foundations of Software Engineering (ESEC/FSE)*. 532–543. doi:10.1145/2786805.2786825

[13] Jean Ville. 1939. *Étude critique de la notion de collectif*. Gauthier-Villars, Paris.

[14] Vladimir Vovk, Alexander Gammerman, and Glenn Shafer. 2005. *Algorithmic Learning in a Random World*. Springer.

[15] Vladimir Vovk and Ruodu Wang. 2021. E-values: Calibration, Combination and Applications. *The Annals of Statistics* 49, 3 (2021), 1736–1754. doi:10.1214/20-AOS2020

[16] Guanzhi Wang, Yuqi Xie, Yunfan Jiang, Ajay Mandlekar, Chaowei Xiao, Yuke Zhu, Linxi Fan, and Anima Anandkumar. 2024. Voyager: An Open-Ended Embodied Agent with Large Language Models. *Transactions on Machine Learning Research* (2024).

[17] Qihao Wang, Ziming Cheng, Shuo Zhang, Fan Liu, Rui Xu, Heng Lian, Kunyi Wang, Xiaoming Yu, Jianghao Yin, Sen Hu, Yue Hu, Shaolei Zhang, Yanbing Liu, Ronghao Chen, and Huacan Wang. 2026. MemGovern: Enhancing Code Agents through Learning from Governed Human Experiences. In *Findings of the Association for Computational Linguistics: EMNLP 2026*. arXiv:2601.06789; ACL Anthology 2026.findings-emnlp.898.

[18] Ruodu Wang and Aaditya Ramdas. 2022. False Discovery Rate Control with E-values. *Journal of the Royal Statistical Society Series B* 84, 3 (2022), 822–852.

[19] You Wang, Michael Pradel, and Zhongxin Liu. 2026. Are "Solved Issues" in SWE-bench Really Solved Correctly? An Empirical Study. In *Proceedings of the IEEE/ACM International Conference on Software Engineering (ICSE)*. doi:10.1145/3744916.3764576

[20] Ian Waudby-Smith and Aaditya Ramdas. 2024. Estimating Means of Bounded Random Variables by Betting. *Journal of the Royal Statistical Society Series B* 86, 1 (2024), 1–27.

[21] Chen Yang, Jiashuo Tian, Ziqi Wang, Xinyin Liu, Meiru Ye, and Junjie Chen. 2026. Learning Globally Reusable Skills for Coding Agents. arXiv:2608.06153.