



AMERICAN INTERNATIONAL UNIVERSITY–BANGLADESH

(AIUB)

Department Of CSE

ADVANCE DATABASE MANAGEMENT SYSTEM

Spring: 2024-2025

Section: C Group: 02

Mid-Term Project Report:

Food Court Management System

Course Teacher:

JUENA AHMED NOSHIN

Group Members:

Name	ID	Contribution	Topics
S. M. Kamrul Hassan	22-46452-1	25%	Introduction, User Interface Planning
Dipaneeta Pramanik	22-48286-3	25%	Scenario Description, ER Diagram, Conclusion
Tonima Islam	22-48325-3	25%	Normalization, Finalization, Final Table
Mahin Sarker	22-48338-3	25%	Table Creation, Sequence Creation, Data Insertion, User Creation, Query Writing

Table Of Contents


<u>Serial No.</u>	<u>Topic Name</u>	<u>Page No.</u>
1.	Introduction	3
2.	User Interface Planning	3
3.	Scenario Description	6
4.	ER Diagram	7
5.	Normalization	8
6.	Finalization	16
7.	Final Table	17
8.	Table Creation	18
9.	Sequence Creation	31
10.	Data Insertion	44
11.	User Creation	59
12.	Query Writing	67
13.	Conclusion	107



Introduction:

In today's busy world, food courts are becoming a popular choice for people who want quick, tasty, and affordable meals from different brands all in one place. Our project, the Food Court Management System, is designed to make managing such food courts easier and more organized. This system helps food stall owners track their sales, manage inventory, assign staff shifts, and collect customer feedback. Customers can order food, leave reviews, and make secure payments, while admins can monitor overall performance through detailed reports. It's like having a smart assistant for the food court that makes sure everything runs smoothly—from the kitchen to the counter.


User Interface Planning:

Customer Interface:

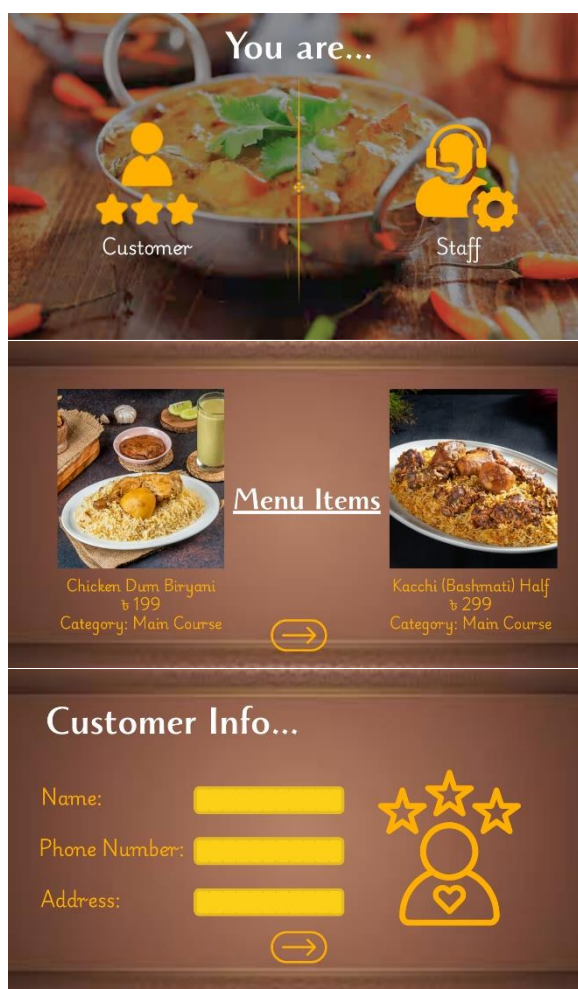

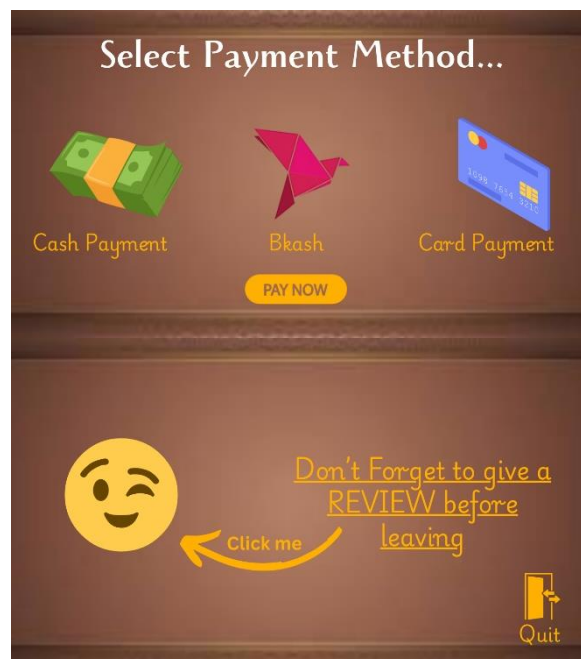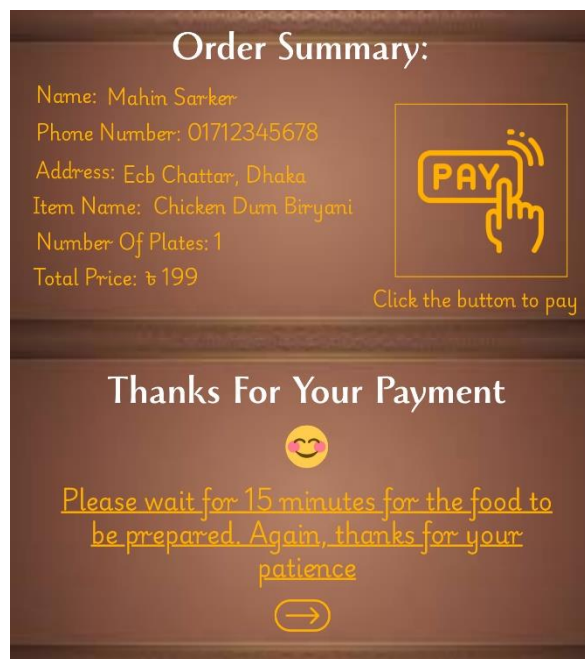

Admin Interface:

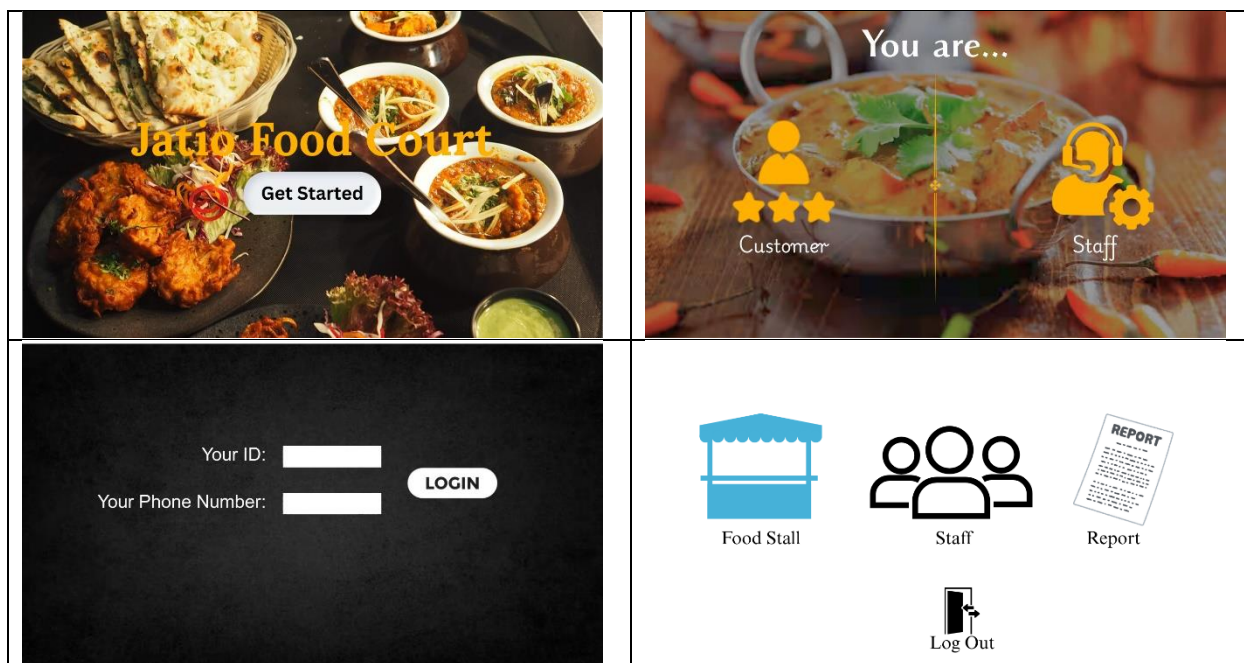

Staffs

Staff Id	Staff Name	Staff Role	Staff Salary	Working Hours	Working Date	Staff Mobile Number
1	Jibon	Cleaner	\$10	9.00am-10pm	1-May-2025	0192347291283

Add Staff
Go Back



Food Stall



Staff



Report



Log Out

Staff and Employess:



Jatio Food Court

Get Started

Your ID:

Your Phone Number:

LOGIN



Jatio Food Court

Get Started

You are...



Customer



Staff

Welcome Rahim

Employee ID: 101

Salary: \$101

Role: Head Cheif


Phone: 011124253431

Log Out

Scenario Description:

In the Food Court Management System, a customer places orders directly from available food stalls within the premises. Each customer, identified by Customer ID, has their name, phone number, and address stored in the system. After placing an order, a customer can give feedback which is identified by rating, comments, and a unique Feedback ID. A customer can give only one feedback. An Order, identified by Order ID, order status, number of plates, and total price, may include multiple Menu Items and can have discounts applied from the Discounts & Promotions module, which stores discount details such as Discount ID, discount type, discount percentage, and validity period. Each discount can be applied to multiple Orders. Every order generates a Payment entry with associated Payment ID, payment methods, amount, and payment status. Multiple menu items classified by Menu ID, belong to a specific food stall and contain details like item name, price, description and category. Food stalls, identified by Stall ID, include stall name, stall location, owner name, license number, and Contact Number. Each food stall employs many employees, each having an Employee ID, employee name, employee role, employee address, employee salary, and employee mobile number. Each stall also maintains an Inventory, which is identified by Inventory ID, quantity available, product list, added date, and buying price. An Inventory is supplied by many registered suppliers identified by Supplier ID, supplier name, supplier mobile number, products, total products supplied, last supplied date, and selling price. The food court Admins access the system via the Admin Panel using a secure username and password to monitor food stalls and manage staff. Staffs are identified by Staff id, staff name, staff role, staff salary, working hours, working dates, staff mobile number, and staff address. The admin panel also creates many Analytical Reports. These reports include report ID, report date, total sales, total orders, most sold items, and customer average ratings—offering vital insights to ensure smooth and data-driven canteen operations. Thus, many analytical reports are owned by a food stall every year.

ER-Diagram:

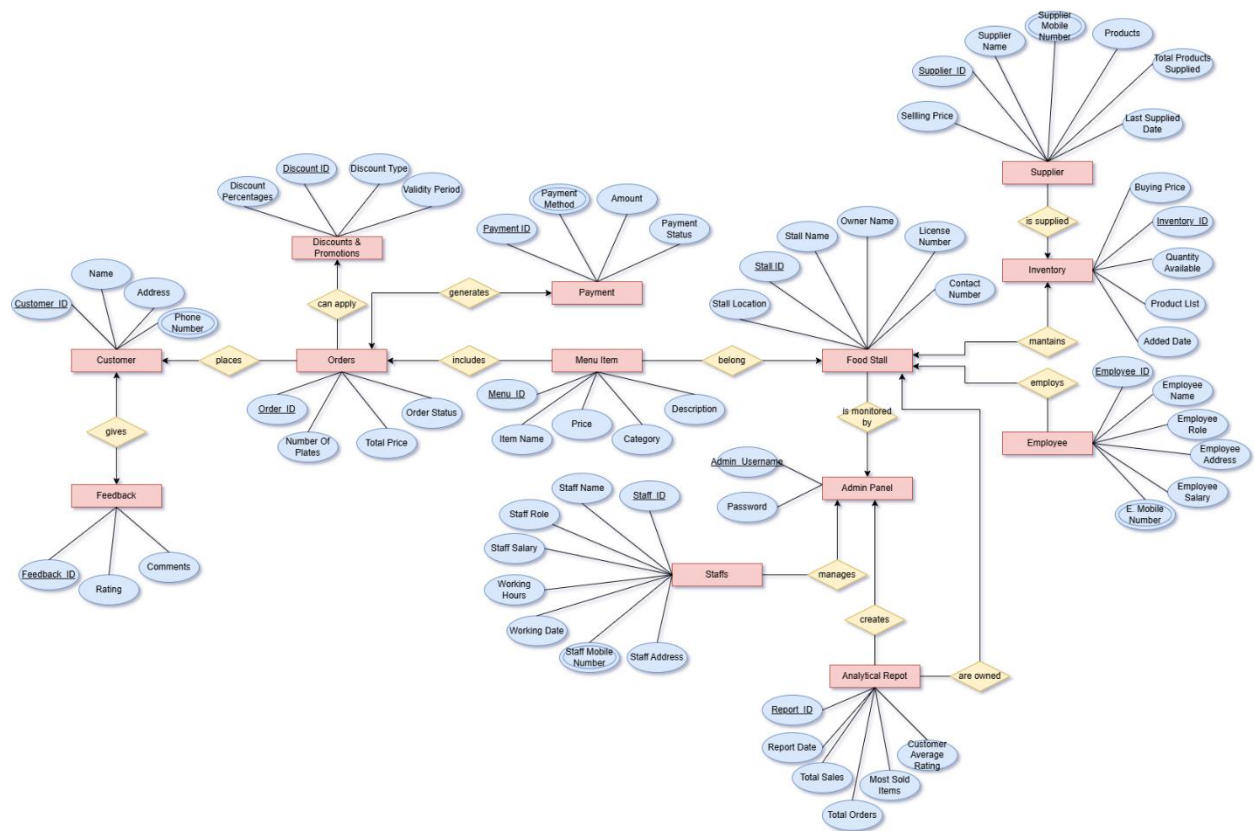

Normalization:

1. Places (One to Many):

UNF: Customer_ID, Name, Address, Phone Number, Order_ID, Order Status, Number of Plates, Total Price

1NF: Customer_ID, Name, Address, Phone Number (Multivalued Attribute), Order_ID, Order Status, Number of Plates, Total Price

2NF:

- 1) Customer_ID, Name, Address, Phone Number
- 2) Order_ID, Order Status, Number of Plates, Total Price

3NF:

- 1) Customer_ID, Name, Address, Phone Number
- 2) Order_ID, Order Status, Number of Plates, Total Price

Table:

- 1) Customer_ID(pk), Name, Address, Phone Number
- 2) Order_ID(pk), Order Status, Number of Plates, Total Price, Customer_ID (fk)

2. Gives (One to One):

UNF: Customer_ID, Name, Address, Phone Number, Feedback_ID, Rating, Comments

1NF: Customer_ID, Name, Address, Phone Number (Multivalued Attribute), Feedback_ID, Rating, Comments

2NF:

- 1) Customer_ID, Name, Address, Phone Number,
- 2) Feedback_ID, Rating, Comments

3NF:

- 1) Customer_ID, Name, Address, Phone Number
- 2) Feedback_ID, Rating, Comments

Table:

- 1) Customer_ID (pk), Name, Address, Phone Number,
- 2) Feedback_ID(pk), Rating, Comments, Customer_ID(fk)

3. Can Apply (Many to One):

UNF: Order_ID, Order Status, Number of Plates, Total Price, Discount_ID, Discount Percentages, Discount Type, Validity Period

1NF: Order_ID, Order Status, Number of Plates, Total Price, Discount_ID, Discount Percentages, Discount Type, Validity Period

2NF:

- 1) Order_ID, Order Status, Number of Plates, Total Price
- 2) Discount_ID, Discount Percentages, Discount Type, Validity Period

3NF:

- 1) Order_ID, Order Status, Number of Plates, Total Price
- 2) Discount_ID, Discount Percentages, Discount Type, Validity Period

Table:

- 1) Order_ID(pk), Order Status, Number of Plates, Total Price, Discount_ID(fk)
- 2) Discount_ID(pk), Discount Percentages, Discount Type, Validity Period.

4. Generates (One to One):

UNF: Order_ID, Order Status, Number of Plates, Total Price, Payment_ID, Payment Method, Amount, Payment Status

1NF: Order_ID, Order Status, Number of Plates, Total Price, Payment_ID, Payment Method (Multivalued Attribute), Amount, Payment Status

2NF:

- 1) Order_ID, Order Status, Number of Plates, Total Price
- 2) Payment_ID, Payment Method, Amount, Payment Status

3NF:

- 1) Order_ID, Order Status, Number of Plates, Total Price
- 2) Payment_ID, Payment Method, Amount, Payment Status

Table:

- 1) Order_ID(pk), Order Status, Number of Plates, Total Price
- 2) Payment_ID(pk), Payment Method, Amount, Payment Status, Order_ID(fk)

5. Includes (One to Many)

UNF: Order_ID, Order Status, Number of Plates, Total Price, Menu_ID, Item Name, Price, Category, Description

1NF: Order_ID, Order Status, Number of Plates, Total Price, Menu_ID, Item Name, Price, Category, Description

2NF:

- 1) Order_ID, Order Status, Number of Plates, Total Price
- 2) Menu_ID, Item Name, Price, Category, Description

3NF:

- 1) Order_ID, Order Status, Number of Plates, Total Price
- 2) Menu_ID, Item Name, Price, Category, Description

Table:

- 1) Order_ID(pk), Order Status, Number of Plates, Total Price
- 2) Menu_ID(pk), Item Name, Price, Category, Description, Order_ID(fk)

6. Belong (Many to One)

UNF: Menu_ID, Item Name, Price, Category, Description, Stall_ID, Stall Location, Stall Name, Owner Name, License Number, Contact Number,

1NF: Menu_ID, Item Name, Price, Category, Description, Stall_ID, Stall Location, Stall Name, Owner Name, License Number, Contact Number,

2NF:

- 1) Menu_ID, Item Name, Price, Category, Description
- 2) Stall_ID, Stall Location, Stall Name, Owner Name, License Number, Contact Number

3NF:

- 1) Menu_ID, Item Name, Price, Category, Description
- 2) Stall_ID, Stall Location, Stall Name, Owner Name, License Number, Contact Number

Table:

- 1) Stall_ID(pk), Stall Location, Stall Name, Owner Name, License Number, Contact Number
- 2) Menu_ID(pk), Item Name, Price, Category, Description, Stall_ID(fk)

7. Maintains (One to One):

UNF: Stall_ID, Stall Location, Stall Name, Owner Name, License Number, Contact Number, Inventory_ID, Quantity Available, Product List, Added Date, Buying Price

1NF: Stall_ID, Stall Location, Stall Name, Owner Name, License Number, Contact Number, Inventory_ID, Quantity Available, Product List, Added Date, Buying Price

2NF:

- 1) Stall_ID, Stall Location, Stall Name, Owner Name, License Number, Contact Number
- 2) Inventory_ID, Quantity Available, Product List, Added Date, Buying Price

3NF:

- 1) Stall_ID, Stall Location, Stall Name, Owner Name, License Number, Contact Number
- 2) Inventory_ID, Quantity Available, Product List, Added Date, Buying Price

Table:

- 1) Stall_ID (pk), Stall Location, Stall Name, Owner Name, License Number, Contact Number
- 2) Inventory_ID (pk), Quantity Available, Product List, Added Date, Buying Price, Stall_ID (fk)

8. Is Supplied (One to Many):

UNF: Inventory_ID, Quantity Available, Product List, Added Date, Buying Price, Supplier_ID, Supplier Name, Supplier Mobile Number, Products, Total Products Supplied, Last Supplied Date, Selling Price

1NF: Inventory_ID, Quantity Available, Product List, Added Date, Buying Price, Supplier_ID, Supplier Name, Supplier Mobile Number (Multivalued Attribute), Products, Total Products Supplied, Last Supplied Date, Selling Price

2NF:

- 1) Inventory_ID, Quantity Available, Product List, Added Date, Buying Price
- 2) Supplier_ID, Supplier Name, Supplier Mobile Number, Products, Total Products Supplied, Last Supplied Date, Selling Price

3NF:

- 1) Inventory_ID, Quantity Available, Product List, Added Date, Buying Price
- 2) Supplier_ID, Supplier Name, Supplier Mobile Number, Products, Total Products Supplied, Last Supplied Date, Selling Price

Table:

- 1) Inventory_ID(pk), Quantity Available, Product List, Added Date, Buying Price
- 2) Supplier_ID(pk), Supplier Name, Supplier Mobile Number, Products, Total Products Supplied, Last Supplied Date, Selling Price, Inventory_ID(fk)

9. Employs (One to Many):

UNF: Stall_ID, Stall Location, Stall Name, Owner Name, License Number, Contact Number, Employee_ID, Employee Name, Employee Role, Employee Address, Employee Salary, E.Mobile Number

1NF: Stall_ID, Stall Location, Stall Name, Owner Name, License Number, Contact Number, Employee_ID, Employee Name, Employee Role, Employee Address, Employee Salary, E.Mobile Number (Multivalued Attribute)

2NF:

- 1) Stall_ID, Stall Location, Stall Name, Owner Name, License Number, Contact Number
- 2) Employee_ID, Employee Name, Employee Role, Employee Address, Employee Salary, E.Mobile Number

3NF:

- 1) Stall_ID, Stall Location, Stall Name, Owner Name, License Number, Contact Number
- 2) Employee_ID, Employee Name, Employee Role, Employee Address, Employee Salary, E.Mobile Number

Table:

- 1) Stall_ID(pk), Stall Location, Stall Name, Owner Name, License Number, Contact Number
- 2) Employee_ID(pk), Employee Name, Employee Role, Employee Address, Employee Salary, E.Mobile Number, Stall_ID(fk)

10. Is Monitored by (Many to One):

UNF: Stall_ID, Stall Location, Stall Name, Owner Name, License Number, Contact Number, Admin_Username, Password

1NF: Stall_ID, Stall Location, Stall Name, Owner Name, License Number, Contact Number, Admin_Username, Password

2NF:

- 1) Stall_ID, Stall Location, Stall Name, Owner Name, License Number, Contact Number
- 2) Admin_Username, Password

3NF:

- 1) Stall_ID, Stall Location, Stall Name, Owner Name, License Number, Contact Number
- 2) Admin_Username, Password

Table:

- 1) Stall_ID(pk), Stall Location, Stall Name, Owner Name, License Number, Contact Number, Admin_Username(fk)
- 2) Admin_Username(pk), Password

11. Manages (One to Many):

UNF: Admin_Username, Password, Staff_ID, Staff Name, Staff Role, Staff Salary, Working Hours, Working Date, Staff Mobile Number, Staff Address

1NF: Admin_Username, Password, Staff_ID, Staff Name, Staff Role, Staff Salary, Working Hours, Working Date, Staff Mobile Number (Multivalued Attribute), Staff Address

2NF:

- 1) Admin_Username, Password
- 2) Staff_ID, Staff Name, Staff Role, Staff Salary, Working Hours, Working Date, Staff Mobile Number, Staff Address

3NF:

- 1) Admin_Username, Password
- 2) Staff_ID, Staff Name, Staff Role, Staff Salary, Working Hours, Working Date, Staff Mobile Number, Staff Address

Table:

- 1) Admin_Username(pk), Password

- 2) Staff_ID(pk), Staff Name, Staff Role, Staff Salary, Working Hours, Working Date, Staff Mobile Number, Staff Address, Admin Username(fk)

12. Creates (One to Many):

UNF: Admin Username, Password, Report_ID, Report Date, Total Sales, Total Orders, Most Sold Items, Customer Average Rating

1NF: Admin Username, Password, Report_ID, Report Date, Total Sales, Total Orders, Most Sold Items, Customer Average Rating

2NF:

- 1) Admin Username, Password
- 2) Report_ID, Report Date, Total Sales, Total Orders, Most Sold Items, Customer Average Rating

3NF:

- 1) Admin Username, Password
- 2) Report_ID, Report Date, Total Sales, Total Orders, Most Sold Items, Customer Average Rating

Table:

- 1) Admin Username(pk), Password
- 2) Report_ID(pk), Report Date, Total Sales, Total Orders, Most Sold Items, Customer Average Rating, Admin Username(fk)

13. are Owned (Many to One):

UNF: Report_ID, Report Date, Total Sales, Total Orders, Most Sold Items, Customer Average Rating, Stall_ID, Stall Location, Stall Name, Owner Name, License Number, Contact Number

1NF: Report_ID, Report Date, Total Sales, Total Orders, Most Sold Items, Customer Average Rating, Stall_ID, Stall Location, Stall Name, Owner Name, License Number, Contact Number

2NF:

- 1) Report_ID, Report Date, Total Sales, Total Orders, Most Sold Items, Customer Average Rating
- 2) Stall_ID, Stall Location, Stall Name, Owner Name, License Number, Contact Number

3NF:

- 1) Report_ID, Report Date, Total Sales, Total Orders, Most Sold Items, Customer Average Rating
- 2) Stall_ID, Stall Location, Stall Name, Owner Name, License Number, Contact Number

Table:

- 1) Report_ID(pk), Report Date, Total Sales, Total Orders, Most Sold Items, Customer Average Rating, Stall_ID(fk)
- 2) Stall_ID(pk), Stall Location, Stall Name, Owner Name, License Number, Contact Number.

Finalization:

- 1) Customer_ID(pk), Name, Address, Phone Number
- 2) Order_ID(pk), Order Status, Number of Plates, Total Price, Customer_ID (fk)
- 3) ~~Customer_ID (pk), Name, Address, Phone Number,~~
- 4) Feedback_ID(pk), Rating, Comments, Customer_ID(fk)
- 5) Order_ID(pk), Order Status, Number of Plates, Total Price, Discount_ID(fk)
- 6) Discount_ID(pk), Discount Percentages, Discount Type, Validity Period.
- 7) Order_ID(pk), Order Status, Number of Plates, Total Price
- 8) Payment_ID(pk), Payment Method, Amount, Payment Status, Order_ID(fk)
- 9) ~~Order_ID(pk), Order Status, Number of Plates, Total Price~~
- 10) Menu_ID(pk), Item Name, Price, Category, Description, Order_ID(fk)
- 11) Stall_ID(pk), Stall Location, Stall Name, Owner Name, License Number, Contact Number
- 12) Menu_ID(pk), Item Name, Price, Category, Description, Stall_ID(fk)
- 13) ~~Stall_ID (pk), Stall Location, Stall Name, Owner Name, License Number, Contact Number~~
- 14) Inventory_ID(pk), Quantity Available, Product List, Added Date, Buying Price, Stall_ID(fk)
- 15) Inventory_ID(pk), Quantity Available, Product List, Added Date, Buying Price
- 16) Supplier_ID(pk), Supplier Name, Supplier Mobile Number, Products, Total Products Supplied, Last Supplied Date, Selling Price, Inventory_ID(fk)
- 17) ~~Stall_ID(pk), Stall Location, Stall Name, Owner Name, License Number, Contact Number~~
- 18) Employee_ID(pk), Employee Name, Employee Role, Employee Address, Employee Salary, E.Mobile Number, Stall_ID(fk)
- 19) Stall_ID(pk), Stall Location, Stall Name, Owner Name, License Number, Contact Number, Admin_Username(fk)
- 20) Admin_Username(pk), Password
- 21) ~~Admin_Username(pk), Password~~
- 22) Staff_ID(pk), Staff Name, Staff Role, Staff Salary, Working Hours, Working Date, Staff Mobile Number, Staff Address, Admin_Username(fk)
- 23) ~~Admin_Username(pk), Password~~
- 24) Report_ID(pk), Report Date, Total Sales, Total Orders, Most Sold Items, Customer Average Rating, Admin_Username(fk)
- 25) Report_ID(pk), Report Date, Total Sales, Total Orders, Most Sold Items, Customer Average Rating, Stall_ID(fk)
- 26) ~~Stall_ID(pk), Stall Location, Stall Name, Owner Name, License Number, Contact Number~~

Final Table:

- 1) Customer_ID(pk), Name, Address, Phone Number
- 2) Order_ID(pk), Order Status, Number of Plates, Total Price, Customer_ID (fk)
- 3) Feedback_ID(pk), Rating, Comments, Customer_ID(fk)
- 4) Order_ID(pk), Order Status, Number of Plates, Total Price, Discount_ID(fk)
- 5) Discount_ID(pk), Discount Percentages, Discount Type, Validity Period.
- 6) Order_ID(pk), Order Status, Number of Plates, Total Price
- 7) Payment_ID(pk), Payment Method, Amount, Payment Status, Order_ID(fk)
- 8) Menu_ID(pk), Item Name, Price, Category, Description, Order_ID(fk)
- 9) Stall_ID(pk), Stall Location, Stall Name, Owner Name, License Number, Contact Number
- 10) Menu_ID(pk), Item Name, Price, Category, Description, Stall_ID(fk)
- 11) Inventory_ID(pk), Quantity Available, Product List, Added Date, Buying Price, Stall_ID(fk)
- 12) Inventory_ID(pk), Quantity Available, Product List, Added Date, Buying Price
- 13) Supplier_ID(pk), Supplier Name, Supplier Mobile Number, Products, Total Products Supplied, Last Supplied Date, Selling Price, Inventory_ID(fk)
- 14) Employee_ID(pk), Employee Name, Employee Role, Employee Address, Employee Salary, E.Mobile Number, Stall_ID(fk)
- 15) Stall_ID(pk), Stall Location, Stall Name, Owner Name, License Number, Contact Number, Admin_Username(fk)
- 16) Admin_Username(pk), Password
- 17) Staff_ID(pk), Staff Name, Staff Role, Staff Salary, Working Hours, Working Date, Staff Mobile Number, Staff Address, Admin_Username(fk)
- 18) Report_ID(pk), Report Date, Total Sales, Total Orders, Most Sold Items, Customer Average Rating, Admin_Username(fk)
- 19) Report_ID(pk), Report Date, Total Sales, Total Orders, Most Sold Items, Customer Average Rating, Stall_ID(fk)

Table Creation:

1. Customer Table

Sql:

```
CREATE TABLE Customer (
    Customer_ID NUMBER(10) PRIMARY KEY,
    Name VARCHAR2(100) NOT NULL,
    Address VARCHAR2(200) NOT NULL,
    Phone_Number VARCHAR2(15) NOT NULL
);
```

The screenshot shows the Oracle Database Express Edition interface. The SQL command entered is:

```
CREATE TABLE Customer (
    Customer_ID NUMBER(10) PRIMARY KEY,
    Name VARCHAR2(100) NOT NULL,
    Address VARCHAR2(200) NOT NULL,
    Phone_Number VARCHAR2(15) NOT NULL
);
desc Customer;
```

The results are displayed in a table below the command editor:

Table	Column	Data Type	Length	Precision	Scale	Primary Key	Nullable	Default	Comment
CUSTOMER	CUSTOMER_ID	Number	-	10	0	1	-	-	-
	NAME	Varchar2	100	-	-	-	-	-	-
	ADDRESS	Varchar2	200	-	-	-	-	-	-
	PHONE_NUMBER	Varchar2	15	-	-	-	-	-	-

At the bottom of the results table, it says "1 - 4".

2. Feedback Table

Sql:

```
CREATE TABLE Feedback (
    Feedback_ID NUMBER PRIMARY KEY,
    Rating NUMBER NOT NULL,
    Comments VARCHAR2(500),
    Customer_ID NUMBER NOT NULL,
    FOREIGN KEY (Customer_ID) REFERENCES Customer(Customer_ID)
);
```

The screenshot shows the Oracle Database Express Edition web interface. The SQL command has been executed successfully, and the table structure is displayed below.

Object Type: TABLE Object: FEEDBACK

Table	Column	Data Type	Length	Precision	Scale	Primary Key	Nullable	Default	Comment
FEEDBACK	FEEDBACK_ID	Number	-	-	-	1	-	-	-
	RATING	Number	-	-	-	-	-	-	-
	COMMENTS	Varchar2	500	-	-	-	✓	-	-
	CUSTOMER_ID	Number	-	-	-	-	-	-	-

1 - 4

Application Express 2.1.0.0.39
Copyright © 1999, 2006, Oracle. All rights reserved.

3. Discount & Feedback Table

Sql:

```
CREATE TABLE Discount (
    Discount_ID NUMBER PRIMARY KEY,
    Discount_Percentages NUMBER(5,2) NOT NULL,
    Discount_Type VARCHAR2(50) NOT NULL,
    Validity_Period DATE NOT NULL
);
```

The screenshot shows the Oracle Database Express Edition web interface. The user is SYSTEM. The SQL command entered is:

```
CREATE TABLE Discount (
    Discount_ID NUMBER PRIMARY KEY,
    Discount_Percentages NUMBER(5,2) NOT NULL,
    Discount_Type VARCHAR2(50) NOT NULL,
    Validity_Period DATE NOT NULL
);
desc Discount;
```

The command was executed successfully. The results show the table structure for DISCOUNT:

Table	Column	Data Type	Length	Precision	Scale	Primary Key	Nullable	Default	Comment
DISCOUNT	DISCOUNT_ID	Number	-	-	-	1	-	-	-
	DISCOUNT_PERCENTAGES	Number	-	5	2	-	-	-	-
	DISCOUNT_TYPE	Varchar2	50	-	-	-	-	-	-
	VALIDITY_PERIOD	Date	7	-	-	-	-	-	-

The interface also shows the Oracle logo, navigation links (Home, Logout, Help), and a footer with the application version (Express 2.1.0.0.39) and copyright information.

4. Orders Table

Sql:

```
CREATE TABLE Orders (
    Order_ID NUMBER PRIMARY KEY,
    Order_Status VARCHAR2(50) NOT NULL,
    Number_of_Plates NUMBER NOT NULL,
    Total_Price NUMBER(10,2) NOT NULL,
    Customer_ID NUMBER NOT NULL,
    Discount_ID NUMBER,
    FOREIGN KEY (Customer_ID) REFERENCES Customer(Customer_ID),
    FOREIGN KEY (Discount_ID) REFERENCES Discount(Discount_ID)
);
```

The screenshot shows the Oracle Database Express Edition web interface. The SQL command has been executed successfully, and the table structure is displayed below.

Object Type: TABLE Object: ORDERS

Table	Column	Data Type	Length	Precision	Scale	Primary Key	Nullable	Default	Comment
ORDERS	ORDER_ID	Number	-	-	-	1	-	-	-
	ORDER_STATUS	Varchar2	50	-	-	-	-	-	-
	NUMBER_OF_PLATES	Number	-	-	-	-	-	-	-
	TOTAL_PRICE	Number	-	10	2	-	-	-	-
	CUSTOMER_ID	Number	-	-	-	-	-	-	-
	DISCOUNT_ID	Number	-	-	-	-	✓	-	-

1 - 6

5. Payment Table

Sql:

```
CREATE TABLE Payment (
    Payment_ID NUMBER PRIMARY KEY,
    Payment_Method VARCHAR2(50) NOT NULL,
    Amount NUMBER(10,2) NOT NULL,
    Payment_Status VARCHAR2(50) NOT NULL,
    Order_ID NUMBER NOT NULL,
    FOREIGN KEY (Order_ID) REFERENCES Orders(Order_ID)
);
```

The screenshot shows the Oracle Database Express Edition web interface. The user is logged in as SYSTEM. The SQL Commands window contains the following SQL script:

```
CREATE TABLE Payment (
    Payment_ID NUMBER PRIMARY KEY,
    Payment_Method VARCHAR2(50) NOT NULL,
    Amount NUMBER(10,2) NOT NULL,
    Payment_Status VARCHAR2(50) NOT NULL,
    Order_ID NUMBER NOT NULL,
    FOREIGN KEY (Order_ID) REFERENCES Orders(Order_ID)
);
desc Payment;
```

The Results tab is selected, displaying the structure of the PAYMENT table:

Table	Column	Data Type	Length	Precision	Scale	Primary Key	Nullable	Default	Comment
PAYMENT	PAYMENT_ID	Number	-	-	-	1	-	-	-
PAYMENT	PAYMENT_METHOD	Varchar2	50	-	-	-	-	-	-
PAYMENT	AMOUNT	Number	-	10	2	-	-	-	-
PAYMENT	PAYMENT_STATUS	Varchar2	50	-	-	-	-	-	-
PAYMENT	ORDER_ID	Number	-	-	-	-	-	-	-

The interface also shows the Oracle logo and version information (Oracle Database Express Edition 2.1.0.0.0.39).

6. Admin Panel Table

Sql:

```
CREATE TABLE Admin_Panel (
    Admin_Username VARCHAR2(50) PRIMARY KEY,
    Password VARCHAR2(100) NOT NULL
);
```

The screenshot shows the Oracle Database Express Edition web interface. The user is logged in as SYSTEM. The SQL Commands window contains the following code:

```
CREATE TABLE Admin_Panel (
    Admin_Username VARCHAR2(50) PRIMARY KEY,
    Password VARCHAR2(100) NOT NULL
);
desc Admin_Panel;
```

The code is executed, and the Results tab shows the table structure for ADMIN_PANEL:

Table	Column	Data Type	Length	Precision	Scale	Primary Key	Nullable	Default	Comment
ADMIN_PANEL	ADMIN_USERNAME	Varchar2	50	-	-	1	-	-	-
	PASSWORD	Varchar2	100	-	-	-	-	-	-

At the bottom right, the application version is noted as Application Express 2.1.0.00.39, Copyright © 1999, 2006, Oracle. All rights reserved.

7. Food Stall Table

Sql:

```
CREATE TABLE Food_Stall (
    Stall_ID INT PRIMARY KEY,
    Stall_Location VARCHAR(100) NOT NULL,
    Stall_Name VARCHAR(100) NOT NULL,
    Owner_Name VARCHAR(100) NOT NULL,
    License_Number VARCHAR(50) NOT NULL,
    Contact_Number VARCHAR2(15) NOT NULL,
    Admin_Username VARCHAR(50) NOT NULL,
    FOREIGN KEY (Admin_Username) REFERENCES Admin_Panel(Admin_Username)
);
```

The screenshot shows the Oracle Database Express Edition web interface. The SQL command has been executed successfully, and the results pane displays the table structure for the newly created **FOOD_STALL** table.

Table	Column	Data Type	Length	Precision	Scale	Primary Key	Nullable	Default	Comment
FOOD_STALL	STALL_ID	Number	-	-	0	1	-	-	-
	STALL_LOCATION	Varchar2	100	-	-	-	-	-	-
	STALL_NAME	Varchar2	100	-	-	-	-	-	-
	OWNER_NAME	Varchar2	100	-	-	-	-	-	-
	LICENSE_NUMBER	Varchar2	50	-	-	-	-	-	-
	CONTACT_NUMBER	Varchar2	15	-	-	-	-	-	-
	ADMIN_USERNAME	Varchar2	50	-	-	-	-	-	-

8. Inventory Table

Sql:

```
CREATE TABLE Inventory (
    Inventory_ID NUMBER PRIMARY KEY,
    Quantity_Available NUMBER NOT NULL,
    Product_List VARCHAR2(255) NOT NULL,
    Added_Date DATE NOT NULL,
    Buying_Price NUMBER(10,2) NOT NULL,
    Stall_ID NUMBER NOT NULL,
    FOREIGN KEY (Stall_ID) REFERENCES Food_Stall(Stall_ID)
);
```

The screenshot shows the Oracle Database Express Edition web interface. The SQL command window displays the following code:

```
CREATE TABLE Inventory (
    Inventory_ID NUMBER PRIMARY KEY,
    Quantity_Available NUMBER NOT NULL,
    Product_List VARCHAR2(255) NOT NULL,
    Added_Date DATE NOT NULL,
    Buying_Price NUMBER(10,2) NOT NULL,
    Stall_ID NUMBER NOT NULL,
    FOREIGN KEY (Stall_ID) REFERENCES Food_Stall(Stall_ID)
);
desc Inventory;
```

The command was executed successfully. Below the command window, the 'Results' tab shows the table structure for the 'INVENTORY' table:

Table	Column	Data Type	Length	Precision	Scale	Primary Key	Nullable	Default	Comment
INVENTORY	INVENTORY_ID	Number	-	-	-	1	-	-	-
	QUANTITY_AVAILABLE	Number	-	-	-	-	-	-	-
	PRODUCT_LIST	Varchar2	255	-	-	-	-	-	-
	ADDED_DATE	Date	7	-	-	-	-	-	-
	BUYING_PRICE	Number	-	10	2	-	-	-	-
	STALL_ID	Number	-	-	-	-	-	-	-

The interface also shows the 'Object Type' as 'TABLE Object INVENTORY' and a page indicator '1 - 6'.

9. Supplier Table

Sql:

CREATE TABLE Supplier (

Supplier_ID NUMBER PRIMARY KEY,

Supplier_Name VARCHAR2(100) NOT NULL,

Supplier_Mobile_Number VARCHAR2(20) NOT NULL,

Products VARCHAR2(255) NOT NULL,

Total_Products_Supplied NUMBER NOT NULL,

Last_Supplied_Date DATE NOT NULL,

Selling_Price NUMBER NOT NULL,

Inventory_ID NUMBER NOT NULL,

FOREIGN KEY (Inventory_ID) REFERENCES Inventory(Inventory_ID)

);

The screenshot shows the Oracle Database Express Edition interface. The SQL Command window contains the following code:

```
CREATE TABLE Supplier (
  Supplier_ID NUMBER PRIMARY KEY,
  Supplier_Name VARCHAR2(100) NOT NULL,
  Supplier_Mobile_Number VARCHAR2(20) NOT NULL,
  Products VARCHAR2(255) NOT NULL,
  Total_Products_Supplied NUMBER NOT NULL,
  Last_Supplied_Date DATE NOT NULL,
  Selling_Price NUMBER NOT NULL,
  Inventory_ID NUMBER NOT NULL,
  FOREIGN KEY (Inventory_ID) REFERENCES Inventory(Inventory_ID)
);
desc Supplier;
```

Below the SQL Command window, the 'Describe' tab is selected, showing the table structure for the 'SUPPLIER' table:

Table	Column	Data Type	Length	Precision	Scale	Primary Key	Nullable	Default	Comment
SUPPLIER	SUPPLIER_ID	Number	-	-	-	1	-	-	-
	SUPPLIER_NAME	Varchar2	100	-	-	-	-	-	-
	SUPPLIER_MOBILE_NUMBER	Varchar2	20	-	-	-	-	-	-
	PRODUCTS	Varchar2	255	-	-	-	-	-	-
	TOTAL_PRODUCTS_SUPPLIED	Number	-	-	-	-	-	-	-
	LAST_SUPPLIED_DATE	Date	7	-	-	-	-	-	-
	SELLING_PRICE	Number	-	-	-	-	-	-	-
	INVENTORY_ID	Number	-	-	-	-	-	-	-

10. Employee Table

Sql:

```
CREATE TABLE Employee (
    Employee_ID NUMBER PRIMARY KEY,
    Employee_Name VARCHAR2(100) NOT NULL,
    Employee_Role VARCHAR2(50) NOT NULL,
    Employee_Address VARCHAR2(255) NOT NULL,
    Employee_Salary NUMBER(10,2) NOT NULL,
    E_Mobile_Number VARCHAR2(20) NOT NULL,
    Stall_ID NUMBER NOT NULL,
    FOREIGN KEY (Stall_ID) REFERENCES Food_Stall(Stall_ID)
);
```

The screenshot shows the Oracle Database Express Edition interface. The SQL command is entered in the SQL Commands window and executed. The results are displayed in a table below the command window.

SQL Command:

```
CREATE TABLE Employee (
    Employee_ID NUMBER PRIMARY KEY,
    Employee_Name VARCHAR2(100) NOT NULL,
    Employee_Role VARCHAR2(50) NOT NULL,
    Employee_Address VARCHAR2(255) NOT NULL,
    Employee_Salary NUMBER(10,2) NOT NULL,
    E_Mobile_Number VARCHAR2(20) NOT NULL,
    Stall_ID NUMBER NOT NULL,
    FOREIGN KEY (Stall_ID) REFERENCES Food_Stall(Stall_ID)
);
```

Results:

Table	Column	Data Type	Length	Precision	Scale	Primary Key	Nullable	Default	Comment
EMPLOYEE	EMPLOYEE_ID	Number	-	-	-	1	-	-	-
	EMPLOYEE_NAME	Varchar2	100	-	-	-	-	-	-
	EMPLOYEE_ROLE	Varchar2	50	-	-	-	-	-	-
	EMPLOYEE_ADDRESS	Varchar2	255	-	-	-	-	-	-
	EMPLOYEE_SALARY	Number	-	10	2	-	-	-	-
	E_MOBILE_NUMBER	Varchar2	20	-	-	-	-	-	-
	STALL_ID	Number	-	-	-	-	-	-	-

11. Staffs Table

Sql:

CREATE TABLE Staffs (

Staff_ID NUMBER PRIMARY KEY,

Staff_Name VARCHAR2(100) NOT NULL,

Staff_Role VARCHAR2(50) NOT NULL,

Staff_Salary NUMBER(10,2) NOT NULL,

Working_Hours NUMBER NOT NULL,

Working_Date DATE NOT NULL,

Staff_Mobile_Number VARCHAR2(20) NOT NULL,

Staff_Address VARCHAR2(255) NOT NULL,

Admin_Username VARCHAR2(50) NOT NULL,

FOREIGN KEY (Admin_Username) REFERENCES Admin_Panel (Admin_Username)

);

The screenshot shows the Oracle SQL Developer interface. The top toolbar includes buttons for Autocommit, Display (set to 10), Save, and Run. The main text area contains the SQL command to create the STAFFS table, with syntax highlighting. Below the text area, the 'Results' tab is active, displaying the table's structure in a grid format.

SQL Command:

```

CREATE TABLE Staffs (
  Staff_ID NUMBER PRIMARY KEY,
  Staff_Name VARCHAR2(100) NOT NULL,
  Staff_Role VARCHAR2(50) NOT NULL,
  Staff_Salary NUMBER(10,2) NOT NULL,
  Working_Hours NUMBER NOT NULL,
  Working_Date DATE NOT NULL,
  Staff_Mobile_Number VARCHAR2(20) NOT NULL,
  Staff_Address VARCHAR2(255) NOT NULL,
  Admin_Username VARCHAR2(50) NOT NULL,
  FOREIGN KEY (Admin_Username) REFERENCES Admin_Panel (Admin_Username)
);

```

Table Structure:

Table	Column	Data Type	Length	Precision	Scale	Primary Key	Nullable	Default	Comment
STAFFS	STAFF_ID	Number	-	-	-	1	-	-	-
	STAFF_NAME	Varchar2	100	-	-	-	-	-	-
	STAFF_ROLE	Varchar2	50	-	-	-	-	-	-
	STAFF_SALARY	Number	-	10	2	-	-	-	-
	WORKING_HOURS	Number	-	-	-	-	-	-	-
	WORKING_DATE	Date	7	-	-	-	-	-	-
	STAFF_MOBILE_NUMBER	Varchar2	20	-	-	-	-	-	-
	STAFF_ADDRESS	Varchar2	255	-	-	-	-	-	-
	ADMIN_USERNAME	Varchar2	50	-	-	-	-	-	-

The bottom of the screenshot shows the Windows taskbar with the search bar and system clock indicating 10:59 AM on 25-Apr-25.

12. Analytical Report Table

Sql:

```
CREATE TABLE Analytical_Report (
    Report_ID NUMBER PRIMARY KEY,
    Report_Date DATE NOT NULL,
    Total_Sales NUMBER(10,2) NOT NULL,
    Total_Orders NUMBER NOT NULL,
    Most_Sold_Items VARCHAR2(255) NOT NULL,
    Customer_Avg_Rating NUMBER(3,2) NOT NULL,
    Admin_Username VARCHAR2(50) NOT NULL,
    Stall_ID NUMBER NOT NULL,
    FOREIGN KEY (Admin_Username) REFERENCES Admin_Panel(Admin_Username),
    FOREIGN KEY (Stall_ID) REFERENCES Food_Stall(Stall_ID)
);
```

The screenshot shows the Oracle SQL Developer interface. The top toolbar includes buttons for Autocommit, Display (set to 10), Save, and Run. The SQL Command window contains the following SQL code:

```
CREATE TABLE Analytical_Report (
    Report_ID NUMBER PRIMARY KEY,
    Report_Date DATE NOT NULL,
    Total_Sales NUMBER(10,2) NOT NULL,
    Total_Orders NUMBER NOT NULL,
    Most_Sold_Items VARCHAR2(255) NOT NULL,
    Customer_Avg_Rating NUMBER(3,2) NOT NULL,
    Admin_Username VARCHAR2(50) NOT NULL,
    Stall_ID NUMBER NOT NULL,
    FOREIGN KEY (Admin_Username) REFERENCES Admin_Panel(Admin_Username),
    FOREIGN KEY (Stall_ID) REFERENCES Food_Stall(Stall_ID)
);
```

Below the SQL window, the 'Results' tab is active, displaying the table structure for 'ANALYTICAL_REPORT'.

Table	Column	Data Type	Length	Precision	Scale	Primary Key	Nullable	Default	Comment
ANALYTICAL_REPORT	REPORT_ID	Number	-	-	-	1	-	-	-
	REPORT_DATE	Date	7	-	-	-	-	-	-
	TOTAL_SALES	Number	-	10	2	-	-	-	-
	TOTAL_ORDERS	Number	-	-	-	-	-	-	-
	MOST_SOLD_ITEMS	Varchar2	255	-	-	-	-	-	-
	CUSTOMER_AVG_RATING	Number	-	3	2	-	-	-	-
	ADMIN_USERNAME	Varchar2	50	-	-	-	-	-	-
	STALL_ID	Number	-	-	-	-	-	-	-

The bottom status bar shows the user 'Mighty Sarker' and the date '25-Apr-25'.

13. Menu Item Table

Sql:

```
CREATE TABLE Menu_Item (
    Menu_ID NUMBER PRIMARY KEY,
    Item_Name VARCHAR2(100) NOT NULL,
    Price NUMBER(10,2) NOT NULL,
    Description VARCHAR2(500) NOT NULL,
    Category VARCHAR2(50) NOT NULL,
    Order_ID NUMBER NOT NULL,
    Stall_ID NUMBER NOT NULL,
    FOREIGN KEY (Order_ID) REFERENCES Orders(Order_ID),
    FOREIGN KEY (Stall_ID) REFERENCES Food_Stall(Stall_ID)
);
```

The screenshot shows the Oracle Database Express Edition interface. The SQL command editor contains the following code:

```
CREATE TABLE Menu_Item (
  Menu_ID NUMBER PRIMARY KEY,
  Item_Name VARCHAR2(100) NOT NULL,
  Price NUMBER(10,2) NOT NULL,
  Description VARCHAR2(500) NOT NULL,
  Category VARCHAR2(50) NOT NULL,
  Order_ID NUMBER NOT NULL,
  Stall_ID NUMBER NOT NULL,
  FOREIGN KEY (Order_ID) REFERENCES Orders(Order_ID),
  FOREIGN KEY (Stall_ID) REFERENCES Food_Stall(Stall_ID)
);
desc Menu_Item;
```

The 'Run' button has been clicked, and the results pane displays the table structure for the newly created table:

Table	Column	Data Type	Length	Precision	Scale	Primary Key	Nullable	Default	Comment
MENU_ITEM	MENU_ID	Number	-	-	-	1	-	-	-
MENU_ITEM	ITEM_NAME	Varchar2	100	-	-	-	-	-	-
MENU_ITEM	PRICE	Number	-	10	2	-	-	-	-
MENU_ITEM	DESCRIPTION	Varchar2	500	-	-	-	-	-	-
MENU_ITEM	CATEGORY	Varchar2	50	-	-	-	-	-	-
MENU_ITEM	ORDER_ID	Number	-	-	-	-	-	-	-
MENU_ITEM	STALL_ID	Number	-	-	-	-	-	-	-

Sequence Creation:

Here are the sequences needed for the database:

1. Customer:

Sql:


```
CREATE SEQUENCE customer_seq
```

```
START WITH 1
```

```
INCREMENT BY 1
```

```
NOCACHE
```

```
NOCYCLE;
```

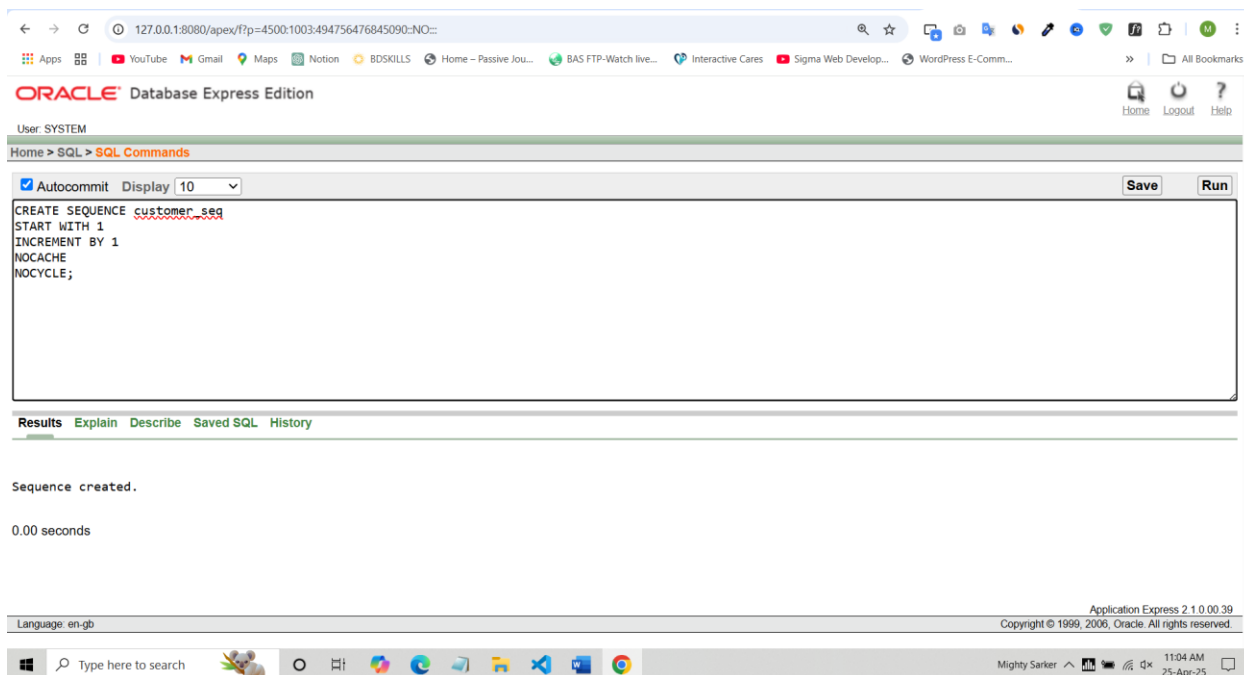

2. Feedback:

Sql:

CREATE SEQUENCE feedback_seq

START WITH 1

INCREMENT BY 1

NOCACHE

NOCYCLE;

The screenshot shows the Oracle Database Express Edition web interface. The browser address bar displays the URL: 127.0.0.1:8080/apex/f?p=4500:1003:494756476845090::NO::. The page title is "ORACLE Database Express Edition". The user is logged in as "SYSTEM". The navigation menu shows "Home > SQL > SQL Commands". The "Autocommit" checkbox is checked, and the "Display" dropdown is set to "10". The "Save" and "Run" buttons are visible. The SQL command entered is:

```
CREATE SEQUENCE feedback_seq
START WITH 1
INCREMENT BY 1
NOCACHE
NOCYCLE;
```

 The "Results" tab is selected, showing the message "Sequence created." and the execution time "0.00 seconds". The footer indicates "Application Express 2.1.0.0.39" and "Copyright © 1999, 2006, Oracle. All rights reserved." The Windows taskbar at the bottom shows the time as 11:07 AM on 25-Apr-25.

3. Orders:

Sql:

CREATE SEQUENCE order_seq

START WITH 1

INCREMENT BY 1

NOCACHE

NOCYCLE;

The screenshot shows the Oracle Database Express Edition web interface. The browser address bar displays the URL 127.0.0.1:8080/apex/f?p=4500:1003:494756476845090::NO::. The page title is "ORACLE Database Express Edition". The user is logged in as "SYSTEM". The navigation bar shows "Home > SQL > SQL Commands". The main content area has a text input field with the SQL command:

```
drop SEQUENCE order_seq
START WITH 1
INCREMENT BY 1
NOCACHE
NOCYCLE;
```

 The "Autocommit" checkbox is checked, and the "Display" dropdown is set to "10". There are "Save" and "Run" buttons. Below the command field, the "Results" tab is selected, showing the message "Sequence created." and the execution time "0.00 seconds". The footer of the application shows "Application Express 2.1.0.0.39" and "Copyright © 1999, 2006, Oracle. All rights reserved." The Windows taskbar at the bottom shows the search bar and various application icons.

4. Discounts & Promotions:

Sql:

CREATE SEQUENCE discount_seq

START WITH 1

INCREMENT BY 1

NOCACHE

NOCYCLE;

The screenshot shows the Oracle Database Express Edition web interface. The browser address bar displays the URL 127.0.0.1:8080/apex/f?p=4500:1003:494756476845090::NO... The page header includes the Oracle logo and 'Database Express Edition'. The user is logged in as 'SYSTEM'. The main content area is titled 'Home > SQL > SQL Commands'. It features a text input field containing the SQL command: `CREATE SEQUENCE discount_seq
START WITH 1
INCREMENT BY 1
NOCACHE
NOCYCLE;`. Above the input field are checkboxes for 'Autocommit' (checked) and a 'Display' dropdown set to '10'. To the right of the input field are 'Save' and 'Run' buttons. Below the input field, the 'Results' tab is selected, showing the message 'Sequence created.' and the execution time '0.00 seconds'. The footer of the interface includes 'Language: en-gb', 'Application Express 2.1.0.0.39', and 'Copyright © 1999, 2006, Oracle. All rights reserved.' The Windows taskbar at the bottom shows the search bar and various application icons.

5. Payment:

Sql:


CREATE SEQUENCE payment_seq

START WITH 1

INCREMENT BY 1

NOCACHE

NOCYCLE;

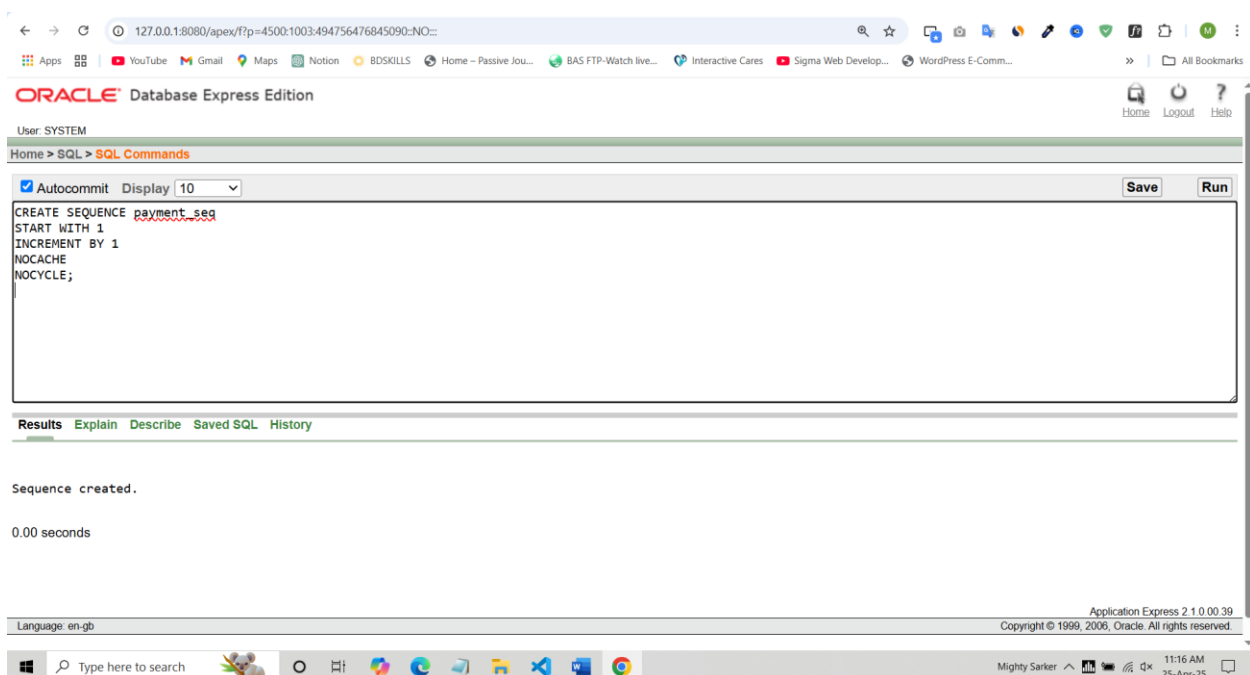

6. Menu Item:

Sql:


```
CREATE SEQUENCE menu_item_seq
```

```
START WITH 101
```

```
INCREMENT BY 1
```

```
NOCACHE
```

```
NOCYCLE;
```

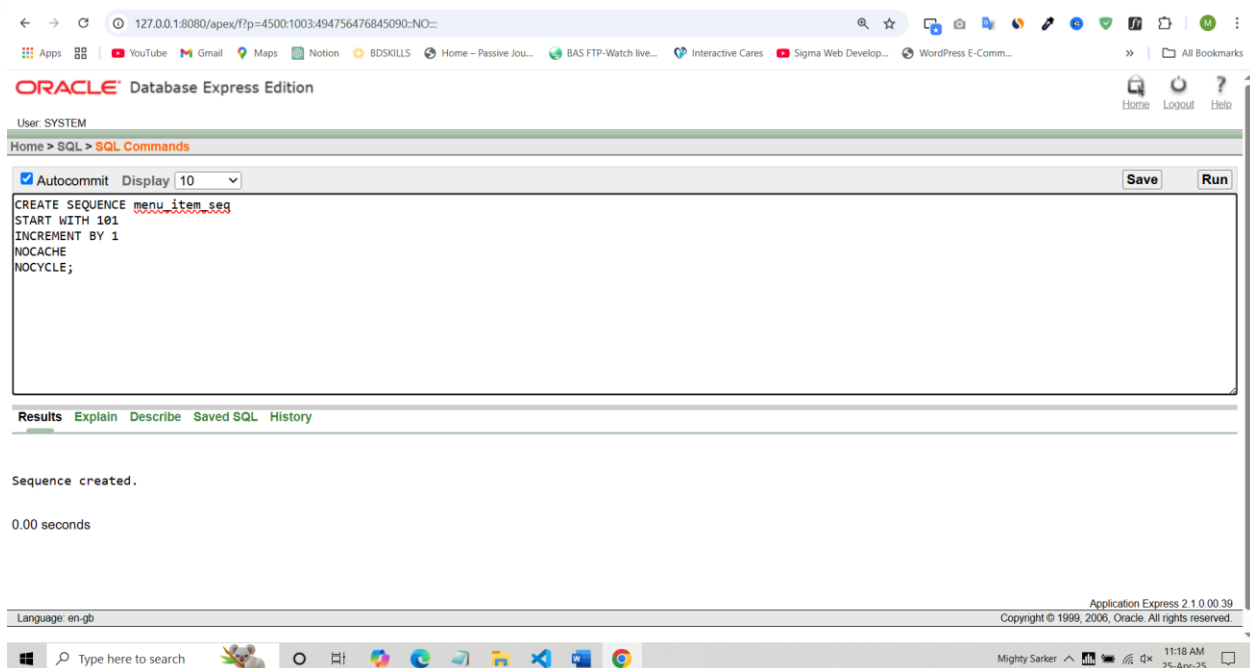

7. Food Stall:

Sql:


```
CREATE SEQUENCE food_stall_seq
```

```
START WITH 10
```

```
INCREMENT BY 10
```

```
NOCACHE
```

```
NOCYCLE;
```

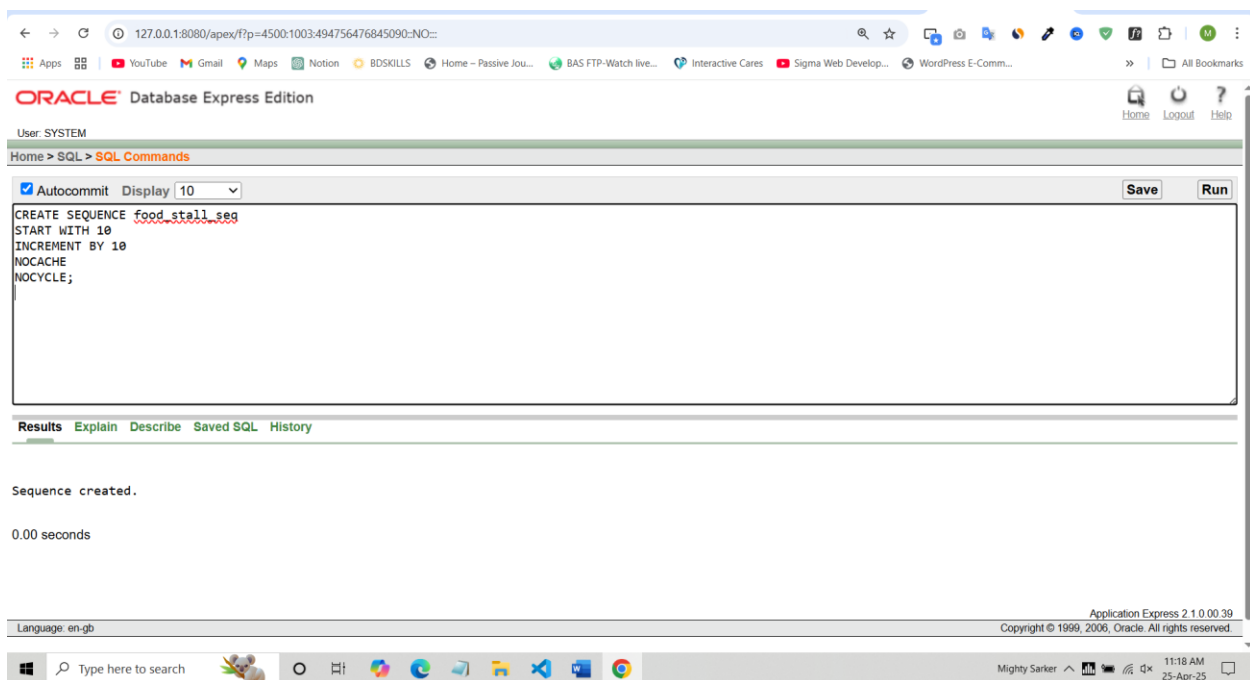

8. Employee:

Sql:

CREATE SEQUENCE employee_seq

START WITH 1

INCREMENT BY 1

NOCACHE

NOCYCLE;

The screenshot shows the Oracle Database Express Edition interface. The browser address bar displays the URL `127.0.0.1:8080/apex/f?p=4500:1003:494756476845090::NO::`. The page title is "ORACLE Database Express Edition". The user is logged in as "SYSTEM". The navigation menu shows "Home > SQL > SQL Commands". The "Autocommit" checkbox is checked, and the "Display" dropdown is set to "10". The "Save" and "Run" buttons are visible. The SQL command entered in the text area is:

```
CREATE SEQUENCE employee_seq
START WITH 1
INCREMENT BY 1
NOCACHE
NOCYCLE;
```

Below the command area, the "Results" tab is selected, showing the message "Sequence created." and the execution time "0.00 seconds". The footer of the application shows "Application Express 2.1.0.0.39" and "Copyright © 1999, 2006, Oracle. All rights reserved." The Windows taskbar at the bottom shows the search bar and various application icons, including the Start menu, search, and several open applications like Notepad, Chrome, and VS Code. The system clock shows "11:19 AM 25-Apr-25".

9. Inventory:

Sql:

CREATE SEQUENCE inventory_seq

START WITH 1

INCREMENT BY 10

NOCACHE

NOCYCLE;

The screenshot shows the Oracle Database Express Edition web interface. The browser address bar displays the URL 127.0.0.1:8080/apex/f?p=4500:1003:494756476845090::NO::. The page title is "ORACLE Database Express Edition". The user is logged in as "SYSTEM". The breadcrumb navigation shows "Home > SQL > SQL Commands". The "Autocommit" checkbox is checked, and the "Display" dropdown is set to "10". The "Save" and "Run" buttons are visible. The SQL command entered in the text area is: `CREATE SEQUENCE inventory_seq
START WITH 1
INCREMENT BY 10
NOCACHE
NOCYCLE;`. Below the command area, the "Results" tab is selected, showing the message "Sequence created." and the execution time "0.00 seconds". The footer of the interface includes "Language: en-gb", "Application Express 2.1.0.0.39", and "Copyright © 1999, 2006, Oracle. All rights reserved.".

10. Supplier:

Sql:

CREATE SEQUENCE supplier_seq

START WITH 1

INCREMENT BY 1

NOCACHE

NOCYCLE;

The screenshot shows the Oracle Database Express Edition web interface. The browser address bar displays the URL: 127.0.0.1:8080/apex/?p=4500:1003:494756476845090:NO:: The page title is "ORACLE Database Express Edition". The user is logged in as "SYSTEM". The navigation menu shows "Home > SQL > SQL Commands". The "Autocommit" checkbox is checked, and the "Display" dropdown is set to "10". The "Save" and "Run" buttons are visible. The SQL command entered in the text area is:

```
CREATE SEQUENCE supplier_seq
START WITH 1
INCREMENT BY 1
NOCACHE
NOCYCLE;
```

 Below the command area, the "Results" tab is selected, showing the message "Sequence created." and the execution time "0.00 seconds". The footer of the application shows "Application Express 2.1.0.00.39" and "Copyright © 1999, 2006, Oracle. All rights reserved." The Windows taskbar at the bottom shows the search bar, task view button, and several application icons, including the Oracle Express Edition icon.

11. Admin Panel:

Query:


```
CREATE SEQUENCE admin_seq
```

```
START WITH 1
```

```
INCREMENT BY 1
```

```
NOCACHE
```

```
NOCYCLE;
```

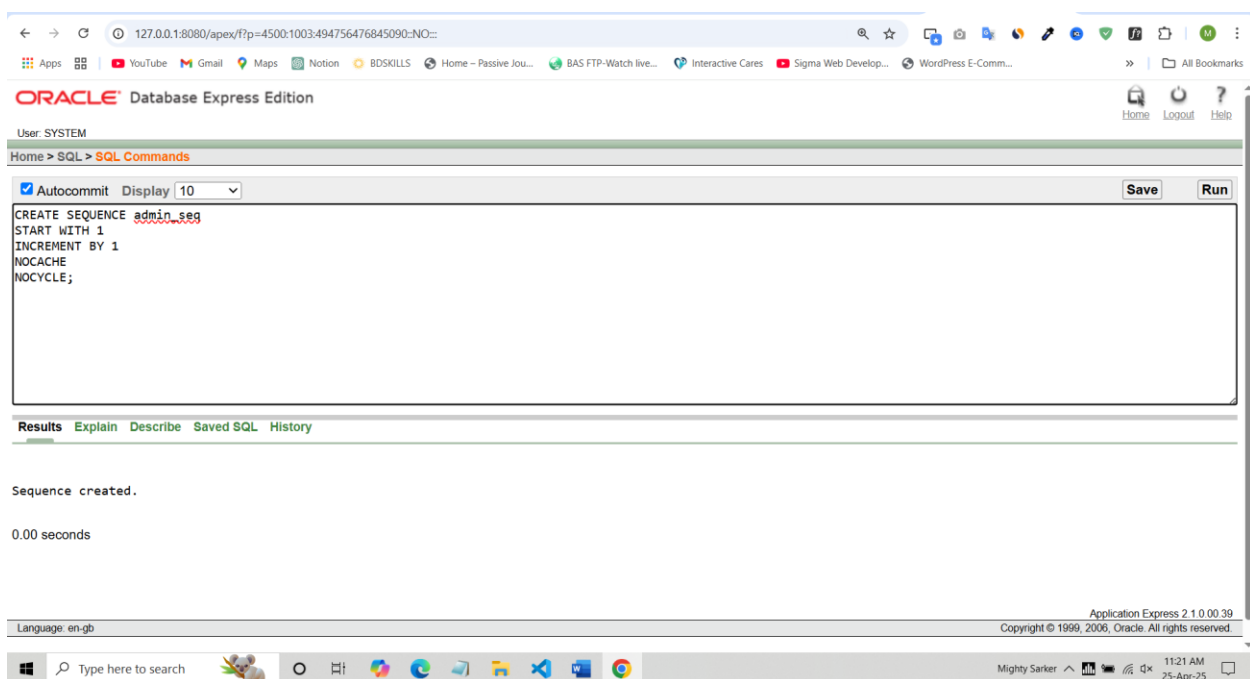

12. Staffs:

Sql:


CREATE SEQUENCE staffs_seq

START WITH 1

INCREMENT BY 1

NOCACHE

NOCYCLE;

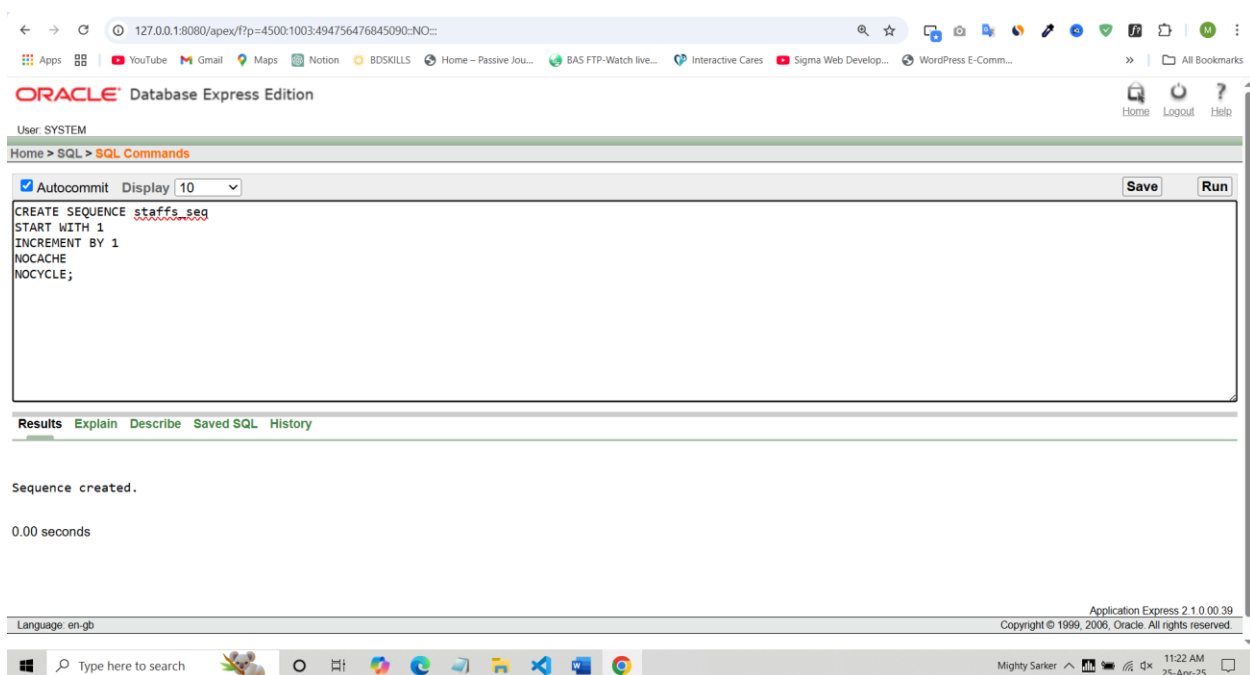

13. Analytical Report:

Sql:


CREATE SEQUENCE report_seq

START WITH 1

INCREMENT BY 1

NOCACHE

NOCYCLE;

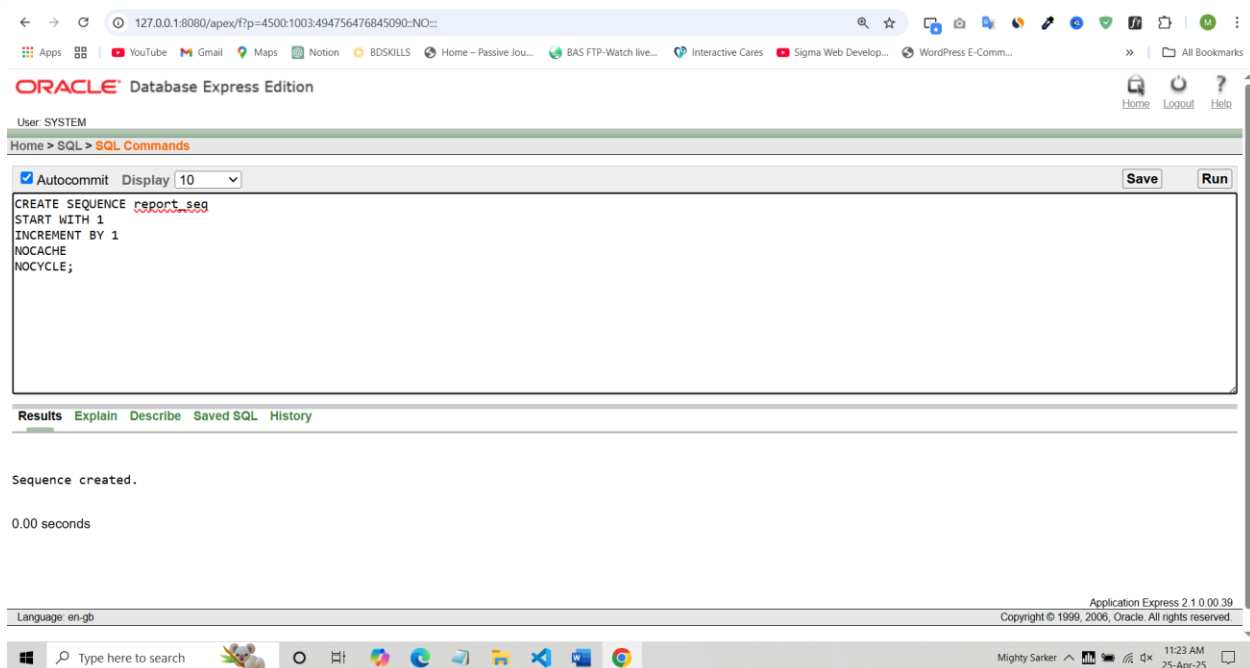

Data Insertion:

1. Customer

Sql:

```
INSERT INTO Customer (Customer_ID, Name, Address, Phone_Number) VALUES
(customer_seq.NEXTVAL, 'Rahim Khan', 'Mirpur, Dhaka', '01712345678');
```

```
INSERT INTO Customer (Customer_ID, Name, Address, Phone_Number) VALUES
(customer_seq.NEXTVAL, 'Mahin Sarker', 'Mirpur, Dhaka', '01987654321');
```

```
INSERT INTO Customer (Customer_ID, Name, Address, Phone_Number)
VALUES(customer_seq.NEXTVAL, 'Kamrul Hasan', 'Gulshan, Dhaka', '01623456789');
```

```
INSERT INTO Customer (Customer_ID, Name, Address, Phone_Number)
VALUES(customer_seq.NEXTVAL, 'Tonima Islam', 'Dhanmondi, Dhaka', '01834567890');
```

```
INSERT INTO Customer (Customer_ID, Name, Address, Phone_Number)
VALUES(customer_seq.NEXTVAL, 'Dipaneeta Pramanik', 'Uttara, Dhaka', '01545678901');
```

The screenshot shows the Oracle Database Express Edition web interface. The browser address bar displays the URL: 127.0.0.1:8080/apex/f?p=4500:1003:1372086599801244::NO::. The page title is "ORACLE Database Express Edition". The user is logged in as "SYSTEM". The main content area shows a SQL command window with the following commands:

```

Autocommit Display 10
INSERT INTO Customer (Customer_ID, Name, Address, Phone_Number) VALUES (customer_seq.NEXTVAL, 'Rahim Khan', 'Mirpur, Dhaka', '01712345678');
INSERT INTO Customer (Customer_ID, Name, Address, Phone_Number) VALUES (customer_seq.NEXTVAL, 'Mahin Sarker', 'Mirpur, Dhaka', '01987654321');
INSERT INTO Customer (Customer_ID, Name, Address, Phone_Number) VALUES (customer_seq.NEXTVAL, 'Kamrul Hasan', 'Gulshan, Dhaka', '01623456789');
INSERT INTO Customer (Customer_ID, Name, Address, Phone_Number) VALUES (customer_seq.NEXTVAL, 'Tonima Islam', 'Dhanmondi, Dhaka', '01834567890');
INSERT INTO Customer (Customer_ID, Name, Address, Phone_Number) VALUES (customer_seq.NEXTVAL, 'Dipaneeta Pramanik', 'Uttara, Dhaka', '01545678901');
select * from Customer;
  
```

Below the SQL command window, the "Results" tab is selected, showing the output of the last query. The results are displayed in a table with 5 rows and 4 columns: CUSTOMER_ID, NAME, ADDRESS, and PHONE_NUMBER.

CUSTOMER_ID	NAME	ADDRESS	PHONE_NUMBER
1	Rahim Khan	Mirpur, Dhaka	01712345678
2	Mahin Sarker	Mirpur, Dhaka	01987654321
3	Kamrul Hasan	Gulshan, Dhaka	01623456789
4	Tonima Islam	Dhanmondi, Dhaka	01834567890
5	Dipaneeta Pramanik	Uttara, Dhaka	01545678901

5 rows returned in 0.02 seconds CSV Export

The footer of the page shows the language set to "en-gb", the application version "Application Express 2.1.0.00.39", and the copyright notice "Copyright © 1999, 2006, Oracle. All rights reserved." The Windows taskbar at the bottom shows the time as 1:32 PM on 25-Apr-25.

2. Admin Panel

Sql:

```
INSERT INTO Admin_Panel (Admin_Username, Password) VALUES ('admin' ||
admin_seq.NEXTVAL, 'hashed_pass1');
```

```
INSERT INTO Admin_Panel (Admin_Username, Password) VALUES ('admin' ||
admin_seq.NEXTVAL, 'hashed_pass2');
```

```
INSERT INTO Admin_Panel (Admin_Username, Password) VALUES ('admin' ||
admin_seq.NEXTVAL, 'hashed_pass3');
```

```
INSERT INTO Admin_Panel (Admin_Username, Password) VALUES ('admin' ||
admin_seq.NEXTVAL, 'hashed_pass4');
```

```
INSERT INTO Admin_Panel (Admin_Username, Password) VALUES ('admin' ||
admin_seq.NEXTVAL, 'hashed_pass5');
```

The screenshot shows the Oracle Database Express Edition interface. The SQL Command window contains five INSERT statements and a SELECT statement. The results are displayed in a table below the commands.

SQL Commands:

```
INSERT INTO Admin_Panel (Admin_Username, Password) VALUES ('admin' || admin_seq.NEXTVAL, 'hashed_pass1');
INSERT INTO Admin_Panel (Admin_Username, Password) VALUES ('admin' || admin_seq.NEXTVAL, 'hashed_pass2');
INSERT INTO Admin_Panel (Admin_Username, Password) VALUES ('admin' || admin_seq.NEXTVAL, 'hashed_pass3');
INSERT INTO Admin_Panel (Admin_Username, Password) VALUES ('admin' || admin_seq.NEXTVAL, 'hashed_pass4');
INSERT INTO Admin_Panel (Admin_Username, Password) VALUES ('admin' || admin_seq.NEXTVAL, 'hashed_pass5');
select * from Admin_Panel;
```

Results:

ADMIN_USERNAME	PASSWORD
admin1	hashed_pass1
admin2	hashed_pass2
admin3	hashed_pass3
admin4	hashed_pass4
admin5	hashed_pass5

5 rows returned in 0.00 seconds

3. Food Stall:

Sql:

```
INSERT INTO Food_Stall (Stall_ID, Stall_Location, Stall_Name, Owner_Name,
License_Number, Contact_Number, Admin_Username) VALUES (food_stall_seq.NEXTVAL,
'Main Entrance', 'Sultans Dine', 'Abdul Karim', 'LIC001', '01711122233', 'admin1');
```

```
INSERT INTO Food_Stall (Stall_ID, Stall_Location, Stall_Name, Owner_Name,
License_Number, Contact_Number, Admin_Username) VALUES (food_stall_seq.NEXTVAL,
'Left Side', 'Takeout', 'Rashedul Islam', 'LIC002', '01922233344', 'admin1');
```

```
INSERT INTO Food_Stall (Stall_ID, Stall_Location, Stall_Name, Owner_Name,
License_Number, Contact_Number, Admin_Username) VALUES (food_stall_seq.NEXTVAL,
'Center Spot', 'BFC', 'Shabnam Akter', 'LIC003', '01633344455', 'admin1');
```

```
INSERT INTO Food_Stall (Stall_ID, Stall_Location, Stall_Name, Owner_Name,
License_Number, Contact_Number, Admin_Username) VALUES (food_stall_seq.NEXTVAL,
'Right Corner', 'Cha Time', 'Mahmud Hasan', 'LIC004', '01844455566', 'admin1');
```

```
INSERT INTO Food_Stall (Stall_ID, Stall_Location, Stall_Name, Owner_Name,
License_Number, Contact_Number, Admin_Username) VALUES (food_stall_seq.NEXTVAL,
'Near Exit', 'Tasty Treat', 'Nusrat Jahan', 'LIC005', '01555566677', 'admin1');
```

The screenshot shows the Oracle Database Express Edition web interface. The browser address bar displays the URL: 127.0.0.1:8080/apex/f?p=4500:1003:1372086599801244::NO::. The interface includes a top navigation bar with links for Home, Logout, and Help. Below the navigation bar, the user is logged in as SYSTEM. The main content area shows a SQL command window with the following commands:

```
INSERT INTO Food_Stall (Stall_ID, Stall_Location, Stall_Name, Owner_Name, License_Number, Contact_Number, Admin_Username) VALUES (food_stall_seq.NEXTVAL, 'Main Entrance', 'Sultans Dine', 'Abdul Karim', 'LIC001', '01711122233', 'admin1');
INSERT INTO Food_Stall (Stall_ID, Stall_Location, Stall_Name, Owner_Name, License_Number, Contact_Number, Admin_Username) VALUES (food_stall_seq.NEXTVAL, 'Left Side', 'Takeout', 'Rashedul Islam', 'LIC002', '01922233344', 'admin1');
INSERT INTO Food_Stall (Stall_ID, Stall_Location, Stall_Name, Owner_Name, License_Number, Contact_Number, Admin_Username) VALUES (food_stall_seq.NEXTVAL, 'Center Spot', 'BFC', 'Shabnam Akter', 'LIC003', '01633344455', 'admin1');
INSERT INTO Food_Stall (Stall_ID, Stall_Location, Stall_Name, Owner_Name, License_Number, Contact_Number, Admin_Username) VALUES (food_stall_seq.NEXTVAL, 'Right Corner', 'Cha Time', 'Mahmud Hasan', 'LIC004', '01844455566', 'admin1');
INSERT INTO Food_Stall (Stall_ID, Stall_Location, Stall_Name, Owner_Name, License_Number, Contact_Number, Admin_Username) VALUES (food_stall_seq.NEXTVAL, 'Near Exit', 'Tasty Treat', 'Nusrat Jahan', 'LIC005', '01555566677', 'admin1');
```

Below the SQL command window, the results of the queries are displayed in a table. The table has 7 columns: STALL_ID, STALL_LOCATION, STALL_NAME, OWNER_NAME, LICENSE_NUMBER, CONTACT_NUMBER, and ADMIN_USERNAME. The results show 5 rows of data:

STALL_ID	STALL_LOCATION	STALL_NAME	OWNER_NAME	LICENSE_NUMBER	CONTACT_NUMBER	ADMIN_USERNAME
10	Main Entrance	Sultans Dine	Abdul Karim	LIC001	01711122233	admin1
20	Left Side	Takeout	Rashedul Islam	LIC002	01922233344	admin1
30	Center Spot	BFC	Shabnam Akter	LIC003	01633344455	admin1
40	Right Corner	Cha Time	Mahmud Hasan	LIC004	01844455566	admin1
50	Near Exit	Tasty Treat	Nusrat Jahan	LIC005	01555566677	admin1

At the bottom of the interface, there is a status bar showing the language as en-gb, the application version as Express 2.1.0.0.39, and the copyright information: Copyright © 1999, 2006, Oracle. All rights reserved. The system clock shows 1:37 PM on 25-Apr-25.

4. Discount

Sql:

```
INSERT INTO Discount (Discount_ID, Discount_Percentages, Discount_Type, Validity_Period)
VALUES (discount_seq.NEXTVAL, 10.00, 'Seasonal', TO_DATE('2025-06-30', 'YYYY-MM-DD'));
```

```
INSERT INTO Discount (Discount_ID, Discount_Percentages, Discount_Type, Validity_Period)
VALUES (discount_seq.NEXTVAL, 15.00, 'Loyalty', TO_DATE('2025-12-31', 'YYYY-MM-DD'));
```

```
INSERT INTO Discount (Discount_ID, Discount_Percentages, Discount_Type, Validity_Period)
VALUES (discount_seq.NEXTVAL, 5.00, 'First Order', TO_DATE('2025-03-31', 'YYYY-MM-DD'));
```

```
INSERT INTO Discount (Discount_ID, Discount_Percentages, Discount_Type, Validity_Period)
VALUES (discount_seq.NEXTVAL, 20.00, 'Festive', TO_DATE('2025-04-15', 'YYYY-MM-DD'));
```

```
INSERT INTO Discount (Discount_ID, Discount_Percentages, Discount_Type, Validity_Period)
VALUES (discount_seq.NEXTVAL, 25.00, 'Special', TO_DATE('2025-05-31', 'YYYY-MM-DD'));
```

The screenshot shows the Oracle Database Express Edition web interface. The browser address bar displays the URL: 127.0.0.1:8080/apex/f?p=4500:1003:1372086599801244::NO::. The page title is "ORACLE Database Express Edition". The user is logged in as "SYSTEM". The "SQL Commands" tab is active, showing a list of five INSERT statements for the "Discount" table. The statements are:

- INSERT INTO Discount (Discount_ID, Discount_Percentages, Discount_Type, Validity_Period) VALUES (discount_seq.NEXTVAL, 10.00, 'Seasonal', TO_DATE('2025-06-30', 'YYYY-MM-DD'));
- INSERT INTO Discount (Discount_ID, Discount_Percentages, Discount_Type, Validity_Period) VALUES (discount_seq.NEXTVAL, 15.00, 'Loyalty', TO_DATE('2025-12-31', 'YYYY-MM-DD'));
- INSERT INTO Discount (Discount_ID, Discount_Percentages, Discount_Type, Validity_Period) VALUES (discount_seq.NEXTVAL, 5.00, 'First Order', TO_DATE('2025-03-31', 'YYYY-MM-DD'));
- INSERT INTO Discount (Discount_ID, Discount_Percentages, Discount_Type, Validity_Period) VALUES (discount_seq.NEXTVAL, 20.00, 'Festive', TO_DATE('2025-04-15', 'YYYY-MM-DD'));
- INSERT INTO Discount (Discount_ID, Discount_Percentages, Discount_Type, Validity_Period) VALUES (discount_seq.NEXTVAL, 25.00, 'Special', TO_DATE('2025-05-31', 'YYYY-MM-DD'));

 Below the SQL commands, the "Results" tab is active, displaying a table with 5 rows and 4 columns: DISCOUNT_ID, DISCOUNT_PERCENTAGES, DISCOUNT_TYPE, and VALIDITY_PERIOD. The data is as follows:

DISCOUNT_ID	DISCOUNT_PERCENTAGES	DISCOUNT_TYPE	VALIDITY_PERIOD
1	10	Seasonal	30-JUN-25
2	15	Loyalty	31-DEC-25
3	5	First Order	31-MAR-25
4	20	Festive	15-APR-25
5	25	Special	31-MAY-25

 The status bar at the bottom indicates "5 rows returned in 0.00 seconds" and "CSV Export" is available. The footer shows the application version "Express 2 10.00.39" and copyright information "Copyright © 1999, 2006, Oracle. All rights reserved."

5. Orders

Sql:

```
INSERT INTO Orders (Order_ID, Order_Status, Number_of_Plates, Total_Price, Customer_ID, Discount_ID) VALUES (order_seq.NEXTVAL, 'Delivered', 2, 500.00, 1, 1);
```

```
INSERT INTO Orders (Order_ID, Order_Status, Number_of_Plates, Total_Price, Customer_ID, Discount_ID) VALUES (order_seq.NEXTVAL, 'Pending', 3, 450.00, 1, NULL);
```

```
INSERT INTO Orders (Order_ID, Order_Status, Number_of_Plates, Total_Price, Customer_ID, Discount_ID) VALUES (order_seq.NEXTVAL, 'Delivered', 2, 300.00, 2, 2);
```

```
INSERT INTO Orders (Order_ID, Order_Status, Number_of_Plates, Total_Price, Customer_ID, Discount_ID) VALUES (order_seq.NEXTVAL, 'Processing', 1, 120.00, 3, NULL);
```

```
INSERT INTO Orders (Order_ID, Order_Status, Number_of_Plates, Total_Price, Customer_ID, Discount_ID) VALUES (order_seq.NEXTVAL, 'Delivered', 4, 240.00, 4, 3);
```

```
INSERT INTO Orders (Order_ID, Order_Status, Number_of_Plates, Total_Price, Customer_ID, Discount_ID) VALUES (order_seq.NEXTVAL, 'Cancelled', 2, 200.00, 5, NULL);
```

The screenshot shows the Oracle Database Express Edition interface. The SQL Commands window contains the following commands:

```

INSERT INTO Orders (Order_ID, Order_Status, Number_of_Plates, Total_Price, Customer_ID, Discount_ID) VALUES (order_seq.NEXTVAL, 'Delivered', 2, 500.00, 1, 1);
INSERT INTO Orders (Order_ID, Order_Status, Number_of_Plates, Total_Price, Customer_ID, Discount_ID) VALUES (order_seq.NEXTVAL, 'Pending', 3, 450.00, 1, NULL);
INSERT INTO Orders (Order_ID, Order_Status, Number_of_Plates, Total_Price, Customer_ID, Discount_ID) VALUES (order_seq.NEXTVAL, 'Delivered', 2, 300.00, 2, 2);
INSERT INTO Orders (Order_ID, Order_Status, Number_of_Plates, Total_Price, Customer_ID, Discount_ID) VALUES (order_seq.NEXTVAL, 'Processing', 1, 120.00, 3, NULL);
INSERT INTO Orders (Order_ID, Order_Status, Number_of_Plates, Total_Price, Customer_ID, Discount_ID) VALUES (order_seq.NEXTVAL, 'Delivered', 4, 240.00, 4, 3);
INSERT INTO Orders (Order_ID, Order_Status, Number_of_Plates, Total_Price, Customer_ID, Discount_ID) VALUES (order_seq.NEXTVAL, 'Cancelled', 2, 200.00, 5, NULL);

```

The Results window shows the output of the query `select * from Orders`:

ORDER_ID	ORDER_STATUS	NUMBER_OF_PLATES	TOTAL_PRICE	CUSTOMER_ID	DISCOUNT_ID
1	Delivered	2	500	1	1
2	Pending	3	450	1	-
3	Delivered	2	300	2	2
4	Processing	1	120	3	-
5	Delivered	4	240	4	3
6	Cancelled	2	200	5	-

6 rows returned in 0.00 seconds

6. Feedback:

Sql:

```
INSERT INTO Feedback (Feedback_ID, Rating, Comments, Customer_ID) VALUES
(feedback_seq.NEXTVAL, 5, 'Excellent biryani!', 1);
```

```
INSERT INTO Feedback (Feedback_ID, Rating, Comments, Customer_ID) VALUES
(feedback_seq.NEXTVAL, 4, 'Good taste, slow delivery', 2);
```

```
INSERT INTO Feedback (Feedback_ID, Rating, Comments, Customer_ID) VALUES
(feedback_seq.NEXTVAL, 3, 'Average experience', 3);
```

```
INSERT INTO Feedback (Feedback_ID, Rating, Comments, Customer_ID) VALUES
(feedback_seq.NEXTVAL, 5, 'Loved the bubble tea', 4);
```

```
INSERT INTO Feedback (Feedback_ID, Rating, Comments, Customer_ID) VALUES
(feedback_seq.NEXTVAL, 2, 'Order was incorrect', 5);
```

The screenshot shows the Oracle Database Express Edition web interface. The user is logged in as SYSTEM. The SQL Commands window contains five INSERT statements and a SELECT statement. The results window shows a table with 5 rows of feedback data.

SQL Commands:

```

INSERT INTO Feedback (Feedback_ID, Rating, Comments, Customer_ID) VALUES (feedback_seq.NEXTVAL, 5, 'Excellent biryani!', 1);
INSERT INTO Feedback (Feedback_ID, Rating, Comments, Customer_ID) VALUES (feedback_seq.NEXTVAL, 4, 'Good taste, slow delivery', 2);
INSERT INTO Feedback (Feedback_ID, Rating, Comments, Customer_ID) VALUES (feedback_seq.NEXTVAL, 3, 'Average experience', 3);
INSERT INTO Feedback (Feedback_ID, Rating, Comments, Customer_ID) VALUES (feedback_seq.NEXTVAL, 5, 'Loved the bubble tea', 4);
INSERT INTO Feedback (Feedback_ID, Rating, Comments, Customer_ID) VALUES (feedback_seq.NEXTVAL, 2, 'Order was incorrect', 5);

select * from Feedback;
```

Results:

FEEDBACK_ID	RATING	COMMENTS	CUSTOMER_ID
1	5	Excellent biryani!	1
2	4	Good taste, slow delivery	2
3	3	Average experience	3
4	5	Loved the bubble tea	4
5	2	Order was incorrect	5

5 rows returned in 0.00 seconds

7. Payment

Sql:

```
INSERT INTO Payment (Payment_ID, Payment_Method, Amount, Payment_Status, Order_ID)
VALUES (payment_seq.NEXTVAL, 'Cash', 500.00, 'Paid', 1);
```

```
INSERT INTO Payment (Payment_ID, Payment_Method, Amount, Payment_Status, Order_ID)
VALUES (payment_seq.NEXTVAL, 'Bkash', 450.00, 'Pending', 2);
```

```
INSERT INTO Payment (Payment_ID, Payment_Method, Amount, Payment_Status, Order_ID)
VALUES (payment_seq.NEXTVAL, 'Card', 300.00, 'Paid', 3);
```

```
INSERT INTO Payment (Payment_ID, Payment_Method, Amount, Payment_Status, Order_ID)
VALUES (payment_seq.NEXTVAL, 'Nagad', 120.00, 'Pending', 4);
```

```
INSERT INTO Payment (Payment_ID, Payment_Method, Amount, Payment_Status, Order_ID)
VALUES (payment_seq.NEXTVAL, 'Cash', 240.00, 'Paid', 5);
```

The screenshot shows the Oracle Database Express Edition web interface. The browser address bar displays the URL: 127.0.0.1:8080/apex/f?p=4500:1003:1372086599801244::NO::. The page title is "ORACLE Database Express Edition". The user is logged in as "SYSTEM". The main content area shows a list of SQL commands in the "SQL Commands" tab. The commands are five INSERT statements into the "Payment" table, each using a sequence value and specific values for Payment_Method, Amount, Payment_Status, and Order_ID. Below the commands, the "Results" tab is selected, showing a table with 5 rows of data. The table has columns: PAYMENT_ID, PAYMENT_METHOD, AMOUNT, PAYMENT_STATUS, and ORDER_ID. The data rows are: (1, Cash, 500, Paid, 1), (2, Bkash, 450, Pending, 2), (3, Card, 300, Paid, 3), (4, Nagad, 120, Pending, 4), and (5, Cash, 240, Paid, 5). The status bar at the bottom indicates "5 rows returned in 0.02 seconds" and "CSV Export" link. The footer shows "Application Express 2.1.0.00.39" and "Copyright © 1999, 2006, Oracle. All rights reserved."

```

INSERT INTO Payment (Payment_ID, Payment_Method, Amount, Payment_Status, Order_ID) VALUES (payment_seq.NEXTVAL, 'Cash', 500.00, 'Paid', 1);
INSERT INTO Payment (Payment_ID, Payment_Method, Amount, Payment_Status, Order_ID) VALUES (payment_seq.NEXTVAL, 'Bkash', 450.00, 'Pending', 2);
INSERT INTO Payment (Payment_ID, Payment_Method, Amount, Payment_Status, Order_ID) VALUES (payment_seq.NEXTVAL, 'Card', 300.00, 'Paid', 3);
INSERT INTO Payment (Payment_ID, Payment_Method, Amount, Payment_Status, Order_ID) VALUES (payment_seq.NEXTVAL, 'Nagad', 120.00, 'Pending', 4);
INSERT INTO Payment (Payment_ID, Payment_Method, Amount, Payment_Status, Order_ID) VALUES (payment_seq.NEXTVAL, 'Cash', 240.00, 'Paid', 5);

select * from Payment;
  
```

PAYMENT_ID	PAYMENT_METHOD	AMOUNT	PAYMENT_STATUS	ORDER_ID
1	Cash	500	Paid	1
2	Bkash	450	Pending	2
3	Card	300	Paid	3
4	Nagad	120	Pending	4
5	Cash	240	Paid	5

5 rows returned in 0.02 seconds CSV Export

8. Menu Item

Sql:

```
INSERT INTO Menu_Item (Menu_ID, Item_Name, Price, Description, Category, Order_ID,
Stall_ID) VALUES (menu_item_seq.NEXTVAL, 'Kacchi Biryani', 250.00, 'Traditional mutton
biryani with basmati rice', 'Main Course', 1, 10);
```

```
INSERT INTO Menu_Item (Menu_ID, Item_Name, Price, Description, Category, Order_ID,
Stall_ID) VALUES (menu_item_seq.NEXTVAL, 'Chicken Tehari', 200.00, 'Spicy chicken rice
dish', 'Main Course', 1, 10);
```

```
INSERT INTO Menu_Item (Menu_ID, Item_Name, Price, Description, Category, Order_ID,
Stall_ID) VALUES (menu_item_seq.NEXTVAL, 'Fried Chicken', 150.00, 'Crispy fried chicken
pieces', 'Fast Food', 2, 20);
```

```
INSERT INTO Menu_Item (Menu_ID, Item_Name, Price, Description, Category, Order_ID,
Stall_ID) VALUES (menu_item_seq.NEXTVAL, 'Chicken Burger', 180.00, 'Juicy chicken patty
with lettuce', 'Fast Food', 2, 20);
```

```
INSERT INTO Menu_Item (Menu_ID, Item_Name, Price, Description, Category, Order_ID,
Stall_ID) VALUES (menu_item_seq.NEXTVAL, 'Spicy Wings', 120.00, 'Hot and spicy chicken
wings', 'Fast Food', 4, 30);
```

```
INSERT INTO Menu_Item (Menu_ID, Item_Name, Price, Description, Category, Order_ID,
Stall_ID) VALUES (menu_item_seq.NEXTVAL, 'Chicken Nuggets', 100.00, 'Crispy chicken
nuggets', 'Fast Food', 4, 30);
```

```
INSERT INTO Menu_Item (Menu_ID, Item_Name, Price, Description, Category, Order_ID,
Stall_ID) VALUES (menu_item_seq.NEXTVAL, 'Bubble Tea', 80.00, 'Classic milk tea with
tapioca pearls', 'Beverage', 3, 40);
```

```
INSERT INTO Menu_Item (Menu_ID, Item_Name, Price, Description, Category, Order_ID,
Stall_ID) VALUES (menu_item_seq.NEXTVAL, 'Milk Tea', 90.00, 'Creamy milk tea',
'Beverage', 3, 40);
```

```
INSERT INTO Menu_Item (Menu_ID, Item_Name, Price, Description, Category, Order_ID,
Stall_ID) VALUES (menu_item_seq.NEXTVAL, 'Choco Pastry', 60.00, 'Rich chocolate layered
pastry', 'Dessert', 5, 50);
```

```
INSERT INTO Menu_Item (Menu_ID, Item_Name, Price, Description, Category, Order_ID,
Stall_ID) VALUES (menu_item_seq.NEXTVAL, 'Vanilla Cake', 70.00, 'Soft vanilla sponge
cake', 'Dessert', 5, 50);
```

127.0.0.1:8080/apex/?p=4500:1003:1372086599801244:NO::

User: SYSTEM

Home > SQL > SQL Commands

Autocommit Display 10

```

INSERT INTO Menu_Item (Menu_ID, Item_Name, Price, Description, Category, Order_ID, Stall_ID) VALUES (menu_item_seq.NEXTVAL, 'Chicken Nuggets', 100.00, 'Crispy chicken nuggets', 'Fast Food', 4, 30);
INSERT INTO Menu_Item (Menu_ID, Item_Name, Price, Description, Category, Order_ID, Stall_ID) VALUES (menu_item_seq.NEXTVAL, 'Bubble Tea', 80.00, 'Classic milk tea with tapioca pearls', 'Beverage', 3, 40);
INSERT INTO Menu_Item (Menu_ID, Item_Name, Price, Description, Category, Order_ID, Stall_ID) VALUES (menu_item_seq.NEXTVAL, 'Milk Tea', 90.00, 'Creamy milk tea', 'Beverage', 3, 40);
INSERT INTO Menu_Item (Menu_ID, Item_Name, Price, Description, Category, Order_ID, Stall_ID) VALUES (menu_item_seq.NEXTVAL, 'Choco Pastry', 60.00, 'Rich chocolate layered pastry', 'Dessert', 5, 50);
INSERT INTO Menu_Item (Menu_ID, Item_Name, Price, Description, Category, Order_ID, Stall_ID) VALUES (menu_item_seq.NEXTVAL, 'Vanilla Cake', 70.00, 'Soft vanilla sponge cake', 'Dessert', 5, 50);

select * from Menu_Item order by menu_ID;

```

Results Explain Describe Saved SQL History

MENU_ID	ITEM_NAME	PRICE	DESCRIPTION	CATEGORY	ORDER_ID	STALL_ID
111	Kacchi Biryani	250	Traditional mutton biryani with basmati rice	Main Course	1	10
112	Chicken Tehari	200	Spicy chicken rice dish	Main Course	1	10
113	Fried Chicken	150	Crispy fried chicken pieces	Fast Food	2	20
114	Chicken Burger	180	Juicy chicken patty with lettuce	Fast Food	2	20
115	Spicy Wings	120	Hot and spicy chicken wings	Fast Food	4	30
116	Chicken Nuggets	100	Crispy chicken nuggets	Fast Food	4	30
117	Bubble Tea	80	Classic milk tea with tapioca pearls	Beverage	3	40
118	Milk Tea	90	Creamy milk tea	Beverage	3	40
119	Choco Pastry	60	Rich chocolate layered pastry	Dessert	5	50
120	Vanilla Cake	70	Soft vanilla sponge cake	Dessert	5	50

10 rows returned in 0.00 seconds CSV Export

9. Inventory

Sql:

INSERT INTO Inventory (Inventory_ID, Quantity_Available, Product_List, Added_Date, Buying_Price, Stall_ID) VALUES (inventory_seq.NEXTVAL, 100, 'Rice, Chicken, Spices', TO_DATE('2025-04-01', 'YYYY-MM-DD'), 5000.00, 10);

INSERT INTO Inventory (Inventory_ID, Quantity_Available, Product_List, Added_Date, Buying_Price, Stall_ID) VALUES (inventory_seq.NEXTVAL, 50, 'Chicken, Bread, Oil', TO_DATE('2025-04-02', 'YYYY-MM-DD'), 3000.00, 20);

INSERT INTO Inventory (Inventory_ID, Quantity_Available, Product_List, Added_Date, Buying_Price, Stall_ID) VALUES (inventory_seq.NEXTVAL, 80, 'Chicken, Flour, Spices', TO_DATE('2025-04-03', 'YYYY-MM-DD'), 4000.00, 30);

INSERT INTO Inventory (Inventory_ID, Quantity_Available, Product_List, Added_Date, Buying_Price, Stall_ID) VALUES (inventory_seq.NEXTVAL, 60, 'Tea, Milk, Sugar', TO_DATE('2025-04-04', 'YYYY-MM-DD'), 2000.00, 40);

INSERT INTO Inventory (Inventory_ID, Quantity_Available, Product_List, Added_Date, Buying_Price, Stall_ID) VALUES (inventory_seq.NEXTVAL, 40, 'Flour, Sugar, Chocolate', TO_DATE('2025-04-05', 'YYYY-MM-DD'), 2500.00, 50);

The screenshot shows the Oracle Database Express Edition web interface. The browser address bar displays the URL: 127.0.0.1:8080/apex/f?p=4500:1003:1372086599801244::NO::.

The interface includes a top navigation bar with links for Home, Logout, and Help. Below this, the user is logged in as SYSTEM. The main area is titled "SQL Commands" and contains a text editor with the following SQL commands:

```

INSERT INTO Inventory (Inventory_ID, Quantity_Available, Product_List, Added_Date, Buying_Price, Stall_ID) VALUES (inventory_seq.NEXTVAL, 100, 'Rice, Chicken, Spices', TO_DATE('2025-04-01', 'YYYY-MM-DD'), 5000.00, 10);
INSERT INTO Inventory (Inventory_ID, Quantity_Available, Product_List, Added_Date, Buying_Price, Stall_ID) VALUES (inventory_seq.NEXTVAL, 50, 'Chicken, Bread, Oil', TO_DATE('2025-04-02', 'YYYY-MM-DD'), 3000.00, 20);
INSERT INTO Inventory (Inventory_ID, Quantity_Available, Product_List, Added_Date, Buying_Price, Stall_ID) VALUES (inventory_seq.NEXTVAL, 80, 'Chicken, Flour, Spices', TO_DATE('2025-04-03', 'YYYY-MM-DD'), 4000.00, 30);
INSERT INTO Inventory (Inventory_ID, Quantity_Available, Product_List, Added_Date, Buying_Price, Stall_ID) VALUES (inventory_seq.NEXTVAL, 60, 'Tea, Milk, Sugar', TO_DATE('2025-04-04', 'YYYY-MM-DD'), 2000.00, 40);
INSERT INTO Inventory (Inventory_ID, Quantity_Available, Product_List, Added_Date, Buying_Price, Stall_ID) VALUES (inventory_seq.NEXTVAL, 40, 'Flour, Sugar, Chocolate', TO_DATE('2025-04-05', 'YYYY-MM-DD'), 2500.00, 50);

select * from Inventory;

```

Below the SQL editor, there are tabs for Results, Explain, Describe, Saved SQL, and History. The "Results" tab is active, displaying a table with the following data:

INVENTORY_ID	QUANTITY_AVAILABLE	PRODUCT_LIST	ADDED_DATE	BUYING_PRICE	STALL_ID
1	100	Rice, Chicken, Spices	01-APR-25	5000	10
11	50	Chicken, Bread, Oil	02-APR-25	3000	20
21	80	Chicken, Flour, Spices	03-APR-25	4000	30
31	60	Tea, Milk, Sugar	04-APR-25	2000	40
41	40	Flour, Sugar, Chocolate	05-APR-25	2500	50

Below the table, it states "5 rows returned in 0.00 seconds" and provides a "CSV Export" link. The bottom of the interface shows the application version "Application Express 2.1.0.0.39" and the copyright notice "Copyright © 1999, 2006, Oracle. All rights reserved.".

10. Supplier:

Sql:

INSERT INTO Supplier (Supplier_ID, Supplier_Name, Supplier_Mobile_Number, Products, Total_Products_Supplied, Last_Supplied_Date, Selling_Price, Inventory_ID) VALUES (supplier_seq.NEXTVAL, 'Haque Traders', '01711122233', 'Rice, Spices', 500, TO_DATE('2025-04-01', 'YYYY-MM-DD'), 6000.00, 1);

INSERT INTO Supplier (Supplier_ID, Supplier_Name, Supplier_Mobile_Number, Products, Total_Products_Supplied, Last_Supplied_Date, Selling_Price, Inventory_ID) VALUES (supplier_seq.NEXTVAL, 'Rahman Suppliers', '01922233344', 'Chicken', 300, TO_DATE('2025-04-02', 'YYYY-MM-DD'), 3500.00, 1);

INSERT INTO Supplier (Supplier_ID, Supplier_Name, Supplier_Mobile_Number, Products, Total_Products_Supplied, Last_Supplied_Date, Selling_Price, Inventory_ID) VALUES (supplier_seq.NEXTVAL, 'Alam Distributors', '01633344455', 'Chicken, Oil', 400, TO_DATE('2025-04-03', 'YYYY-MM-DD'), 4500.00, 11);

INSERT INTO Supplier (Supplier_ID, Supplier_Name, Supplier_Mobile_Number, Products, Total_Products_Supplied, Last_Supplied_Date, Selling_Price, Inventory_ID) VALUES (supplier_seq.NEXTVAL, 'Siddique Foods', '01844455566', 'Tea, Sugar', 200, TO_DATE('2025-04-04', 'YYYY-MM-DD'), 2500.00, 21);

```
INSERT INTO Supplier (Supplier_ID, Supplier_Name, Supplier_Mobile_Number, Products,
Total_Products_Supplied, Last_Supplied_Date, Selling_Price, Inventory_ID) VALUES
(supplier_seq.NEXTVAL, 'Nahar Enterprises', '01555566677', 'Flour, Chocolate', 150,
TO_DATE('2025-04-05', 'YYYY-MM-DD'), 3000.00, 31);
```

```
INSERT INTO Supplier (Supplier_ID, Supplier_Name, Supplier_Mobile_Number, Products,
Total_Products_Supplied, Last_Supplied_Date, Selling_Price, Inventory_ID) VALUES
(supplier_seq.NEXTVAL, 'Khan Suppliers', '01766677788', 'Milk, Sugar', 100, TO_DATE('2025-
04-06', 'YYYY-MM-DD'), 2000.00, 41);
```

The screenshot shows the Oracle Database Express Edition interface. The SQL Commands window contains the following commands:

```
VALUES (supplier_seq.NEXTVAL, 'Haque Traders', '01711122233', 'Rice, Spices', 500, TO_DATE('2025-04-01', 'YYYY-MM-DD'), 6000.00, 1);
INSERT INTO Supplier (Supplier_ID, Supplier_Name, Supplier_Mobile_Number, Products, Total_Products_Supplied, Last_Supplied_Date, Selling_Price, Inventory_ID)
VALUES (supplier_seq.NEXTVAL, 'Rahman Suppliers', '01922233344', 'Chicken', 300, TO_DATE('2025-04-02', 'YYYY-MM-DD'), 3500.00, 1);
INSERT INTO Supplier (Supplier_ID, Supplier_Name, Supplier_Mobile_Number, Products, Total_Products_Supplied, Last_Supplied_Date, Selling_Price, Inventory_ID)
VALUES (supplier_seq.NEXTVAL, 'Alam Distributors', '01633344455', 'Chicken, Oil', 400, TO_DATE('2025-04-03', 'YYYY-MM-DD'), 4500.00, 11);
INSERT INTO Supplier (Supplier_ID, Supplier_Name, Supplier_Mobile_Number, Products, Total_Products_Supplied, Last_Supplied_Date, Selling_Price, Inventory_ID)
VALUES (supplier_seq.NEXTVAL, 'Siddique Foods', '01844455566', 'Tea, Sugar', 200, TO_DATE('2025-04-04', 'YYYY-MM-DD'), 2500.00, 21);
INSERT INTO Supplier (Supplier_ID, Supplier_Name, Supplier_Mobile_Number, Products, Total_Products_Supplied, Last_Supplied_Date, Selling_Price, Inventory_ID)
VALUES (supplier_seq.NEXTVAL, 'Nahar Enterprises', '01555566677', 'Flour, Chocolate', 150, TO_DATE('2025-04-05', 'YYYY-MM-DD'), 3000.00, 31);
INSERT INTO Supplier (Supplier_ID, Supplier_Name, Supplier_Mobile_Number, Products, Total_Products_Supplied, Last_Supplied_Date, Selling_Price, Inventory_ID)
VALUES (supplier_seq.NEXTVAL, 'Khan Suppliers', '01766677788', 'Milk, Sugar', 100, TO_DATE('2025-04-06', 'YYYY-MM-DD'), 2000.00, 41);
```

The Results window shows the following data:

SUPPLIER_ID	SUPPLIER_NAME	SUPPLIER_MOBILE_NUMBER	PRODUCTS	TOTAL_PRODUCTS_SUPPLIED	LAST_SUPPLIED_DATE	SELLING_PRICE	INVENTORY_ID
1	Haque Traders	01711122233	Rice, Spices	500	01-APR-25	6000	1
2	Rahman Suppliers	01922233344	Chicken	300	02-APR-25	3500	1
3	Alam Distributors	01633344455	Chicken, Oil	400	03-APR-25	4500	11
4	Siddique Foods	01844455566	Tea, Sugar	200	04-APR-25	2500	21
5	Nahar Enterprises	01555566677	Flour, Chocolate	150	05-APR-25	3000	31
6	Khan Suppliers	01766677788	Milk, Sugar	100	06-APR-25	2000	41

6 rows returned in 0.02 seconds

11. Employee

Sql:

```
INSERT INTO Employee (Employee_ID, Employee_Name, Employee_Role,
Employee_Address, Employee_Salary, E_Mobile_Number, Stall_ID) VALUES
(employee_seq.NEXTVAL, 'Asif Rahman', 'Chef', 'Mirpur, Dhaka', 20000.00, '01777788899',
10);
```

```
INSERT INTO Employee (Employee_ID, Employee_Name, Employee_Role,
Employee_Address, Employee_Salary, E_Mobile_Number, Stall_ID) VALUES
(employee_seq.NEXTVAL, 'Nadia Akter', 'Waiter', 'Mirpur, Dhaka', 15000.00, '01988899900',
10);
```

```
INSERT INTO Employee (Employee_ID, Employee_Name, Employee_Role,
Employee_Address, Employee_Salary, E_Mobile_Number, Stall_ID) VALUES
(employee_seq.NEXTVAL, 'Sohel Mia', 'Cashier', 'Banani, Dhaka', 18000.00, '01699900011',
20);
```

```
INSERT INTO Employee (Employee_ID, Employee_Name, Employee_Role,
Employee_Address, Employee_Salary, E_Mobile_Number, Stall_ID) VALUES
(employee_seq.NEXTVAL, 'Ruma Begum', 'Chef', 'Gulshan, Dhaka', 22000.00, '01800011122',
30);
```

```
INSERT INTO Employee (Employee_ID, Employee_Name, Employee_Role,
Employee_Address, Employee_Salary, E_Mobile_Number, Stall_ID) VALUES
(employee_seq.NEXTVAL, 'Jamil Hossain', 'Waiter', 'Dhanmondi, Dhaka', 16000.00,
'01511122233', 40);
```

```
INSERT INTO Employee (Employee_ID, Employee_Name, Employee_Role,
Employee_Address, Employee_Salary, E_Mobile_Number, Stall_ID) VALUES
(employee_seq.NEXTVAL, 'Shirin Akter', 'Baker', 'Uttara, Dhaka', 20000.00, '01722233344',
50);
```

The screenshot displays the Oracle Database Express Edition web interface. The top navigation bar includes links for Home, Logout, and Help. The main content area shows a list of SQL commands executed, including several INSERT statements for the Employee table and a SELECT statement. Below the commands, a table displays the results of the SELECT query, showing 6 rows of employee data.

SQL Commands:

```

Rahman, 'Chef', 'Mirpur, Dhaka', 20000.00, '0177788899', 10);
INSERT INTO Employee (Employee_ID, Employee_Name, Employee_Role, Employee_Address, Employee_Salary, E_Mobile_Number, Stall_ID) VALUES (employee_seq.NEXTVAL,
'Nadia Akter', 'Waiter', 'Mirpur, Dhaka', 15000.00, '01988899900', 10);
INSERT INTO Employee (Employee_ID, Employee_Name, Employee_Role, Employee_Address, Employee_Salary, E_Mobile_Number, Stall_ID) VALUES (employee_seq.NEXTVAL,
'Sohel Mia', 'Cashier', 'Banani, Dhaka', 18000.00, '01699900011', 20);
INSERT INTO Employee (Employee_ID, Employee_Name, Employee_Role, Employee_Address, Employee_Salary, E_Mobile_Number, Stall_ID) VALUES (employee_seq.NEXTVAL, 'Ruma
Begum', 'Chef', 'Gulshan, Dhaka', 22000.00, '01800011122', 30);
INSERT INTO Employee (Employee_ID, Employee_Name, Employee_Role, Employee_Address, Employee_Salary, E_Mobile_Number, Stall_ID) VALUES (employee_seq.NEXTVAL,
'Jamil Hossain', 'Waiter', 'Dhanmondi, Dhaka', 16000.00, '01511122233', 40);
INSERT INTO Employee (Employee_ID, Employee_Name, Employee_Role, Employee_Address, Employee_Salary, E_Mobile_Number, Stall_ID) VALUES (employee_seq.NEXTVAL,
'Shirin Akter', 'Baker', 'Uttara, Dhaka', 20000.00, '01722233344', 50);
select * from Employee;

```

Results:

EMPLOYEE_ID	EMPLOYEE_NAME	EMPLOYEE_ROLE	EMPLOYEE_ADDRESS	EMPLOYEE_SALARY	E_MOBILE_NUMBER	STALL_ID
1	Asif Rahman	Chef	Mirpur, Dhaka	20000	01777788899	10
2	Nadia Akter	Waiter	Mirpur, Dhaka	15000	01988899900	10
3	Sohel Mia	Cashier	Banani, Dhaka	18000	01699900011	20
4	Ruma Begum	Chef	Gulshan, Dhaka	22000	01800011122	30
5	Jamil Hossain	Waiter	Dhanmondi, Dhaka	16000	01511122233	40
6	Shirin Akter	Baker	Uttara, Dhaka	20000	01722233344	50

6 rows returned in 0.00 seconds

12. Staffs

Sql:

```
INSERT INTO Staffs (Staff_ID, Staff_Name, Staff_Role, Staff_Salary, Working_Hours,
Working_Date, Staff_Mobile_Number, Staff_ADDRESS, Admin_Username) VALUES
(staffs_seq.NEXTVAL, 'Tarek Ahmed', 'Manager', 30000.00, 8, TO_DATE('2025-05-01',
'YYYY-MM-DD'), '01733344455', 'Mirpur, Dhaka', 'admin1');
```

```
INSERT INTO Staffs (Staff_ID, Staff_Name, Staff_Role, Staff_Salary, Working_Hours,
Working_Date, Staff_Mobile_Number, Staff_ADDRESS, Admin_Username) VALUES
(staffs_seq.NEXTVAL, 'Laila Khan', 'Supervisor', 25000.00, 7, TO_DATE('2025-05-01', 'YYYY-
MM-DD'), '01944455566', 'Banani, Dhaka', 'admin1');
```

```
INSERT INTO Staffs (Staff_ID, Staff_Name, Staff_Role, Staff_Salary, Working_Hours,
Working_Date, Staff_Mobile_Number, Staff_ADDRESS, Admin_Username) VALUES
(staffs_seq.NEXTVAL, 'Imran Ali', 'Accountant', 28000.00, 8, TO_DATE('2025-05-01', 'YYYY-
MM-DD'), '01655566677', 'Gulshan, Dhaka', 'admin1');
```

```
INSERT INTO Staffs (Staff_ID, Staff_Name, Staff_Role, Staff_Salary, Working_Hours,
Working_Date, Staff_Mobile_Number, Staff_ADDRESS, Admin_Username) VALUES
(staffs_seq.NEXTVAL, 'Sultana Razia', 'HR', 27000.00, 6, TO_DATE('2025-05-01', 'YYYY-
MM-DD'), '01866677788', 'Dhanmondi, Dhaka', 'admin1');
```

```
INSERT INTO Staffs (Staff_ID, Staff_Name, Staff_Role, Staff_Salary, Working_Hours,
Working_Date, Staff_Mobile_Number, Staff_ADDRESS, Admin_Username) VALUES
(staffs_seq.NEXTVAL, 'Faruk Hossain', 'Security', 20000.00, 8, TO_DATE('2025-05-01',
'YYYY-MM-DD'), '01577788899', 'Uttara, Dhaka', 'admin1');
```

The screenshot shows the Oracle Database Express Edition web interface. The SQL Commands window contains five INSERT statements for the Staffs table, followed by a SELECT statement to retrieve all data from the table. The Results window displays the output of the SELECT statement as a table with 5 rows.

SQL Commands:

```
INSERT INTO Staffs (Staff_ID, Staff_Name, Staff_Role, Staff_Salary, Working_Hours, Working_Date, Staff_Mobile Number, Staff_ADDRESS, Admin_Username) VALUES
(staffs_seq.NEXTVAL, 'Tarek Ahmed', 'Manager', 30000.00, 8, TO_DATE('2025-05-01', 'YYYY-MM-DD'), '01733344455', 'Mirpur, Dhaka', 'admin1');
INSERT INTO Staffs (Staff_ID, Staff_Name, Staff_Role, Staff_Salary, Working_Hours, Working_Date, Staff_Mobile Number, Staff_ADDRESS, Admin_Username) VALUES
(staffs_seq.NEXTVAL, 'Laila Khan', 'Supervisor', 25000.00, 7, TO_DATE('2025-05-01', 'YYYY-MM-DD'), '01944455566', 'Banani, Dhaka', 'admin1');
INSERT INTO Staffs (Staff_ID, Staff_Name, Staff_Role, Staff_Salary, Working_Hours, Working_Date, Staff_Mobile Number, Staff_ADDRESS, Admin_Username) VALUES
(staffs_seq.NEXTVAL, 'Imran Ali', 'Accountant', 28000.00, 8, TO_DATE('2025-05-01', 'YYYY-MM-DD'), '01655566677', 'Gulshan, Dhaka', 'admin1');
INSERT INTO Staffs (Staff_ID, Staff_Name, Staff_Role, Staff_Salary, Working_Hours, Working_Date, Staff_Mobile Number, Staff_ADDRESS, Admin_Username) VALUES
(staffs_seq.NEXTVAL, 'Sultana Razia', 'HR', 27000.00, 6, TO_DATE('2025-05-01', 'YYYY-MM-DD'), '01866677788', 'Dhanmondi, Dhaka', 'admin1');
INSERT INTO Staffs (Staff_ID, Staff_Name, Staff_Role, Staff_Salary, Working_Hours, Working_Date, Staff_Mobile Number, Staff_ADDRESS, Admin_Username) VALUES
(staffs_seq.NEXTVAL, 'Faruk Hossain', 'Security', 20000.00, 8, TO_DATE('2025-05-01', 'YYYY-MM-DD'), '01577788899', 'Uttara, Dhaka', 'admin1');
```

Results:

STAFF_ID	STAFF_NAME	STAFF_ROLE	STAFF_SALARY	WORKING_HOURS	WORKING_DATE	STAFF_MOBILE_NUMBER	STAFF_ADDRESS	ADMIN_USERNAME
1	Tarek Ahmed	Manager	30000	8	01-MAY-25	01733344455	Mirpur, Dhaka	admin1
2	Laila Khan	Supervisor	25000	7	01-MAY-25	01944455566	Banani, Dhaka	admin1
3	Imran Ali	Accountant	28000	8	01-MAY-25	01655566677	Gulshan, Dhaka	admin1
4	Sultana Razia	HR	27000	6	01-MAY-25	01866677788	Dhanmondi, Dhaka	admin1
5	Faruk Hossain	Security	20000	8	01-MAY-25	01577788899	Uttara, Dhaka	admin1

5 rows returned in 0.01 seconds

13. Analytical Report:

Sql:

```
INSERT INTO Analytical_Report (Report_ID, Report_Date, Total_Sales, Total_Orders,
Most_Sold_Items, Customer_Avg_Rating, Admin_Username, Stall_ID) VALUES
(report_seq.NEXTVAL, TO_DATE('2025-04-01', 'YYYY-MM-DD'), 5000.00, 20, 'Kacchi
Biryani', 4.5, 'admin1', 10);
```

```
INSERT INTO Analytical_Report (Report_ID, Report_Date, Total_Sales, Total_Orders,
Most_Sold_Items, Customer_Avg_Rating, Admin_Username, Stall_ID) VALUES
(report_seq.NEXTVAL, TO_DATE('2025-04-02', 'YYYY-MM-DD'), 3000.00, 15, 'Fried
Chicken', 4.0, 'admin1', 20);
```

```
INSERT INTO Analytical_Report (Report_ID, Report_Date, Total_Sales, Total_Orders,
Most_Sold_Items, Customer_Avg_Rating, Admin_Username, Stall_ID) VALUES
(report_seq.NEXTVAL, TO_DATE('2025-04-03', 'YYYY-MM-DD'), 4000.00, 18, 'Spicy Wings',
3.8, 'admin1', 30);
```

```
INSERT INTO Analytical_Report (Report_ID, Report_Date, Total_Sales, Total_Orders,
Most_Sold_Items, Customer_Avg_Rating, Admin_Username, Stall_ID) VALUES
(report_seq.NEXTVAL, TO_DATE('2025-04-04', 'YYYY-MM-DD'), 2000.00, 10, 'Bubble Tea',
4.2, 'admin1', 40);
```

```
INSERT INTO Analytical_Report (Report_ID, Report_Date, Total_Sales, Total_Orders,
Most_Sold_Items, Customer_Avg_Rating, Admin_Username, Stall_ID) VALUES
(report_seq.NEXTVAL, TO_DATE('2025-04-05', 'YYYY-MM-DD'), 2500.00, 12, 'Choco
Pastry', 4.7, 'admin1', 50);
```

```
INSERT INTO Analytical_Report (Report_ID, Report_Date, Total_Sales, Total_Orders,
Most_Sold_Items, Customer_Avg_Rating, Admin_Username, Stall_ID) VALUES
(report_seq.NEXTVAL, TO_DATE('2025-05-01', 'YYYY-MM-DD'), 5500.00, 22, 'Chicken
Tehari', 4.6, 'admin1', 10);
```

```
INSERT INTO Analytical_Report (Report_ID, Report_Date, Total_Sales, Total_Orders,
Most_Sold_Items, Customer_Avg_Rating, Admin_Username, Stall_ID) VALUES
(report_seq.NEXTVAL, TO_DATE('2025-05-02', 'YYYY-MM-DD'), 3200.00, 16, 'Chicken
Burger', 4.1, 'admin1', 20);
```

```
INSERT INTO Analytical_Report (Report_ID, Report_Date, Total_Sales, Total_Orders,
Most_Sold_Items, Customer_Avg_Rating, Admin_Username, Stall_ID) VALUES
(report_seq.NEXTVAL, TO_DATE('2025-05-03', 'YYYY-MM-DD'), 4200.00, 19, 'Chicken
Nuggets', 3.9, 'admin1', 30);
```

```
INSERT INTO Analytical_Report (Report_ID, Report_Date, Total_Sales, Total_Orders,
Most_Sold_Items, Customer_Avg_Rating, Admin_Username, Stall_ID) VALUES
(report_seq.NEXTVAL, TO_DATE('2025-05-04', 'YYYY-MM-DD'), 2300.00, 11, 'Milk Tea',
4.3, 'admin1', 40);
```

```
INSERT INTO Analytical_Report (Report_ID, Report_Date, Total_Sales, Total_Orders,
Most_Sold_Items, Customer_Avg_Rating, Admin_Username, Stall_ID) VALUES
(report_seq.NEXTVAL, TO_DATE('2025-05-05', 'YYYY-MM-DD'), 2700.00, 13, 'Vanilla Cake',
4.8, 'admin1', 50);
```

127.0.0.1:8080/apex/f?p=4500:1003:1372086599801244::NO::

Apps | YouTube | Gmail | Maps | Notion | BDSKILLS | Home - Passive Jou... | BAS FTP-Watch live... | Interactive Cares | Sigma Web Develop... | WordPress E-Comm... | All Bookmarks

User: SYSTEM

Home > SQL > SQL Commands

☒ Autocommit Display 10 Save Run

```
(report_seq.NEXTVAL, TO_DATE('2025-04-05', 'YYYY-MM-DD'), 2500.00, 12, 'Choco Pastry', 4.7, 'admin1', 50);
INSERT INTO Analytical_Report (Report_ID, Report_Date, Total_Sales, Total_Orders, Most_Sold_Items, Customer_Avg_Rating, Admin_Username, Stall_ID) VALUES
(report_seq.NEXTVAL, TO_DATE('2025-05-01', 'YYYY-MM-DD'), 5500.00, 22, 'Chicken Tehari', 4.6, 'admin1', 10);
INSERT INTO Analytical_Report (Report_ID, Report_Date, Total_Sales, Total_Orders, Most_Sold_Items, Customer_Avg_Rating, Admin_Username, Stall_ID) VALUES
(report_seq.NEXTVAL, TO_DATE('2025-05-02', 'YYYY-MM-DD'), 3200.00, 16, 'Chicken Burger', 4.1, 'admin1', 20);
INSERT INTO Analytical_Report (Report_ID, Report_Date, Total_Sales, Total_Orders, Most_Sold_Items, Customer_Avg_Rating, Admin_Username, Stall_ID) VALUES
(report_seq.NEXTVAL, TO_DATE('2025-05-03', 'YYYY-MM-DD'), 4200.00, 19, 'Chicken Nuggets', 3.9, 'admin1', 30);
INSERT INTO Analytical_Report (Report_ID, Report_Date, Total_Sales, Total_Orders, Most_Sold_Items, Customer_Avg_Rating, Admin_Username, Stall_ID) VALUES
(report_seq.NEXTVAL, TO_DATE('2025-05-04', 'YYYY-MM-DD'), 2300.00, 11, 'Milk Tea', 4.3, 'admin1', 40);
INSERT INTO Analytical_Report (Report_ID, Report_Date, Total_Sales, Total_Orders, Most_Sold_Items, Customer_Avg_Rating, Admin_Username, Stall_ID) VALUES
(report_seq.NEXTVAL, TO_DATE('2025-05-05', 'YYYY-MM-DD'), 2700.00, 13, 'Vanilla Cake', 4.8, 'admin1', 50);
select * from Analytical_Report;
```

Results Explain Describe Saved SQL History

REPORT_ID	REPORT_DATE	TOTAL_SALES	TOTAL_ORDERS	MOST_SOLD_ITEMS	CUSTOMER_AVG_RATING	ADMIN_USERNAME	STALL_ID
1	01-APR-25	5000	20	Kacchi Biryani	4.5	admin1	10
2	02-APR-25	3000	15	Fried Chicken	4	admin1	20
3	03-APR-25	4000	18	Spicy Wings	3.8	admin1	30
4	04-APR-25	2000	10	Bubble Tea	4.2	admin1	40
5	05-APR-25	2500	12	Choco Pastry	4.7	admin1	50
6	01-MAY-25	5500	22	Chicken Tehari	4.6	admin1	10
7	02-MAY-25	3200	16	Chicken Burger	4.1	admin1	20
8	03-MAY-25	4200	19	Chicken Nuggets	3.9	admin1	30
9	04-MAY-25	2300	11	Milk Tea	4.3	admin1	40
10	05-MAY-25	2700	13	Vanilla Cake	4.8	admin1	50

10 rows returned in 0.00 seconds CSV Export

Type here to search

Mighty Sarker 2:10 PM 25-Apr-25

User Creation:

1. A Customer:

Queries:

```
CREATE USER customer IDENTIFIED BY "password123"
DEFAULT TABLESPACE users
TEMPORARY TABLESPACE temp
QUOTA UNLIMITED ON users;

-- Grant basic connection privileges to the CUSTOMER user
GRANT CREATE SESSION TO customer;

-- Grant SELECT privilege on the MENU_ITEM table to CUSTOMER user
GRANT SELECT ON menu_item TO customer;

-- Grant SELECT, INSERT, and UPDATE privileges on the ORDERS table
GRANT SELECT, INSERT, UPDATE ON orders TO customer;

-- Grant SELECT and INSERT privileges on the FEEDBACK table
GRANT SELECT, INSERT ON feedback TO customer;


-- Create a role for easier management
CREATE ROLE customer_role;

GRANT SELECT ON menu_item TO customer_role;

GRANT SELECT, INSERT, UPDATE ON orders TO customer_role;

GRANT SELECT, INSERT ON feedback TO customer_role;

GRANT customer_role TO customer;
```

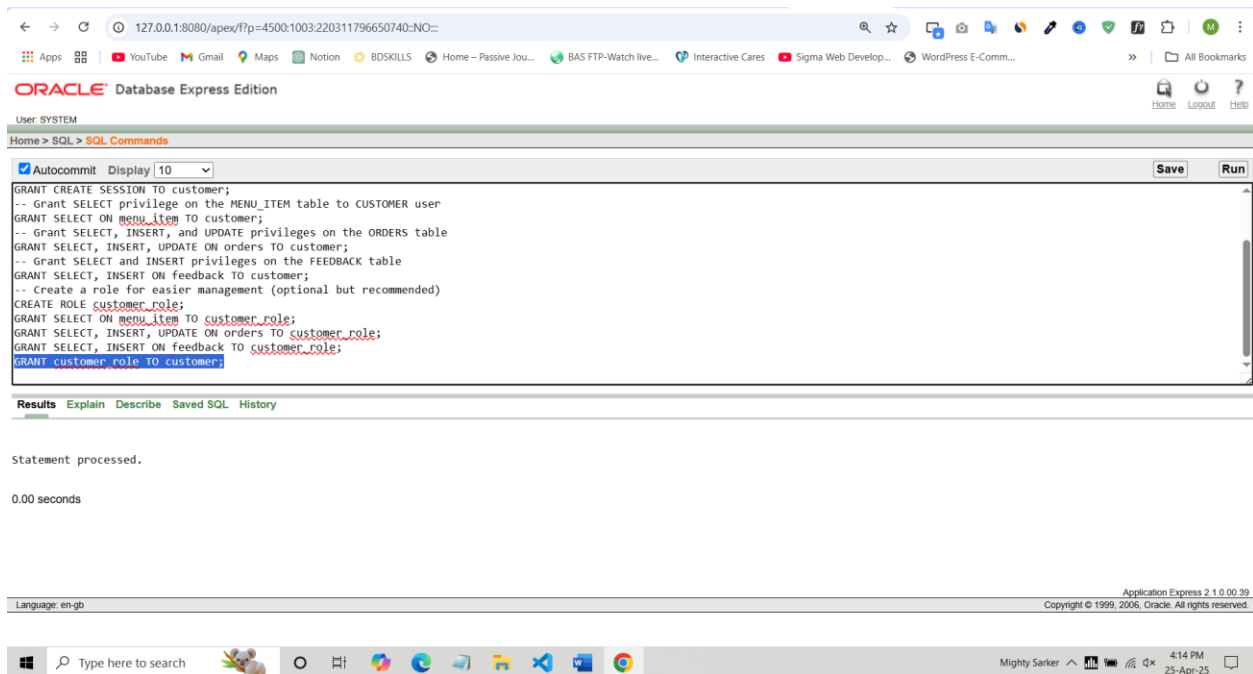

2. An Admin:

Queries:

CREATE USER admin1 IDENTIFIED BY "hashed_pass1"

DEFAULT TABLESPACE users

TEMPORARY TABLESPACE temp

QUOTA UNLIMITED ON users;

-- Grant basic connection and system privileges

GRANT CREATE SESSION TO admin1;

GRANT CREATE TABLE TO admin1;

GRANT CREATE VIEW TO admin1;

GRANT CREATE PROCEDURE TO admin1;

GRANT CREATE SEQUENCE TO admin1;

-- Grant privileges on FOOD_STALL table for monitoring

GRANT SELECT, UPDATE ON system.food_stall TO admin1;

-- Grant full privileges on STAFFS table for management

GRANT SELECT, INSERT, UPDATE, DELETE ON system.staffs TO admin1;

-- Grant privileges for creating analytical reports

GRANT SELECT, INSERT, UPDATE, DELETE ON system.analytical_report TO admin1;


-- Create an ADMIN_ROLE to group these permissions

CREATE ROLE admin_role;

GRANT SELECT, INSERT, UPDATE, DELETE ON system.staffs TO admin_role;

GRANT SELECT, INSERT, UPDATE, DELETE ON system.analytical_report TO admin_role;

GRANT admin_role TO admin1;

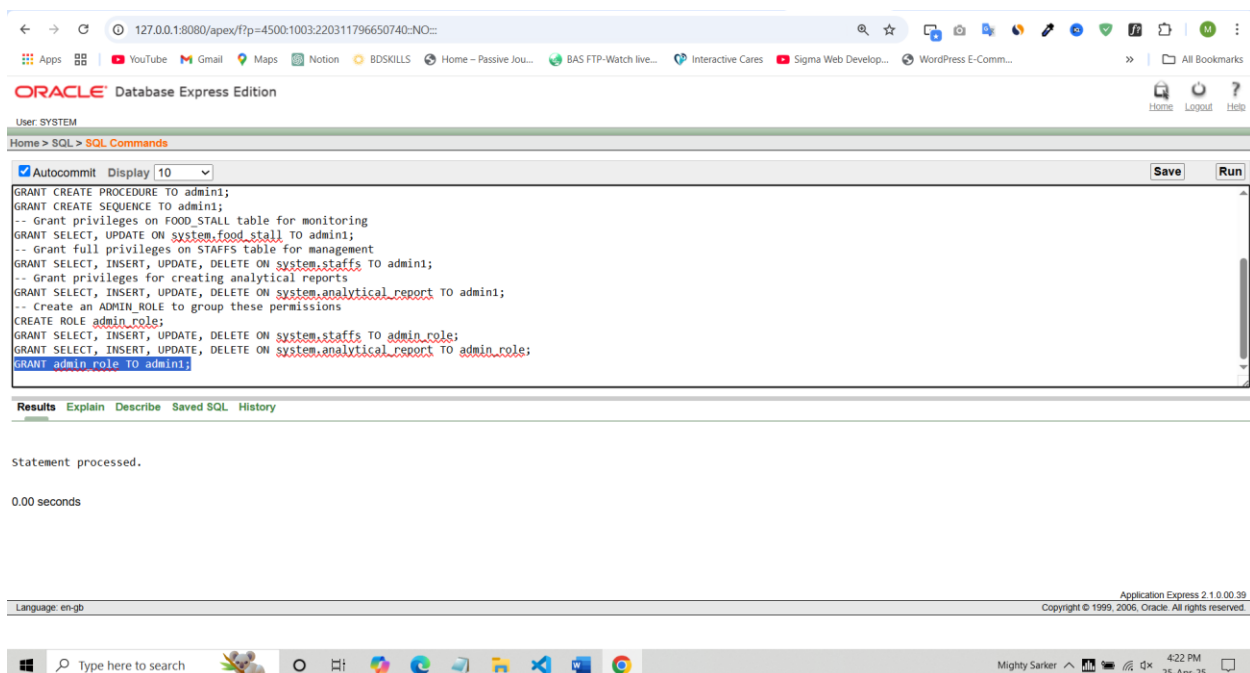

3. A Stall Owner:

Queries:

```
CREATE USER stall_owner IDENTIFIED BY "stall_owner_sd"
DEFAULT TABLESPACE users
TEMPORARY TABLESPACE temp
QUOTA UNLIMITED ON users;
-- Grant basic connection privilege
GRANT CREATE SESSION TO stall_owner;
-- Full access as they need to manage their stall information
GRANT SELECT, INSERT, UPDATE, DELETE ON system.food_stall TO stall_owner;
-- Full access to manage their menu items
GRANT SELECT, INSERT, UPDATE, DELETE ON system.menu_item TO stall_owner;
-- Full access to view and process orders
GRANT SELECT, INSERT, UPDATE, DELETE ON system.orders TO stall_owner;
-- Full access to maintain inventory
GRANT SELECT, INSERT, UPDATE, DELETE ON system.inventory TO stall_owner;
-- Full access to manage employees
GRANT SELECT, INSERT, UPDATE, DELETE ON system.employee TO stall_owner;
-- Create a STALL_OWNER_ROLE to group these permissions
CREATE ROLE stall_owner_role;
GRANT SELECT, INSERT, UPDATE, DELETE ON system.food_stall TO stall_owner_role;
GRANT SELECT, INSERT, UPDATE, DELETE ON system.menu_item TO stall_owner_role;
GRANT SELECT, INSERT, UPDATE, DELETE ON system.orders TO stall_owner_role;
GRANT SELECT, INSERT, UPDATE, DELETE ON system.inventory TO stall_owner_role;
GRANT SELECT, INSERT, UPDATE, DELETE ON system.employee TO stall_owner_role;
GRANT stall_owner_role TO stall_owner;
```

The screenshot shows the Oracle Database Express Edition web interface. The browser address bar displays the URL: 127.0.0.1:8080/apex/?p=4500:1003:220311796650740:NO:: The page title is "ORACLE Database Express Edition". The user is logged in as "SYSTEM". The "SQL Commands" tab is active, showing a list of SQL commands. The commands are as follows:

```

GRANT SELECT, INSERT, UPDATE, DELETE ON system.orders TO stall_owner;
-- Full access to maintain inventory
GRANT SELECT, INSERT, UPDATE, DELETE ON system.inventory TO stall_owner;
-- Full access to manage employees
GRANT SELECT, INSERT, UPDATE, DELETE ON system.employee TO stall_owner;
-- Create a STALL_OWNER_ROLE to group these permissions
CREATE ROLE stall_owner_role;
GRANT SELECT, INSERT, UPDATE, DELETE ON system.food_stall TO stall_owner_role;
GRANT SELECT, INSERT, UPDATE, DELETE ON system.menu_item TO stall_owner_role;
GRANT SELECT, INSERT, UPDATE, DELETE ON system.orders TO stall_owner_role;
GRANT SELECT, INSERT, UPDATE, DELETE ON system.inventory TO stall_owner_role;
GRANT SELECT, INSERT, UPDATE, DELETE ON system.employee TO stall_owner_role;
GRANT stall_owner_role TO stall_owner;

```

The "Results" tab is selected, showing the message "Statement processed." and "0.00 seconds". The footer of the interface indicates "Application Express 2.1.0.0.39" and "Copyright © 1999, 2006, Oracle. All rights reserved.".

4.An Employee:

Queries:

CREATE USER employee_user IDENTIFIED BY "emp_secure_pwd"

DEFAULT TABLESPACE users

TEMPORARY TABLESPACE temp


QUOTA UNLIMITED ON users;

-- Grant connection privilege

GRANT CREATE SESSION TO employee_user;

-- Grant SELECT ONLY on employee table

GRANT SELECT ON system.employee TO employee_user;

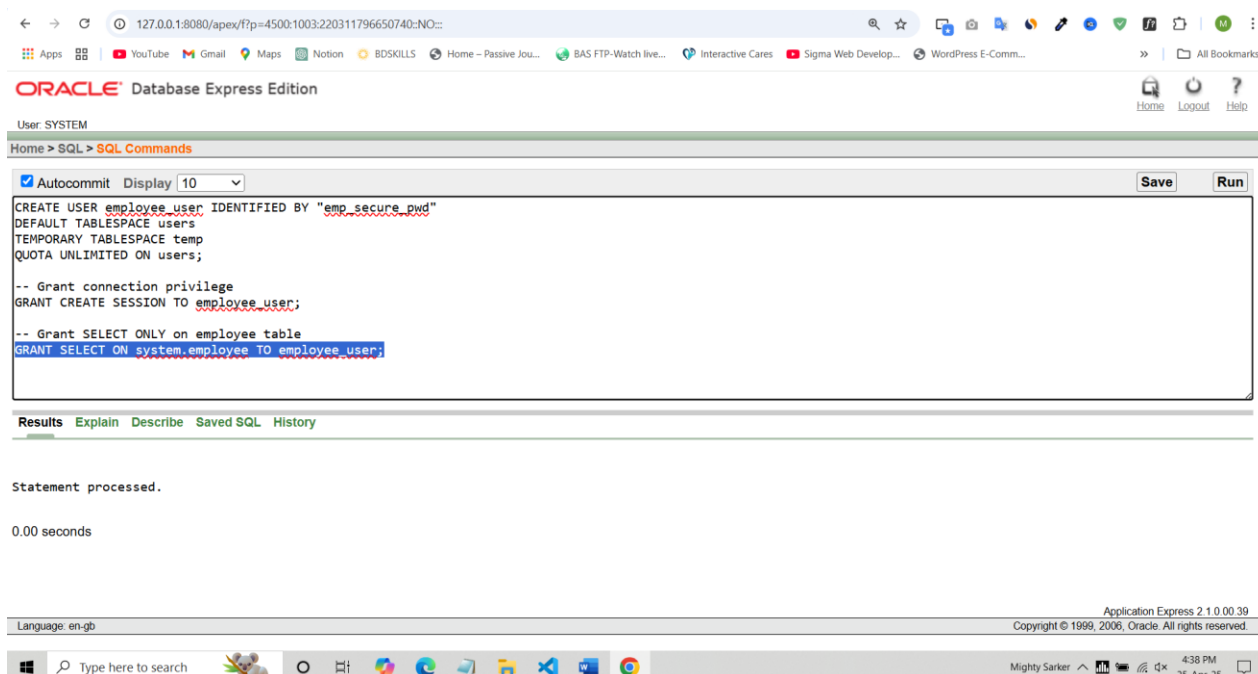

5. A Staff:

Queries:

CREATE USER staff_user IDENTIFIED BY "staff_secure_pwd"

DEFAULT TABLESPACE users

TEMPORARY TABLESPACE temp


QUOTA UNLIMITED ON users;

-- Grant connection privilege

GRANT CREATE SESSION TO staff_user;

-- Grant SELECT ONLY on staffs table

GRANT SELECT ON system.staffs TO staff_user;

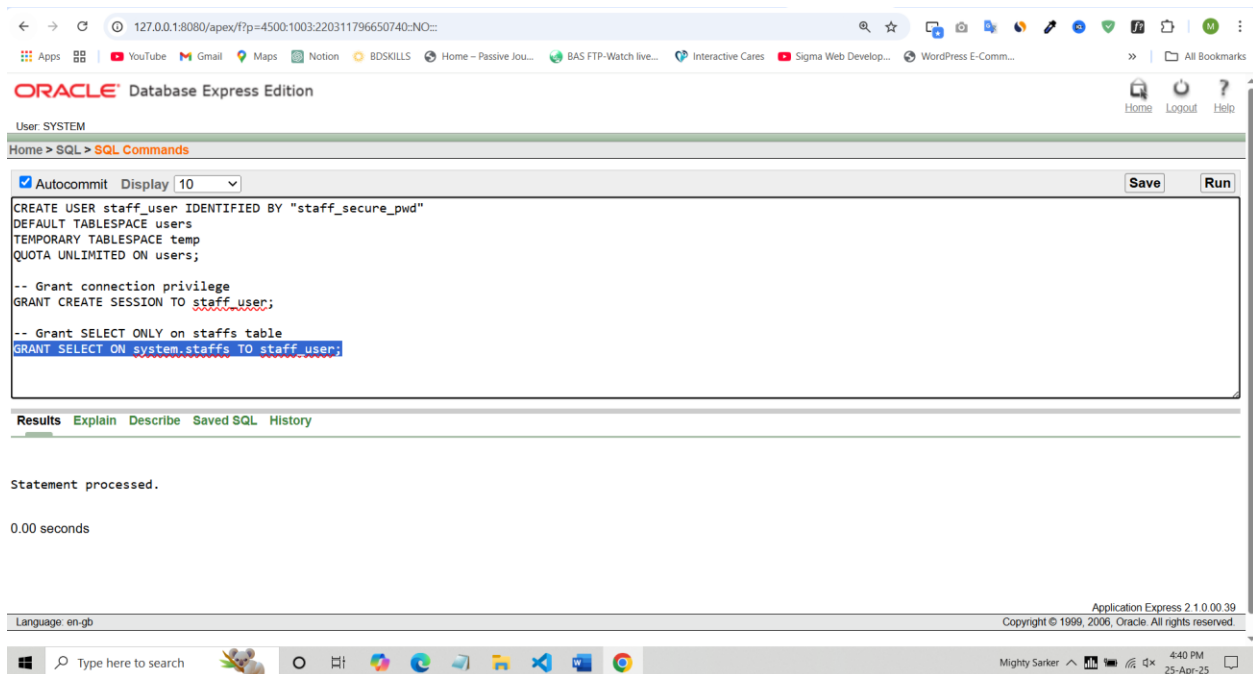

6. A Supplier:

Queries:

CREATE USER supplier IDENTIFIED BY "supply me"

DEFAULT TABLESPACE users

TEMPORARY TABLESPACE temp

QUOTA UNLIMITED ON users;

-- Grant connection privilege

GRANT CREATE SESSION TO supplier;

-- Grant INSERT, UPDATE, DELETE on inventory table

GRANT INSERT, UPDATE, DELETE ON system.inventory TO supplier;

-- Grant full access on the supplier's own supply table

GRANT ALL ON system.supplier TO supplier;

The screenshot shows the Oracle Database Express Edition web interface. The browser address bar displays the URL: 127.0.0.1:8080/apex/?p=4500:1003:220311796650740:NO::: The page title is "ORACLE Database Express Edition". The user is logged in as "SYSTEM". The "SQL Commands" tab is active, showing a text area with the following SQL commands:

```
TEMPORARY TABLESPACE temp
QUOTA UNLIMITED ON users;

-- Grant connection privilege
GRANT CREATE SESSION TO supplier;

-- Grant INSERT, UPDATE, DELETE on inventory table
GRANT INSERT, UPDATE, DELETE ON system.inventory TO supplier;

-- Grant full access on the supplier's own supply table
GRANT ALL ON system.supplier TO supplier;
```

The "Run" button has been clicked, and the "Results" tab is active, displaying the message "Statement processed." and the execution time "0.05 seconds". The bottom of the window shows the Windows taskbar with the search bar and various application icons. The system clock indicates 4:48 PM on 25-Apr-25.

Query Writing:

BASIC PL/SQL:

* Variables:

Q1: Declare a variable to store a customer's name, fetch the name from the Customer table, and display it

PL/SQL:

-- Project Name: Food Court Management System

-- Semester : Spring 2024-2025

-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM

-- Section : C

DECLARE

 v_name VARCHAR2(100);


BEGIN

 SELECT name INTO v_name FROM Customer WHERE customer_id = 1;

 DBMS_OUTPUT.PUT_LINE('Customer Name: ' || v_name);

END;

/

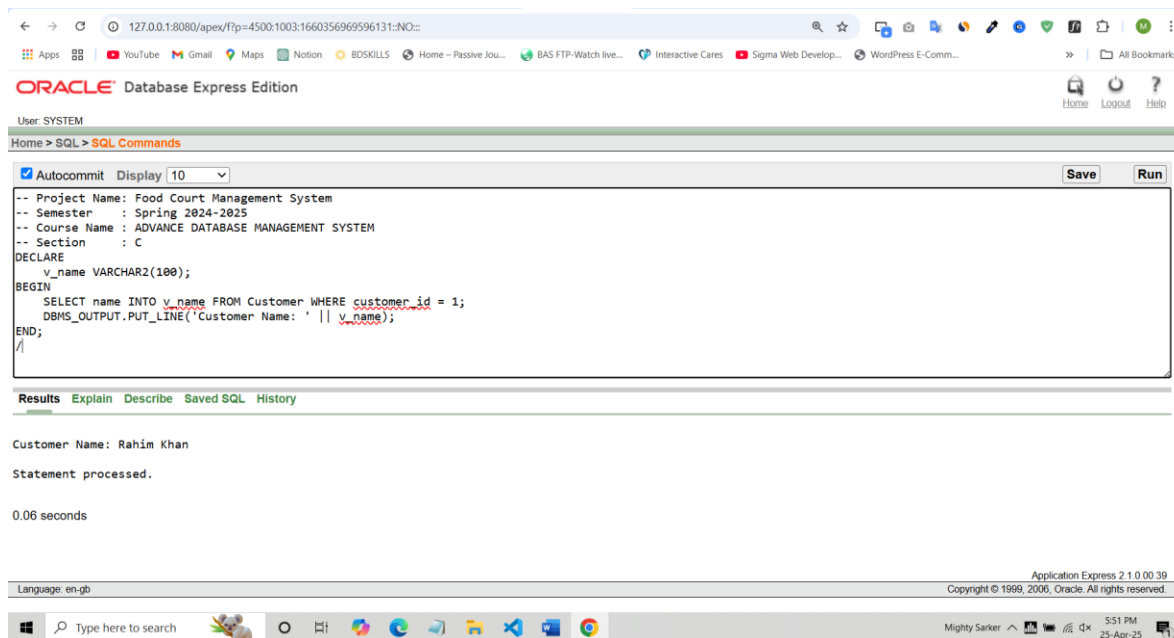

Q2: Declare variables for item name and price, then assign and display them.

PL/SQL:

-- Project Name: Food Court Management System

-- Semester : Spring 2024-2025

-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM

-- Section : C

DECLARE

v_item Menu_Item.item_name%TYPE := 'Chicken Burger';


v_price Menu_Item.price%TYPE := 220;

BEGIN

DBMS_OUTPUT.PUT_LINE('Item: ' || v_item || ', Price: ' || v_price);

END;

/

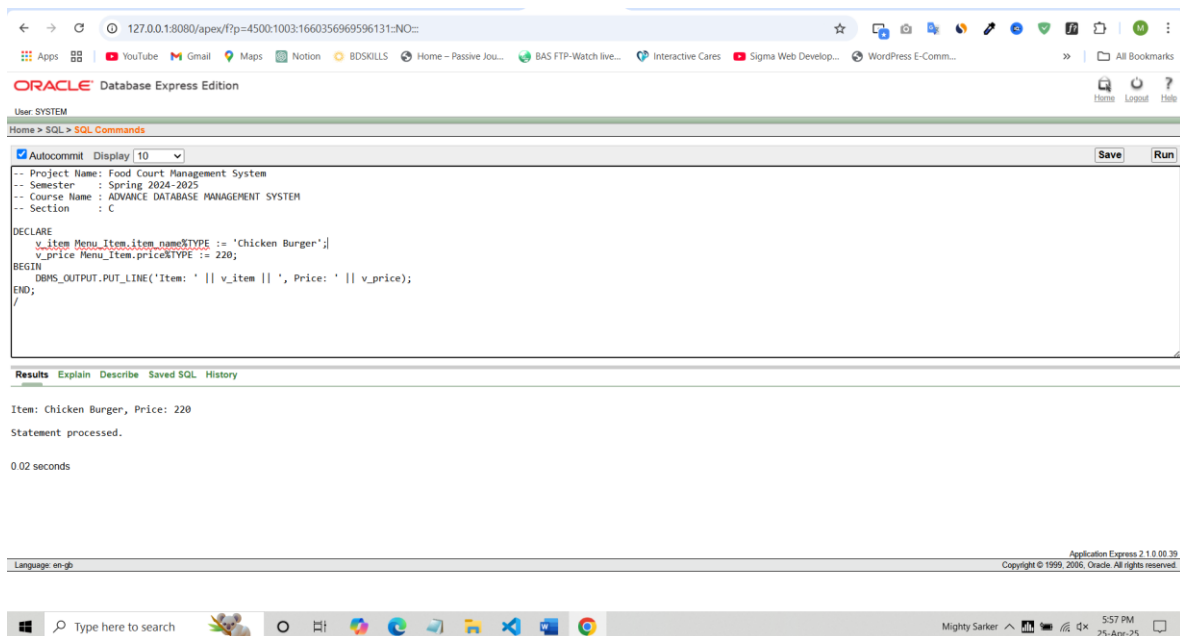

* Operators:

Q1: Add two item prices and display the result.

PL/SQL:

-- Project Name: Food Court Management System

-- Semester : Spring 2024-2025

-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM

-- Section : C

DECLARE

p1 NUMBER := 120;

p2 NUMBER := 100;

total NUMBER;


BEGIN

total := p1 + p2;

DBMS_OUTPUT.PUT_LINE('Total Price: ' || total);

END;

/

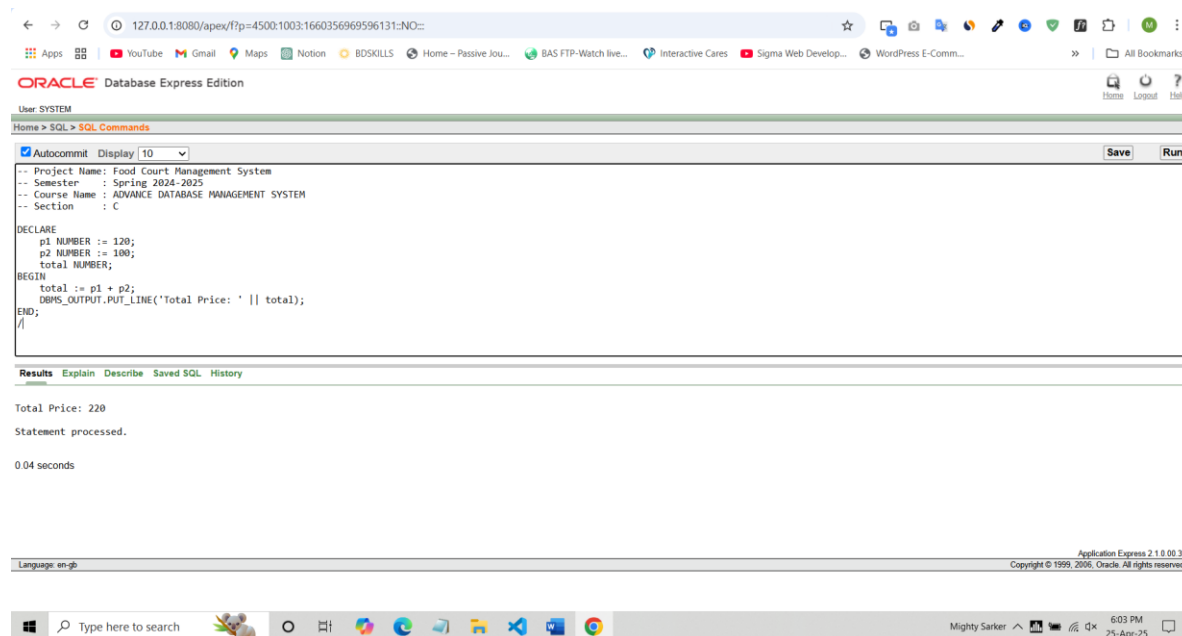

Q2: Compare order amount and discount using a relational operator.

PL/SQL:

-- Project Name: Food Court Management System

-- Semester : Spring 2024-2025

-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM

-- Section : C

DECLARE

amount NUMBER := 500;

discount NUMBER := 100;

BEGIN

IF amount > discount THEN

DBMS_OUTPUT.PUT_LINE('Eligible for discount');


ELSE

DBMS_OUTPUT.PUT_LINE('Not eligible');

END IF;

END;

/

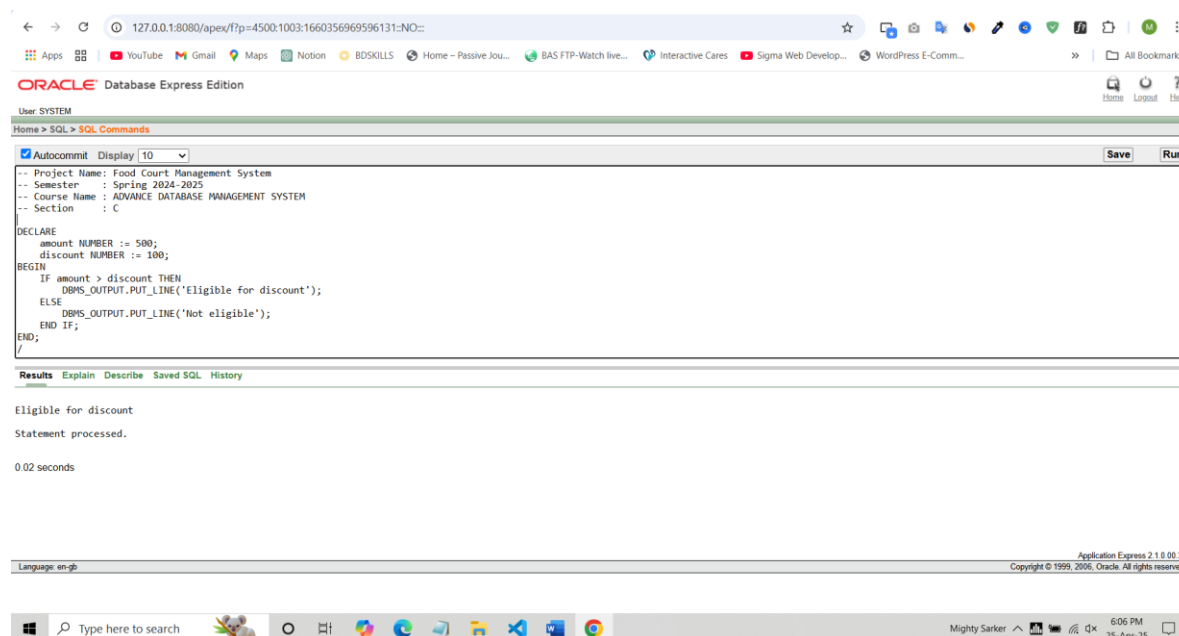

*Single-row function

Q1: Use the UPPER function to display a customer's name in uppercase.

PL/SQL:

-- Project Name: Food Court Management System

-- Semester : Spring 2024-2025

-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM

-- Section : C

DECLARE

 v_name VARCHAR2(100);


BEGIN

 SELECT UPPER(name) INTO v_name FROM Customer WHERE customer_id = 1;

 DBMS_OUTPUT.PUT_LINE('Customer Name in Uppercase: ' || v_name);

END;

/

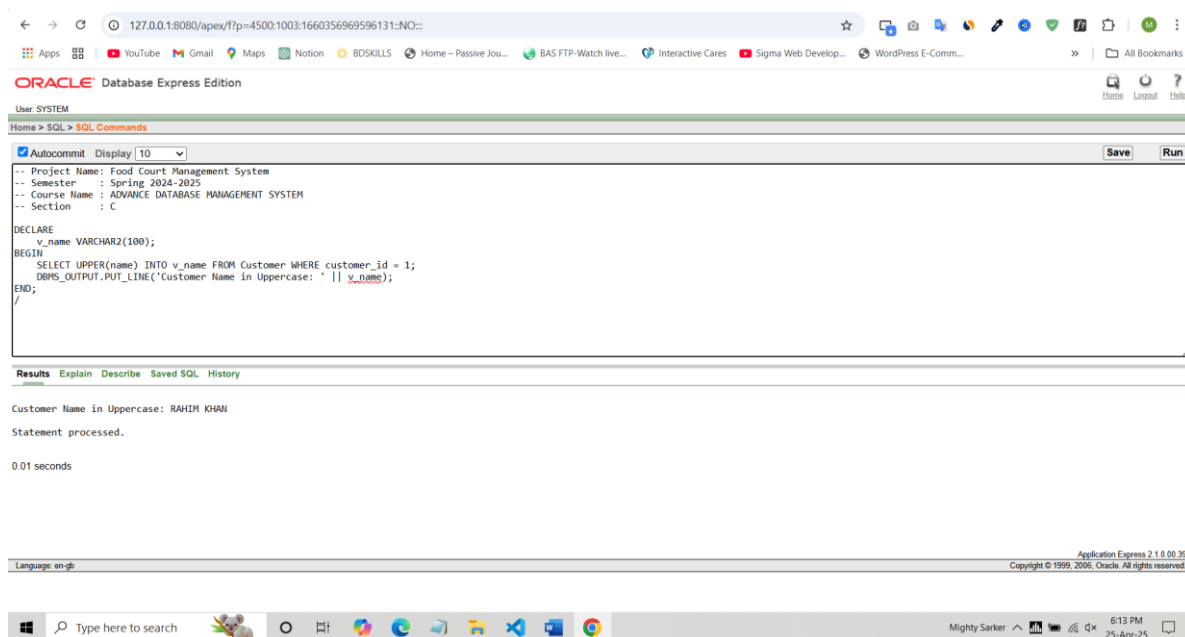

Q2: Write a PL/SQL block to retrieve the **working date** of the staff member with `staff_id = 1` from the `Staff` table and display it in the DD-MM-YYYY format using a single-row function.

PL/SQL:

```
-- Project Name: Food Court Management System

-- Semester   : Spring 2024-2025

-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM

-- Section    : C
```

DECLARE

```
v_working_date VARCHAR2(50);
```


BEGIN

```
SELECT TO_CHAR(working_date, 'DD-MM-YYYY') INTO v_working_date
FROM Staffs WHERE staff_id = 1;
```

```
DBMS_OUTPUT.PUT_LINE('Formatted Working Date: ' || v_working_date);
```

END;

/

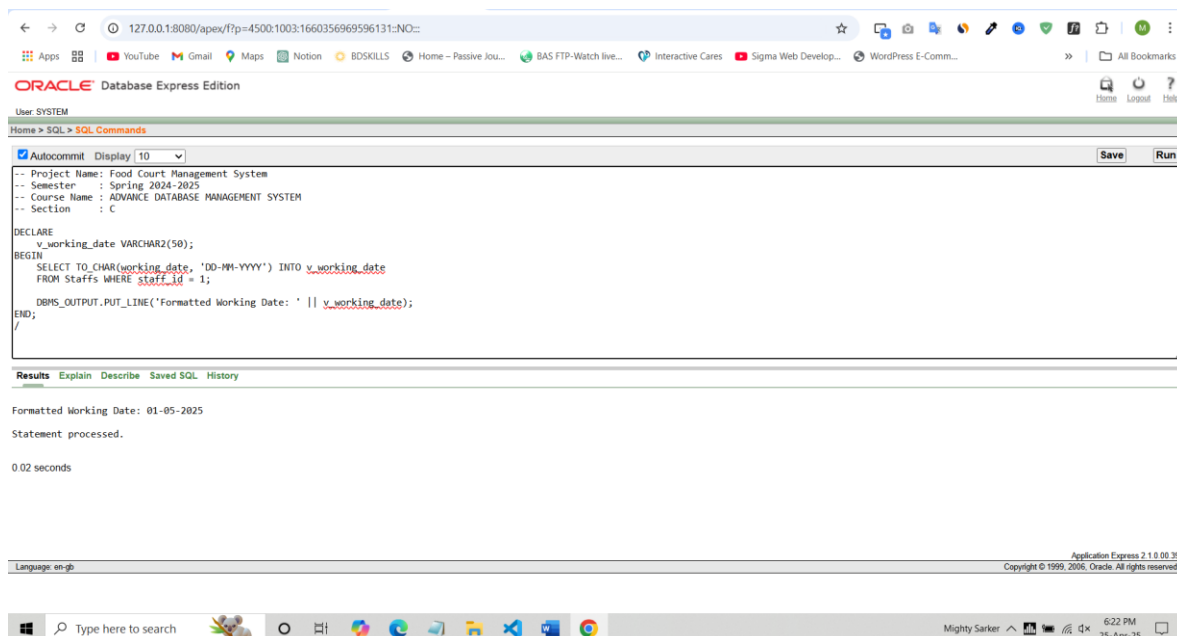

*Group function

Q1: Show total number of orders.

PL/SQL:

-- Project Name: Food Court Management System

-- Semester : Spring 2024-2025

-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM

-- Section : C

DECLARE

total_orders NUMBER;


BEGIN

SELECT COUNT(*) INTO total_orders FROM Orders;

DBMS_OUTPUT.PUT_LINE('Total Orders: ' || total_orders);

END;

/

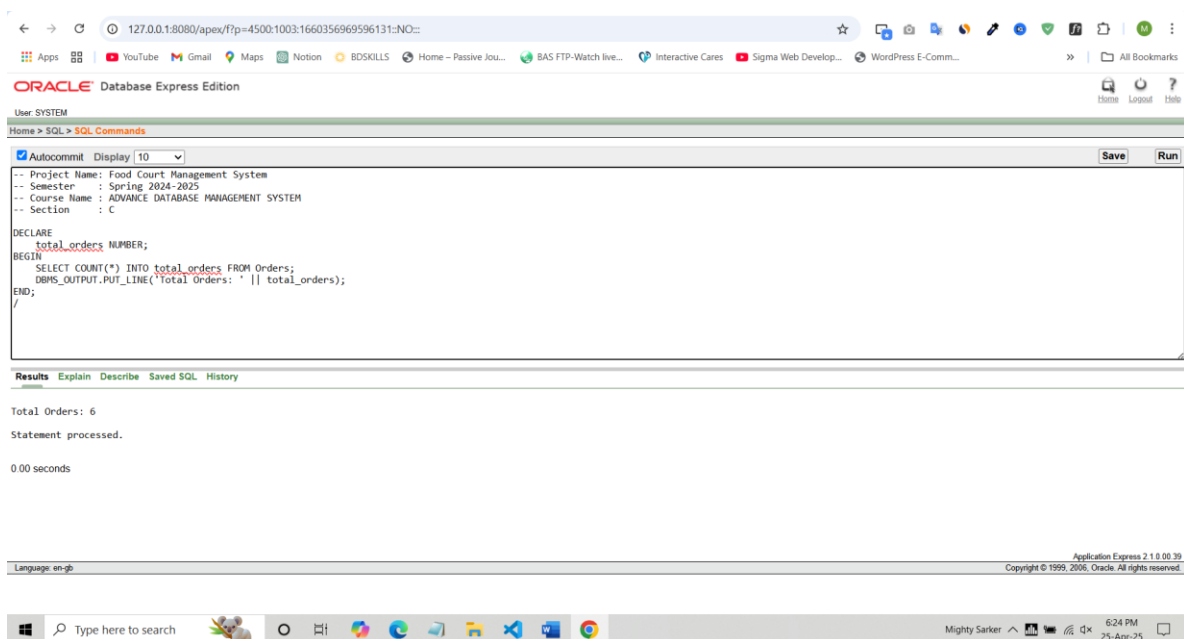

Q2: Show average price of all menu items

PL/SQL:

-- Project Name: Food Court Management System

-- Semester : Spring 2024-2025

-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM

-- Section : C

DECLARE

avg_price NUMBER;


BEGIN

SELECT AVG(price) INTO avg_price FROM Menu_Item;

DBMS_OUTPUT.PUT_LINE('Average Item Price: ' || avg_price);

END;

/

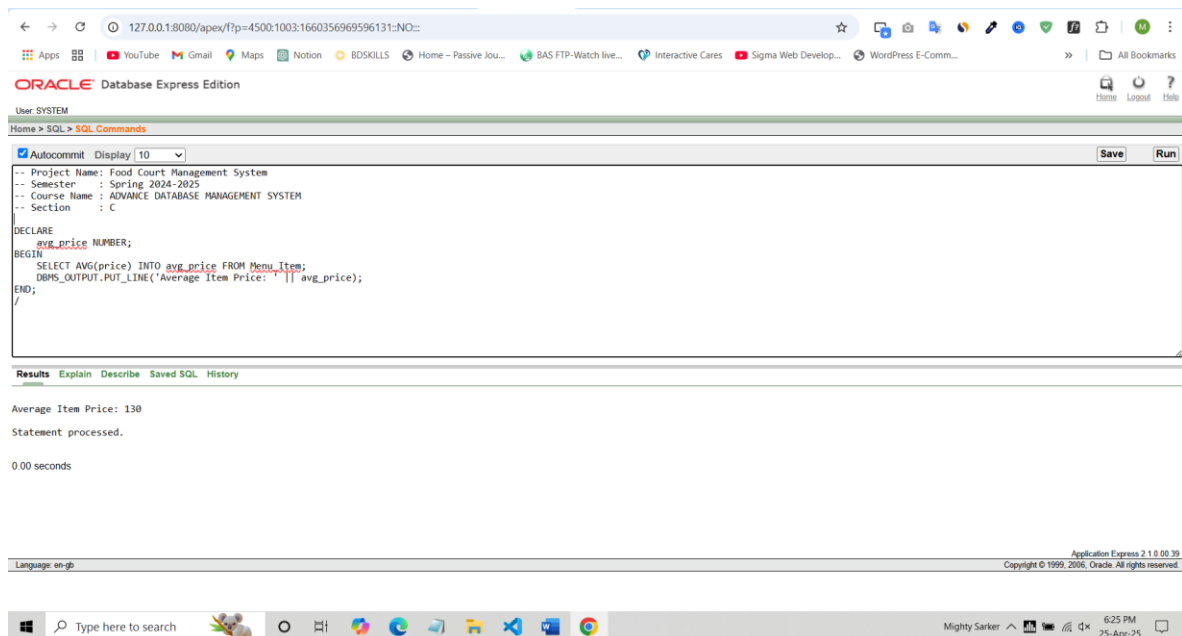

*Loop

Q1: Print customer names using a FOR loop.

PL/SQL:

-- Project Name: Food Court Management System

-- Semester : Spring 2024-2025

-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM

-- Section : C

DECLARE

CURSOR c IS SELECT name FROM Customer;

v_name Customer.name%TYPE;

BEGIN


FOR rec IN c LOOP

DBMS_OUTPUT.PUT_LINE('Customer: ' || rec.name);

END LOOP;

END;

/

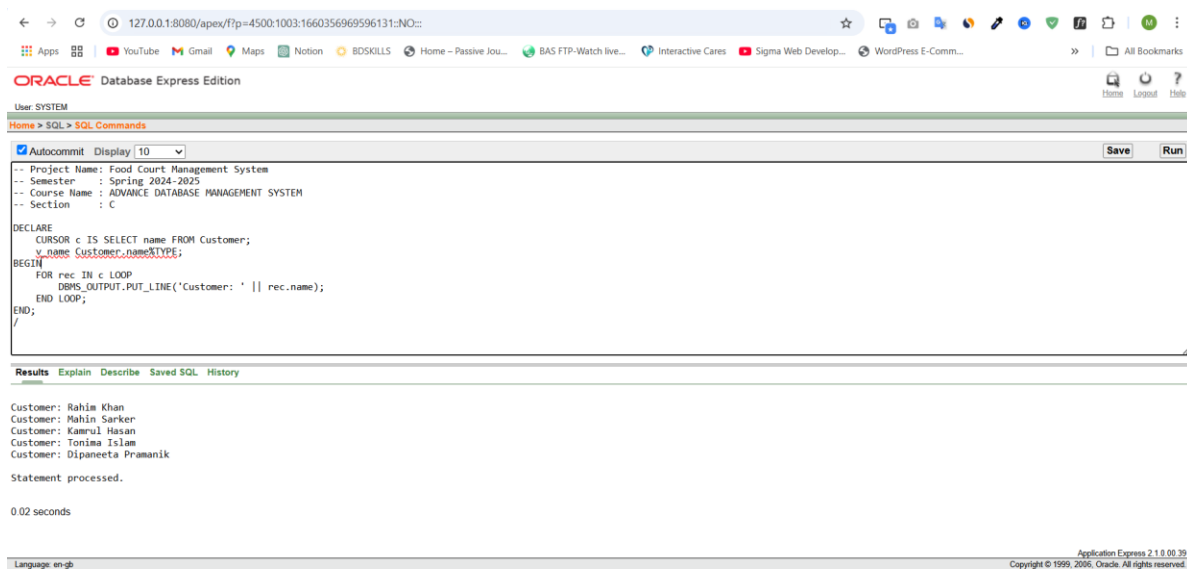

Q2: Print item IDs from 1 to 5 using numeric loop.

PL/SQL:

-- Project Name: Food Court Management System

-- Semester : Spring 2024-2025

-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM

-- Section : C

BEGIN

FOR i IN 1..5 LOOP

DBMS_OUTPUT.PUT_LINE('Item ID: ' || i);

END LOOP;

END;

/

The screenshot shows the Oracle Database Express Edition interface. The SQL Command window contains the following PL/SQL script:

```
-- Project Name: Food Court Management System
-- Semester : Spring 2024-2025
-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM
-- Section : C

BEGIN
  FOR i IN 1..5 LOOP
    DBMS_OUTPUT.PUT_LINE('Item ID: ' || i);
  END LOOP;
END;
/
```

The 'Results' tab shows the output of the script:

```
Item ID: 1
Item ID: 2
Item ID: 3
Item ID: 4
Item ID: 5

Statement processed.

0.00 seconds
```

The bottom of the screenshot shows the Windows taskbar with the search bar and system tray.

***Conditional Statements**

Q1: Write a PL/SQL block to check if the working date of the staff member with staff_id = 1 is before January 1, 2025. If it is, display 'Senior Staff'; otherwise, display 'Junior Staff'.

PL/SQL:

```
-- Project Name: Food Court Management System
-- Semester   : Spring 2024-2025
-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM
-- Section    : C
```

```
DECLARE
```

```
    v_working_date DATE;
```

```
BEGIN
```

```
    SELECT working_date INTO v_working_date FROM Staffs WHERE staff_id = 1;
```

```
    IF v_working_date < TO_DATE('01-01-2025', 'DD-MM-YYYY') THEN
```

```
        DBMS_OUTPUT.PUT_LINE('Senior Staff');
```


```
    ELSE
```

```
        DBMS_OUTPUT.PUT_LINE('Junior Staff');
```

```
    END IF;
```

```
END;
```

```
/
```

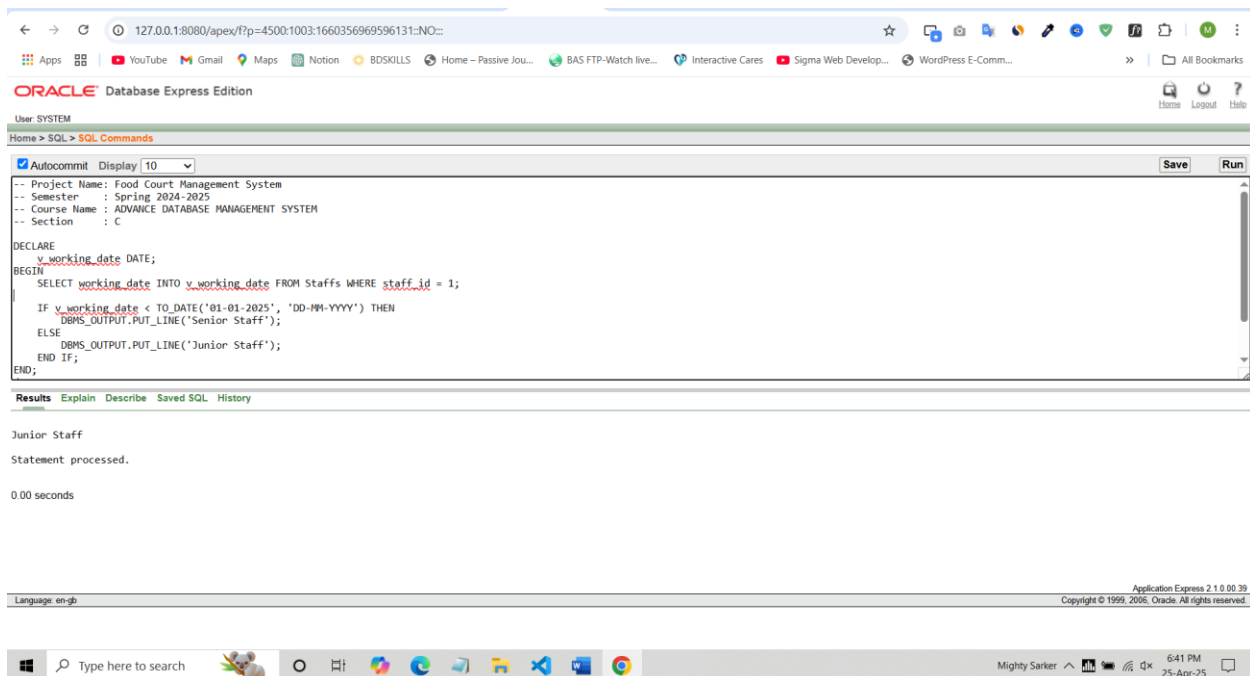

Q2: Write a PL/SQL block that uses a CASE statement to determine the staff category based on their staff_id. The categories are as follows:

- 1: Manager
- 2: Chef
- 3: Waiter
- Others: Support Staff

PL/SQL:

-- Project Name: Food Court Management System

-- Semester : Spring 2024-2025

-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM

-- Section : C

DECLARE

v_staff_id NUMBER := 2;

BEGIN

CASE v_staff_id

WHEN 1 THEN DBMS_OUTPUT.PUT_LINE('Manager');

WHEN 2 THEN DBMS_OUTPUT.PUT_LINE('Chef');

WHEN 3 THEN DBMS_OUTPUT.PUT_LINE('Waiter');

ELSE DBMS_OUTPUT.PUT_LINE('Support Staff');

END CASE;

END;

/

The screenshot shows the Oracle Database Express Edition web interface in a browser. The address bar shows the URL: 127.0.0.1:8080/apex/f?p=4500:1003:1660356969596131::NO::: The page title is "ORACLE Database Express Edition". The user is logged in as "SYSTEM". The "Home > SQL > SQL Commands" path is visible. The "Autocommit" checkbox is checked, and the "Display" is set to 10. The "Save" and "Run" buttons are visible. The SQL command window contains the following code:

```
-- Project Name: Food Court Management System
-- Semester : Spring 2024-2025
-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM
-- Section : C

DECLARE
  v_staff_id NUMBER := 2;
BEGIN
  CASE v_staff_id
    WHEN 1 THEN DBMS_OUTPUT.PUT_LINE('Manager');
    WHEN 2 THEN DBMS_OUTPUT.PUT_LINE('Chef');
    WHEN 3 THEN DBMS_OUTPUT.PUT_LINE('Waiter');
    ELSE DBMS_OUTPUT.PUT_LINE('Support Staff');
  END CASE;
END;
/
```

The "Results" tab is selected, showing the output:

```
Chef
Statement processed.
0.00 seconds
```

The footer of the page shows "Language: en-gb" and "Application Express 2.1.0.00.39 Copyright © 1996, 2006, Oracle. All rights reserved." The Windows taskbar at the bottom shows the search bar, task view, and several application icons. The system tray shows the user "Mighty Sarker" and the time "6:44 PM 25-Apr-25".

***Subquery**

Q1: Count how many feedback entries have a rating above the average rating

PL/SQL:

-- Project Name: Food Court Management System

-- Semester : Spring 2024-2025

-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM

-- Section : C

DECLARE

v_above_avg_feedbacks NUMBER;

BEGIN

SELECT COUNT(*)

INTO v_above_avg_feedbacks

FROM Feedback

WHERE rating > (

SELECT AVG(rating) FROM Feedback

);

DBMS_OUTPUT.PUT_LINE(

'Feedback entries with above-average ratings: '

|| v_above_avg_feedbacks

);

END;

/

The screenshot shows the Oracle Database Express Edition web interface. The browser address bar displays the URL: 127.0.0.1:8080/apex/f?p=4500:1003:1660356969596131::NO::.

The interface includes a top navigation bar with links for Apps, YouTube, Gmail, Maps, Notion, BOSKILLS, Home - Passive Jou..., BAS FTP-Watch live..., Interactive Cares, Sigma Web Develop..., and WordPress E-Comm... There are also links for Home, Logout, and Help.

The main content area is titled "Oracle Database Express Edition" and shows the "User: SYSTEM" session. The "Home > SQL > SQL Commands" path is visible. The "Autocommit" checkbox is checked, and the "Display" is set to 10. The "Save" and "Run" buttons are present.

The SQL command window contains the following code:

```
-- Project Name: Food Court Management System
-- Semester   : Spring 2024-2025
-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM
-- Section    : C

DECLARE
  v_above_avg_feedbacks NUMBER;
BEGIN
  SELECT COUNT(*)
    INTO v_above_avg_feedbacks
    FROM Feedback
   WHERE rating > (
      SELECT AVG(rating) FROM Feedback
    );
  DBMS_OUTPUT.PUT_LINE(

```

The "Results" tab is selected, showing the output of the query:

```
Feedback entries with above-average ratings: 3
Statement processed.

0.01 seconds
```

The bottom status bar indicates the language is en-gb and the application is Express 2.1.0.00.39, Copyright © 1999, 2006, Oracle. All rights reserved.

Q2: Count how many payments exceed the average payment amount

PL/SQL:

-- Project Name: Food Court Management System

-- Semester : Spring 2024-2025

-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM

-- Section : C

DECLARE

v_high_payments NUMBER;

BEGIN

SELECT COUNT(*)

INTO v_high_payments

FROM Payment

WHERE amount > (-- Use the correct column name here

SELECT AVG(amount) FROM Payment -- Again, make sure 'amount' is correct

```
);
```

```
DBMS_OUTPUT.PUT_LINE(
```

```
    'Payments above average amount: '
```

```
    || v_high_payments
```

```
);
```

```
END;
```

```
/
```

The screenshot shows the Oracle Database Express Edition web interface. The browser address bar displays the URL: 127.0.0.1:8080/apex/f?p=4500:1003:1660356969596131::NO::. The page title is "ORACLE Database Express Edition". The user is logged in as "User: SYSTEM". The breadcrumb navigation shows "Home > SQL > SQL Commands".

The SQL editor shows the following code:

```

Autocommit Display 10
-- Project Name: Food Court Management System
-- Semester    : Spring 2024-2025
-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM
-- Section     : C

DECLARE
    v_high_payments NUMBER;
BEGIN
    SELECT COUNT(*)
    INTO v_high_payments
    FROM Payment
    WHERE amount > ( -- Use the correct column name here
                    SELECT AVG(amount) FROM Payment -- Again, make sure 'amount' is correct
                    );
    DBMS_OUTPUT.PUT_LINE(

```

The "Results" tab is selected, showing the output of the SQL command:

```

Payments above average amount: 2
Statement processed.

0.00 seconds

```

The footer of the interface shows "Language: en-gb" and "Application Express 2.1.0.00.39 Copyright © 1999, 2006, Oracle. All rights reserved." The Windows taskbar at the bottom shows the time as 7:01 PM on 25-Apr-25.

*Joining

Q1: Join Customer and Orders tables to display customer names and their order IDs.

PL/SQL:

-- Project Name: Food Court Management System

-- Semester : Spring 2024-2025

-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM

-- Section : C

BEGIN

FOR rec IN (SELECT c.NAME, o.ORDER_ID

FROM Customer c

JOIN Orders o ON c.CUSTOMER_ID = o.CUSTOMER_ID)


LOOP

DBMS_OUTPUT.PUT_LINE('Customer: ' || rec.NAME || ', Order ID: ' || rec.ORDER_ID);

END LOOP;

END;

/

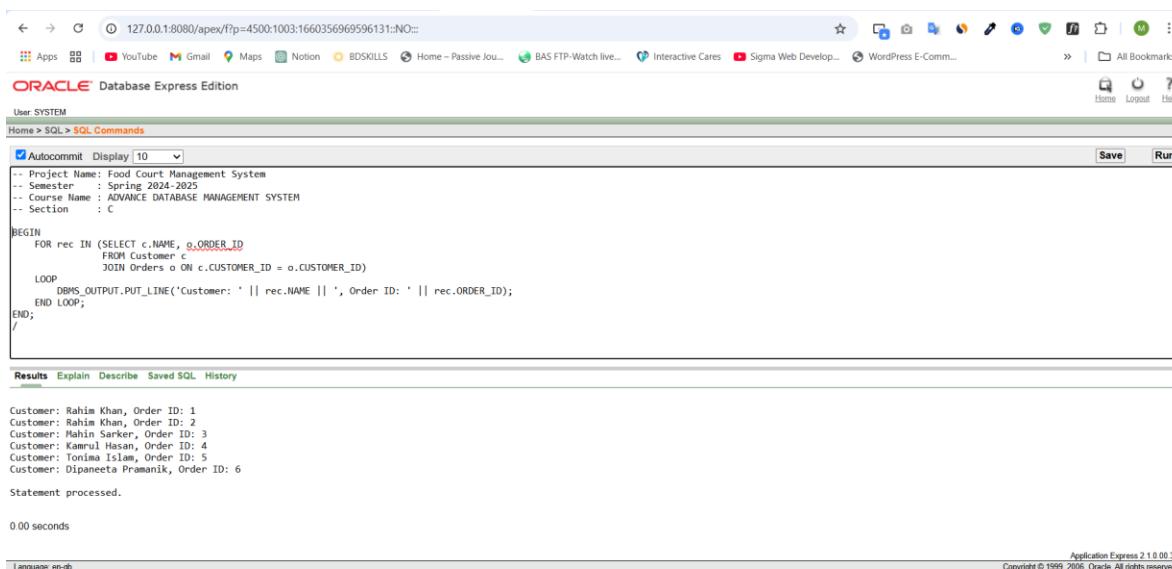

Q2: Join Menu_Item and Food_Stall tables to display item names and stall names.

PL/SQL:

-- Project Name: Food Court Management System

-- Semester : Spring 2024-2025

-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM

-- Section : C

BEGIN

FOR rec IN (SELECT m.ITEM_NAME, f.STALL_NAME

FROM Menu_Item m

JOIN Food_Stall f ON m.STALL_ID = f.STALL_ID)

LOOP

DBMS_OUTPUT.PUT_LINE('Item: ' || rec.ITEM_NAME || ', Stall: ' ||
rec.STALL_NAME);

END LOOP;

END;

/

```

-- Project Name: Food Court Management System
-- Semester : Spring 2024-2025
-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM
-- Section : C

BEGIN
  FOR rec IN (SELECT m.ITEM_NAME, f.STALL_NAME
              FROM Menu_Item m
              JOIN Food_Stall f ON m.STALL_ID = f.STALL_ID)
  LOOP
    DBMS_OUTPUT.PUT_LINE('Item: ' || rec.ITEM_NAME || ', Stall: ' || rec.STALL_NAME);
  END LOOP;
END;
/

```

Results Explain Describe Saved SQL History

```

Item: Fried Chicken, Stall: Takeout
Item: Chicken Burger, Stall: Takeout
Item: Spicy Wings, Stall: BFC
Item: Chicken Nuggets, Stall: BFC
Item: Bubble Tea, Stall: Cha Time
Item: Milk Tea, Stall: Cha Time
Item: Choco Pastry, Stall: Tasty Treat
Item: Vanilla Cake, Stall: Tasty Treat
Item: Kacchi Biryani, Stall: Sultans Dine
Item: Chicken Tehari, Stall: Sultans Dine

Statement processed.

0.00 seconds

```

ADNACE PL/SQL:

*Stored Function

Q1: Create a function to return customer name from ID.

PL/SQL:

-- Project Name: Food Court Management System

-- Semester : Spring 2024-2025

-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM

-- Section : C

CREATE OR REPLACE FUNCTION Get_Customer_Name(p_id IN NUMBER)

RETURN VARCHAR2 IS

v_name Customer.name%TYPE;


BEGIN

SELECT name INTO v_name FROM Customer WHERE customer_id = p_id;

RETURN v_name;

END;

/

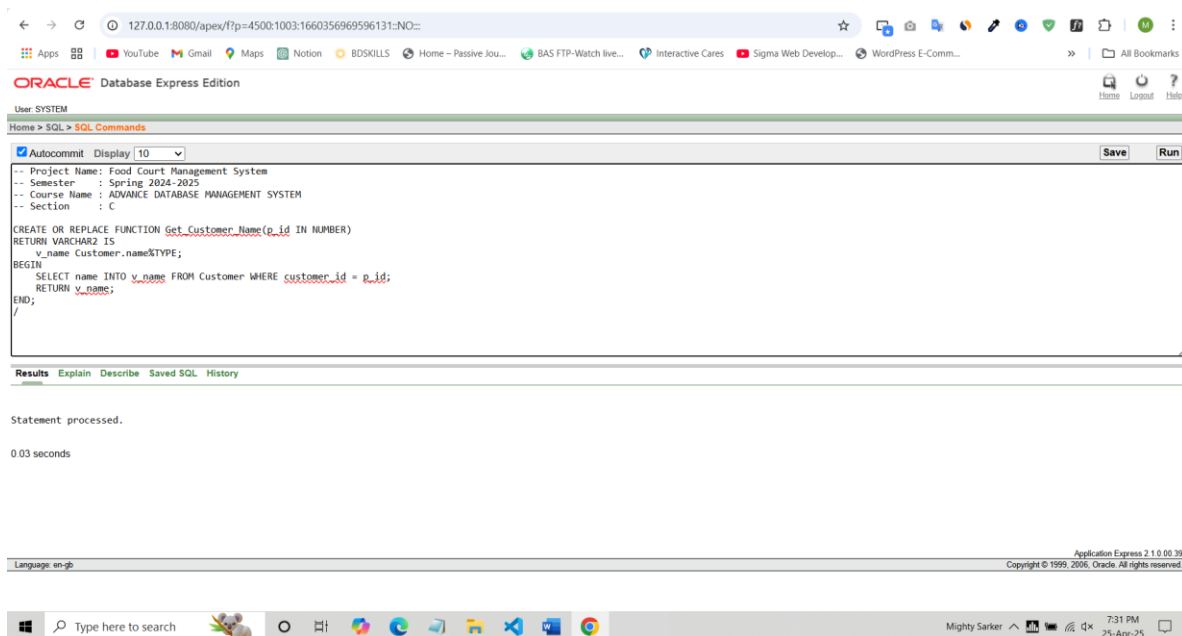

Q2: Create a function to get total order count for a customer.

PL/SQL:

-- Project Name: Food Court Management System

-- Semester : Spring 2024-2025

-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM

-- Section : C

CREATE OR REPLACE FUNCTION Get_Order_Count(p_cust_id IN NUMBER)

RETURN NUMBER IS

v_count NUMBER;

BEGIN

SELECT COUNT(*) INTO v_count FROM Orders WHERE customer_id = p_cust_id;

RETURN v_count;

END;

/

The screenshot displays the Oracle Database Express Edition interface. The browser address bar shows the URL: 127.0.0.1:8080/apex/f?p=4500:1003:1660356969596131::NO::. The page title is "ORACLE Database Express Edition". The user is logged in as "SYSTEM". The "SQL Commands" tab is active, showing the PL/SQL code entered in the editor. The code is as follows:

```
-- Project Name: Food Court Management System
-- Semester : Spring 2024-2025
-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM
-- Section : C

CREATE OR REPLACE FUNCTION Get_Order_Count(p_cust_id IN NUMBER)
RETURN NUMBER IS
v_count NUMBER;
BEGIN
SELECT COUNT(*) INTO v_count FROM Orders WHERE customer_id = p_cust_id;
RETURN v_count;
END;
/
```

Below the editor, the "Results" tab is selected, showing the message "Statement processed." and "0.00 seconds". The footer of the page indicates "Application Express 2.1.0.00.39" and "Copyright © 1999, 2006, Oracle. All rights reserved." The Windows taskbar at the bottom shows the time as 7:32 PM on 25-Apr-25.

*Stored Procedure

Q1: Procedure to print all items above a certain price.

PL/SQL:

-- Project Name: Food Court Management System

-- Semester : Spring 2024-2025

-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM

-- Section : C

CREATE OR REPLACE PROCEDURE Show_Expensive_Items(p_min_price IN NUMBER) IS

BEGIN

FOR rec IN (SELECT item_name, price FROM Menu_Item WHERE price > p_min_price)

LOOP

DBMS_OUTPUT.PUT_LINE(rec.item_name || ' - ' || rec.price);

END LOOP;

END;

/

The screenshot displays the Oracle Database Express Edition interface. The top navigation bar includes links for Apps, YouTube, Gmail, Maps, Notion, BDSKILLS, Home - Passive Jou..., BAS FTP-Watch live..., Interactive Cares, Sigma Web Develop..., and WordPress E-Comm... The main content area shows the SQL Commands window with the following code:

```
-- Project Name: Food Court Management System
-- Semester : Spring 2024-2025
-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM
-- Section : C

CREATE OR REPLACE PROCEDURE Show_Expensive_Items(p_min_price IN NUMBER) IS
BEGIN
  FOR rec IN (SELECT item_name, price FROM Menu_Item WHERE price > p_min_price) LOOP
    DBMS_OUTPUT.PUT_LINE(rec.item_name || ' - ' || rec.price);
  END LOOP;
END;
/
```

The code is executed, and the Results tab shows the output:

```
Statement processed.

0.03 seconds
```

The bottom status bar indicates the application is Express 2.1.0.00.39, Copyright © 1999, 2006, Oracle. All rights reserved. The system clock shows 7:35 PM on 25-Apr-25.

Q2: Procedure to update the order status based on Order_ID.

PL/SQL:

-- Project Name: Food Court Management System

-- Semester : Spring 2024-2025

-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM

-- Section : C

CREATE OR REPLACE PROCEDURE Update_Order_Status(

p_order_id IN NUMBER,

p_status IN VARCHAR2

) IS

BEGIN

UPDATE Orders

SET Order_Status = p_status

WHERE Order_ID = p_order_id;

COMMIT;

DBMS_OUTPUT.PUT_LINE('Order status updated.');

END Update_Order_Status;

/

← → ↻ 127.0.0.1:8080/apex/f?p=4500:1003:1660356969596131::NO::

Apps YouTube Gmail Maps Notion BDSKILLS Home - Passive Jou... BAS FTP-Watch live... Interactive Cares Sigma Web Develop... WordPress E-Comm... All Bookmarks

ORACLE Database Express Edition Home Logout Help

User: SYSTEM

Home > SQL > **SQL Commands**

☒ Autocommit Display 10 Save Run

```
-- Project Name: Food Court Management System
-- Semester   : Spring 2024-2025
-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM
-- Section    : C

CREATE OR REPLACE PROCEDURE Update_Order_Status(
    p_order_id IN NUMBER,
    p_status IN VARCHAR2
) IS
BEGIN
    UPDATE Orders
    SET Order_Status = p_status
    WHERE Order_ID = p_order_id;

    COMMIT;
    DBMS_OUTPUT.PUT_LINE('Order status updated.');
```

Results Explain Describe Saved SQL History

0 row(s) updated.

0.00 seconds

Application Express 2.1.8.00.39
Copyright © 1999, 2006, Oracle. All rights reserved.

Language: en-gb

Windows taskbar: Type here to search, Mighty Sarker, 7:51 PM, 25-Apr-25

Table-Based Record*Q1:** Record for fetching a customer's details.PL/SQL:

```
-- Project Name: Food Court Management System
-- Semester   : Spring 2024-2025
-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM
-- Section    : C
```

DECLARE

```
TYPE Customer_Record IS RECORD (
    customer_id Customer.Customer_ID%TYPE,
    name Customer.Name%TYPE,
    address Customer.Address%TYPE,
    phone Customer.Phone_Number%TYPE
);
```

```
v_customer Customer_Record;
```


BEGIN

```
SELECT Customer_ID, Name, Address, Phone_Number
INTO v_customer
FROM Customer
WHERE Customer_ID = 1; -- Example customer ID
```

```
DBMS_OUTPUT.PUT_LINE('Customer ID: ' || v_customer.customer_id);
DBMS_OUTPUT.PUT_LINE('Name: ' || v_customer.name);
DBMS_OUTPUT.PUT_LINE('Address: ' || v_customer.address);
DBMS_OUTPUT.PUT_LINE('Phone: ' || v_customer.phone);
```

END;

/

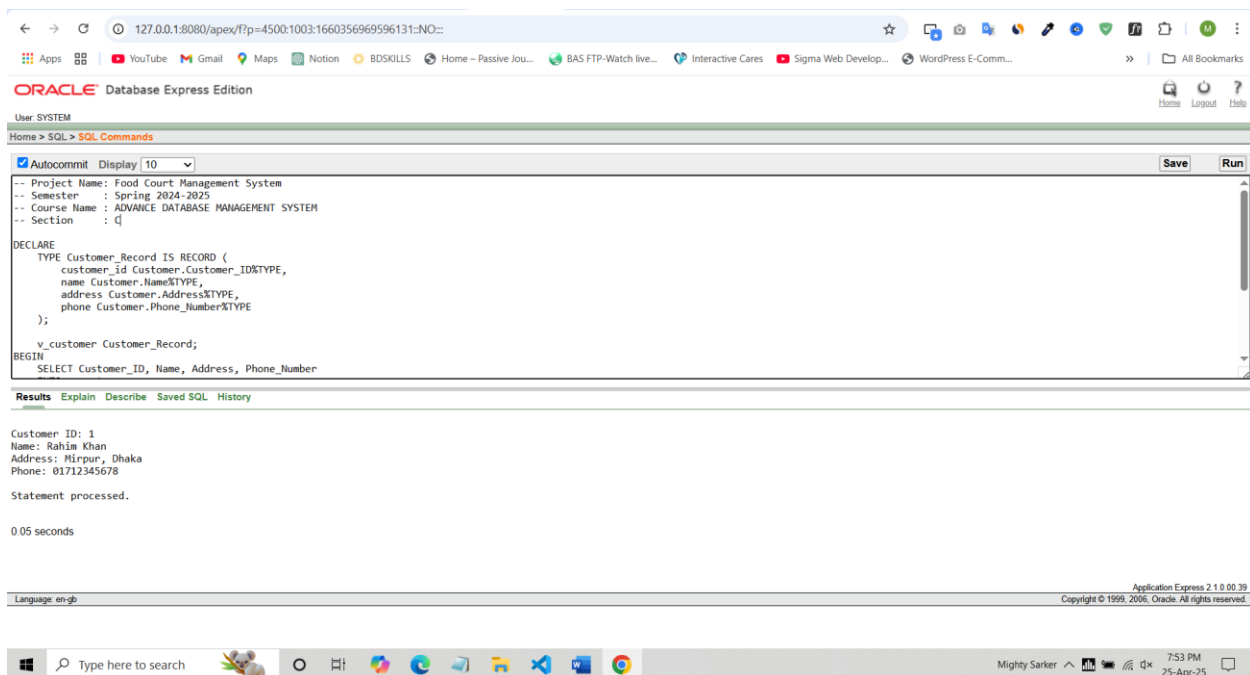

Q2: Write a block that collects all reports into a record array and prints each report's date and total sales.

PL/SQL:

-- Project Name: Food Court Management System

-- Semester : Spring 2024-2025

-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM

-- Section : C

DECLARE

TYPE ReportRec IS TABLE OF Analytical_Report%ROWTYPE;

v_reports ReportRec;

BEGIN

SELECT * BULK COLLECT INTO v_reports

FROM Analytical_Report;

```

FOR i IN 1..v_reports.COUNT LOOP

    DBMS_OUTPUT.PUT_LINE(

        'Date: ' || TO_CHAR(v_reports(i).Report_Date,'DD-MON-YYYY')

        || ', Sales: ' || v_reports(i).Total_Sales

    );

END LOOP;

END;

/

```

The screenshot shows the Oracle Database Express Edition web interface. The browser address bar displays the URL: 127.0.0.1:8080/apex/f?p=4500:1003:1660356969596131::NO::.

The page title is "ORACLE Database Express Edition". The user is logged in as "User SYSTEM". The breadcrumb navigation shows "Home > SQL > SQL Commands".

The SQL editor shows the following code:

```

-- Project Name: Food Court Management System
-- Semester : Spring 2024-2025
-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM
-- Section : C

DECLARE
    TYPE ReportRec IS TABLE OF Analytical_Report%ROWTYPE;
    v_reports ReportRec;
BEGIN
    SELECT * BULK COLLECT INTO v_reports
    FROM Analytical_Report;
    FOR i IN 1..v_reports.COUNT LOOP
        DBMS_OUTPUT.PUT_LINE(
            'Date: ' || TO_CHAR(v_reports(i).Report_Date,'DD-MON-YYYY')
            || ', Sales: ' || v_reports(i).Total_Sales
        );
    END LOOP;
END;

```

The "Results" tab is selected, showing the output of the SQL statement:

```

Date: 01-APR-2025, Sales: 5000
Date: 02-APR-2025, Sales: 3000
Date: 03-APR-2025, Sales: 4000
Date: 04-APR-2025, Sales: 2000
Date: 05-APR-2025, Sales: 2500
Date: 01-MAY-2025, Sales: 5500
Date: 02-MAY-2025, Sales: 3200
Date: 03-MAY-2025, Sales: 4200
Date: 04-MAY-2025, Sales: 2300
Date: 05-MAY-2025, Sales: 2700

```

Below the results, it says "Statement processed." and "0.05 seconds".

The footer of the interface shows "Application Express 21.0.0.39" and the system time "8:02 PM 25-Apr-25".

***Explicit Cursor**

Q1: Write a PL/SQL block using an explicit cursor to list all customers who have at least one payment with Payment_Status = 'Pending'.

PL/SQL:

```
-- Project Name: Food Court Management System
-- Semester   : Spring 2024-2025
-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM
-- Section    : C
```

DECLARE

CURSOR c_pending IS

SELECT DISTINCT c.Name, c.Phone_Number

FROM Customer c

JOIN Orders o ON c.Customer_ID = o.Customer_ID

JOIN Payment p ON o.Order_ID = p.Order_ID

WHERE p.Payment_Status = 'Pending';

v_name Customer.Name%TYPE;

v_phone Customer.Phone_Number%TYPE;

BEGIN

OPEN c_pending;

LOOP

FETCH c_pending INTO v_name, v_phone;

EXIT WHEN c_pending%NOTFOUND;

DBMS_OUTPUT.PUT_LINE('Customer: ' || v_name || ', Phone: ' || v_phone);

END LOOP;

CLOSE c_pending;

END;

/

The screenshot shows the Oracle Database Express Edition interface. The SQL Command window contains the following PL/SQL script:

```
-- Project Name: Food Court Management System
-- Semester : Spring 2024-2025
-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM
-- Section : C

DECLARE
CURSOR c_pending IS
SELECT DISTINCT c.Name, c.Phone_Number
FROM Customer c
JOIN Orders o ON c.Customer_ID = o.Customer_ID
JOIN Payment p ON o.Order_ID = p.Order_ID
WHERE p.Payment_Status = 'Pending';
v_name Customer.Name%TYPE;
v_phone Customer.Phone_Number%TYPE;
BEGIN
OPEN c_pending;
```

The Results window shows the following output:

```
Customer: Rahim Khan, Phone: 01712345678
Customer: Kamrul Hassan, Phone: 01623456789
Statement processed.

0.05 seconds
```

The bottom of the screenshot shows the Windows taskbar with the time 8:04 PM on 25-Apr-25.

Q2: Use an explicit cursor to find Stall_IDs from Food_Stall whose total sales (from Analytical_Report) exceed 4000.

PL/SQL:

-- Project Name: Food Court Management System

-- Semester : Spring 2024-2025

-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM

-- Section : C

DECLARE

CURSOR c_stalls IS

SELECT fr.Stall_ID, SUM(fr.Total_Sales) AS sales_sum

FROM Analytical_Report fr

GROUP BY fr.Stall_ID

HAVING SUM(fr.Total_Sales) > 4000;

v_stall Analytical_Report.Stall_ID%TYPE;

```

v_sales NUMBER;

BEGIN

OPEN c_stalls;

LOOP

    FETCH c_stalls INTO v_stall, v_sales;

    EXIT WHEN c_stalls%NOTFOUND;

    DBMS_OUTPUT.PUT_LINE('Stall ' || v_stall || ' Sales: ' || v_sales);

END LOOP;

CLOSE c_stalls;

END;

/

```

The screenshot shows the Oracle Database Express Edition interface. The SQL Command window contains the following PL/SQL script:

```

-- Project Name: Food Court Management System
-- Semester : Spring 2024-2025
-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM
-- Section : C

DECLARE
CURSOR c_stalls IS
SELECT fr.Stall_ID, SUM(fr.Total_Sales) AS sales_sum
FROM Analytical_Report fr
GROUP BY fr.Stall_ID
HAVING SUM(fr.Total_Sales) > 4000;
v_stall Analytical_Report.Stall_ID%TYPE;
v_sales NUMBER;
BEGIN
OPEN c_stalls;
LOOP

```

The Results window displays the output of the script:

```

Stall 30 Sales: 8200
Stall 20 Sales: 6200
Stall 40 Sales: 4300
Stall 50 Sales: 5200
Stall 10 Sales: 10500

Statement processed.

0.01 seconds

```

The bottom of the screenshot shows the Windows taskbar with the search bar, taskbar icons, and system tray showing the time as 8:05 PM on 25-Apr-25.

***Cursor-Based Record**

Q1: Write a PL/SQL block using a cursor record to display each menu item's name and price for category 'Fast Food'.

PL/SQL:

```
-- Project Name: Food Court Management System
-- Semester   : Spring 2024-2025
-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM
-- Section    : C
```

DECLARE

CURSOR c_menu IS

SELECT Item_Name, Price

FROM Menu_Item

WHERE Category = 'Fast Food';

v_rec c_menu%ROWTYPE;

BEGIN

OPEN c_menu;

LOOP

FETCH c_menu INTO v_rec;

EXIT WHEN c_menu%NOTFOUND;

DBMS_OUTPUT.PUT_LINE(v_rec.Item_Name || ' - ' || v_rec.Price);

END LOOP;

CLOSE c_menu;

END;

/

Oracle Database Express Edition interface showing a PL/SQL script execution. The script declares a cursor c_menu, selects item names and prices from Menu_Item where Category is 'Fast Food', and loops through the results. The output shows: Fried Chicken - 150, Chicken Burger - 180, Spicy Wings - 120, Chicken Nuggets - 100. The statement was processed in 0.00 seconds.

Q2: Use a cursor record to fetch and display staff name and working date for staff who joined on or after May 1, 2025.

PL/SQL:

```
-- Project Name: Food Court Management System
-- Semester   : Spring 2024-2025
-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM
-- Section    : C
```

DECLARE

CURSOR c_staff IS

SELECT Staff_Name, Working_Date

FROM Staffs

WHERE Working_Date >= TO_DATE('2025-05-01','YYYY-MM-DD');

v_staff c_staff%ROWTYPE;

BEGIN

OPEN c_staff;

LOOP

```

    FETCH c_staff INTO v_staff;

    EXIT WHEN c_staff%NOTFOUND;

    DBMS_OUTPUT.PUT_LINE(
        v_staff.Staff_Name || ' joined on '
        || TO_CHAR(v_staff.Working_Date,'DD-MON-YYYY')
    );

END LOOP;

CLOSE c_staff;

END;

/

```

The screenshot shows the Oracle Database Express Edition web interface. The browser address bar displays the URL: 127.0.0.1:8080/apex/f?p=4500:1003:1660356969596131::NO::. The page title is "ORACLE Database Express Edition". The user is logged in as "User: SYSTEM". The main content area shows the execution of an SQL command. The command is a PL/SQL block that declares a cursor, selects staff names and working dates, and prints them. The results are displayed in a table with 2 columns: Staff Name and Working Date. The results are: Tarek Ahmed joined on 01-MAY-2025, Laila Khan joined on 01-MAY-2025, Imran Ali joined on 01-MAY-2025, Sultana Razia joined on 01-MAY-2025, and Faruk Hossain joined on 01-MAY-2025. The statement was processed successfully in 0.00 seconds.

Oracle Database Express Edition

User: SYSTEM

Home > SQL > SQL Commands

Autocommit Display 10 Save Run

```
-- Project Name: Food Court Management System
-- Semester   : Spring 2024-2025
-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM
-- Section    : C

DECLARE
CURSOR c_staff IS
    SELECT Staff_Name, Working_Date
    FROM Staffs
    WHERE Working_Date >= TO_DATE('2025-05-01', 'YYYY-MM-DD');
v_staff c_staff%ROWTYPE;
BEGIN
    OPEN c_staff;
    LOOP
        FETCH c_staff INTO v_staff;
        EXIT WHEN c_staff%NOTFOUND;
        DBMS_OUTPUT.PUT_LINE(v_staff.Staff_Name || ' joined on ' || TO_CHAR(v_staff.Working_Date, 'DD-MON-YYYY'));
    END LOOP;
    CLOSE c_staff;
END;
```

Results Explain Describe Saved SQL History

Tarek Ahmed joined on 01-MAY-2025
Laila Khan joined on 01-MAY-2025
Imran Ali joined on 01-MAY-2025
Sultana Razia joined on 01-MAY-2025
Faruk Hossain joined on 01-MAY-2025

Statement processed.

0.00 seconds

Application Express 2.1.0.00.39
Copyright © 1999, 2006, Oracle. All rights reserved.

Language: en-gb

*Row Level Trigger

Q1: Write a row-level trigger on Orders to prevent insertion if Total_Price < 0.

PL/SQL:

-- Project Name: Food Court Management System

-- Semester : Spring 2024-2025

-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM

-- Section : C

CREATE OR REPLACE TRIGGER trg_no_negative_price

BEFORE INSERT ON Orders

FOR EACH ROW

BEGIN


IF :NEW.Total_Price < 0 THEN

RAISE_APPLICATION_ERROR(-20001,'Negative price not allowed');

END IF;

END;

/

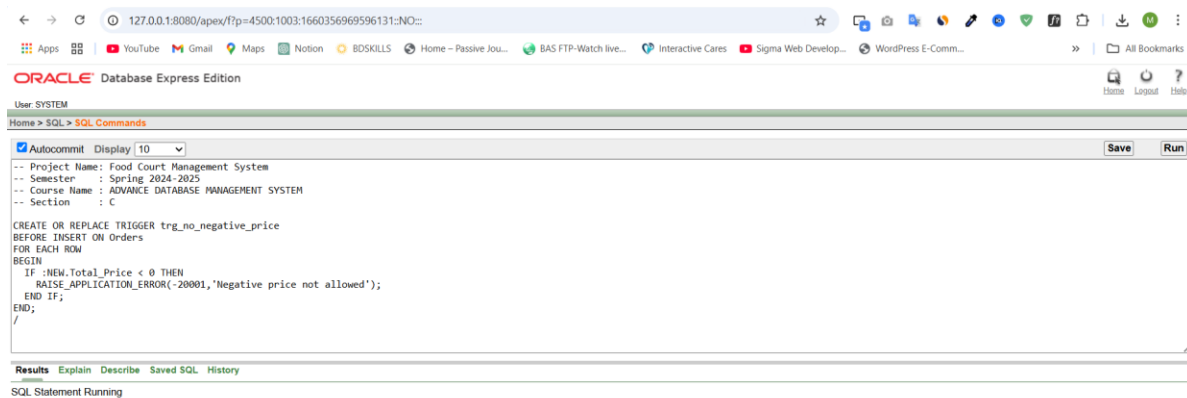

Q2: Write a row-level trigger on Supplier to output a message whenever a new supplier is added.

PL/SQL:

-- Project Name: Food Court Management System

-- Semester : Spring 2024-2025

-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM

-- Section : C

CREATE OR REPLACE TRIGGER trg_supplier_added

AFTER INSERT ON Supplier

FOR EACH ROW

BEGIN

DBMS_OUTPUT.PUT_LINE(


'New Supplier: ' || :NEW.Supplier_Name

|| ', Products: ' || :NEW.Products

);

END;

/

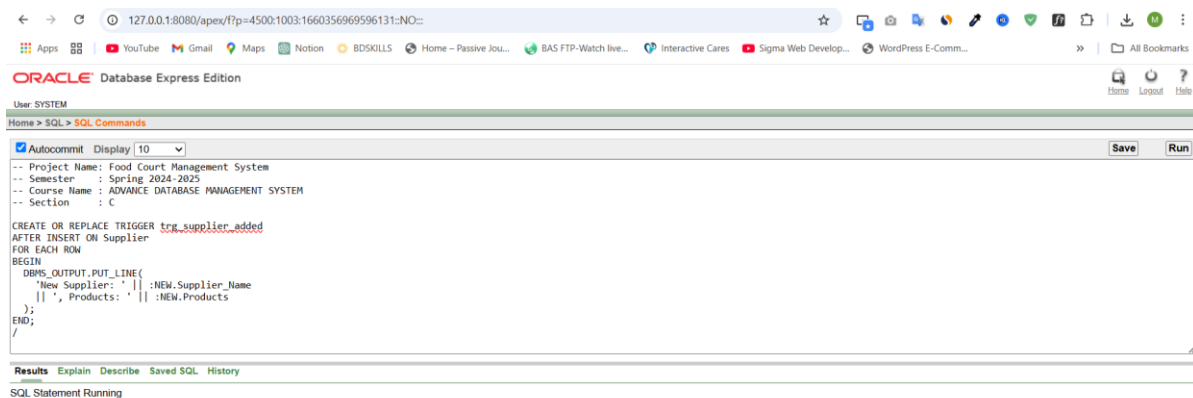

*Statement Level Trigger

Q1: Write a statement-level trigger to display a message after any update on Menu_Item.

PL/SQL:

-- Project Name: Food Court Management System

-- Semester : Spring 2024-2025

-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM

-- Section : C

CREATE OR REPLACE TRIGGER trg_menu_update

AFTER UPDATE ON Menu_Item

BEGIN

DBMS_OUTPUT.PUT_LINE('Menu_Item table was updated.');

END;

/

The screenshot shows the Oracle Database Express Edition interface. The SQL Command window contains the following text:

```
-- Project Name: Food Court Management System
-- Semester : Spring 2024-2025
-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM
-- Section : C

CREATE OR REPLACE TRIGGER trg_menu_update
AFTER UPDATE ON Menu_Item
BEGIN
  DBMS_OUTPUT.PUT_LINE('Menu_Item table was updated.');
```

The 'Run' button has been clicked, and the output shows:

```
0 row(s) updated.
0.02 seconds
```

The footer of the application shows 'Application Express 2.1.0.00.39' and 'Copyright © 1999, 2006, Oracle. All rights reserved.'

Q2: Write a statement-level trigger to output the count of feedback rows deleted in a delete operation.

PL/SQL:

-- Project Name: Food Court Management System

-- Semester : Spring 2024-2025

-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM

-- Section : C

CREATE OR REPLACE TRIGGER trg_feedback_delete

AFTER DELETE ON Feedback

DECLARE

v_deleted NUMBER := SQL%ROWCOUNT;

BEGIN

DBMS_OUTPUT.PUT_LINE(v_deleted || ' feedback record(s) deleted.');

END;

/

The screenshot displays the Oracle Database Express Edition web interface. The browser address bar shows the URL: 127.0.0.1:8080/apex/f?p=4500:1003:1660356969596131::NO::.

The page title is "ORACLE Database Express Edition". The user is logged in as "User: SYSTEM".

The "SQL Commands" window shows the following code:

```
-- Project Name: Food Court Management System
-- Semester : Spring 2024-2025
-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM
-- Section : C

CREATE OR REPLACE TRIGGER trg_feedback_delete
AFTER DELETE ON Feedback
DECLARE
v_deleted NUMBER := SQL%ROWCOUNT;
BEGIN
DBMS_OUTPUT.PUT_LINE(v_deleted || ' feedback record(s) deleted.');
```

The "Results" window shows the output of the execution:

```
0 row(s) deleted.
0.00 seconds
```

The footer of the page indicates the application version: "Application Express 2.1.0.00.39" and the copyright: "Copyright © 1999, 2006, Oracle. All rights reserved."

Package*Q1:** Create a package cust_pkg with:

- Procedure Show_Customers to list all customer names.
- Function Count_Customers to return the total customer count.

PL/SQL:

-- Project Name: Food Court Management System

-- Semester : Spring 2024-2025

-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM

-- Section : C

CREATE OR REPLACE PACKAGE cust_pkg AS

PROCEDURE Show_Customers;

FUNCTION Count_Customers RETURN NUMBER;

END cust_pkg;

/

CREATE OR REPLACE PACKAGE BODY cust_pkg AS

PROCEDURE Show_Customers IS

BEGIN

FOR r IN (SELECT Name FROM Customer) LOOP

DBMS_OUTPUT.PUT_LINE('Customer: ' || r.Name);

END LOOP;

END;

FUNCTION Count_Customers RETURN NUMBER IS

v_count NUMBER;

BEGIN

SELECT COUNT(*) INTO v_count FROM Customer;

RETURN v_count;

END;

END cust_pkg;

/

The screenshot shows the Oracle Database Express Edition web interface. The browser address bar displays the URL: 127.0.0.1:8080/apex/f?p=4500:1003:1660356969596131::NO::. The page title is "ORACLE Database Express Edition". The user is logged in as "SYSTEM". The "SQL Commands" tab is active, showing the following SQL script:

```
-- Project Name: Food Court Management System
-- Semester : Spring 2024-2025
-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM
-- Section : C

CREATE OR REPLACE PACKAGE cust_pkg AS
  PROCEDURE Show_Customers;
  FUNCTION Count_Customers RETURN NUMBER;
END cust_pkg;
/

CREATE OR REPLACE PACKAGE BODY cust_pkg AS
  PROCEDURE Show_Customers IS
  BEGIN
    FOR r IN (SELECT Name FROM Customer) LOOP
```

Below the SQL editor, the "Results" tab is selected, displaying the message: "Package Body created." and "0.00 seconds". The footer of the interface shows "Language: en-gb" and "Application Express 2.1.8.00.39 Copyright © 1999, 2006, Oracle. All rights reserved."

Q2: Create a package report_pkg with:

- Procedure Show_Today_Report to display today's analytical report.
- Function Avg_Daily_Sales(p_date DATE) to return average sales for that date.

PL/SQL:

-- Project Name: Food Court Management System

-- Semester : Spring 2024-2025

-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM

-- Section : C

CREATE OR REPLACE PACKAGE report_pkg AS

PROCEDURE Show_Today_Report;

FUNCTION Avg_Daily_Sales(p_date IN DATE) RETURN NUMBER;

END report_pkg;

/

CREATE OR REPLACE PACKAGE BODY report_pkg AS

PROCEDURE Show_Today_Report IS

BEGIN

FOR r IN (

SELECT Total_Sales, Total_Orders

FROM Analytical_Report

WHERE TRUNC(Report_Date) = TRUNC(SYSDATE)

) LOOP

DBMS_OUTPUT.PUT_LINE(

'Sales: ' || r.Total_Sales

```

|| ', Orders: ' || r.Total_Orders
);

END LOOP;

END;

```

```

FUNCTION Avg_Daily_Sales(p_date IN DATE) RETURN NUMBER IS
    v_avg NUMBER;

BEGIN

    SELECT AVG(Total_Sales) INTO v_avg
    FROM Analytical_Report
    WHERE Report_Date = p_date;

    RETURN v_avg;

END;

```

```

END report_pkg;

```

```

/

```

The screenshot shows the Oracle Database Express Edition web interface. The browser address bar displays the URL: 127.0.0.1:8080/apex/?p=4500:1003:1660356969596131:NO::: The page title is "ORACLE Database Express Edition". The user is logged in as "User: SYSTEM". The breadcrumb navigation shows "Home > SQL > SQL Commands". The "Autocommit" checkbox is checked, and the "Display" dropdown is set to "10". The "Save" and "Run" buttons are visible in the top right of the command area.

The SQL command area contains the following text:

```

-- Project Name: Food Court Management System
-- Semester : Spring 2024-2025
-- Course Name : ADVANCE DATABASE MANAGEMENT SYSTEM
-- Section : C

CREATE OR REPLACE PACKAGE report_pkg AS
    PROCEDURE Show_Today_Report;
    FUNCTION Avg_Daily_Sales(p_date IN DATE) RETURN NUMBER;
END report_pkg;
/

CREATE OR REPLACE PACKAGE BODY report_pkg AS
    PROCEDURE Show_Today_Report IS
    BEGIN

```

The "Results" tab is selected, showing the message "Package Body created." and the execution time "0.00 seconds". The footer of the interface indicates "Application Express 2.1.0.00.39" and "Copyright © 1999, 2006, Oracle. All rights reserved.".

Conclusion:

The Food Court Management System Project successfully demonstrates efficient data organization and relationship modeling through well-structured tables and clearly defined relationships. By implementing logical associations among entities such as stalls, employees, customers, orders, and feedback, the system ensures accurate tracking of operations within a food court environment. The project highlights the importance of database normalization and relationship integrity in managing real-world business data. For future improvements, the system can be enhanced by integrating real-time inventory tracking, digital payment processing, and a web-based interface to facilitate user interaction and administrative control, ultimately making the system more dynamic, scalable, and user-friendly.