

Python 3 cheatsheet (the basics)



Interact with the user (*input* and *output*)

Print a message

```
print('Hello, world!')
```

Print multiple values (of different types)

```
ndays = 365
print('There are', ndays, 'in a year')
```

Asking the user for a string

```
name = input('What is your name? ')
```

Asking the user for a whole number (an integer)

```
num = int(input('Enter a number: '))
```

Decide between options

Decide to run a block (or not)

```
x = 3
if x == 3:
    print('x is 3')
```

Decide between two blocks

```
mark = 80
if mark >= 50:
    print('pass')
else:
    print('fail')
```

Decide between many blocks

```
mark = 80
if mark >= 65:
    print('credit')
elif mark >= 50:
    print('pass')
else:
    print('fail')
```

- ▶ `elif` can be used without `else`
- ▶ `elif` can be used many times

Are two values equal?

```
x == 3
```

⚠ **two equals signs, not one**

Are two values not equal?

```
x != 3
```

Less than another?

```
x < 3
```

Greater than another?

```
x > 3
```

Less than or equal to?

```
x <= 3
```

Greater than or equal to?

```
x >= 3
```

The answer is a *Boolean*:

```
True
```

 or

```
False
```

String manipulation

Compare two strings

```
msg = 'hello'
if msg == 'hello':
    print('howdy')
```

Less than another string?

```
if msg < 'n':
    print('a-m')
else:
    print('n-z')
```

⚠ **strings are compared character at a time (lexicographic order)**

Is a character in a string?

```
'e' in msg
```

Is a string in another string?

```
'ell' in msg
```

Convert to uppercase

```
msg.upper()
```

also `lower` and `title`

Count a character in a string

```
msg.count('l')
```

Replace a character or string

```
msg.replace('l', 'X')
```

Delete a character or string

```
msg.replace('l', '')
```

Is the string all lowercase?

```
msg.islower()
```

also `isupper` and `istitle`

Text (*strings*)

Single quoted

```
'perfect'
```

Double quoted

```
"credit"
```

Multi-line

```
'''Hello,
World!'''
```

Add (*concatenate*) strings

```
'Hello' + 'World'
```

Multiply string by integer

```
'Echo...' * 4
```

Length of a string

```
len('Hello')
```

Convert string to integer

```
int('365')
```

Variables

Creating a variable

```
celsius = 25
```

Using a variable

```
celsius*9/5 + 32
```

Whole numbers (*integers*)

Addition and subtraction

```
365 + 1 - 2
```

Multiplication and division

```
25*9/5 + 32
```

Powers (2 to the power of 8)

```
2**8
```

Convert integer to string

```
str(365)
```

Repeat a block (a fixed number of times)

Repeat a block 10 times

```
for i in range(10):
    print(i)
```

Sum the numbers 0 to 9

```
total = 0
for i in range(10):
    total = total + i
print(total)
```

Repeat a block over a string

```
for c in 'Hello':
    print(c)
```

Keep printing on one line

```
for c in 'Hello':
    print(c, end=' ')
print('!')
```

Repeat a block over list (or string) indices

```
msg = 'I grok Python!'
for i in range(len(msg)):
    print(i, msg[i])
```

Count from 0 to 9

```
range(10)
```

⚠ **range starts from 0 and goes up to, but not including, 10**

Count from 1 to 10

```
range(1, 11)
```

Count from 10 down to 1

```
range(10, 0, -1)
```

Count 2 at a time to 10

```
range(0, 11, 2)
```

Count down 2 at a time

```
range(10, 0, -2)
```

Putting it together: Celsius to Fahrenheit converter

Ask the user for a temperature in degrees Celsius

```
celsius = int(input('Temp. in Celsius: '))
```

Calculate the conversion


```
fahrenheit = celsius*9/5 + 32
```

Output the result

```
print(fahrenheit, 'Fahrenheit')
```



Learn more in *Intro. to Programming* @ [groklearning.com](https://www.groklearning.com)



Base Types

integer, float, boolean, string, bytes

```
int 783 0 -192 0b010 0o642 0xF3
      zero binary octal hexa
float 9.23 0.0 -1.7e-6
bool True False
str "One\nTwo"
  escaped new line
  'I\'m'
  escaped '
bytes b"toto\xfe\775"
      hexadecimal octal
```

Multiline string:
"""X\tY\tZ
1\t2\t3"""
escaped tab

⚡ immutables

Container Types

- ordered sequences, fast index access, repeatable values
 - list** [1, 5, 9] ["x", 11, 8.9] ["mot"]
 - tuple** (1, 5, 9) 11, "y", 7.4 ("mot",)

Non modifiable values (immutables) ⚡ expression with only commas → tuple
- key containers, no a priori order, fast key access, each key is unique
 - dict** {"key": "value"} dict(a=3, b=4, k="v")
 - (key/value associations) {1: "one", 3: "three", 2: "two", 3.14: "pi"}
 - set** {"key1", "key2"} {1, 9, 3, 0} **set** {}
 - ⚡ keys=hashable values (base types, immutables...) **frozenset** immutable set empty

Identifiers

for variables, functions, modules, classes... names

a...zA...Z followed by a...zA...Z_0...9

- diacritics allowed but should be avoided
- language keywords forbidden
- lower/UPPER case discrimination

Ⓢ a toto x7 y_max BigOne
Ⓢ 8y and for

Variables assignment

⚡ assignment ⇔ **binding** of a name with a value

- evaluation of right side expression value
- assignment in order with left side names

```
x=1.2+8+sin(y)
a=b=c=0 assignment to same value
y, z, r=9.2, -7.6, 0 multiple assignments
a, b=b, a values swap
a, *b=seq unpacking of sequence in
*a, b=seq item and list
x+=3 increment ⇔ x=x+3
x-=2 decrement ⇔ x=x-2
x=None « undefined » constant value
del x remove name x
```

Conversions

type (expression)

can specify integer number base in 2nd parameter

```
int("15") → 15
int("3f", 16) → 63
int(15.56) → 15 truncate decimal part
float("-11.24e8") → -1124000000.0
round(15.56, 1) → 15.6 rounding to 1 decimal (0 decimal → integer number)
bool(x) False for null x, empty container x, None or False x; True for other x
str(x) → "..." representation string of x for display (cf. formatting on the back)
chr(64) → '@' ord('@') → 64 code → char
repr(x) → "..." literal representation string of x
bytes([72, 9, 64]) → b'H\t@'
list("abc") → ['a', 'b', 'c']
dict([(3, "three"), (1, "one")]) → {1: 'one', 3: 'three'}
set(["one", "two"]) → {'one', 'two'}
```

separator **str** and sequence of **str** → assembled **str**

```
':'.join(['toto', '12', 'pswd']) → 'toto:12:pswd'
```

str splitted on whitespaces → **list** of **str**

```
"words with spaces".split() → ['words', 'with', 'spaces']
```

str splitted on separator **str** → **list** of **str**

```
"1,4,8,2".split(",") → ['1', '4', '8', '2']
```

sequence of one type → **list** of another type (via list comprehension)

```
[int(x) for x in ('1', '29', '-3')] → [1, 29, -3]
```

Sequence Containers Indexing

for lists, tuples, strings, bytes...

negative index	-5	-4	-3	-2	-1
positive index	0	1	2	3	4

```
lst=[10, 20, 30, 40, 50]
```

positive slice	0	1	2	3	4	5
negative slice	-5	-4	-3	-2	-1	

Items count
len(lst) → 5
⚡ index from 0 (here from 0 to 4)

Individual access to **items** via **lst** [index]

```
lst[0] → 10 ⇒ first one
lst[1] → 20
lst[-1] → 50 ⇒ last one
lst[-2] → 40
```

On mutable sequences (**list**), remove with **del** **lst**[3] and modify with assignment **lst**[4]=25

Access to **sub-sequences** via **lst** [start slice: end slice: step]

```
lst[:-1] → [10, 20, 30, 40]
lst[1:-1] → [20, 30, 40]
lst[::2] → [10, 30, 50]
lst[::-1] → [50, 40, 30, 20, 10]
lst[::-2] → [50, 30, 10]
lst[:]:] → [10, 20, 30, 40, 50] shallow copy of sequence
```

Missing slice indication → from start / up to end.

On mutable sequences (**list**), remove with **del** **lst**[3:5] and modify with assignment **lst**[1:4]=[15, 25]

Boolean Logic

Comparisons : < > <= >= == != (boolean results)

a and **b** logical and both simultaneously

a or **b** logical or one or other or both

⚡ pitfall : **and** and **or** return **value** of **a** or of **b** (under shortcut evaluation).
⇒ ensure that **a** and **b** are booleans.

not **a** logical not

True
False } True and False constants

Statements Blocks

```
parent statement:
├── statement block 1...
├── ...
├── parent statement:
│   ├── statement block 2...
│   ├── ...
└── next statement after block 1
```

⚡ configure editor to insert 4 spaces in place of an indentation tab.

Modules/Namespace Imports

module **truc** ⇔ file **truc.py**

```
from monmod import nom1, nom2 as fct
  → direct access to names, renaming with as
import monmod
  → access via monmod.nom1 ...
```

⚡ modules and packages searched in python path (cf **sys.path**)

Conditional Statement

statement block executed only if a condition is true

if logical condition: statements block

Can go with several **elif**, **elif**... and only one final **else**. Only the block of first true condition is executed.

```
if age <= 18:
    state = "Kid"
elif age > 65:
    state = "Retired"
else:
    state = "Active"
```

⚡ with a var **x**:
if **bool**(**x**) == **True**: ⇔ if **x**:
if **bool**(**x**) == **False**: ⇔ if not **x**:

Maths

floating numbers... approximated values

Operators: + - * / // % **

Priority (...)

integer ÷ ÷ remainder

@ → matrix × python3.5+numpy

```
(1+5.3)*2 → 12.6
abs(-3.2) → 3.2
round(3.57, 1) → 3.6
pow(4, 3) → 64.0
```

⚡ usual order of operations

angles in radians

```
from math import sin, pi...
sin(pi/4) → 0.707...
cos(2*pi/3) → -0.4999...
sqrt(81) → 9.0
log(e**2) → 2.0
ceil(12.5) → 13
floor(12.5) → 12
```

modules **math**, **statistics**, **random**, **decimal**, **fractions**, **numpy**, etc. (cf. doc)

Exceptions on Errors


Signaling an error:
raise **ExcClass**(...)

Errors processing:
try:
→ normal processing block
except **Exception** as **e**:
→ error processing block

⚡ **finally** block for final processing in all cases.

```
normal
raise X()
error processing
error
raise
```


Iterative Loop Statement



Generic Operations on Containers


Operations on Lists

Operations on Dictionaries

Operations on Sets

Files

Function Call



`s.startswith(prefix[start:end])` Operations on Strings

formatting directives values to format **Formatting**

`<> ^ =` `+- space` `0` at start for filling with 0

integer: **b** binary, **c** char, **d** decimal (default), **o** octal, **x** or **X** hexa...

float: **e** or **E** exponential, **f** or **F** fixed point, **g** or **G** appropriate (default),
string: **s** ... **%** percent

Python For Data Science Cheat Sheet

Python Basics

Learn More Python for Data Science Interactively at www.datacamp.com



Variables and Data Types

Variable Assignment

```
>>> x=5
>>> x
5
```

Calculations With Variables

>>> x+2 7	Sum of two variables
>>> x-2 3	Subtraction of two variables
>>> x*2 10	Multiplication of two variables
>>> x**2 25	Exponentiation of a variable
>>> x%2 1	Remainder of a variable
>>> x/float(2) 2.5	Division of a variable

Types and Type Conversion

str()	'5', '3.45', 'True'	Variables to strings
int()	5, 3, 1	Variables to integers
float()	5.0, 1.0	Variables to floats
bool()	True, True, True	Variables to booleans

Asking For Help

```
>>> help(str)
```

Strings

```
>>> my_string = 'thisStringIsAwesome'
>>> my_string
'thisStringIsAwesome'
```

String Operations

```
>>> my_string * 2
'thisStringIsAwesomethisStringIsAwesome'
>>> my_string + 'Innit'
'thisStringIsAwesomeInnit'
>>> 'm' in my_string
True
```

Lists

Also see NumPy Arrays

```
>>> a = 'is'
>>> b = 'nice'
>>> my_list = ['my', 'list', a, b]
>>> my_list2 = [[4,5,6,7], [3,4,5,6]]
```

Selecting List Elements

Index starts at 0

Subset

```
>>> my_list[1]
>>> my_list[-3]
```

Select item at index 1
Select 3rd last item

Slice

```
>>> my_list[1:3]
>>> my_list[1:]
>>> my_list[:3]
>>> my_list[:]
```

Select items at index 1 and 2
Select items after index 0
Select items before index 3
Copy my_list

Subset Lists of Lists

```
>>> my_list2[1][0]
>>> my_list2[1][:2]
```

my_list[list][itemOfList]

List Operations

```
>>> my_list + my_list
['my', 'list', 'is', 'nice', 'my', 'list', 'is', 'nice']
>>> my_list * 2
['my', 'list', 'is', 'nice', 'my', 'list', 'is', 'nice']
>>> my_list2 > 4
True
```

List Methods

>>> my_list.index(a)	Get the index of an item
>>> my_list.count(a)	Count an item
>>> my_list.append('!')	Append an item at a time
>>> my_list.remove('!')	Remove an item
>>> del(my_list[0:1])	Remove an item
>>> my_list.reverse()	Reverse the list
>>> my_list.extend('!')	Append an item
>>> my_list.pop(-1)	Remove an item
>>> my_list.insert(0, '!')	Insert an item
>>> my_list.sort()	Sort the list

String Operations

Index starts at 0

```
>>> my_string[3]
>>> my_string[4:9]
```

String Methods

>>> my_string.upper()	String to uppercase
>>> my_string.lower()	String to lowercase
>>> my_string.count('w')	Count String elements
>>> my_string.replace('e', 'i')	Replace String elements
>>> my_string.strip()	Strip whitespaces

Libraries

Import libraries

```
>>> import numpy
>>> import numpy as np
Selective import
>>> from math import pi
```

pandas Data analysis	Machine learning
NumPy Scientific computing	matplotlib 2D plotting

Install Python

ANACONDA Leading open data science platform powered by Python	spyder Free IDE that is included with Anaconda	jupyter Create and share documents with live code, visualizations, text, ...
---	--	---

NumPy Arrays

Also see Lists

```
>>> my_list = [1, 2, 3, 4]
>>> my_array = np.array(my_list)
>>> my_2darray = np.array([[1,2,3], [4,5,6]])
```

Selecting Numpy Array Elements

Index starts at 0

Subset

```
>>> my_array[1]
2
```

Select item at index 1

Slice

```
>>> my_array[0:2]
array([1, 2])
```

Select items at index 0 and 1

Subset 2D Numpy arrays

```
>>> my_2darray[:,0]
array([1, 4])
```

my_2darray[rows, columns]

NumPy Array Operations

```
>>> my_array > 3
array([False, False, False,  True], dtype=bool)
>>> my_array * 2
array([2, 4, 6, 8])
>>> my_array + np.array([5, 6, 7, 8])
array([6, 8, 10, 12])
```

NumPy Array Functions

>>> my_array.shape	Get the dimensions of the array
>>> np.append(other_array)	Append items to an array
>>> np.insert(my_array, 1, 5)	Insert items in an array
>>> np.delete(my_array, [1])	Delete items in an array
>>> np.mean(my_array)	Mean of the array
>>> np.median(my_array)	Median of the array
>>> my_array.corrcoef()	Correlation coefficient
>>> np.std(my_array)	Standard deviation



Python For Data Science Cheat Sheet

Jupyter Notebook

Learn More Python for Data Science Interactively at www.DataCamp.com



Saving/Loading Notebooks

Create new notebook

Make a copy of the current notebook

Save current notebook and record checkpoint

Preview of the printed notebook

Close notebook & stop running any scripts

Open an existing notebook

Rename notebook

Revert notebook to a previous checkpoint

Download notebook as

- IPython notebook
- Python
- HTML
- Markdown
- reST
- LaTeX
- PDF

Writing Code And Text

Code and text are encapsulated by 3 basic cell types: markdown cells, code cells, and raw NBConvert cells.

Edit Cells

Cut currently selected cells to clipboard

Paste cells from clipboard above current cell

Paste cells from clipboard on top of current cell

Revert "Delete Cells" invocation

Merge current cell with the one above

Move current cell up

Adjust metadata underlying the current notebook

Remove cell attachments

Paste attachments of current cell

Copy cells from clipboard to current cursor position

Paste cells from clipboard below current cell

Delete current cells

Split up a cell from current cursor position

Merge current cell with the one below

Move current cell down

Find and replace in selected cells

Copy attachments of current cell

Insert image in selected cells

Insert Cells

Add new cell above the current one

Add new cell below the current one

Working with Different Programming Languages

Kernels provide computation and communication with front-end interfaces like the notebooks. There are three main kernels:

IP[y]:
IPython

R
IRkernel

IJ[.]:
IJulia

Installing Jupyter Notebook will automatically install the IPython kernel.

Restart kernel

Restart kernel & run all cells

Restart kernel & run all cells

Interrupt kernel

Interrupt kernel & clear all output

Connect back to a remote notebook

Run other installed kernels

Command Mode:

Edit Mode:

Executing Cells

Run selected cell(s)

Run current cells down and create a new one above

Run all cells above the current cell

Change the cell type of current cell

toggle, toggle scrolling and clear all output

Run current cells down and create a new one below

Run all cells

Run all cells below the current cell

toggle, toggle scrolling and clear current outputs

View Cells

Toggle display of Jupyter logo and filename

Toggle line numbers in cells

Toggle display of toolbar

Toggle display of cell action icons:

- None
- Edit metadata
- Raw cell format
- Slideshow
- Attachments
- Tags

Widgets

Notebook widgets provide the ability to visualize and control changes in your data, often as a control like a slider, textbox, etc.

You can use them to build interactive GUIs for your notebooks or to synchronize stateful and stateless information between Python and JavaScript.

Download serialized state of all widget models in use

Save notebook with interactive widgets

Embed current widgets

1. Save and checkpoint
2. Insert cell below
3. Cut cell
4. Copy cell(s)
5. Paste cell(s) below
6. Move cell up
7. Move cell down
8. Run current cell
9. Interrupt kernel
10. Restart kernel
11. Display characteristics
12. Open command palette
13. Current kernel
14. Kernel status
15. Log out from notebook server

Asking For Help

Walk through a UI tour

Edit the built-in keyboard shortcuts

Description of markdown available in notebook

Python help topics

NumPy help topics

Matplotlib help topics

Pandas help topics

List of built-in keyboard shortcuts

Notebook help topics

Information on unofficial Jupyter Notebook extensions

IPython help topics

SciPy help topics

SymPy help topics

About Jupyter Notebook



Python For Data Science Cheat Sheet

NumPy Basics

Learn Python for Data Science Interactively at [www.DataCamp.com](https://www.datacamp.com)



NumPy

The NumPy library is the core library for scientific computing in Python. It provides a high-performance multidimensional array object, and tools for working with these arrays.

Use the following import convention:

```
>>> import numpy as np
```



NumPy

NumPy Arrays

1D array

```
1 2 3
```

2D array

axis 1
axis 0

```
1.5 2 3  
4 5 6
```

3D array

axis 2
axis 1
axis 0

Creating Arrays

```
>>> a = np.array([1,2,3])  
>>> b = np.array([(1.5,2,3), (4,5,6)], dtype = float)  
>>> c = np.array([(1.5,2,3), (4,5,6)], [(3,2,1), (4,5,6)]],  
                dtype = float)
```

Initial Placeholders

```
>>> np.zeros((3,4))  
>>> np.ones((2,3,4),dtype=np.int16)  
>>> d = np.arange(10,25,5)  
  
>>> np.linspace(0,2,9)  
  
>>> e = np.full((2,2),7)  
>>> f = np.eye(2)  
>>> np.random.random((2,2))  
>>> np.empty((3,2))
```

Create an array of zeros
Create an array of ones
Create an array of evenly spaced values (step value)
Create an array of evenly spaced values (number of samples)
Create a constant array
Create a 2X2 identity matrix
Create an array with random values
Create an empty array

I/O

Saving & Loading On Disk

```
>>> np.save('my_array', a)  
>>> np.savez('array.npz', a, b)  
>>> np.load('my_array.npy')
```

Saving & Loading Text Files

```
>>> np.loadtxt("myfile.txt")  
>>> np.genfromtxt("my_file.csv", delimiter=',')  
>>> np.savetxt("myarray.txt", a, delimiter=" ")
```

Data Types

```
>>> np.int64  
>>> np.float32  
>>> np.complex  
>>> np.bool  
>>> np.object  
>>> np.string_  
>>> np.unicode_
```

Signed 64-bit integer types
Standard double-precision floating point
Complex numbers represented by 128 floats
Boolean type storing TRUE and FALSE values
Python object type
Fixed-length string type
Fixed-length unicode type

Inspecting Your Array

```
>>> a.shape  
>>> len(a)  
>>> b.ndim  
>>> e.size  
>>> b.dtype  
>>> b.dtype.name  
>>> b.astype(int)
```

Array dimensions
Length of array
Number of array dimensions
Number of array elements
Data type of array elements
Name of data type
Convert an array to a different type

Asking For Help

```
>>> np.info(np.ndarray.dtype)
```

Array Mathematics

Arithmetic Operations

```
>>> g = a - b  
array([[ -0.5,  0. ,  0. ],  
       [ -3. , -3. , -3. ]])  
>>> np.subtract(a,b)  
>>> b + a  
array([[ 2.5,  4. ,  6. ],  
       [ 5. ,  7. ,  9. ]])  
>>> np.add(b,a)  
>>> a / b  
array([[ 0.66666667,  1. ,  1. ],  
       [ 0.25 ,  0.4 ,  0.5 ]])  
>>> np.divide(a,b)  
>>> a * b  
array([[ 1.5,  4. ,  9. ],  
       [ 4. , 10. , 18. ]])  
>>> np.multiply(a,b)  
>>> np.exp(b)  
>>> np.sqrt(b)  
>>> np.sin(a)  
>>> np.cos(b)  
>>> np.log(a)  
>>> e.dot(f)  
array([[ 7. ,  7. ],  
       [ 7. ,  7.]])
```

Subtraction
Subtraction
Addition
Addition
Division
Division
Division
Multiplication
Multiplication
Exponentiation
Square root
Print sines of an array
Element-wise cosine
Element-wise natural logarithm
Dot product

Comparison

```
>>> a == b  
array([[False,  True,  True],  
       [False, False, False]], dtype=bool)  
>>> a < 2  
array([[True, False, False], dtype=bool)  
>>> np.array_equal(a, b)
```

Element-wise comparison
Element-wise comparison
Array-wise comparison

Aggregate Functions

```
>>> a.sum()  
>>> a.min()  
>>> b.max(axis=0)  
>>> b.cumsum(axis=1)  
>>> a.mean()  
>>> b.median()  
>>> a.corrcoef()  
>>> np.std(b)
```

Array-wise sum
Array-wise minimum value
Maximum value of an array row
Cumulative sum of the elements
Mean
Median
Correlation coefficient
Standard deviation

Copying Arrays

```
>>> h = a.view()  
>>> np.copy(a)  
>>> h = a.copy()
```

Create a view of the array with the same data
Create a copy of the array
Create a deep copy of the array

Sorting Arrays

```
>>> a.sort()  
>>> c.sort(axis=0)
```

Sort an array
Sort the elements of an array's axis

Subsetting, Slicing, Indexing

Also see Lists

Subsetting

```
>>> a[2]  
3  
>>> b[1,2]  
6.0
```

Select the element at the 2nd index
Select the element at row 0 column 2 (equivalent to b[1][2])

Slicing

```
>>> a[0:2]  
array([1, 2])  
>>> b[0:2,1]  
array([ 2.,  5.])  
>>> b[:1]  
array([[1.5, 2., 3.]])  
>>> c[1,...]  
array([[ 3.,  2.,  1.],  
       [ 4.,  5.,  6.]])
```

Select items at index 0 and 1
Select items at rows 0 and 1 in column 1
Select all items at row 0 (equivalent to b[0:1, :])
Same as [1, :, :]

Boolean Indexing

```
>>> a[a<2]  
array([1])  
>>> b[[1, 0, 1, 0], [0, 1, 2, 0]]  
array([ 4. ,  2. ,  6. , 1.5])  
>>> b[[1, 0, 1, 0]][:, [0,1,2,0]]  
array([[ 4. ,  5. ,  6. ,  4. ],  
       [ 1.5,  2. ,  3. , 1.5],  
       [ 4. ,  5. ,  6. ,  4. ],  
       [ 1.5,  2. ,  3. , 1.5]])
```

Reversed array a
Select elements from a less than 2
Select elements (1,0), (0,1), (1,2) and (0,0)
Select a subset of the matrix's rows and columns

Array Manipulation

Transposing Array

```
>>> i = np.transpose(b)  
>>> i.T
```

Permute array dimensions
Permute array dimensions

Changing Array Shape

```
>>> b.ravel()  
>>> g.reshape(3,-2)
```

Flatten the array
Reshape, but don't change data

Adding/Removing Elements

```
>>> h.resize((2,6))  
>>> np.append(h,g)  
>>> np.insert(a, 1, 5)  
>>> np.delete(a, [1])
```

Return a new array with shape (2,6)
Append items to an array
Insert items in an array
Delete items from an array

Combining Arrays

```
>>> np.concatenate((a,d),axis=0)  
array([ 1,  2,  3, 10, 15, 20])  
>>> np.vstack((a,b))  
array([[ 1. ,  2. ,  3. ],  
       [ 1.5,  2. ,  3. ],  
       [ 4. ,  5. ,  6. ]])  
>>> np.r_[e,f]  
>>> np.hstack((e,f))  
array([[ 7.,  7.,  1.,  0.],  
       [ 7.,  7.,  0.,  1.]])  
>>> np.column_stack((a,d))  
array([[ 1, 10],  
       [ 2, 15],  
       [ 3, 20]])  
>>> np.c_[a,d]
```

Concatenate arrays
Stack arrays vertically (row-wise)
Stack arrays vertically (row-wise)
Stack arrays horizontally (column-wise)
Create stacked column-wise arrays
Create stacked column-wise arrays

Splitting Arrays

```
>>> np.hsplit(a,3)  
[array([1]),array([2]),array([3])]  
>>> np.vsplit(c,2)  
[array([[ 1.5,  2. ,  1. ],  
       [ 4. ,  5. ,  6. ]]),  
 array([[ 3.,  2.,  3.],  
       [ 4. ,  5. ,  6.]])]
```

Split the array horizontally at the 3rd index
Split the array vertically at the 2nd index

DataCamp

Learn Python for Data Science Interactively



Python For Data Science Cheat Sheet

SciPy - Linear Algebra

Learn More Python for Data Science [Interactively](https://www.datacamp.com) at www.datacamp.com



SciPy

The **SciPy** library is one of the core packages for scientific computing that provides mathematical algorithms and convenience functions built on the NumPy extension of Python.



Interacting With NumPy

[Also see NumPy](#)

```
>>> import numpy as np
>>> a = np.array([1,2,3])
>>> b = np.array([(1+5j,2j,3j), (4j,5j,6j)])
>>> c = np.array([(1.5,2,3), (4,5,6)], [(3,2,1), (4,5,6)])
```

Index Tricks

<pre>>>> np.mgrid[0:5,0:5] >>> np.ogrid[0:2,0:2] >>> np.r_[[3,[0]*5,-1:1:10j]] >>> np.c_[b,c]</pre>	Create a dense meshgrid Create an open meshgrid Stack arrays vertically (row-wise) Create stacked column-wise arrays
---	---

Shape Manipulation

<pre>>>> np.transpose(b) >>> b.flatten() >>> np.hstack((b,c)) >>> np.vstack((a,b)) >>> np.hsplit(c,2) >>> np.vpsplit(d,2)</pre>	Permute array dimensions Flatten the array Stack arrays horizontally (column-wise) Stack arrays vertically (row-wise) Split the array horizontally at the 2nd index Split the array vertically at the 2nd index
---	--

Polynomials

<pre>>>> from numpy import polyld >>> p = polyld([3,4,5])</pre>	Create a polynomial object
---	----------------------------

Vectorizing Functions

<pre>>>> def myfunc(a): if a < 0: return a*2 else: return a/2 >>> np.vectorize(myfunc)</pre>	Vectorize functions
---	---------------------

Type Handling

<pre>>>> np.real(c) >>> np.imag(c) >>> np.real_if_close(c,tol=1000) >>> np.cast['f'](np.pi)</pre>	Return the real part of the array elements Return the imaginary part of the array elements Return a real array if complex parts close to 0 Cast object to a data type
---	--

Other Useful Functions

<pre>>>> np.angle(b,deg=True) >>> g = np.linspace(0,np.pi,num=5) >>> g[3:] += np.pi >>> np.unwrap(g) >>> np.logspace(0,10,3) >>> np.select([c<4],[c*2]) >>> misc.factorial(a) >>> misc.comb(10,3,exact=True) >>> misc.central_diff_weights(3) >>> misc.derivative(myfunc,1.0)</pre>	Return the angle of the complex argument Create an array of evenly spaced values (number of samples) Unwrap Create an array of evenly spaced values (log scale) Return values from a list of arrays depending on conditions Factorial Combine N things taken at k time Weights for Np-point central derivative Find the n-th derivative of a function at a point
---	--

Linear Algebra

You'll use the `linalg` and `sparse` modules. Note that `scipy.linalg` contains and expands on `numpy.linalg`.

```
>>> from scipy import linalg, sparse
```

Creating Matrices

```
>>> A = np.matrix(np.random.random((2,2)))
>>> B = np.asmatrix(b)
>>> C = np.mat(np.random.random((10,5)))
>>> D = np.mat([[3,4], [5,6]])
```

Basic Matrix Routines

Inverse

```
>>> A.I
>>> linalg.inv(A)
>>> A.T
>>> A.H
>>> np.trace(A)
```

Inverse
Inverse
Transpose matrix
Conjugate transposition
Trace

Norm

```
>>> linalg.norm(A)
>>> linalg.norm(A,1)
>>> linalg.norm(A,np.inf)
```

Frobenius norm
L1 norm (max column sum)
L inf norm (max row sum)

Rank

```
>>> np.linalg.matrix_rank(C)
```

Matrix rank

Determinant

```
>>> linalg.det(A)
```

Determinant

Solving linear problems

```
>>> linalg.solve(A,b)
>>> E = np.mat(a).T
>>> linalg.lstsq(D,E)
```

Solver for dense matrices
Solver for dense matrices
Least-squares solution to linear matrix equation

Generalized inverse

```
>>> linalg.pinv(C)
>>> linalg.pinv2(C)
```

Compute the pseudo-inverse of a matrix (least-squares solver)
Compute the pseudo-inverse of a matrix (SVD)

Creating Sparse Matrices

<pre>>>> F = np.eye(3, k=1) >>> G = np.mat(np.identity(2)) >>> C[C > 0.5] = 0 >>> H = sparse.csr_matrix(C) >>> I = sparse.csc_matrix(D) >>> J = sparse.dok_matrix(A) >>> E.todense() >>> sparse.isspmatrix_csc(A)</pre>	Create a 2X2 identity matrix Create a 2x2 identity matrix Compressed Sparse Row matrix Compressed Sparse Column matrix Dictionary Of Keys matrix Sparse matrix to full matrix Identify sparse matrix
--	--

Sparse Matrix Routines

Inverse

```
>>> sparse.linalg.inv(I)
```

Inverse

Norm

```
>>> sparse.linalg.norm(I)
```

Norm

Solving linear problems

```
>>> sparse.linalg.spsolve(H,I)
```

Solver for sparse matrices

Sparse Matrix Functions

<pre>>>> sparse.linalg.expm(I)</pre>	Sparse matrix exponential
---	---------------------------

Asking For Help

```
>>> help(scipy.linalg.diagsvd)
>>> np.info(np.matrix)
```

[Also see NumPy](#)

Matrix Functions

Addition

```
>>> np.add(A,D)
```

Addition

Subtraction

```
>>> np.subtract(A,D)
```

Subtraction

Division

```
>>> np.divide(A,D)
```

Division

Multiplication

```
>>> np.multiply(D,A)
```

```
>>> np.dot(A,D)
```

```
>>> np.vdot(A,D)
```

```
>>> np.inner(A,D)
```

```
>>> np.outer(A,D)
```

```
>>> np.tensordot(A,D)
```

```
>>> np.kron(A,D)
```

Multiplication
Dot product
Vector dot product
Inner product
Outer product
Tensor dot product
Kronecker product

Exponential Functions

```
>>> linalg.expm(A)
```

```
>>> linalg.expm2(A)
```

```
>>> linalg.expm3(D)
```

Matrix exponential
Matrix exponential (Taylor Series)
Matrix exponential (eigenvalue decomposition)

Logarithm Function

```
>>> linalg.logm(A)
```

Matrix logarithm

Trigonometric Functions

```
>>> linalg.sinm(D)
```

```
>>> linalg.cosm(D)
```

```
>>> linalg.tanm(A)
```

Matrix sine
Matrix cosine
Matrix tangent

Hyperbolic Trigonometric Functions

```
>>> linalg.sinhm(D)
```

```
>>> linalg.coshm(D)
```

```
>>> linalg.tanhm(A)
```

Hyperbolic matrix sine
Hyperbolic matrix cosine
Hyperbolic matrix tangent

Matrix Sign Function

```
>>> np.sigm(A)
```

Matrix sign function

Matrix Square Root

```
>>> linalg.sqrtm(A)
```

Matrix square root

Arbitrary Functions

```
>>> linalg.funm(A, lambda x: x*x)
```

Evaluate matrix function

Decompositions

Eigenvalues and Eigenvectors

```
>>> la, v = linalg.eig(A)
```

Solve ordinary or generalized eigenvalue problem for square matrix
Unpack eigenvalues
First eigenvector
Second eigenvector
Unpack eigenvalues

```
>>> l1, l2 = la
```

```
>>> v[:,0]
```

```
>>> v[:,1]
```

```
>>> linalg.eigvals(A)
```

Singular Value Decomposition

```
>>> U,s,Vh = linalg.svd(B)
```

```
>>> M,N = B.shape
```

```
>>> Sig = linalg.diagsvd(s,M,N)
```

Singular Value Decomposition (SVD)
Construct sigma matrix in SVD

LU Decomposition

```
>>> P,L,U = linalg.lu(C)
```

LU Decomposition

Sparse Matrix Decompositions

```
>>> la, v = sparse.linalg.eigs(F,1)
```

Eigenvalues and eigenvectors
SVD

```
>>> sparse.linalg.svds(H, 2)
```

DataCamp

Learn Python for Data Science [Interactively](#)



Python For Data Science Cheat Sheet

Pandas Basics

Learn Python for Data Science Interactively at [www.DataCamp.com](https://www.datacamp.com)



Pandas

The **Pandas** library is built on NumPy and provides easy-to-use **data structures** and **data analysis tools** for the Python programming language.



Use the following import convention:

```
>>> import pandas as pd
```

Pandas Data Structures

Series

A **one-dimensional** labeled array capable of holding any data type

a	3
b	-5
c	7
d	4

Index

```
>>> s = pd.Series([3, -5, 7, 4], index=['a', 'b', 'c', 'd'])
```

DataFrame

	Country	Capital	Population
0	Belgium	Brussels	11190846
1	India	New Delhi	1303171035
2	Brazil	Brasília	207847528

A **two-dimensional** labeled data structure with columns of potentially different types

```
>>> data = {'Country': ['Belgium', 'India', 'Brazil'],
            'Capital': ['Brussels', 'New Delhi', 'Brasília'],
            'Population': [11190846, 1303171035, 207847528]}
```

```
>>> df = pd.DataFrame(data,
                      columns=['Country', 'Capital', 'Population'])
```

I/O

Read and Write to CSV

```
>>> pd.read_csv('file.csv', header=None, nrows=5)
>>> df.to_csv('myDataFrame.csv')
```

Read and Write to Excel

```
>>> pd.read_excel('file.xlsx')
>>> pd.to_excel('dir/myDataFrame.xlsx', sheet_name='Sheet1')

Read multiple sheets from the same file
>>> xlsx = pd.ExcelFile('file.xls')
>>> df = pd.read_excel(xlsx, 'Sheet1')
```

Asking For Help

```
>>> help(pd.Series.loc)
```

Selection

Also see NumPy Arrays

Getting

```
>>> s['b']
-5
```

Get one element

```
>>> df[1:]
   Country  Capital  Population
1   India  New Delhi  1303171035
2  Brazil  Brasília  207847528
```

Get subset of a DataFrame

Selecting, Boolean Indexing & Setting

By Position

```
>>> df.iloc([0], [0])
'Belgium'
>>> df.iat([0], [0])
'Belgium'
```

Select single value by row & column

By Label

```
>>> df.loc([0], ['Country'])
'Belgium'
>>> df.at([0], ['Country'])
'Belgium'
```

Select single value by row & column labels

By Label/Position

```
>>> df.ix[2]
Country      Brazil
Capital      Brasília
Population    207847528
```

Select single row of subset of rows

```
>>> df.ix[:, 'Capital']
0      Brussels
1      New Delhi
2      Brasilia
```

Select a single column of subset of columns

```
>>> df.ix[1, 'Capital']
'New Delhi'
```

Select rows and columns

Boolean Indexing

```
>>> s[~(s > 1)]
>>> s[(s < -1) | (s > 2)]
>>> df[df['Population'] > 1200000000]
```

Series **s** where value is not >1
s where value is <-1 or >2
Use filter to adjust DataFrame

Setting

```
>>> s['a'] = 6
```

Set index **a** of Series **s** to 6

Dropping

```
>>> s.drop(['a', 'c'])
```

Drop values from rows (axis=0)

```
>>> df.drop('Country', axis=1)
```

Drop values from columns(axis=1)

Sort & Rank

```
>>> df.sort_index()
>>> df.sort_values(by='Country')
>>> df.rank()
```

Sort by labels along an axis
Sort by the values along an axis
Assign ranks to entries

Retrieving Series/DataFrame Information

Basic Information

```
>>> df.shape
>>> df.index
>>> df.columns
>>> df.info()
>>> df.count()
```

(rows,columns)
Describe index
Describe DataFrame columns
Info on DataFrame
Number of non-NA values

Summary

```
>>> df.sum()
>>> df.cumsum()
>>> df.min()/df.max()
>>> df.idxmin()/df.idxmax()
>>> df.describe()
>>> df.mean()
>>> df.median()
```

Sum of values
Cumulative sum of values
Minimum/maximum values
Minimum/Maximum index value
Summary statistics
Mean of values
Median of values

Applying Functions

```
>>> f = lambda x: x*2
>>> df.apply(f)
>>> df.applymap(f)
```

Apply function
Apply function element-wise

Data Alignment

Internal Data Alignment

NA values are introduced in the indices that don't overlap:

```
>>> s3 = pd.Series([7, -2, 3], index=['a', 'c', 'd'])
>>> s + s3
a      10.0
b      NaN
c       5.0
d       7.0
```

Arithmetic Operations with Fill Methods

You can also do the internal data alignment yourself with the help of the fill methods:

```
>>> s.add(s3, fill_value=0)
a      10.0
b     -5.0
c       5.0
d       7.0
>>> s.sub(s3, fill_value=2)
>>> s.div(s3, fill_value=4)
>>> s.mul(s3, fill_value=3)
```

Read and Write to SQL Query or Database Table

```
>>> from sqlalchemy import create_engine
>>> engine = create_engine('sqlite:///memory:')
>>> pd.read_sql("SELECT * FROM my_table;", engine)
>>> pd.read_sql_table('my_table', engine)
>>> pd.read_sql_query("SELECT * FROM my_table;", engine)
```

`read_sql()` is a convenience wrapper around `read_sql_table()` and `read_sql_query()`

```
>>> pd.to_sql('myDf', engine)
```

DataCamp

Learn Python for Data Science Interactively



Python For Data Science Cheat Sheet

Scikit-Learn

Learn Python for data science [Interactively](#) at [www.DataCamp.com](#)



Scikit-learn

Scikit-learn is an open source Python library that implements a range of machine learning, preprocessing, cross-validation and visualization algorithms using a unified interface.



A Basic Example

```
>>> from sklearn import neighbors, datasets, preprocessing
>>> from sklearn.model_selection import train_test_split
>>> from sklearn.metrics import accuracy_score
>>> iris = datasets.load_iris()
>>> X, y = iris.data[:, :2], iris.target
>>> X_train, X_test, y_train, y_test = train_test_split(X, y, random_state=33)
>>> scaler = preprocessing.StandardScaler().fit(X_train)
>>> X_train = scaler.transform(X_train)
>>> X_test = scaler.transform(X_test)
>>> knn = neighbors.KNeighborsClassifier(n_neighbors=5)
>>> knn.fit(X_train, y_train)
>>> y_pred = knn.predict(X_test)
>>> accuracy_score(y_test, y_pred)
```

Loading The Data

Also see NumPy & Pandas

Your data needs to be numeric and stored as NumPy arrays or SciPy sparse matrices. Other types that are convertible to numeric arrays, such as Pandas DataFrame, are also acceptable.

```
>>> import numpy as np
>>> X = np.random.random((10,5))
>>> y = np.array(['M','M','F','F','M','F','M','F','F','F'])
>>> X[X < 0.7] = 0
```

Training And Test Data

```
>>> from sklearn.model_selection import train_test_split
>>> X_train, X_test, y_train, y_test = train_test_split(X,
                                                    y,
                                                    random_state=0)
```

Preprocessing The Data

Standardization

```
>>> from sklearn.preprocessing import StandardScaler
>>> scaler = StandardScaler().fit(X_train)
>>> standardized_X = scaler.transform(X_train)
>>> standardized_X_test = scaler.transform(X_test)
```

Normalization

```
>>> from sklearn.preprocessing import Normalizer
>>> scaler = Normalizer().fit(X_train)
>>> normalized_X = scaler.transform(X_train)
>>> normalized_X_test = scaler.transform(X_test)
```

Binarization

```
>>> from sklearn.preprocessing import Binarizer
>>> binarizer = Binarizer(threshold=0.0).fit(X)
>>> binary_X = binarizer.transform(X)
```

Create Your Model

Supervised Learning Estimators

```
Linear Regression
>>> from sklearn.linear_model import LinearRegression
>>> lr = LinearRegression(normalize=True)

Support Vector Machines (SVM)
>>> from sklearn.svm import SVC
>>> svc = SVC(kernel='linear')

Naive Bayes
>>> from sklearn.naive_bayes import GaussianNB
>>> gnb = GaussianNB()

KNN
>>> from sklearn import neighbors
>>> knn = neighbors.KNeighborsClassifier(n_neighbors=5)
```

Unsupervised Learning Estimators

```
Principal Component Analysis (PCA)
>>> from sklearn.decomposition import PCA
>>> pca = PCA(n_components=0.95)

K Means
>>> from sklearn.cluster import KMeans
>>> k_means = KMeans(n_clusters=3, random_state=0)
```

Model Fitting

Supervised learning	Fit the model to the data
<pre>>>> lr.fit(X, y) >>> knn.fit(X_train, y_train) >>> svc.fit(X_train, y_train)</pre>	
Unsupervised Learning	Fit the model to the data
<pre>>>> k_means.fit(X_train) >>> pca_model = pca.fit_transform(X_train)</pre>	Fit to data, then transform it

Prediction

Supervised Estimators	Predict labels
<pre>>>> y_pred = svc.predict(np.random.random((2,5))) >>> y_pred = lr.predict(X_test) >>> y_pred = knn.predict_proba(X_test)</pre>	Predict labels
Unsupervised Estimators	Estimate probability of a label
<pre>>>> y_pred = k_means.predict(X_test)</pre>	Predict labels in clustering algos

Evaluate Your Model's Performance

Classification Metrics

Accuracy Score	Estimator score method
<pre>>>> knn.score(X_test, y_test) >>> from sklearn.metrics import accuracy_score >>> accuracy_score(y_test, y_pred)</pre>	Metric scoring functions
Classification Report	Precision, recall, f1-score and support
<pre>>>> from sklearn.metrics import classification_report >>> print(classification_report(y_test, y_pred))</pre>	
Confusion Matrix	
<pre>>>> from sklearn.metrics import confusion_matrix >>> print(confusion_matrix(y_test, y_pred))</pre>	

Regression Metrics

Mean Absolute Error
<pre>>>> from sklearn.metrics import mean_absolute_error >>> y_true = [3, -0.5, 2] >>> mean_absolute_error(y_true, y_pred)</pre>
Mean Squared Error
<pre>>>> from sklearn.metrics import mean_squared_error >>> mean_squared_error(y_true, y_pred)</pre>
R² Score
<pre>>>> from sklearn.metrics import r2_score >>> r2_score(y_true, y_pred)</pre>

Clustering Metrics

Adjusted Rand Index
<pre>>>> from sklearn.metrics import adjusted_rand_score >>> adjusted_rand_score(y_true, y_pred)</pre>
Homogeneity
<pre>>>> from sklearn.metrics import homogeneity_score >>> homogeneity_score(y_true, y_pred)</pre>
V-measure
<pre>>>> from sklearn.metrics import v_measure_score >>> metrics.v_measure_score(y_true, y_pred)</pre>

Cross-Validation

```
>>> from sklearn.cross_validation import cross_val_score
>>> print(cross_val_score(knn, X_train, y_train, cv=4))
>>> print(cross_val_score(lr, X, y, cv=2))
```

Tune Your Model

Grid Search

```
>>> from sklearn.grid_search import GridSearchCV
>>> params = {"n_neighbors": np.arange(1,5),
            "metric": ["euclidean", "cityblock"]}
>>> grid = GridSearchCV(estimator=knn,
                      param_grid=params)
>>> grid.fit(X_train, y_train)
>>> print(grid.best_score_)
>>> print(grid.best_estimator_.n_neighbors)
```

Randomized Parameter Optimization

```
>>> from sklearn.grid_search import RandomizedSearchCV
>>> params = {"n_neighbors": range(1,5),
            "weights": ["uniform", "distance"]}
>>> rsearch = RandomizedSearchCV(estimator=knn,
                               param_distributions=params,
                               cv=4,
                               n_iter=8,
                               random_state=5)
>>> rsearch.fit(X_train, y_train)
>>> print(rsearch.best_score_)
```



Python For Data Science Cheat Sheet

Matplotlib

Learn Python Interactively at [www.DataCamp.com](https://www.datacamp.com)



Matplotlib

Matplotlib is a Python 2D plotting library which produces publication-quality figures in a variety of hardcopy formats and interactive environments across platforms.



1 Prepare The Data

Also see [Lists & NumPy](#)

1D Data

```
>>> import numpy as np
>>> x = np.linspace(0, 10, 100)
>>> y = np.cos(x)
>>> z = np.sin(x)
```

2D Data or Images

```
>>> data = 2 * np.random.random((10, 10))
>>> data2 = 3 * np.random.random((10, 10))
>>> Y, X = np.mgrid[-3:3:100j, -3:3:100j]
>>> U = -1 - X**2 + Y
>>> V = 1 + X - Y**2
>>> from matplotlib.cbook import get_sample_data
>>> img = np.load(get_sample_data('axes_grid/bivariate_normal.npy'))
```

2 Create Plot

```
>>> import matplotlib.pyplot as plt
```

Figure

```
>>> fig = plt.figure()
>>> fig2 = plt.figure(figsize=plt.figaspect(2.0))
```

Axes

All plotting is done with respect to an Axes. In most cases, a subplot will fit your needs. A subplot is an axes on a grid system.

```
>>> fig.add_axes()
>>> ax1 = fig.add_subplot(221) # row-col-num
>>> ax3 = fig.add_subplot(212)
>>> fig3, axes = plt.subplots(nrows=2,ncols=2)
>>> fig4, axes2 = plt.subplots(ncols=3)
```

3 Plotting Routines

1D Data

```
>>> fig, ax = plt.subplots()
>>> lines = ax.plot(x,y)
>>> ax.scatter(x,y)
>>> axes[0,0].bar([1,2,3],[3,4,5])
>>> axes[1,0].barh([0.5,1,2.5],[0,1,2])
>>> axes[1,1].axhline(0.45)
>>> axes[0,1].axvline(0.65)
>>> ax.fill(x,y,color='blue')
>>> ax.fill_between(x,y,color='yellow')
```

Draw points with lines or markers connecting them
Draw unconnected points, scaled or colored
Plot vertical rectangles (constant width)
Plot horizontal rectangles (constant height)
Draw a horizontal line across axes
Draw a vertical line across axes
Draw filled polygons
Fill between y-values and 0

2D Data or Images

```
>>> fig, ax = plt.subplots()
>>> im = ax.imshow(img,
                  cmap='gist_earth',
                  interpolation='nearest',
                  vmin=-2,
                  vmax=2)
```

Colormapped or RGB arrays

Vector Fields

```
>>> axes[0,1].arrow(0,0,0.5,0.5)
>>> axes[1,1].quiver(y,z)
>>> axes[0,1].streamplot(X,Y,U,V)
```

Add an arrow to the axes
Plot a 2D field of arrows
Plot a 2D field of arrows

Data Distributions

```
>>> ax1.hist(y)
>>> ax3.boxplot(y)
>>> ax3.violinplot(z)
```


Plot a histogram
Make a box and whisker plot
Make a violin plot

```
>>> axes2[0].pcolor(data2)
>>> axes2[0].pcolormesh(data)
>>> CS = plt.contour(Y,X,U)
>>> axes2[2].contourf(data1)
>>> axes2[2] = ax.clabel(CS)
```

Pseudocolor plot of 2D array
Pseudocolor plot of 2D array
Plot contours
Plot filled contours
Label a contour plot

Plot Anatomy & Workflow

Plot Anatomy

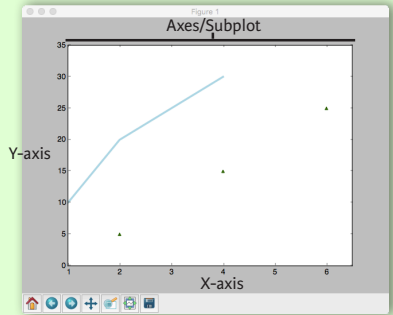

Workflow

The basic steps to creating plots with matplotlib are:

- 1 Prepare data
- 2 Create plot
- 3 Plot
- 4 Customize plot
- 5 Save plot
- 6 Show plot

```
>>> import matplotlib.pyplot as plt
>>> x = [1,2,3,4]
>>> y = [10,20,25,30]
>>> fig = plt.figure()
>>> ax = fig.add_subplot(111)
>>> ax.plot(x, y, color='lightblue', linewidth=3)
>>> ax.scatter([2,4,6],
              [5,15,25],
              color='darkgreen',
              marker='^')
>>> ax.set_xlim(1, 6.5)
>>> plt.savefig('foo.png')
>>> plt.show()
```

4 Customize Plot

Colors, Color Bars & Color Maps

```
>>> plt.plot(x, x, x, x**2, x, x**3)
>>> ax.plot(x, y, alpha = 0.4)
>>> ax.plot(x, y, c='k')
>>> fig.colorbar(im, orientation='horizontal')
>>> im = ax.imshow(img,
                  cmap='seismic')
```

Markers

```
>>> fig, ax = plt.subplots()
>>> ax.scatter(x,y,marker=".")
>>> ax.plot(x,y,marker="o")
```

Linestyles

```
>>> plt.plot(x,y,linewidth=4.0)
>>> plt.plot(x,y,ls='solid')
>>> plt.plot(x,y,ls='--')
>>> plt.plot(x,y,'--',x**2,y**2,'-.')
>>> plt.setp(lines,color='r',linewidth=4.0)
```

Text & Annotations

```
>>> ax.text(1,
          -2.1,
          'Example Graph',
          style='italic')
>>> ax.annotate("Sine",
               xy=(8, 0),
               xycoords='data',
               xytext=(10.5, 0),
               textcoords='data',
               arrowprops=dict(arrowstyle="->",
                               connectionstyle="arc3"),)
```

Mathtext

```
>>> plt.title(r'$\sigma_i=15$', fontsize=20)
```

Limits, Legends & Layouts

Limits & Autoscaling

```
>>> ax.margins(x=0.0,y=0.1)
>>> ax.axis('equal')
>>> ax.set(xlim=[0,10.5],ylim=[-1.5,1.5])
>>> ax.set_xlim(0,10.5)
```

Legends

```
>>> ax.set(title='An Example Axes',
          ylabel='Y-Axis',
          xlabel='X-Axis')
>>> ax.legend(loc='best')
```

Ticks

```
>>> ax.xaxis.set(ticks=range(1,5),
               ticklabels=[3,100,-12,"foo"])
>>> ax.tick_params(axis='y',
                  direction='inout',
                  length=10)
```

Subplot Spacing

```
>>> fig3.subplots_adjust(wspace=0.5,
                        hspace=0.3,
                        left=0.125,
                        right=0.9,
                        top=0.9,
                        bottom=0.1)
```

```
>>> fig.tight_layout()
```

Axis Spines

```
>>> ax1.spines['top'].set_visible(False)
>>> ax1.spines['bottom'].set_position(('outward',10))
```

Add padding to a plot
Set the aspect ratio of the plot to 1
Set limits for x-and y-axis
Set limits for x-axis

Set a title and x-and y-axis labels

No overlapping plot elements

Manually set x-ticks

Make y-ticks longer and go in and out

Adjust the spacing between subplots

Fit subplot(s) in to the figure area

Make the top axis line for a plot invisible
Move the bottom axis line outward

5 Save Plot

Save figures

```
>>> plt.savefig('foo.png')
```

Save transparent figures

```
>>> plt.savefig('foo.png', transparent=True)
```

6 Show Plot

```
>>> plt.show()
```

Close & Clear

```
>>> plt.cla()
>>> plt.clf()
>>> plt.close()
```

Clear an axis
Clear the entire figure
Close a window





Statistical Data Visualization With Seaborn

The Python visualization library **Seaborn** is based on **matplotlib** and provides a high-level interface for drawing attractive statistical graphics.

Make use of the following aliases to import the libraries:

```
>>> import matplotlib.pyplot as plt
>>> import seaborn as sns
```

The basic steps to creating plots with Seaborn are:

- 1. Prepare some data
- 2. Control figure aesthetics
- 3. Plot with Seaborn
- 4. Further customize your plot

```
>>> import matplotlib.pyplot as plt
>>> import seaborn as sns
>>> tips = sns.load_dataset("tips")
>>> sns.set_style("whitegrid")
>>> g = sns.lmplot(x="tip", y="total_bill", data=tips, aspect=2)
>>> g = (g.set_axis_labels("Tip", "Total bill (USD)")).set(xlim=(0,10),ylim=(0,100))
>>> plt.title("title")
>>> plt.show(g)
```

1 Data

Also see [Lists](#), [NumPy](#) & [Pandas](#)

```
>>> import pandas as pd
>>> import numpy as np
>>> uniform_data = np.random.rand(10, 12)
>>> data = pd.DataFrame({'x':np.arange(1,101), 'y':np.random.normal(0,4,100)})
```

Seaborn also offers built-in data sets:

```
>>> titanic = sns.load_dataset("titanic")
>>> iris = sns.load_dataset("iris")
```

2 Figure Aesthetics

```
>>> f, ax = plt.subplots(figsize=(5,6))
```

Create a figure and one subplot

Seaborn styles

```
>>> sns.set()
>>> sns.set_style("whitegrid")
>>> sns.set_style("ticks", {'xtick.major.size':8, 'ytick.major.size':8})
>>> sns.axes_style("whitegrid")
```

(Re)set the seaborn default Set the matplotlib parameters Set the matplotlib parameters

Return a dict of params or use with to temporarily set the style

3 Plotting With Seaborn

Axis Grids

```
>>> g = sns.FacetGrid(titanic, col="survived", row="sex")
>>> g = g.map(plt.hist, "age")
>>> sns.factorplot(x="pclass", y="survived", hue="sex", data=titanic)
>>> sns.lmplot(x="sepal_width", y="sepal_length", hue="species", data=iris)
```

Subplot grid for plotting conditional relationships

Draw a categorical plot onto a Facetgrid

Plot data and regression model fits across a FacetGrid

Categorical Plots

```
>>> sns.stripplot(x="species", y="petal_length", data=iris)
>>> sns.swarmplot(x="species", y="petal_length", data=iris)
>>> sns.barplot(x="sex", y="survived", hue="class", data=titanic)
>>> sns.countplot(x="deck", data=titanic, palette="Greens_d")
>>> sns.pointplot(x="class", y="survived", hue="sex", data=titanic, palette={"male": "g", "female": "m"}, markers=["^", "o"], linestyle=["-", "--"])
>>> sns.boxplot(x="alive", y="age", hue="adult_male", data=titanic)
>>> sns.boxplot(data=iris, orient="h")
>>> sns.violinplot(x="age", y="sex", hue="survived", data=titanic)
```

Scatterplot with one categorical variable

Categorical scatterplot with non-overlapping points

Show point estimates and confidence intervals with scatterplot glyphs

Show count of observations

Show point estimates and confidence intervals as rectangular bars

Boxplot

Boxplot with wide-form data

Violin plot

Context Functions

```
>>> sns.set_context("talk")
>>> sns.set_context("notebook", font_scale=1.5, rc={"lines.linewidth":2.5})
```

Set context to "talk" Set context to "notebook", scale font elements and override param mapping

Color Palette

```
>>> sns.set_palette("husl", 3)
>>> sns.color_palette("husl")
>>> flatui = ["#9b59b6", "#3498db", "#95a5a6", "#e74c3c", "#34495e", "#2ecc71"]
>>> sns.set_palette(flatui)
```

Define the color palette Use with with to temporarily set palette Set your own color palette

```
>>> h = sns.PairGrid(iris)
>>> h = h.map(plt.scatter)
>>> sns.pairplot(iris)
>>> i = sns.JointGrid(x="x", y="y", data=data)
>>> i = i.plot(sns.regplot, sns.distplot)
>>> sns.jointplot("sepal_length", "sepal_width", data=iris, kind='kde')
```

Subplot grid for plotting pairwise relationships Plot pairwise bivariate distributions Grid for bivariate plot with marginal univariate plots

Plot bivariate distribution

Regression Plots

```
>>> sns.regplot(x="sepal_width", y="sepal_length", data=iris, ax=ax)
```

Plot data and a linear regression model fit

Distribution Plots

```
>>> plot = sns.distplot(data.y, kde=False, color="b")
```

Plot univariate distribution

Matrix Plots

```
>>> sns.heatmap(uniform_data, vmin=0, vmax=1)
```

Heatmap

4 Further Customizations

Also see [Matplotlib](#)

Axisgrid Objects

```
>>> g.despine(left=True)
>>> g.set_ylabels("Survived")
>>> g.set_xticklabels(rotation=45)
>>> g.set_axis_labels("Survived", "Sex")
>>> h.set(xlim=(0,5), ylim=(0,5), xticks=[0,2.5,5], yticks=[0,2.5,5])
```

Remove left spine Set the labels of the y-axis Set the tick labels for x Set the axis labels

Set the limit and ticks of the x-and y-axis

Plot

```
>>> plt.title("A Title")
>>> plt.ylabel("Survived")
>>> plt.xlabel("Sex")
>>> plt.ylim(0,100)
>>> plt.xlim(0,10)
>>> plt.setp(ax, yticks=[0,5])
>>> plt.tight_layout()
```

Add plot title Adjust the label of the y-axis Adjust the label of the x-axis Adjust the limits of the y-axis Adjust the limits of the x-axis Adjust a plot property Adjust subplot params

5 Show or Save Plot

Also see [Matplotlib](#)

```
>>> plt.show()
>>> plt.savefig("foo.png")
>>> plt.savefig("foo.png", transparent=True)
```

Show the plot Save the plot as a figure Save transparent figure

Close & Clear

Also see [Matplotlib](#)

```
>>> plt.cla()
>>> plt.clf()
>>> plt.close()
```

Clear an axis Clear an entire figure Close a window



Bokeh


Learn Bokeh **Interactively** at [www.DataCamp.com](https://www.datacamp.com),
taught by Bryan Van de Ven, core contributor



Plotting With Bokeh

The Python interactive visualization library **Bokeh** enables high-performance visual presentation of large datasets in modern web browsers.

Bokeh's mid-level general purpose `bokeh.plotting` interface is centered around two main components: data and glyphs.

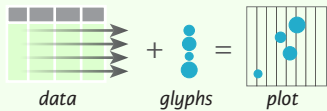

The basic steps to creating plots with the `bokeh.plotting` interface are:

1. Prepare some data:
2. Create a new plot
3. Add renderers for your data, with visual customizations
4. Specify where to generate the output
5. Show or save the results

```
>>> from bokeh.plotting import figure
>>> from bokeh.io import output_file, show
>>> x = [1, 2, 3, 4, 5]
>>> y = [6, 7, 2, 4, 5]
>>> p = figure(title="simple line example",
>>>             x_axis_label='x',
>>>             y_axis_label='y')
>>> p.line(x, y, legend="Temp.", line_width=2)
>>> output_file("lines.html")
>>> show(p)
```

Also see Lists, NumPy & Pandas

1 Data

Under the hood, your data is converted to Column Data Sources. You can also do this manually:

```
>>> import numpy as np
>>> import pandas as pd
>>> df = pd.DataFrame(np.array([[33.9, 4, 65, 'US'],
>>>                             [32.4, 4, 66, 'Asia'],
>>>                             [21.4, 4, 109, 'Europe']]
>>>                  columns=['mpg', 'cyl', 'hp', 'origin'],
>>>                  index=['Toyota', 'Fiat', 'Volvo'])
>>> from bokeh.models import ColumnDataSource
>>> cds_df = ColumnDataSource(df)
```

2 Plotting

```
>>> from bokeh.plotting import figure
>>> p1 = figure(plot_width=300, tools='pan, box_zoom')
>>> p2 = figure(plot_width=300, plot_height=300,
>>>             x_range=(0, 8), y_range=(0, 8))
>>> p3 = figure()
```

Glyphs

Scatter Markers

```
>>> p1.circle(np.array([1, 2, 3]), np.array([3, 2, 1]),
>>>           fill_color='white')
>>> p2.square(np.array([1.5, 3.5, 5.5]), [1, 4, 3],
>>>          color='blue', size=1)
```

Line Glyphs

```
>>> p1.line([1, 2, 3, 4], [3, 4, 5, 6], line_width=2)
>>> p2.multi_line(pd.DataFrame([[1, 2, 3], [5, 6, 7]]),
>>>               pd.DataFrame([[3, 4, 5], [3, 2, 1]]),
>>>               color="blue")
```

Customized Glyphs

Also see Data

Selection and Non-Selection Glyphs

```
>>> p = figure(tools='box_select')
>>> p.circle('mpg', 'cyl', source=cds_df,
>>>          selection_color='red',
>>>          nonselection_alpha=0.1)
```

Hover Glyphs

```
>>> from bokeh.models import HoverTool
>>> hover = HoverTool(tooltips=None, mode='vline')
>>> p3.add_tools(hover)
```

Colormapping

```
>>> from bokeh.models import CategoricalColorMapper
>>> color_mapper = CategoricalColorMapper(
>>>               factors=['US', 'Asia', 'Europe'],
>>>               palette=['blue', 'red', 'green'])
>>> p3.circle('mpg', 'cyl', source=cds_df,
>>>           color=dict(field='origin',
>>>                      transform=color_mapper),
>>>           legend='Origin')
```

Legend Location

Inside Plot Area

```
>>> p.legend.location = 'bottom_left'
```

Outside Plot Area

```
>>> from bokeh.models import Legend
>>> r1 = p2.asterisk(np.array([1, 2, 3]), np.array([3, 2, 1]))
>>> r2 = p2.line([1, 2, 3, 4], [3, 4, 5, 6])
>>> legend = Legend(items=[("One", [p1, r1]), ("Two", [r2])],
>>>                  location=(0, -30))
>>> p.add_layout(legend, 'right')
```

Legend Orientation

```
>>> p.legend.orientation = "horizontal"
>>> p.legend.orientation = "vertical"
```

Legend Background & Border

```
>>> p.legend.border_line_color = "navy"
>>> p.legend.background_fill_color = "white"
```

Rows & Columns Layout

Rows

```
>>> from bokeh.layouts import row
>>> layout = row(p1, p2, p3)
```

Columns

```
>>> from bokeh.layouts import columns
>>> layout = column(p1, p2, p3)
```

Nesting Rows & Columns

```
>>> layout = row(column(p1, p2), p3)
```

Grid Layout

```
>>> from bokeh.layouts import gridplot
>>> row1 = [p1, p2]
>>> row2 = [p3]
>>> layout = gridplot([[p1, p2], [p3]])
```

Tabbed Layout

```
>>> from bokeh.models.widgets import Panel, Tabs
>>> tab1 = Panel(child=p1, title="tab1")
>>> tab2 = Panel(child=p2, title="tab2")
>>> layout = Tabs(tabs=[tab1, tab2])
```

Linked Plots

Linked Axes

```
>>> p2.x_range = p1.x_range
>>> p2.y_range = p1.y_range
```

Linked Brushing

```
>>> p4 = figure(plot_width = 100,
>>>             tools='box_select, lasso_select')
>>> p4.circle('mpg', 'cyl', source=cds_df)
>>> p5 = figure(plot_width = 200,
>>>             tools='box_select, lasso_select')
>>> p5.circle('mpg', 'hp', source=cds_df)
>>> layout = row(p4, p5)
```

4 Output & Export

Notebook

```
>>> from bokeh.io import output_notebook, show
>>> output_notebook()
```

HTML

Standalone HTML

```
>>> from bokeh.embed import file_html
>>> from bokeh.resources import CDN
>>> html = file_html(p, CDN, "my_plot")
>>> from bokeh.io import output_file, show
>>> output_file('my_bar_chart.html', mode='cdn')
```

Components

```
>>> from bokeh.embed import components
>>> script, div = components(p)
```

PNG

```
>>> from bokeh.io import export_png
>>> export_png(p, filename="plot.png")
```

SVG

```
>>> from bokeh.io import export_svgs
>>> p.output_backend = "svg"
>>> export_svgs(p, filename="plot.svg")
```

5 Show or Save Your Plots

```
>>> show(p1)
>>> save(p1)
```

```
>>> show(layout)
>>> save(layout)
```



Data Wrangling

with pandas

Cheat Sheet

<http://pandas.pydata.org>

Syntax – Creating DataFrames

	a	b	c
1	4	7	10
2	5	8	11
3	6	9	12

```
df = pd.DataFrame(  
    {"a" : [4 ,5, 6],  
     "b" : [7, 8, 9],  
     "c" : [10, 11, 12]},  
    index = [1, 2, 3])  
Specify values for each column.
```

```
df = pd.DataFrame(  
    [[4, 7, 10],  
     [5, 8, 11],  
     [6, 9, 12]],  
    index=[1, 2, 3],  
    columns=['a', 'b', 'c'])  
Specify values for each row.
```

		a	b	c
n	v			
d	1	4	7	10
	2	5	8	11
e	2	6	9	12


```
df = pd.DataFrame(  
    {"a" : [4 ,5, 6],  
     "b" : [7, 8, 9],  
     "c" : [10, 11, 12]},  
    index = pd.MultiIndex.from_tuples(  
        [('d',1),('d',2),('e',2)],  
        names=['n','v']))  
Create DataFrame with a MultiIndex
```

Method Chaining

Most pandas methods return a DataFrame so that another pandas method can be applied to the result. This improves readability of code.


```
df = (pd.melt(df)  
     .rename(columns={  
         'variable' : 'var',  
         'value' : 'val'})  
     .query('val >= 200'))
```

Tidy Data – A foundation for wrangling in pandas

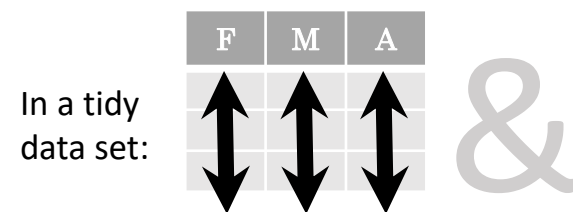


In a tidy data set:

Each **variable** is saved in its own **column**




Each **observation** is saved in its own **row**

Tidy data complements pandas's **vectorized operations**. pandas will automatically preserve observations as you manipulate variables. No other format works as intuitively with pandas.

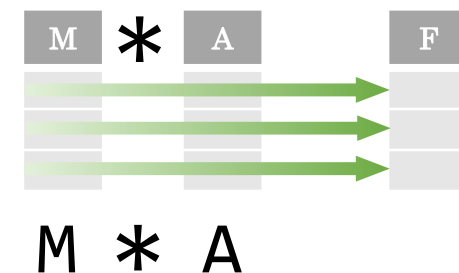

Reshaping Data – Change the layout of a data set




pd.melt(df)
Gather columns into rows.



df.pivot(columns='var', values='val')
Spread rows into columns.



pd.concat([df1,df2])
Append rows of DataFrames

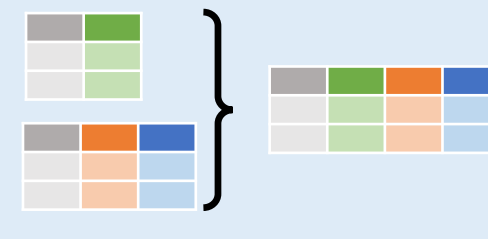

pd.concat([df1,df2], axis=1)
Append columns of DataFrames

df.sort_values('mpg')

Order rows by values of a column (low to high).

df.sort_values('mpg', ascending=False)

Order rows by values of a column (high to low).

df.rename(columns = {'y':'year'})

Rename the columns of a DataFrame

df.sort_index()

Sort the index of a DataFrame


df.reset_index()

Reset index of DataFrame to row numbers, moving index to columns.

df.drop(columns=['Length','Height'])

Drop columns from DataFrame

Subset Observations (Rows)



df[df.Length > 7]

Extract rows that meet logical criteria.

df.drop_duplicates()

Remove duplicate rows (only considers columns).

df.head(n)

Select first n rows.

df.tail(n)

Select last n rows.

df.sample(frac=0.5)

Randomly select fraction of rows.

df.sample(n=10)

Randomly select n rows.

df.iloc[10:20]

Select rows by position.

df.nlargest(n, 'value')

Select and order top n entries.

df.nsmallest(n, 'value')

Select and order bottom n entries.

Subset Variables (Columns)



df[['width','length','species']]

Select multiple columns with specific names.

df['width'] or **df.width**

Select single column with specific name.

df.filter(regex='regex')

Select columns whose name matches regular expression *regex*.

regex (Regular Expressions) Examples

regex	Matches
'\.'	Matches strings containing a period '.'
'Length\$'	Matches strings ending with word 'Length'
'^Sepal'	Matches strings beginning with the word 'Sepal'
'^x[1-5]\$'	Matches strings beginning with 'x' and ending with 1,2,3,4,5
'^(?!Species\$).*\$'	Matches strings except the string 'Species'

df.loc[:, 'x2':'x4']

Select all columns between x2 and x4 (inclusive).

df.iloc[:, [1,2,5]]

Select columns in positions 1, 2 and 5 (first column is 0).

df.loc[df['a'] > 10, ['a','c']]

Select rows meeting logical condition, and only the specific columns.

Logic in Python (and pandas)			
<	Less than	!=	Not equal to
>	Greater than	df.column.isin(values)	Group membership
==	Equals	pd.isnull(obj)	Is NaN
<=	Less than or equals	pd.notnull(obj)	Is not NaN
>=	Greater than or equals	&, , ~, ^, df.any(), df.all()	Logical and, or, not, xor, any, all

Summarize Data

df['w'].value_counts()

Count number of rows with each unique value of variable

len(df)


of rows in DataFrame.

df['w'].nunique()

of distinct values in a column.

df.describe()

Basic descriptive statistics for each column (or GroupBy)

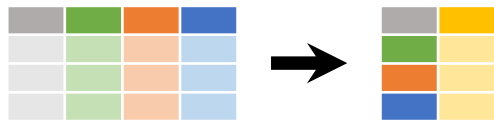

pandas provides a large set of **summary functions** that operate on different kinds of pandas objects (DataFrame columns, Series, GroupBy, Expanding and Rolling (see below)) and produce single values for each of the groups. When applied to a DataFrame, the result is returned as a pandas Series for each column. Examples:

sum()

Sum values of each object.

count()

Count non-NA/null values of each object.

median()

Median value of each object.

quantile([0.25,0.75])

Quantiles of each object.

apply(function)

Apply function to each object.

min()

Minimum value in each object.

max()

Maximum value in each object.

mean()

Mean value of each object.

var()

Variance of each object.

std()

Standard deviation of each object.

Group Data



df.groupby(by="col")

Return a GroupBy object, grouped by values in column named "col".

df.groupby(level="ind")

Return a GroupBy object, grouped by values in index level named "ind".

All of the summary functions listed above can be applied to a group. Additional GroupBy functions:

size()

Size of each group.

agg(function)

Aggregate group using function.

Windows

df.expanding()

Return an Expanding object allowing summary functions to be applied cumulatively.

df.rolling(n)

Return a Rolling object allowing summary functions to be applied to windows of length n.

Handling Missing Data


df.dropna()

Drop rows with any column having NA/null data.

df.fillna(value)

Replace all NA/null data with value.

Make New Columns

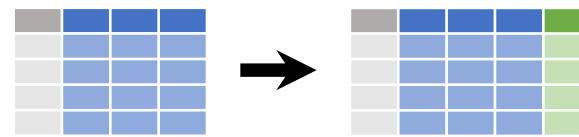

df.assign(Area=lambda df: df.Length*df.Height)

Compute and append one or more new columns.

df['Volume'] = df.Length*df.Height*df.Depth

Add single column.

pd.qcut(df.col, n, labels=False)

Bin column into n buckets.



pandas provides a large set of **vector functions** that operate on all columns of a DataFrame or a single selected column (a pandas Series). These functions produce vectors of values for each of the columns, or a single Series for the individual Series. Examples:

max(axis=1)

Element-wise max.

min(axis=1)

Element-wise min.

clip(lower=-10,upper=10)

Trim values at input thresholds

abs()

Absolute value.

The examples below can also be applied to groups. In this case, the function is applied on a per-group basis, and the returned vectors are of the length of the original DataFrame.

shift(1)

Copy with values shifted by 1.

rank(method='dense')

Ranks with no gaps.

rank(method='min')

Ranks. Ties get min rank.

rank(pct=True)

Ranks rescaled to interval [0, 1].

rank(method='first')

Ranks. Ties go to first value.

shift(-1)

Copy with values lagged by 1.

cumsum()

Cumulative sum.

cummax()

Cumulative max.

cummin()

Cumulative min.


cumprod()

Cumulative product.

Plotting


df.plot.hist()

Histogram for each column



df.plot.scatter(x='w',y='h')

Scatter chart using pairs of points



Combine Data Sets

adf

x1	x2
A	1
B	2
C	3

bdf

x1	x3
A	T
B	F
D	T



Standard Joins

x1	x2	x3
A	1	T
B	2	F
C	3	NaN

pd.merge(adf, bdf, how='left', on='x1')

Join matching rows from bdf to adf.

x1	x2	x3
A	1.0	T
B	2.0	F
D	NaN	T

pd.merge(adf, bdf, how='right', on='x1')

Join matching rows from adf to bdf.

x1	x2	x3
A	1	T
B	2	F

pd.merge(adf, bdf, how='inner', on='x1')

Join data. Retain only rows in both sets.

x1	x2	x3
A	1	T
B	2	F
C	3	NaN
D	NaN	T

pd.merge(adf, bdf, how='outer', on='x1')

Join data. Retain all values, all rows.

Filtering Joins

x1	x2
A	1
B	2

adf[adf.x1.isin(bdf.x1)]

All rows in adf that have a match in bdf.

x1	x2
C	3

adf[~adf.x1.isin(bdf.x1)]

All rows in adf that do not have a match in bdf.

ydf

x1	x2
A	1
B	2
C	3

zdf

x1	x2
B	2
C	3
D	4



Set-like Operations

x1	x2
B	2
C	3

pd.merge(ydf, zdf)

Rows that appear in both ydf and zdf (Intersection).

x1	x2
A	1
B	2
C	3
D	4

pd.merge(ydf, zdf, how='outer')

Rows that appear in either or both ydf and zdf (Union).

x1	x2
A	1

pd.merge(ydf, zdf, how='outer', indicator=True)

.query('_merge == "left_only"')

.drop(columns=['_merge'])

Rows that appear in ydf but not zdf (Setdiff).