ASSIGNMENT 1 – AVNI SHARMA (MODULE 3)

No.	Problem (click to open)	Platform	Difficulty
1	For Loop in C	HackerRank	Very Easy
2	1342 — Number of Steps to Reduce a Number to Zero	LeetCode	Easy
3	2169 — Count Operations to Obtain Zero	LeetCode	Easy
4	1523 — Count Odd Numbers in an Interval Range	LeetCode	Easy
5	2652 — Sum Multiples	LeetCode	Easy
6	Number Line Jumps	HackerRank	Easy–Moderate

1. For Loop in C | HackerRank

```c
#include <stdio.h>
#include <string.h>
#include <math.h>
#include <stdlib.h>


int main()
{
    int a, b;
    scanf("%d\n%d", &a, &b);

    char *words[] = {"one", "two", "three", "four", "five", "six", "seven", "eight", "nine"};

    for (int i = a; i <= b; i++)
    {
        if (i >= 1 && i <= 9)
            printf("%s\n", words[i - 1]);
        else if (i > 9 && i % 2 == 0)
            printf("even\n");
        else
            printf("odd\n");
    }


    return 0;
}
```

Congratulations

You solved this challenge. Would you like to challenge your friends?

Next Challenge

Test case 0

Test case 1

Test case 2

Test case 3

Test case 4

Test case 5

Compiler Message

Success


Input (stdin) Download

```
8
11
```


Expected Output Download

```
eight
nine
even
odd
```


2. [Number of Steps to Reduce a Number to Zero - LeetCode]

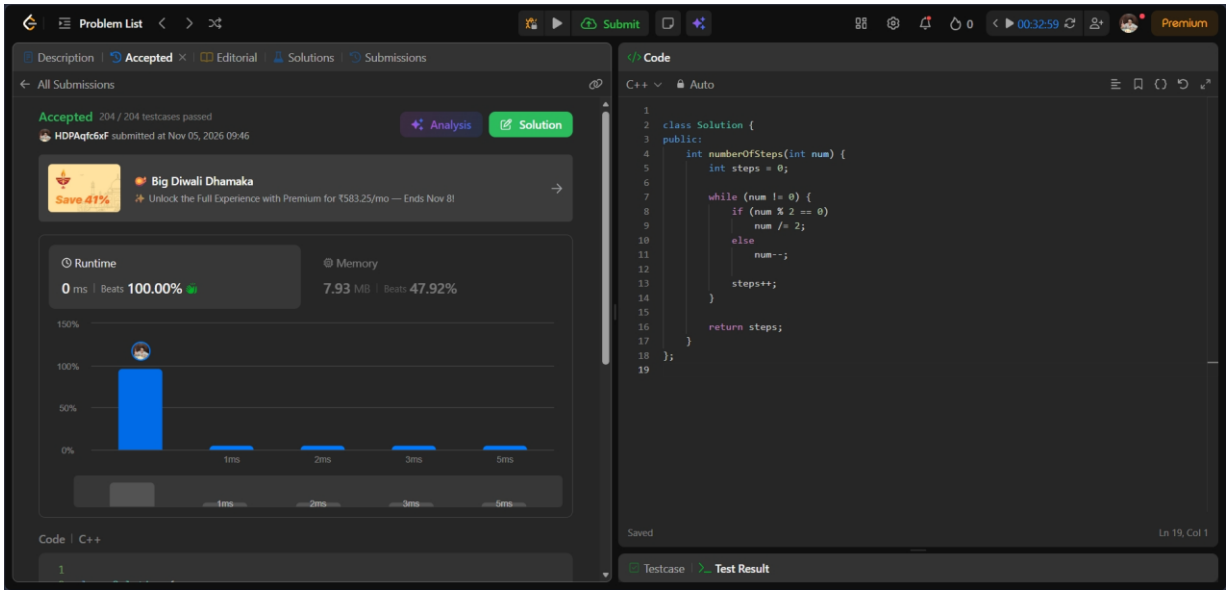


3. [Count Operations to Obtain Zero - LeetCode]

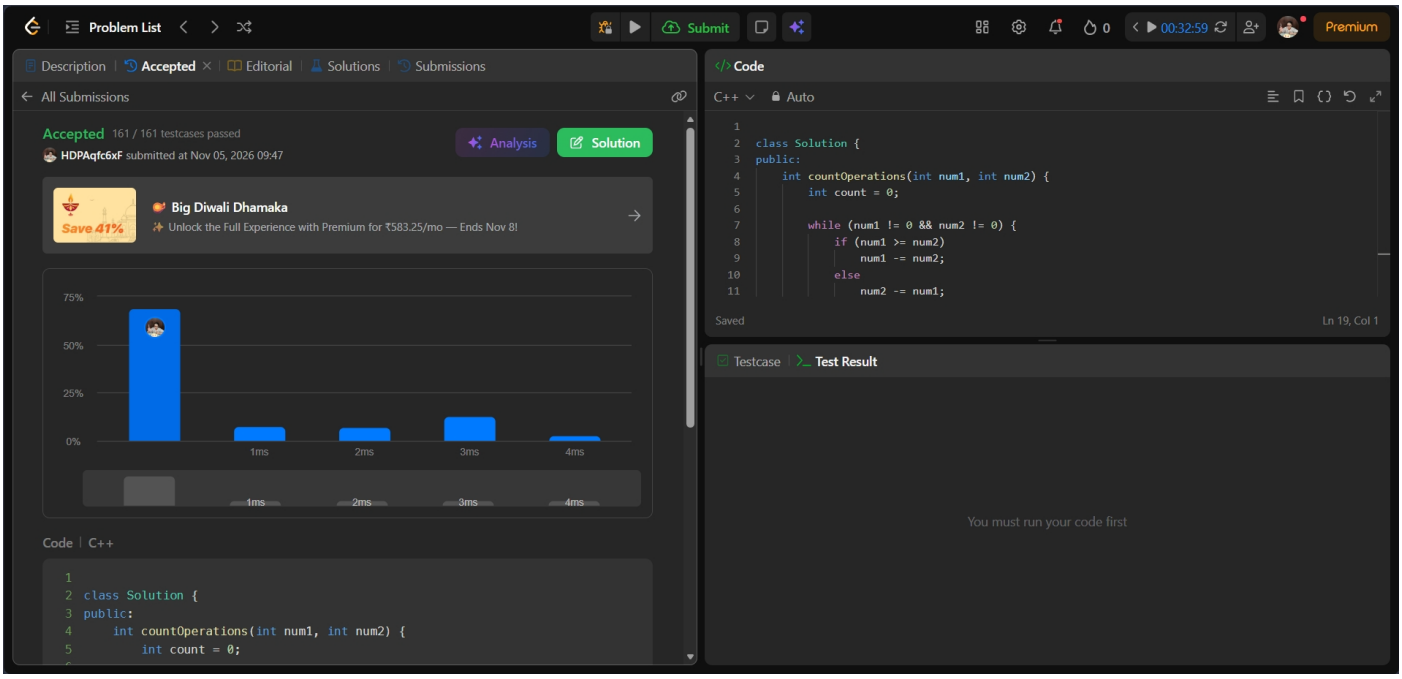

4. [https://leetcode.com/problems/count-odd-numbers-in-an-interval-range/]

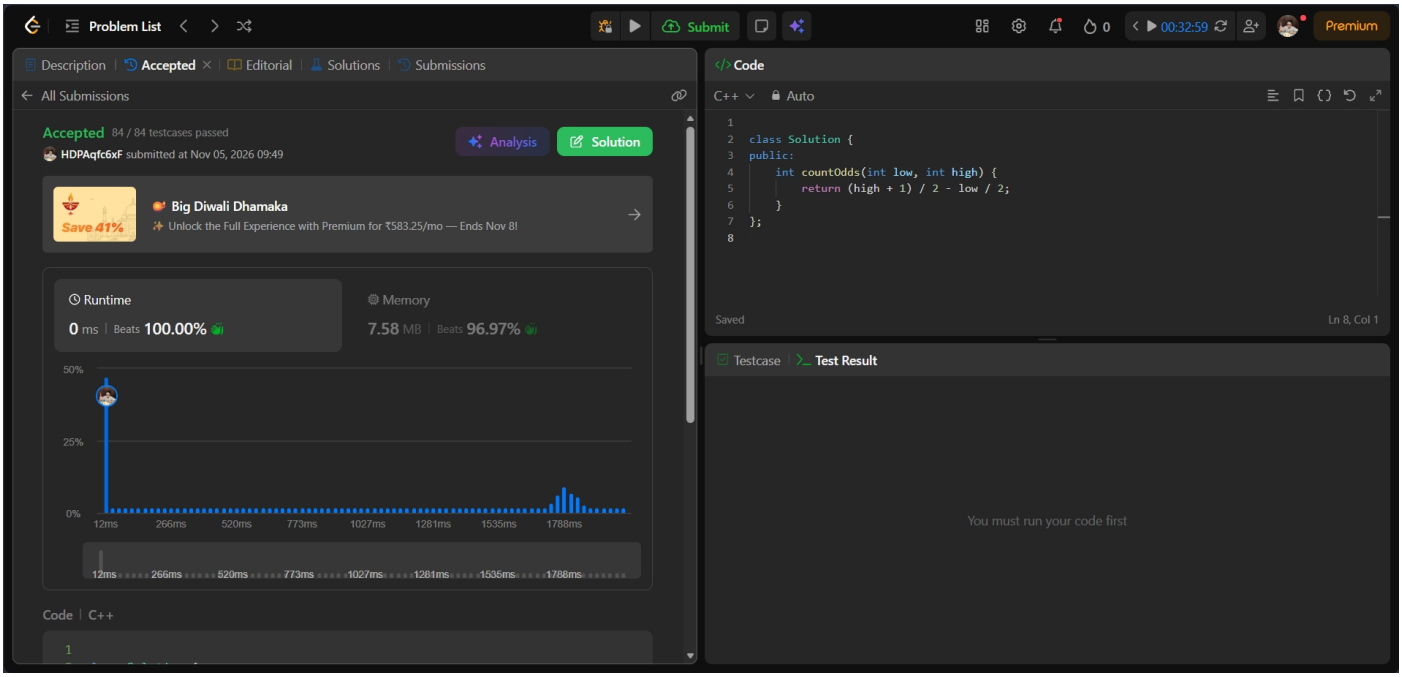

5. https://leetcode.com/problems/sum-multiples/

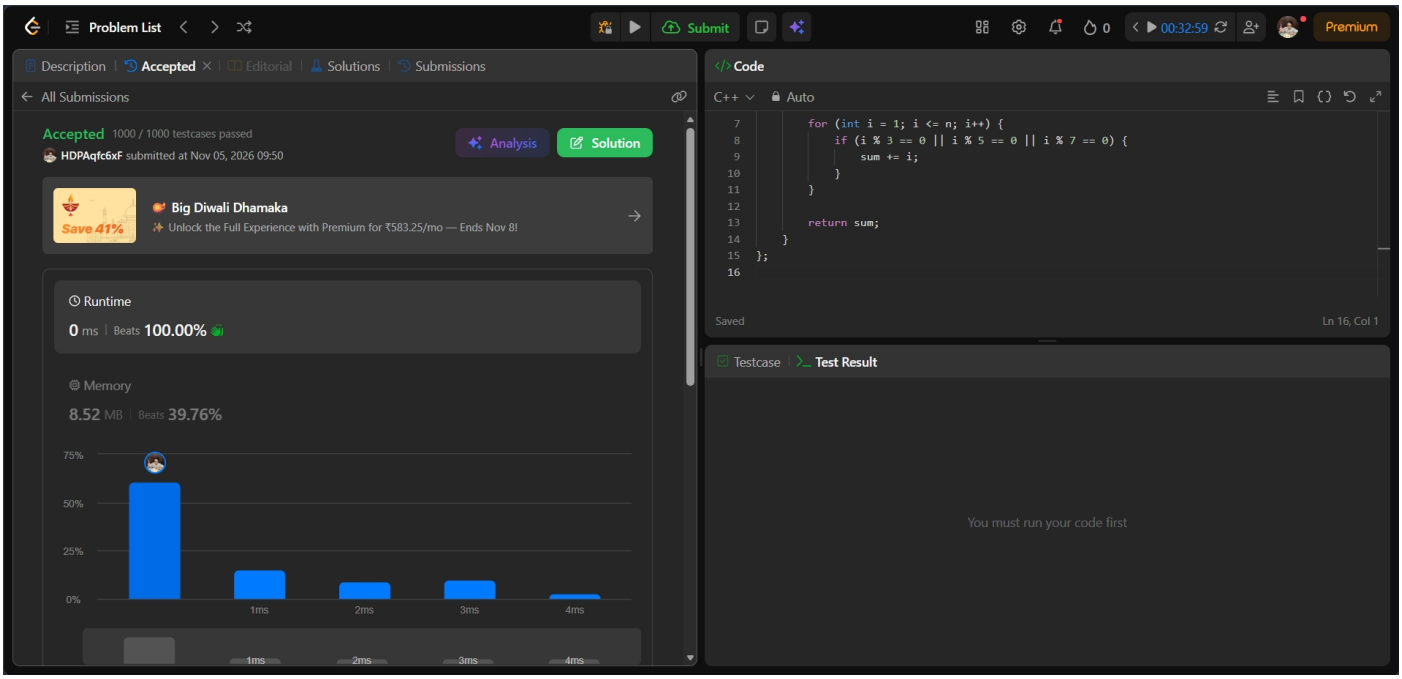

6. Number Line Jumps | HackerRank

```c
char* kangaroo(int x1, int v1, int x2, int v2) {
    static char yes[] = "YES";
    static char no[] = "NO";

    if (v1 == v2)
        return (x1 == x2) ? yes : no;

    if ((x2 - x1) * (v1 - v2) > 0 &&
        (x2 - x1) % (v1 - v2) == 0)
        return yes;

    return no;
}

int main() {
    int x1, v1, x2, v2;

    scanf("%d %d %d %d", &x1, &v1, &x2, &v2);

    printf("%s\n", kangaroo(x1, v1, x2, v2));

    return 0;
```