

基于 CentOS 7 快速安装 Apache

试验前准备

1. 修改 yum 源为阿里云

```
cd /etc/yum.repos.d/
```

```
mkdir bak
```

```
mv *.repo bak
```

```
wget -O /etc/yum.repos.d/CentOS-Base.repo https://mirrors.aliyun.com/repo/Centos-7.repo
```

```
yum clean all && yum makecache 生成缓存
```

2. 关闭防火墙必做

```
systemctl stop firewalld //关闭防火墙;
```

```
systemctl disable firewalld //禁止防火墙开机启动;
```

```
systemctl status firewalld //查看防火墙状态;
```

```
[root@localhost ~]# systemctl status firewalld
● firewalld.service - firewalld - dynamic firewall daemon
   Loaded: loaded (/usr/lib/systemd/system/firewalld.service; disabled; vendor preset: enabled)
   Active: inactive (dead)
     Docs: man:firewalld(1)

8月 01 16:20:49 localhost.localdomain systemd[1]: Starting firewalld - dynamic firewall daemon...
8月 01 16:20:50 localhost.localdomain systemd[1]: Started firewalld - dynamic firewall daemon...
8月 01 17:27:54 localhost.localdomain systemd[1]: Stopping firewalld - dynamic firewall daemon...
8月 01 17:27:55 localhost.localdomain systemd[1]: Stopped firewalld - dynamic firewall daemon.
[root@localhost ~]#
```

3. 关闭 selinux

```
vi /etc/selinux/config #编辑 selinux 配置文件;
```

按 i 键进入插入模式, 修改为 SELINUX=disabled (注意不要输错, 否则 Linux 无法正常启动), 按 ESC 键退回到命令模式, 输入:wq 保存并退出;

```
# This file controls the state of SELinux on the system.
# SELINUX= can take one of these three values:
#   enforcing - SELinux security policy is enforced.
#   permissive - SELinux prints warnings instead of enforcing.
#   disabled - No SELinux policy is loaded.
SELINUX=disabled
# SELINUXTYPE= can take one of three values:
#   targeted - Targeted processes are protected,
#   minimum - Modification of targeted policy. Only selected processes are protected.
#   mls - Multi Level Security protection.
SELINUXTYPE=targeted
```

4. 修改主机名为 自己的学号

```
hostnamectl set-hostname 学号
```

```
reboot #重新启动系统;
```

```
getenforce //查看 selinux 状态, 如果是 disabled 则表示成功;
```

```
[root@localhost student]# getenforce
Disabled
```

一. 安装 Apache 服务

1. 登录系统

2. 执行如下命令, 安装 Apache 服务及其扩展包。

```
yum -y install httpd
```

返回类似如下图结果则表示安装成功。

```
Dependency Installed:
apr.x86_64 0:1.4.8-7.el7
glibc-devel.x86_64 0:2.17-324.el7_9
kernel-headers.x86_64 0:3.10.0-1160.36.2.el7
perl-BSD-Resource.x86_64 0:1.29.07-1.el7
perl-ExtUtils-MakeMaker.noarch 0:6.68-3.el7
perl-linux-Pid.x86_64 0:0.04-18.el7
pyparsing.noarch 0:1.5.6-9.el7

apr-util.x86_64 0:1.5.2-6.el7
glibc-headers.x86_64 0:2.17-324.el7_9
libdb-devel.x86_64 0:5.3.21-25.el7
perl-Data-Dumper.x86_64 0:2.145-3.el7
perl-ExtUtils-Manifest.noarch 0:1.61-244.el7
perl-Test-Harness.noarch 0:3.28-3.el7
systemtap-sdt-devel.x86_64 0:4.0-13.el7

gdbm-devel.x86_64 0:1.10-8.el7
httpd-tools.x86_64 0:2.4.6-97.el7.centos
mailcap.noarch 0:2.1.41-2.el7
perl-ExtUtils-Install.noarch 0:1.58-299.el7_9
perl-ExtUtils-ParseXS.noarch 1:3.18-3.el7
perl-devel.x86_64 4:5.16.3-299.el7_9

Dependency Updated:
glibc.x86_64 0:2.17-324.el7_9
glibc-common.x86_64 0:2.17-324.el7_9
nscd.x86_64 0:2.17-324.el7_9

Complete!
```


3. 执行如下命令，启动 Apache 服务。

```
systemctl enable httpd.service
```

```
systemctl start httpd.service
```

4. 在本地电脑的浏览器的址栏中，输入 IP 登录地址，并按 Enter 键。

若返回页面如下图所示，说明 Apache 服务启动成功。

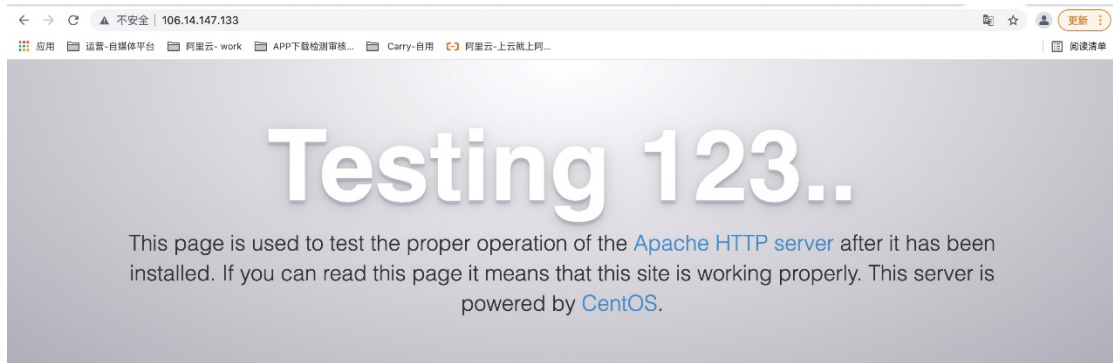

Just visiting?

The website you just visited is either experiencing problems or is undergoing routine maintenance.

If you would like to let the administrators of this website know that you've seen this page instead of the page you expected, you should send them e-mail. In general, mail sent to the name "webmaster" and directed to the website's domain should reach the appropriate person.

For example, if you experienced problems while visiting www.example.com, you should send e-mail to "webmaster@example.com".

Are you the Administrator?

You should add your website content to the directory `/var/www/html/`.

To prevent this page from ever being used, follow the instructions in the file `/etc/httpd/conf.d/welcome.conf`.

Promoting Apache and CentOS

You are free to use the images below on Apache and CentOS Linux powered HTTP servers. Thanks for using Apache and CentOS!

