Shop EZ: E-commerce Application

Team ID: LTVIP2025TMID61010

Team Size: 4

Team Leader: Gangavarapu Madhubabu

Team member: Dirisam Hruthik

Team member : Chapala Harish

Team member: Bellam Konda Sai Krishna

INTRODUCTION

ShopEZ is your one-stop destination for effortless online shopping. With a user-friendly interface and a comprehensive product catalog, finding the perfect items has never been easier. Seamlessly navigate through detailed product descriptions, customer reviews, and available discounts to make informed decisions. Enjoy a secure checkout process and receive instant order confirmation. For sellers, our robust dashboard provides efficient order management and insightful analytics to drive business growth. Experience the future of online shopping with ShopEZ today.

Seamless Checkout Process

Effortless Product Discovery

Personalized Shopping Experience

Efficient Order Management for Sellers

Insightful Analytics for Business Growth

SCENARIO:


Sarah's Birthday Gift

Sarah, a busy professional, is scrambling to find the perfect birthday gift for her best friend, Emily. She knows Emily loves fashion accessories, but with her hectic schedule, she hasn't had time to browse through multiple websites to find the ideal present. Feeling overwhelmed, Sarah turns to ShopEZ to simplify her search.

- 1. Effortless Product Discovery: Sarah opens ShopEZ and navigates to the fashion accessories category. She's greeted with a diverse range of options, from chic handbags to elegant jewelry. Using the filtering options, Sarah selects "bracelets" and refines her search based on Emily's preferred style and budget.
- 2. Personalized Recommendations: As Sarah scrolls through the curated selection of bracelets, she notices a section labeled "Recommended for You." Intrigued, she clicks on it and discovers a stunning gold bangle that perfectly matches Emily's taste. Impressed by the personalized recommendation, Sarah adds it to her cart.
- 3.Seamless Checkout Process: With the bracelet in her cart, Sarah proceeds to checkout. She enters Emily's address as the shipping destination and selects her preferred payment method. Thanks to ShopEZ's secure and efficient checkout process, Sarah completes the transaction in just a few clicks.
- 4. Order Confirmation: Moments after placing her order, Sarah receives a confirmation email from ShopEZ. Relieved to have found the perfect gift for Emily, she eagerly awaits its arrival.
- 5. Efficient Order Management for Sellers: Meanwhile, on the other end, the seller of the gold bangle receives a notification of Sarah's purchase through ShopEZ's seller dashboard. They quickly process the order and prepare it for shipment, confident in ShopEZ's streamlined order management system.
- 6. Celebrating with Confidence: On Emily's birthday, Sarah presents her with the beautifully packaged bracelet, knowing it was chosen with care and thoughtfulness. Emily's eyes light up with joy as she adorns the bracelet, grateful for Sarah's thoughtful gesture.

In this scenario, ShopEZ proves to be the perfect solution for Sarah's busy lifestyle, offering a seamless and personalized shopping experience. From effortless product discovery to secure checkout and efficient order management, ShopEZ simplifies the entire process, allowing Sarah to celebrate Emily's birthday with confidence and ease.

TECHNICAL ARCHITECTURE:




In this architecture diagram:


- The frontend is represented by the "Frontend" section, including user interface components such as User Authentication, Cart, Products, Profile, Admin dashboard, etc.,
- The backend is represented by the "Backend" section, consisting of API endpoints for Users, Orders, Products, etc., It also includes Admin Authentication and an Admin Dashboard.
- The Database section represents the database that stores collections for Users, cart, Orders and Product.

ER DIAGRAM:

ER-MODEL

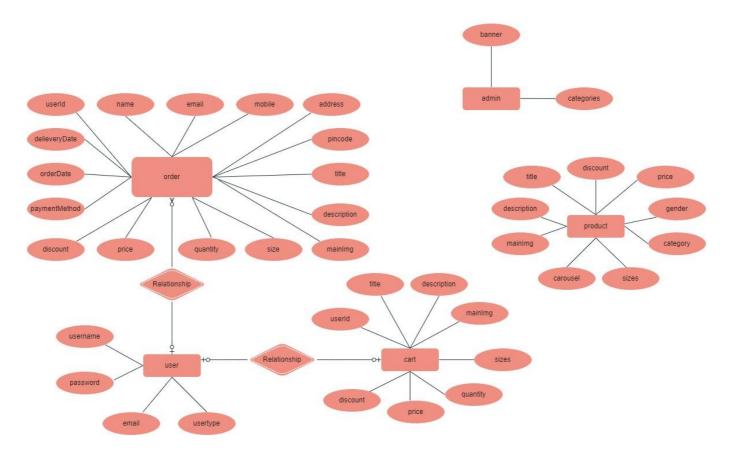

• The Database section represents the database that stores collections for Users, Admin, Cart, Orders and products.

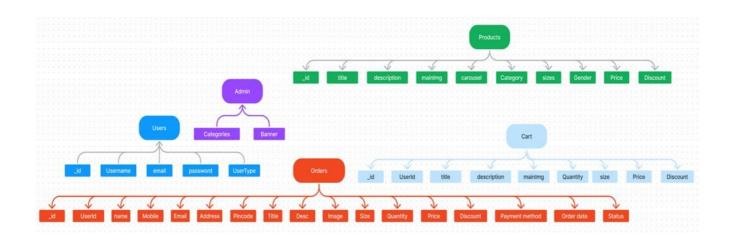

The ShopEZ ER-diagram represents the entities and relationships involved in an ecommerce system. It illustrates how users, products, cart, and orders are interconnected. Here is a breakdown of the entities and their relationships:

USER: Represents the individuals or entities who are registered in the platform. Admin:

Represents a collection with important details such as Banner image and Categories.

Products: Represents a collection of all the products available in the platform.

Cart: This collection stores all the products that are added to the cart by users. Here, the elements in the cart are differentiated by the user Id.

Orders: This collection stores all the orders that are made by the users in the platform.

FEATURES:

- Comprehensive Product Catalog: ShopEZ boasts an extensive catalog of products, offering a
 diverse range of items and options for shoppers. You can effortlessly explore and discover
 various products, complete with detailed descriptions, customer reviews, pricing, and available
 discounts, to find the perfect items for your needs.
- 2. **Shop Now Button:** Each product listing features a convenient "Shop Now" button. When you find a product that aligns with your preferences, simply click on the button to initiate the purchasing process.
- 3. **Order Details Page**: Upon clicking the "Shop Now" button, you will be directed to an order details page. Here, you can provide relevant information such as your shipping address, preferred payment method, and any specific product requirements.
- 4. **Secure and Efficient Checkout Process:** ShopEZ guarantees a secure and efficient checkout process. Your personal information will be handled with the utmost security, and we strive to make the purchasing process as swift and trouble-free as possible.
- 5. **Order Confirmation and Details:** After successfully placing an order, you will receive a confirmation notification. Subsequently, you will be directed to an order details page, where you can review all pertinent information about your order, including shipping details, payment method, and any specific product requests you specified.

In addition to these user-centric features, ShopEZ provides a robust seller dashboard, offering sellers an array of functionalities to efficiently manage their products and sales. With the seller dashboard, sellers can add and oversee multiple product listings, view order history, monitor customer activity, and access order details for all purchases.

ShopEZ is designed to elevate your online shopping experience by providing a seamless and user-friendly way to discover and purchase products. With our efficient checkout process, comprehensive product catalog, and robust seller dashboard, we ensure a convenient and enjoyable online shopping experience for both shoppers and sellers alike.

PREREQUISITES:

To develop a full-stack e-commerce app using React JS, Node.js, and MongoDB, there are several prerequisites you should consider. Here are the key prerequisites for developing such an application:

Node.js and npm:

Install Node.js, which includes npm (Node Package Manager), on your development machine. Node.js is required to run JavaScript on the server side.

- Download: https://nodejs.org/en/download/
- Installation instructions: https://nodejs.org/en/download/package-manager/

MongoDB: Set up a MongoDB database to store hotel and booking information. Install MongoDB locally or use a cloud-based MongoDB service.

- Download: https://www.mongodb.com/try/download/community
- •Installation instructions: https://docs.mongodb.com/manual/installation/

Express.js: Express.js is a web application framework for Node.js. Install Express.js to handle server-side routing, middleware, and API development.

Installation: Open your command prompt or terminal and run the following command: npm install express

React.js: React.js is a popular JavaScript library for building user interfaces. It enables developers to create interactive and reusable UI components, making it easier to build dynamic and responsive web applications. To install React.js, a JavaScript library for building user interfaces, follow the installation guide:

https://reactjs.org/docs/create-a-new-react-app.html

HTML, CSS, and JavaScript: Basic knowledge of HTML for creating the structure of your app, CSS for styling, and JavaScript for client-side interactivity is essential.

Database Connectivity: Use a MongoDB driver or an Object-Document Mapping (ODM) library like Mongoose to connect your Node.js server with the MongoDB database and perform CRUD (Create, Read, Update, Delete) operations.

Front-end Framework: Utilize Angular to build the user-facing part of the application, including product listings, booking forms, and user interfaces for the admin dashboard.

Version Control: Use Git for version control, enabling collaboration and tracking changes throughout the development process. Platforms like GitHub or Bitbucket can host your repository.

• Git: Download and installation instructions can be found at: https://git.scm.com/downloads

Development Environment: Choose a code editor or Integrated Development Environment (IDE) that suits your preferences, such as Visual Studio Code, Sublime Text, or WebStorm.

- Visual Studio Code: Download from https://code.visualstudio.com/download
- Sublime Text: Download from https://www.sublimetext.com/download
- WebStorm: Download from https://www.jetbrains.com/webstorm/download

To Connect the Database with Node JS go through the below provided link: •

Link: https://www.section.io/engineering-education/nodejs-mongoosejsmongodb/

To run the existing ShopEZ App project downloaded from github: Follow below steps:

Clone the repository:

- Open your terminal or command prompt.
- Navigate to the directory where you want to store the ecommerce app. Execute the following command to clone the repository:

Git clone: https://github.com/harsha-vardhan-reddy-07/shopEZ--e-commerceMERN Install

Dependencies:

- Navigate into the cloned repository directory: cd ShopEZ—e-commerce-App-MERN
- Install the required dependencies by running the following command: **npm install**

Start the Development Server:

- To start the development server, execute the following command: **npm run dev or npm run start**
- The e-commerce app will be accessible at http://localhost:3000 by default. You can change the port configuration in the .env file if needed.

Access the App:

• Open your web browser and navigate to http://localhost:3000.

• You should see the flight booking app's homepage, indicating that the installation and setup were successful.

You have successfully installed and set up the ShopEZ app on your local machine. You can now proceed with further customization, development, and testing as needed.

USER & ADMIN FLOW:

1. User Flow:

- Users start by registering for an account.
- After registration, they can log in with their credentials.
- Once logged in, they can check for the available products in the platform.
 Users can add the products they wish to their carts and order.
- They can then proceed by entering address and payment details.
 After ordering, they can check them in the profile section.

2. Admin Flow:


- Admins start by logging in with their credentials.
- Once logged in, they are directed to the Admin Dashboard.
- Admins can access the users list, products, orders, etc.,

PROJECT STRUCTURE:



This structure assumes a React app and follows a modular approach. Here's a brief explanation of the main directories and files:

- src/components: Contains components related to the application such as, register, login, home, etc.,
- src/pages has the files for all the pages in the application.

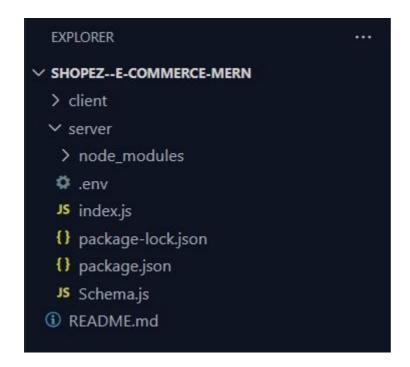

PROJECT SETUP AND CONFIGURATION:

Install required tools and software:

• Node.js.

Reference Article: https://www.geeksforgeeks.org/installation-of-node-js-on-windows/

• Git.

Reference Article: https://git-scm.com/book/en/v2/Getting-Started-Installing-Git

Create project folders and files:

- Client folders.
- Server folders

Referral Video Link:

https://drive.google.com/file/d/1uSMbPIAR6rfAEMcb nLZAZd5QIjTpnYQ/view?usp=sharin g



DATABASE DEVELOPMENT:

Create database in cloud video link:- https://drive.google.com/file/d/1CQil5KzGnPvkVOPWTLP0h-Bu2bXhq7A3/view

- Install Mongoose.
- Create database connection.

Reference Video of connect node with mongoDB database:

https://drive.google.com/file/d/1cTS3 -EOAAvDctkibG5zVikrTdmoY2Ag/view?usp=sharing

Reference Article: https://www.mongodb.com/docs/atlas/tutorial/connect-to-your-cluster/

Reference Image:

```
EXPLORER
                                JS index.js
                                            X
                                                 .env
                 中の甘む
SHOPEZ
                                server > JS index.js > ...
                                        import express from "express";
 ∨ client
                                        import mongoose from "mongoose";

✓ server

                                       import cors from "cors";
  > node modules
                                       import dotenv from "dotenv";
 JS index.js
                                       dotenv.config({ path: "./.env" });
 {} package-lock.json
                                   8 const app = express();
 {} package.json
                                       app.use(express.json());
                                       app.use(cors());
                                       app.listen(3001, () => {
                                         console.log("App server is running on port 3001");
                                        const MongoUri = process.env.DRIVER_LINK;
                                       const connectToMongo = async () => {
                                         await mongoose.connect(MongoUri);
console.log("Connected to your MongoDB database successfully");
                                            console.log(error.message);
                                        connectToMongo();
                                 PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL
                               PS D:\shopEZ> cd server

    PS D:\shopEZ\server> node index.js

                                 App server is running on port 3001
                                 bad auth : authentication failed
                                O PS D:\shopEZ\server> node index.js
> OUTLINE
                                 App server is running on port 3001
 TIMELINE
                                 Connected to your MongoDB database successfully
 NPM SCRIPTS
```

Schema use-case:

1. User Schema:

• Schema: userSchema

• Model: 'User'

- The User schema represents the user data and includes fields such as username, email, and password.
- It is used to store user information for registration and authentication purposes. The email field is marked as unique to ensure that each user has a unique email address

2. Product Schema:

Schema: productSchema

• Model: 'Product'

- The Product schema represents the data of all the products in the platform.
- It is used to store information about the product details, which will later be useful for ordering .

3. Orders Schema:

• Schema: ordersSchema

• Model: 'Orders'

The Orders schema represents the orders data and includes fields such as userId,
 product Id, product name, quantity, size, order date, etc.,

• It is used to store information about the orders made by users.

• The user Id field is a reference to the user who made the order.

4. Cart Schema:

• Schema: cartSchema

• Model: 'Cart'

• The Cart schema represents the cart data and includes fields such as userId, product Id, product name, quantity, size, order date, etc.,

• It is used to store information about the products added to the cart by users. • The user Id field is a reference to the user who has the product in cart.

5. Admin Schema:

• Schema: adminSchema

• Model: 'Admin'

• The admin schema has essential data such as categories, banner.

Code Explanation:

Schemas:

Now let us define the required schemas

```
JS Schema.js X
server > JS Schema.js > [@] productSchema
      import mongoose from "mongoose";
      const userSchema = new mongoose.Schema({
          username: {type: String},
          password: {type: String},
          email: {type: String},
          usertype: {type: String}
      const adminSchema = new mongoose.Schema({
          banner: {type: String},
          categories: {type: Array}
      const productSchema = new mongoose.Schema({
          title: {type: String},
          description: {type: String},
         mainImg: {type: String},
 19
        carousel: {type: Array},
          category: {type: String},
          gender: {type: String},
          price: {type: Number},
          discount: {type: Number}
```

```
JS Schema.js X
server > JS Schema.js > [@] productSchema
        const orderSchema = new mongoose.Schema({
    userId: {type: String},
           name: {type: String},
          email: {type: String},
mobile: {type: String},
address: {type: String},
           pincode: {type: String},
title: {type: String},
           description: {type: String},
           mainImg: {type: String},
size: {type: String},
quantity: {type: Number},
           price: {type: Number},
discount: {type: Number},
            paymentMethod: {type: String},
            orderDate: {type: String},
            deliveryDate: {type: String},
            orderStatus: {type: String, default: 'order placed'}
        const cartSchema = new mongoose.Schema({
           userId: {type: String},
            title: {type: String},
           description: {type: String},
           mainImg: {type: String},
size: {type: String},
quantity: {type: String},
            price: {type: Number},
             discount: {type: Number}
        export const User = mongoose.model('users', userSchema);
        export const Admin = mongoose.model('admin', adminSchema);
        export const Product = mongoose.model('products', productSchema);
        export const Orders = mongoose.model('orders', orderSchema);
        export const Cart = mongoose.model('cart', cartSchema);
```

BACKEND DEVELOPMENT:

Setup express server:

- Create index.js file.
- Create an express server on your desired port number.
- Define API's

Reference Video:

https://drive.google.com/file/d/1uKMIcrok ROHyZl2vRORggrYRio2qXS/view?usp=sharing

Set Up Project Structure:

- Create a new directory for your project and set up a package.json file using the npm init command.
- Install necessary dependencies such as Express.js, Mongoose, and other required packages.

Reference Video:

https://drive.google.com/file/d/19df7NUgQK3DO6wr7ooAfJYIQwne

mZoF/view?usp=sharing Reference Images:

```
₱ package.json ×
                    다 다 이 의 server > {} package.json > {} dependencies
SHOPEZ
                                                 "name": "server",

✓ server

                                                 "version": "1.0.0",
                                                 "description": "",
  {} package.json
                                                 "scripts": {
    "test": "echo \"Error: no test specified\" && exit 1"
                                                 },
"keywords": [],
                                                "author": "",
"license": "ISC",
"dependencies": {
                                                "bcrypt": "^5.1.1 ,
"body-parser": "^1.20.2",
"cors": "^2.8.5",
"dotenv": "^16.4.5",
"express": "^4.19.1",
                                                   "bcrypt": "^5.1.1",
                                                   "mongoose": "^8.2.3"
                                     ● PS D:\shopEZ\server> npm install express mongoose body-parser dotenv
                                       added 85 packages, and audited 86 packages in 11s
                                       14 packages are looking for funding
                                         run `npm fund` for details
                                       found 0 vulnerabilities
                                     PS D:\shopEZ\server> npm i bcrypt cors
> TIMELINE
                                       added 61 packages, and audited 147 packages in 9s
```

```
{} package.json
                                                    JS index.js
                                 server > JS index.js > ...
SHOPEZ
                                        import express from "express";

✓ client

✓ server

                                        const app = express();
 > node modules
                                        app.use(express.json());
 JS index.is
{} package-lock.json
                                        app.listen(3001, () => {
{} package.json
                                          console.log("App server is running on port 3001");
                                           OUTPUT DEBUG CONSOLE TERMINAL
                                PS D:\shopEZ> cd server
                                OPS D:\shopEZ\server> node index.js
                                 App server is running on port 3001
```

2. Database Configuration:

- Set up a MongoDB database either locally or using a cloud-based MongoDB service like MongoDB Atlas or use locally with MongoDB compass.
- Create a database and define the necessary collections for admin, users, products, orders and other relevant data.

3. Create Express.js Server:

- Set up an Express.js server to handle HTTP requests and serve API endpoints.
- Configure middleware such as body-parser for parsing request bodies and cors for handling cross-origin requests.

4. Define API Routes:

- Create separate route files for different API functionalities such as users, orders, and authentication.
- Define the necessary routes for listing products, handling user registration and login, managing orders, etc.

• Implement route handlers using Express.js to handle requests and interact with the database.

5. Implement Data Models:

- Define Mongoose schemas for the different data entities like products, users, and orders.
- Create corresponding Mongoose models to interact with the MongoDB database.
- Implement CRUD operations (Create, Read, Update, Delete) for each model to perform database operations.

6. User Authentication:

Create routes and middleware for user registration, login, and logout.
 Set up authentication middleware to protect routes that require user authentication.

7. Handle new products and Orders:

- Create routes and controllers to handle new product listings, including fetching products data from the database and sending it as a response.
- Implement ordering(buy) functionality by creating routes and controllers to handle order requests, including validation and database updates.

8. Admin Functionality:

- Implement routes and controllers specific to admin functionalities such as adding products, managing user orders, etc.
- Add necessary authentication and authorization checks to ensure only authorized admins can access these routes.

9. Error Handling:

- Implement error handling middleware to catch and handle any errors that occur during the API requests.
- Return appropriate error responses with relevant error messages and HTTP status codes.

WEB DEVELOPMENT:

1. Setup React Application:

- Create a React app in the client folder.
- Install required libraries
- Create required pages and components and add routes.

2.Design UI components:

- Create Components.
- Implement layout and styling.
- Add navigation.

3.Implement frontend logic:

- Integration with API endpoints.
- Implement data binding.

Reference Video Link:

https://drive.google.com/file/d/1EokogagcLMUGilluwHGYQo65x8GRpDcP/view?usp=sharin g

Reference Article Link:

https://www.w3schools.com/react/react_getstarted.asp

Reference Image:

```
O shopEZ
   File Edit Selection View Go Run
                                        Terminal Help
                                                         JS index.js M
        EXPLORER
Ф
      ∨ SHOPEZ
                                        client > src > JS App.js > ♦ App
                                                import logo from "./logo.svg";
                                                import "./App.css";
         > public
                                                function App() {
         # App.css
                                                    <div className="App">
                                                      <header className="App-header">
                                                        <img src={logo} className="App-logo" alt="logo" />
         JS App.test.js
B
          # index.css
                                                          Edit <code>src/App.js</code> and save to reload.
          JS index.js
logo.svg
          JS reportWebVitals.js
                                                          className="App-link"
Ø
          JS setupTests.js
                                                           href="https://reactjs.org"
                                                           target="_blank"
rel="noopener noreferrer"
         gitignore
        {} package-lock.json
        {} package.json
                                                           Learn React
        ① README.md
                                                         </a>
        > server
                                                      </header>
                                                                             TERMINAL
                                         Compiled successfully!
                                         You can now view client in the browser.
                                         Compiled successfully!
                                         You can now view client in the browser.
                                           Local:
                                                             http://localhost:3000
                                           On Your Network: http://192.168.29.151:3000
(A)
                                         Note that the development build is not optimized.
      OUTLINE
                                         To create a production build, use npm run build.
      > TIMELINE
       NPM SCRIPTS
                                         webpack compiled successfully
```

PROJECT IMPLEMENTATION & EXECUTION:

User Authentication:

Backend

Now, here we define the functions to handle http requests from the client for authentication.

Frontend Login:

```
JS GeneralContext.js U X
client > src > context > J5 GeneralContext.js > [@] GeneralContextProvider > [@] logout
         const inputs = {username, email, usertype, password};
         const register = async () =>{
               await axios.post('http://localhost:6001/register', inputs)
                .then( async (res)=>{
                    localStorage.setItem('userId', res.data._id);
                   localStorage.setItem('userType', res.data.usertype);
localStorage.setItem('username', res.data.username);
                   localStorage.setItem('email', res.data.email);
                   if(res.data.usertype === 'customer'){
                        navigate('/');
                    } else if(res.data.usertype === 'admin'){
                        navigate('/admin');
                }).catch((err) =>{
                   alert("registration failed!!");
                    console.log(err);
           }catch(err){
               console.log(err);
```

logout:

```
GeneralContext.jsx U X

client > src > context > GeneralContext.jsx > GeneralContextProvider > GeneralContextProvide
```

All Products (User):

In the home page, we'll fetch all the products available in the platform along with the filters.

Fetching products:

```
Products.jsx 2, U X
client > src > components > 3 Products.jsx > (0) Products > (0) handleCategoryCheckBox
           const [categories, setCategories] = useState([]);
           const [products, setProducts] = useState([]);
           const [visibleProducts, setVisibleProducts] = useState([]);
           useEffect(()=>{
               fetchData();
             }, (D)
             const fetchData = async() =>{
               await axios.get('http://localhost:6001/fetch-products').then(
                 (response)=>{
                   if(props.category === 'all'){
    setProducts(response.data);
                        setVisibleProducts(response.data);
                       setProducts(response.data.filter(product=> product.category === props.category));
                        setVisibleProducts(response.data.filter(product-> product.category === props.category));
                await axios.get('http://localhost:6001/fetch-categories').then(
                 (response)=>{
                   setCategories(response.data);
```

In the backend, we fetch all the products and then filter them on the client side.

Filtering products:

```
client > src > components > 🚭 Products.jsx > 😥 Products > 😚 useEffect() caliback
            const [sortFilter, setSortFilter] = useState('popularity');
            const [categoryFilter, setCategoryFilter] = useState([]);
            const [genderFilter, setGenderFilter] = useState([]);
            const handleCategoryCheckBox = (e) =>{
              const value = e.target.value;
              if(e.target.checked)
                  setCategoryFilter([...categoryFilter, value]);
                  setCategoryFilter(categoryFilter.filter(size=> size !== value));
            const handleGenderCheckBox = (e) =>{
              const value = e.target.value;
              if(e.target.checked){
                  setGenderFilter([...genderFilter, value]);
                  setGenderFilter(genderFilter.filter(size=> size !== value));
            const handleSortFilterChange = (e) =>{
              const value = e.target.value;
              setSortFilter(value);
                 setVisibleProducts(visibleProducts.sort((a,b)=> a.price - b.price))
                  setVisibleProducts(visibleProducts.sort((a,b)=> b.price - a.price))
                  setVisibleProducts(visibleProducts.sort((a,b)=> b.discount - a.discount))
            useEffect(()=>[
                  if (categoryFilter.length > 0 && genderFilter.length > 0){
                      setVisibleProducts(products.filter(product=> categoryFilter.includes(product.category) && genderFilter.includes(product.gender) ));
                  }else if(categoryFilter.length === 0 && genderFilter.length > 0){
                     setVisibleProducts(products.filter(product=> genderFilter.includes(product.gender) ));
                  } else if(categoryFilter.length > 0 && genderFilter.length === 0){
                      setVisibleProducts(products.filter(product=> categoryFilter.includes(product.category)));
                      setVisibleProducts(products);
            [categoryFilter, genderFilter])
```

Add product to cart:

Here, we can add the product to the cart or can buy directly.

```
IndividualProduct.jsx 2, U X
client > src > pages > customer > 👙 IndividualProduct.jsx > 😥 IndividualProduct
       const buyNow = async() =>{
            await axios.post('http://localhost:6001/buy-product',{userId, name, email, mobile, address,
                                                 pincode, title: productName, description: productDescription,
                                                  mainImg: productMainImg, size, quantity: productQuantity, price: productPrice,
                                                 discount: productDiscount, paymentMethod: paymentMethod, orderDate: new Date()}).then(
                    alert('Order placed!!');
                    navigate('/profile');
           ).catch((err)=>{
    alert("Order failed!!");
       const handleAddToCart = async() =>{
           await axios.post('http://localhost:6901/add-to-cart', {userId, title: productName, description: productDescription, mainImg: productMainImg, size, quantity: productQuantity, price: productPrice,
                                                     discount: productDiscount}).then(
                    alert("product added to cart!!");
                    navigate('/cart');
            ).catch((err)=>{
                alert("Operation failed!!");
```

· Backend: In the backend, if we want to buy, then with the address and payment method, we process buying. If we need to add the product to the cart, then we add the product details along with the user Id to the cart collection.

Buy product:

Add product to cart:

Order products:

Now, from the cart, let's place the order

· Frontend

```
Cart.jsx 3, U X
client > src > pages > customer > ۞ Cart.jsx > [❷] Cart
        const [name, setName] = useState('');
        const [mobile, setMobile] = useState('');
        const [email, setEmail] = useState('');
        const [address, setAddress] = useState('');
        const [pincode, setPincode] = useState(''
        const [paymentMethod, setPaymentMethod] = useState('');
        const userId = localStorage.getItem('userId');
        const placeOrder = async() =>{
          if(cartItems.length > 0){
              await axios.post('http://localhost:6001/place-cart-order', {userId, name, mobile,
                                       email, address, pincode, paymentMethod, orderDate: new Date()}).then(
                (response)=>{
                  alert('Order placed!!');
                  setName('');
                  setMobile('');
                  setEmail('');
                  setAddress('');
                  setPincode('');
                  setPaymentMethod('');
                  navigate('/profile');
```

Backend

In the backend, on receiving the request from the client, we then place the order for the products in the cart with the specific user Id.

Add new product:

Here, in the admin dashboard, we will add a new product. o

Frontend:

```
NewProduct.isx U X
client > src > pages > admin > ♥ NewProduct.jsx > ♥ NewProduct
                              const handleNewProduct = async() =>{
                                   await\ axios.post(\ 'http://localhost:6001/add-new-product'),\ \{productName,\ productDescription,\ productMainImg,\ productName,\ productName,\ productDescription,\ productMainImg,\ productName,\ productDescription,\ productName,\ productName
                                                                                                     productCarousel: [productCarouselImg1, productCarouselImg2], productSizes,
                                                                                                     productGender, productCategory, productNewCategory, productPrice, productDiscount}).then(
                                           (response)=>{
                                                alert("product added");
                                                  setProductName('');
                                                   setProductDescription('');
                                                  setProductMainImg('');
                                                  setProductCarouselImg1('');
                                                  setProductCarouselImg2('');
                                                   setProductCarouselImg3('');
                                                  setProductSizes([]);
                                                   setProductGender('');
                                                  setProductCategory(
                                                   setProductNewCategory('');
                                                  setProductPrice(0);
                                                  setProductDiscount(0);
                                                  navigate('/all-products');
```

o Backend:


```
JS index.js X
server > JS index.js > 0 then() callback > 0 app.put('/update-product/:id') callback
           // Add new product
           app.post('/add-new-product', async(req, res)=>{
               {\tt const~\{productName,~productDescription,~productMainImg,~productCarousel,}\\
                            product Sizes, \ product Gender, \ product Category, \ product New Category,
                            productPrice, productDiscount} = req.body;
                       const admin = await Admin.findOne();
                       admin.categories.push(productNewCategory);
                       await admin.save();
                        const newProduct = new Product({title: productName, description: productDescription,
                                 mainImg: productMainImg, carousel: productCarousel, category: productNewCategory,
                                 sizes: productSizes, gender: productGender, price: productPrice, discount: productDiscount});
                       await newProduct.save();
                        const newProduct = new Product({title: productName, description: productDescription,
                                 {\tt mainImg:}\ product {\tt MainImg,\ carousel:}\ product {\tt Carousel,\ category:}\ product {\tt Category,}
                                 sizes: productSizes, gender: productGender, price: productPrice, discount: productDiscount});
                        await newProduct.save();
                    res.json({message: "product added!!"});
                   res.status(500).json({message: "Error occured"});
```

Demo UI images:

Landing page




Products

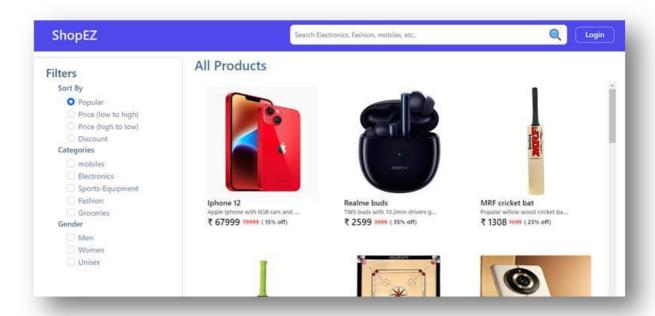


· Authentication

ShopEZ	Search Electronics, Fashion, mobiles, etc.,	Q Login
	Register	
	Username	
	Email address	
	Password	
	User type ~	
	User type Admin Customer	
	Already registered? Login	


· User Profile

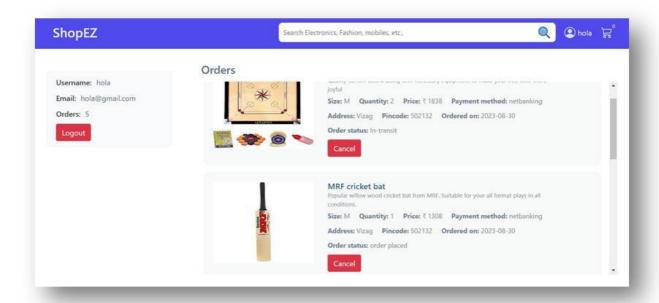


· Cart

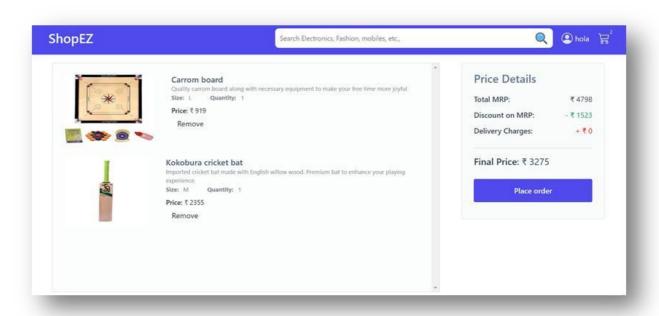


Admin dashboard

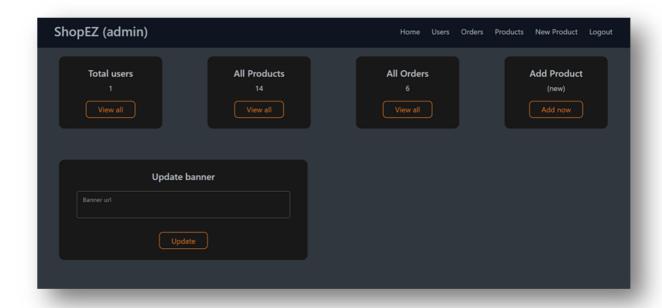

· All Orders

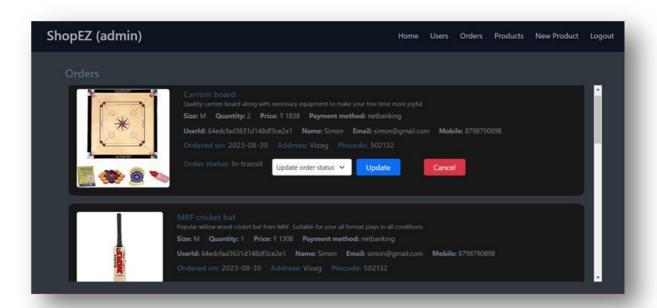

· All Products

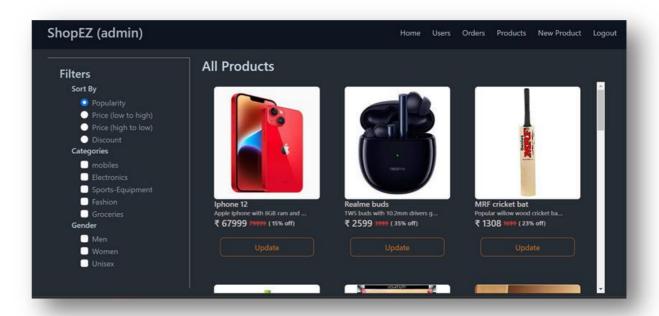

New Product Page

