


Ignition rate by condition, observation pixels, ladder nested_sparse10

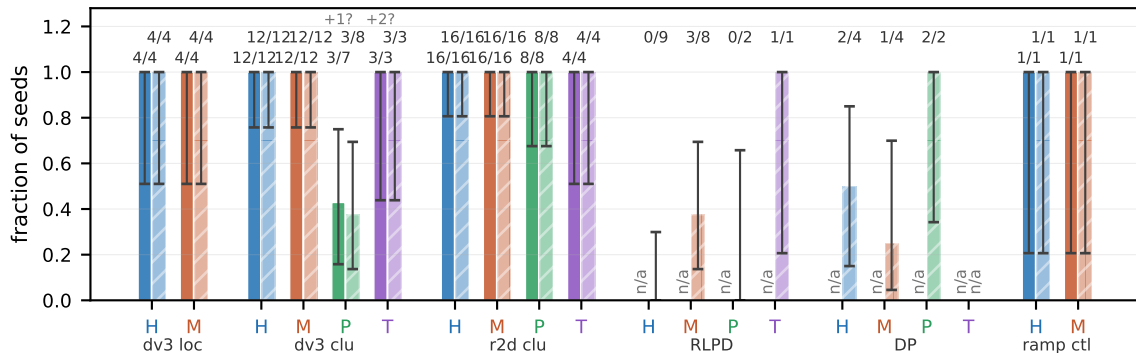

■ TRAINING RECORD (sampled): rolling-30 `home` ≥ 0.5 ▨ EVAL CELLS: ≥ 1 `home` in any rnd30 cell (MODE; {Diffusion Policy}: SAMPLE)

Ignition rate. Solid bar: TRAINING RECORD (sampled actions) -- the fraction of seeds whose rolling-30-episode `home` rate reaches ≥ 0.5 inside budget. Hatched bar: EVAL CELLS (deterministic actions, rnd30, fresh process) -- the fraction of seeds with at least one `home` episode in any rnd30 MODE cell. Error bars = Wilson 95 % CI; k/n above each bar. `+p?` = p seeds still running that have not yet crossed: undetermined, out of the denominator. A seed with no eval cell yet is out of the hatched denominator too (absent, not zero). Ticks: dv3 loc / dv3 clu / r2d clu / RLPD / DP / ramp ctl; H = human demonstrations (dHfull_all, 74 tapes), M = machine (dDPfull_first, 72 tapes from a Diffusion Policy teacher), P = planner (planner72, 72 motion-planner tapes), T = r2dreamer teacher (72 tapes from one human-trained pixel r2dreamer). {Diffusion Policy} (eval only) uses its rnd30 SAMPLE cell and has no training record, so no solid bar. {dv3} loc ran on the pop-os AVX2 GPU workstation. {RLPD} budget 250k decisions = 1 M sim frames and its episode record carries no `home` flag, so it has no solid bar. `ramp ctl' uses nested_ramp, not nested_sparse10.