

DB: backend\_laravel\_test

Ada seeder nya bisa langsung -> php artisan migrate:fresh --seed

## Penggunaan API

### Register

The screenshot shows a REST client interface for a POST request to `localhost:8000/api/auth/register`. The request body is form-data with the following fields:

key	value
email	manager2@example.com
password	password
password_confirmation	password
role_id	2
company_id	3

The response is a 201 Created status with the following JSON body:

```
1 {
2   "email": "manager2@example.com",
3   "role_id": "2",
4   "company_id": "3",
5   "updated_at": "2024-11-19T12:35:26.000000Z",
6   "created_at": "2024-11-19T12:35:26.000000Z",
7   "id": 4
8 }
```


### Login




```
{
  "current_page": 1,
  "data": [
    {
      "id": 1,
      "name": "Karyawan A",
      "phone_number": "081234567890",
      "address": "Alamat A",
      "company_id": 1,
      "created_at": "2024-11-19T11:28:22.000000Z",
      "updated_at": "2024-11-19T11:28:22.000000Z",
      "soft_delete": 0
    },
    {
      "id": 2,
      "name": "Karyawan B",
      "phone_number": "081234567891",
      "address": "Alamat B",
      "company_id": 2,
      "created_at": "2024-11-19T11:28:22.000000Z",
      "updated_at": "2024-11-19T11:28:22.000000Z",
      "soft_delete": 0
    },
    {
      "id": 3,
      "name": "Karyawan C",
      "phone_number": "081234567892",
      "address": "Alamat C",
      "company_id": 3,
      "created_at": "2024-11-19T11:28:22.000000Z",
      "updated_at": "2024-11-19T11:28:22.000000Z",
      "soft_delete": 0
    }
  ]
}
```

```
    }
  ],
  "first_page_url": "http://localhost:8000/api/employees?page=1",
  "from": 1,
  "last_page": 1,
  "last_page_url": "http://localhost:8000/api/employees?page=1",
  "links": [
    {
      "url": null,
      "label": "&laquo; Previous",
      "active": false
    },
    {
      "url": "http://localhost:8000/api/employees?page=1",
      "label": "1",
      "active": true
    },
    {
      "url": null,
      "label": "Next &raquo;",
      "active": false
    }
  ],
  "next_page_url": null,
  "path": "http://localhost:8000/api/employees",
  "per_page": 10,
  "prev_page_url": null,
  "to": 3,
  "total": 3
}
```

Edit (manager/admin)

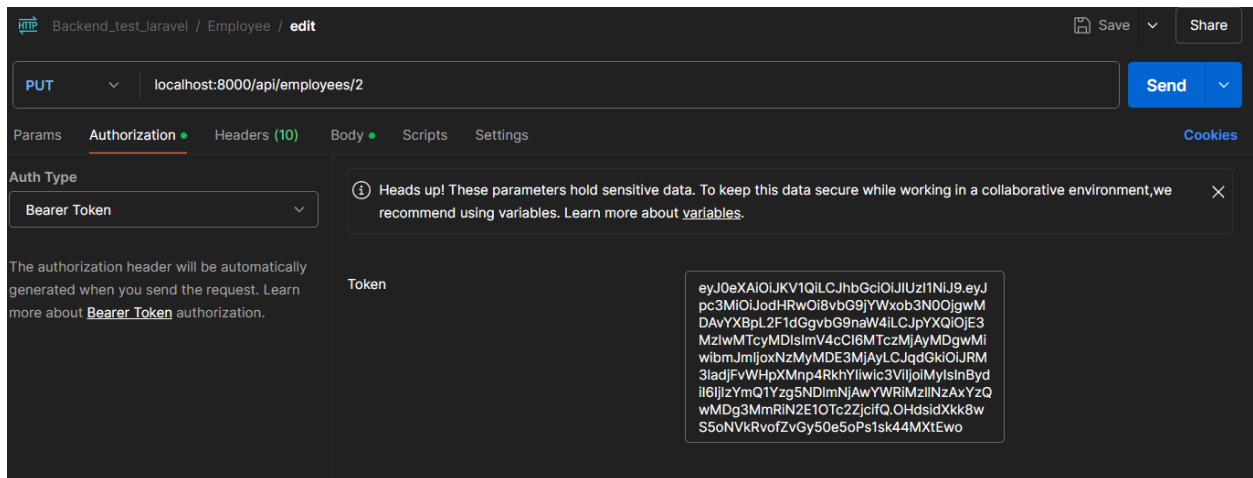

Bearer token contoh ini menggunakan staff

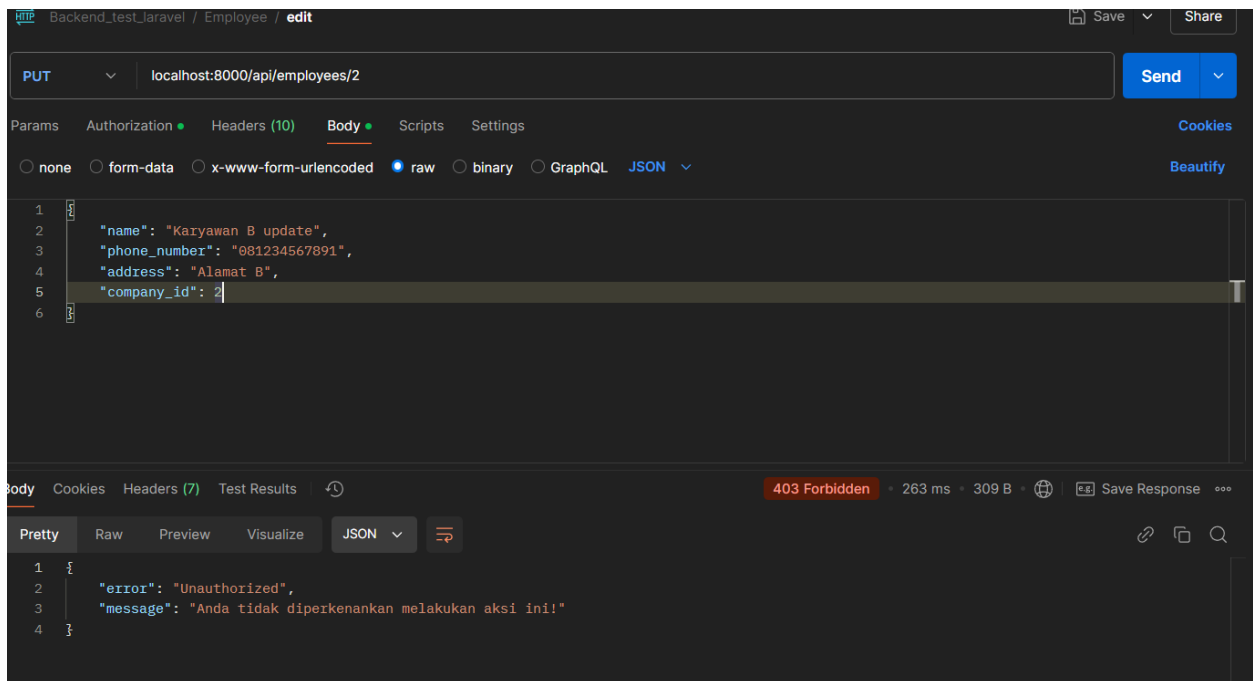

Menggunakan akun manager/admin

Backend\_test\_Laravel / Employee / edit

PUT localhost:8000/api/employees/2

Params Authorization Headers (10) Body Scripts Settings Cookies

none form-data x-www-form-urlencoded raw binary GraphQL JSON

```
1 {
2   "name": "Karyawan B update",
3   "phone_number": "081234567891",
4   "address": "Alamat B",
5   "company_id": 2
6 }
```

body Cookies Headers (7) Test Results 200 OK • 279 ms • 424 B Save Response

Pretty Raw Preview Visualize JSON

```
1 {
2   "id": 2,
3   "name": "Karyawan B update",
4   "phone_number": "081234567891",
5   "address": "Alamat B",
6   "company_id": 2,
7   "created_at": "2024-11-19T11:28:22.000000Z",
8   "updated_at": "2024-11-19T12:45:17.000000Z",
9   "soft_delete": 0
10 }
```

Tambah (manager/admin) jangan lupa barear token

Backend\_test\_Jarvel / Employee / tambah

POST

localhost:8000/api/employees

Send

ParamsAuthorizationHeaders (10)BodyScriptsSettingsCookies

Auth Type

Bearer Token

The authorization header will be automatically generated when you send the request. Learn more about [Bearer Token](#) authorization.

Heads up! These parameters hold sensitive data. To keep this data secure while working in a collaborative environment, we recommend using variables. Learn more about [variables](#).

Token

eyJ0eXAiOiJKV1QiLCJhbGciOiJIUzI1NiJ9.eyJpc3MiOiJodHRwOi8vbG9jYXRob3N0OjgwMDAvYXBpL2F1dG9vbG9naW4iLCJpYXQiOiE3MzlwMjAzMDIsImV4cCI6MTczMjAyMzkwMiwibmJmJoxNzMyMDIwMzAyLCJqdGkiOiI1RVNhaUMzcWthNFduWlZlIiwic3ViIjoiMlIsbnBydml6IjIzYmQ1Yzg5NDImNjAwYWwYWRlMzllNzAxYzQwMDg3MmRlN2E1OTc2ZjlfQ.XaKgRsv7sCz-Fka9f0HQMk9WSC7LRN53E5nTKXLgho

Backend\_test\_Jarvel / Employee / tambah

POST

localhost:8000/api/employees

Send

ParamsAuthorizationHeaders (10)BodyScriptsSettingsCookies

noneform-datax-www-form-urlencodedrawbinaryGraphQLJSON

Beautify

```
1 {
2   "name": "Karyawan D",
3   "phone_number": "081234567000",
4   "address": "Alamat D",
5   "company_id": 3
6 }
```

BodyCookiesHeaders (7)Test Results

201 Created284 ms406 BSave Response

PrettyRawPreviewVisualizeJSON

```
1 {
2   "name": "Karyawan D",
3   "phone_number": "081234567000",
4   "address": "Alamat D",
5   "company_id": 3,
6   "updated_at": "2024-11-19T12:47:32.000000Z",
7   "created_at": "2024-11-19T12:47:32.000000Z",
8   "id": 4
9 }
```

Soft delete

Backend\_test\_Jarvel / Employee / delete

PUT

localhost:8000/api/employees/4

Send

ParamsAuthorizationHeaders (9)BodyScriptsSettingsCookies

Auth Type

Bearer Token

The authorization header will be automatically generated when you send the request. Learn more about [Bearer Token](#) authorization.

Heads up! These parameters hold sensitive data. To keep this data secure while working in a collaborative environment, we recommend using variables. Learn more about [variables](#).

Token

eyJ0eXAiOiJKV1QiLCJhbGciOiJIUzI1NiJ9.eyJ...

BodyCookiesHeaders (7)Test Results200 OK283 ms264 BSave Response

PrettyRawPreviewVisualizeJSON

```
1 {
2   "message": "Employee deleted successfully"
3 }
```

	id	name	phone_number	address	company_id	created_at	updated_at	soft_delete
1	1	Karyawan A	081234567890	Alamat A	1	2024-11-19 11:28:22.000	2024-11-19 11:28:22.000	0
2	2	Karyawan B update	081234567891	Alamat B	2	2024-11-19 11:28:22.000	2024-11-19 12:45:17.000	0
3	3	Karyawan C	081234567892	Alamat C	3	2024-11-19 11:28:22.000	2024-11-19 11:28:22.000	0
4	4	Karyawan D	081234567000	Alamat D	3	2024-11-19 12:47:32.000	2024-11-19 12:59:40.000	1

Company(manager/admin)

Get list

Backend\_test\_Jarvel / company / list

GET

localhost:8000/api/companies

Send

ParamsAuthorizationHeaders (8)BodyScriptsSettingsCookies

Auth Type

Bearer Token

The authorization header will be automatically generated when you send the request. Learn more about [Bearer Token](#) authorization.

Heads up! These parameters hold sensitive data. To keep this data secure while working in a collaborative environment, we recommend using variables. Learn more about [variables](#).

Token

eyJ0eXAiOiJKV1QiLCJhbGciOiJIUzI1NiJ9.eyJ...


```
{
  "current_page": 1,
  "data": [
```




```
{
  "id": 1,
  "name": "Perusahaan A",
  "email": "contact@companyA.com",
  "phone_number": "081234567890",
  "created_at": "2024-11-19T11:28:20.000000Z",
  "updated_at": "2024-11-19T11:28:20.000000Z",
  "soft_delete": 0
},
{
  "id": 2,
  "name": "Perusahaan B",
  "email": "contact@companyB.com",
  "phone_number": "081234567891",
  "created_at": "2024-11-19T11:28:20.000000Z",
  "updated_at": "2024-11-19T11:28:20.000000Z",
  "soft_delete": 0
},
{
  "id": 3,
  "name": "Perusahaan C",
  "email": "contact@companyC.com",
  "phone_number": "081234567892",
  "created_at": "2024-11-19T11:28:20.000000Z",
  "updated_at": "2024-11-19T11:28:20.000000Z",
  "soft_delete": 0
}
],
"first_page_url": "http://localhost:8000/api/companies?page=1",
"from": 1,
"last_page": 1,
"last_page_url": "http://localhost:8000/api/companies?page=1",
```

```
"links": [  
  {  
    "url": null,  
    "label": "&laquo; Previous",  
    "active": false  
  },  
  {  
    "url": "http://localhost:8000/api/companies?page=1",  
    "label": "1",  
    "active": true  
  },  
  {  
    "url": null,  
    "label": "Next &raquo;",  
    "active": false  
  }  
],  
"next_page_url": null,  
"path": "http://localhost:8000/api/companies",  
"per_page": 10,  
"prev_page_url": null,  
"to": 3,  
"total": 3  
}
```

Get list id

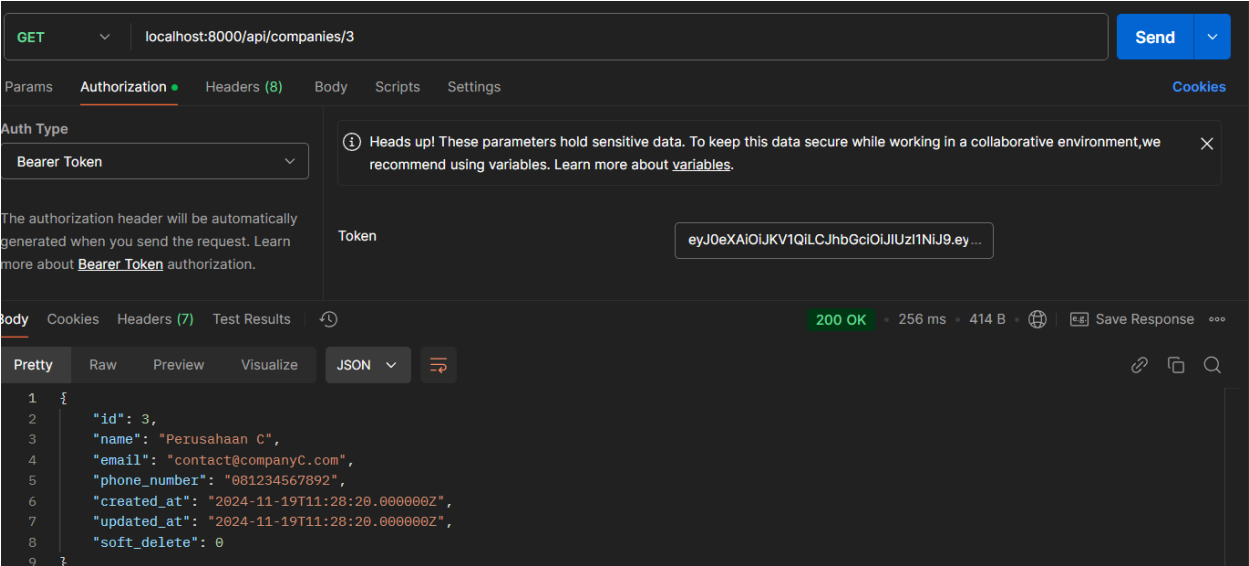

# Tambah

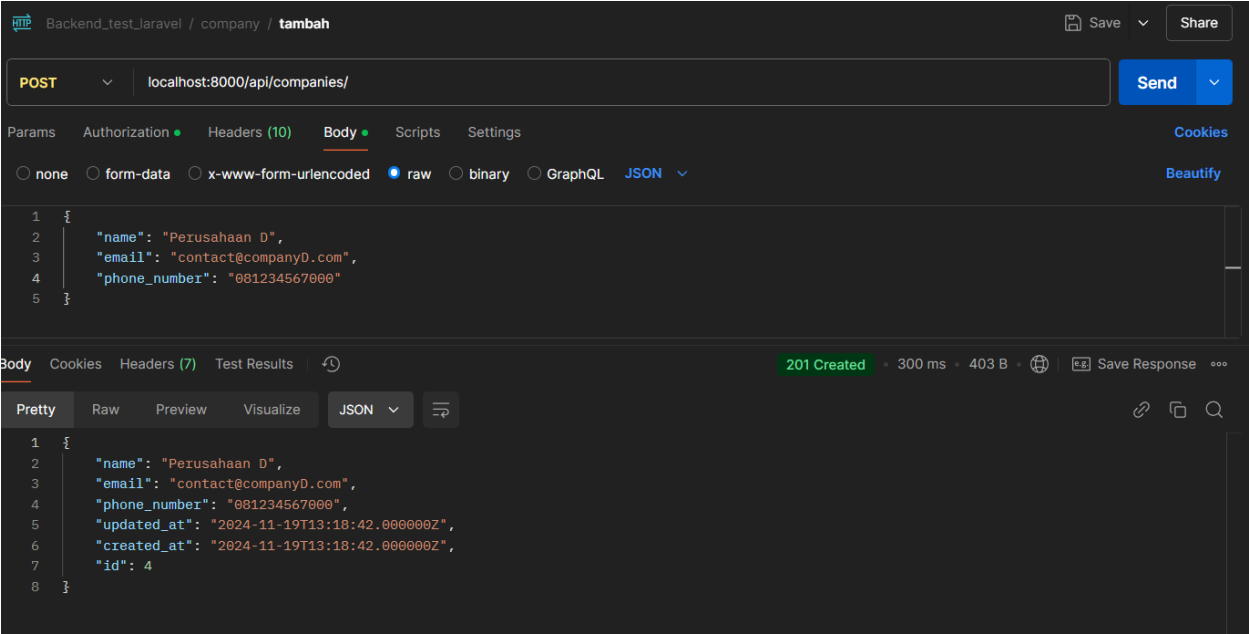

# Edit

Backend\_test\_laravel / company / **edit** Save Share

PUT localhost:8000/api/companies/4 Send

Params Authorization Headers (10) **Body** Scripts Settings Cookies

☐ none ☐ form-data ☐ x-www-form-urlencoded ☒ raw ☐ binary ☐ GraphQL ☒ JSON Beautify

```
1 {
2   "name": "Perusahaan D updated",
3   "email": "contact@companyD.com",
4   "phone_number": "081234567890"
5 }
```

Body Cookies Headers (7) Test Results 200 OK 240 ms 263 B Save Response

Pretty Raw Preview Visualize **JSON** Copy

```
1 {
2   "message": "Company deleted successfully"
3 }
```

## Delete

Backend\_test\_laravel / company / **delete** Save Share

PUT localhost:8000/api/companies/4 Send

Params **Authorization** Headers (9) Body Scripts Settings Cookies

Auth Type

**Bearer Token**

The authorization header will be automatically generated when you send the request. Learn more about [Bearer Token](#) authorization.

Heads up! These parameters hold sensitive data. To keep this data secure while working in a collaborative environment, we recommend using variables. Learn more about [variables](#).

Token eyJ0eXAiOiJKV1QiLCJhbGciOiJIUzI1NiJ9.eyJ...

Body Cookies Headers (7) Test Results 200 OK 304 ms 263 B Save Response

Pretty Raw Preview Visualize **JSON** Copy

```
1 {
2   "message": "Company deleted successfully"
3 }
```