

Optimistic Dual Averaging Unifies Modern Optimizers

Thomas Pethick
Independent Researcher
tmpethick@gmail.com

Wanyun Xie
EPFL (LIONS)
wanyun.xie@epfl.ch

Roman Machacek
University of Bern
roman.machacek@unibe.ch

Volkan Cevher
EPFL (LIONS)
volkan.cevher@epfl.ch

Abstract

We introduce SODA, a generalization of Optimistic Dual Averaging, which provides a common perspective on state-of-the-art optimizers like Muon, Lion, AdE-MAMix and NAdam, showing that they can all be viewed as optimistic instances of this framework. Based on this framing, we propose a practical SODA wrapper for any base optimizer that eliminates weight decay tuning through a theoretically-grounded $1/k$ decay schedule. Empirical results across various scales and training horizons show that SODA consistently improves performance without any additional hyperparameter tuning.

1 Introduction

Deep learning optimization has developed along two largely complementary axes. The first axis is *geometry and adaptation*: designing updates whose implicit norm, preconditioner, or constraint set reflects the structure of modern models, potentially improving scaling in high dimensions. Adam [Kingma and Ba, 2014] is a central example, coupling gradient averaging with an ℓ_∞ -type geometry through elementwise normalization. In parallel, *spectral* geometry and stochastic dualization were developed in Stochastic Spectral Descent (SSD) [Carlson et al., 2015a, 2016], and are now resurfacing in recent methods such as Muon and Scion [Jordan et al., 2024b, Pethick et al., 2025a].

The second axis is *composition of ingredients*: how gradient feedback and iterates are combined through momentum, averaging, and schedules to obtain a stable and performant training recipe. Algorithms such as Lion [Chen et al., 2023] and practical recipes such as the schedule-free wrapper [Defazio et al., 2024] highlight that the assembly of these ingredients can be as important as the ingredients themselves. A striking pattern over the last decade is that many seemingly disparate new optimizers can be explained as different points in this 2D design space.

A useful lens for both axes is the classical dualization framework, where the next iterate is obtained by minimizing a linear surrogate regularized by a geometry-inducing term:

$$x^{k+1} \in \arg \min_{x \in \mathcal{X}} \gamma_k \langle d^k, x \rangle + h_k(x). \quad (1)$$

Here, $\gamma_k > 0$ is a stepsize schedule, d^k is a (possibly averaged) gradient feedback, and h_k is a (possibly time-varying) regularizer/mirror map that determines the geometry.

For instance, choosing $h_k(x) = \frac{1}{2} \|x - x^k\|_2^2$ recovers gradient descent, while non-Euclidean choices of h_k yield normalized and geometry-aware updates, that can depend more favorably on the dimensionality of the problem. In parallel, *how* we form d^k (momentum, averaging, extrapolation) and *how* we average iterates (primal averaging / schedule-free) have a strong effect on the properties of the resulting method, including noise robustness, acceleration, and anytime guarantees.

Table 1: Instances of **SODA** for $\bar{\lambda}_k = 0$ (c.f. Section 3).

Method	Reference	Grad. avg ($\alpha_k < 1$)	Optimism ($\bar{\alpha}_k > 0$)	Geometry (h_k)
Adam	Kingma and Ba [2014]	✓	✗	Smoothed ℓ_∞
NAdam ¹	Dozat [2016]	✓	✓	Smoothed ℓ_∞
Stoch. ℓ_∞	Carlson et al. [2015a, 2016]	✗	✗	ℓ_∞
Signum	Bernstein et al. [2018]	✓	✗	ℓ_∞
Lion	Chen et al. [2023]	✓	✓	ℓ_∞
Shampoo	Gupta et al. [2018]	✗	✗	Smoothed Spectral
SSD	Carlson et al. [2015a, 2016]	✗	✗	Spectral
Scion (Spectral)	Pethick et al. [2025a]	✓	✗	Spectral
Muon	Jordan et al. [2024b]	✓	✓	Spectral
Multi-Norm	Scetbon et al. [2025]	✗	✗	Doubly Stochastic

¹ Rediscovered as Simplified-AdEMAMix [Morwani et al., 2025].

One major challenge is how to set hyperparameters of these optimizers, which becomes particularly important as model size becomes prohibitively expensive to tune and we instead seek predictable scaling rules.

One particularly challenging parameter is weight decay. In the context of multi-epoch training, weight decay has a precise characterization, since it constrains the norm of the iterates, thus acting as a regularizer [Xie and Li, 2024, Pethick et al., 2025a]. However, even in single-epoch training, where overfitting is not a concern, weight decay can surprisingly still be beneficial.

Very recently a scaling rule was developed choosing weight decay as $1/d$ with model dimension d [Xiao, 2024, Qiu et al., 2025]. However, since many large-scale experiments follow compute-optimal training regimes where d and the training horizon n are coupled, it is difficult to disentangle whether the effective dependence is on d or on time. In addition, weight decay typically needs to be tuned on a per-optimizer basis, as observed for Lion, which requires a significantly larger weight decay than AdamW [Chen et al., 2023]. It raises the following question:

*Is it possible to ground these two axes of recent progress in classical methods
and provide guidance on hyperparameters?*

In this paper, we contend that the two axes of algorithmic development are not separate threads. To this end, we introduce **SODA**, a generalization of Optimistic Dual Averaging [Rakhlin and Sridharan, 2013] that explicitly couples *dual processing* (gradient averaging + optimism) and *primal processing* (iterate averaging + primal extrapolation). The resulting framework provides a single template that recovers several widely used optimizers as special cases and makes it straightforward to inject non-Euclidean geometry, such as ℓ_∞ or spectral geometry, into modern training recipes.

In particular, when one of the averaging parameters is simplified (our “modernized” regime), **SODA** yields a practical wrapper around any base optimizer that eliminates weight decay tuning via a theoretically grounded $1/k$ decay.

Contributions. Our contributions are as follows:

- (i) *Unification via optimism and dualization:* We show that **SODA** provides a unified perspective on several state-of-the-art optimizers. Most notably, it captures Muon, Lion- $\mathcal{K}$, and NAdam as *optimistic* instances within this broad framework (cf. Table 1).
- (ii) *Theoretical guarantees:* The **SODA** framing allows us to theoretically derive hyperparameter choices that works remarkably well in practice. Our formulation provides a new perspective on weight decay, not only as a regularizer, but as a form of primal averaging. This results in a new update rule that anchors each update at the initialization and induces a $1/k$ weight decay schedule.
- (iii) *A simple wrapper:* We propose a practical wrapper around any base optimizer (e.g., Adam, Lion, Muon, Scion) that introduces no new hyperparameters and removes the need to tune a weight decay parameter.
- (iv) *Empirical results without additional tuning:* We demonstrate consistent performance improvements when wrapping Adam, Muon, and Scion across various model sizes and training horizons, even outperforming baselines with tuned weight decay. Our proposed instantiation of our framework, **SODA**[†], removes the need to tune weight decay while leading to better performance at scale.

Limitations This work focuses on the single-epoch setting. For multi-epoch training it might be necessary to have a hyperparameter controlling the regularization strength, due to overfitting.

2 Preliminaries

We are interested in the following minimization problem

$$\min_{x \in \mathcal{X}} f(x) := \mathbb{E}_{\xi} [f(x, \xi)], \quad (2)$$

which covers a host of machine learning problems, where ξ represents a data sample, x is the parameter of the model being optimized, and $f(x, \xi)$ is a loss function.

Dual averaging and Fenchel conjugate The Dual Averaging framework [Nesterov, 2009] and its variants typically rely on the Fenchel conjugate to map gradient information back to the primal space. The Fenchel conjugate of a function $h : \mathcal{X} \rightarrow \mathbb{R} \cup \{\infty\}$ is defined as:

$$h^*(d) = \sup_{x \in \mathcal{X}} \{ \langle d, x \rangle - h(x) \},$$

where $d \in \mathcal{X}^*$. The subdifferential ∂h^* is equivalent to the set of maximizers of this conjugate operation:

$$\partial h^*(d) = \operatorname{argmax}_{x \in \mathcal{X}} \{ \langle d, x \rangle - h(x) \}.$$

This identity is a direct consequence of the Fenchel-Young inequality [Bauschke and Lucet, 2012]. The general optimization template (1) can then be written compactly as:

$$x^{k+1} \in \partial h_k^*(-\gamma_k d^k), \quad (3)$$

where d^k is an average (or momentum) of past stochastic gradients, γ_k is a stepsize schedule, and h_k is a sequence of geometry defining regularizers (or mirror maps).

Standard regularizers Different choices of the regularizer $h(x)$ recover well-known optimization steps. We highlight three instances that are particularly relevant for our work, especially when the constraint set is the norm ball $\mathcal{D} = \{x \in \mathcal{X} \mid \|x\| \leq 1\}$ for some arbitrary norm $\|\cdot\|$:

(i) *Unconstrained*: Let $h(x) = \frac{1}{2}\|x\|^2$. Then, the ∂h^* is the sharp operator [Nesterov, 2012]:

$$\partial h^*(d) = [d]^\# := \arg \max_x \{ \langle d, x \rangle - \frac{1}{2}\|x\|^2 \}.$$

(ii) *Linear minimization oracle (lmo)*: Let $h(x) = \iota_{\mathcal{D}}(x)$ be the indicator function of a set $\mathcal{D}$ (i.e., 0 if $x \in \mathcal{D}$ and ∞ otherwise). The ∂h^* is then the lmo:

$$\partial h^*(-d) = \operatorname{lmo}_{\mathcal{D}}(d) := \arg \min_{x \in \mathcal{D}} \langle d, x \rangle.$$

This is the core operation in Frank-Wolfe (conditional gradient) methods [Frank and Wolfe, 1956, Clarkson, 2010, Jaggi, 2013], which are projection-free but typically require f to be smooth.

(iii) *Clipping*: By combining the above, we can handle a non-smooth f via “clipping.” Let $h(x) = \frac{1}{2}\|x\|^2 + \iota_{\mathcal{D}}(x)$. Then, we have

$$\partial h^*(-d) = \operatorname{clip}_{\mathcal{D}}(d) := \arg \min_{x \in \mathcal{D}} \{ \langle d, x \rangle + \frac{1}{2}\|x\|^2 \}.$$

This operation clips the gradient step into the feasibility set $\mathcal{D}$, essentially performing a projection of the negative gradient. This was used in Pethick et al. [2025b], Crawshaw et al. [2025] for training neural networks.

These three choices of ∂h^* can all be related through the lmo, since $[d]^\# = -\|d\|_* \operatorname{lmo}_{\mathcal{D}}(d)$ and $\operatorname{clip}_{\mathcal{D}}(d) = \min\{1, \|d\|_*\} \operatorname{lmo}_{\mathcal{D}}(d)$ (see Theorem A.1).

Norm choices Important special cases arise by taking $h = \iota_{\mathcal{D}}$ with $\mathcal{D}$ the unit ball of a norm. For the ℓ_∞ ball, $\operatorname{lmo}_{\mathcal{D}}(d) = -\operatorname{sign}(d)$ as used in SignSGD and Lion [Bernstein et al., 2018, Chen et al., 2023]. For the spectral norm ball, $\operatorname{lmo}_{\mathcal{D}}(G) = -\operatorname{msign}(G)$ with $\operatorname{msign}(G) := UV^\top$, where $U\Sigma V^\top$ is the singular value decomposition of G as used in Carlson et al. [2016], Jordan et al. [2024b], Pethick et al. [2025a].

3 Method

We propose the following algorithm which generalizes Optimistic Dual Averaging (ODA) by introducing a primal extrapolation sequence (y^k) from Tseng [2008], Lan [2012], Defazio et al. [2024]:

$$\begin{aligned}
m^{k+1} &= (1 - \alpha_k)m^k + \alpha_k \nabla f(y^k, \xi_k) \\
\bar{m}^{k+1} &= (1 - \bar{\alpha}_k)m^{k+1} + \bar{\alpha}_k \nabla f(y^k, \xi_k) \quad (\text{optimism}) \\
z^{k+1} &\in \partial h_k^*(-\gamma_k \bar{m}^{k+1}) = \arg \min_{x \in \mathcal{X}} \gamma_k \langle \bar{m}^{k+1}, x \rangle + h_k(x) \quad (\text{SODA}) \\
x^{k+1} &= (1 - \lambda_k)x^k + \lambda_k z^{k+1} \\
y^{k+1} &= (1 - \bar{\lambda}_k)x^{k+1} + \bar{\lambda}_k z^{k+1} \quad (\text{primal extrapolation})
\end{aligned}$$

with $\alpha_k, \bar{\alpha}_k, \lambda_k, \bar{\lambda}_k \in [0, 1]$ and $\gamma_k > 0$. We initialize $m^0 = 0$ and $x^0 = y^0 = z^0 \in \partial h_0^*(0)$. Observe the elegant symmetry between how the dual (gradients) and primal (iterates) are being processed. Our analysis in Section 4 builds on the Schedule-Free framework of Defazio et al. [2024] and ODA Rakhlin and Sridharan [2013], so we refer to the method as SODA to pay homage.

Note that typically in machine learning libraries such as PyTorch the momentum parameters are instead defined as $\beta_k = 1 - \alpha_k$, $\bar{\beta}_k = 1 - \bar{\alpha}_k$, $\tau_k = 1 - \lambda_k$, and $\bar{\tau}_k = 1 - \bar{\lambda}_k$.

3.1 Special Cases

There are two important extremes depending on the choice of the primal extrapolation parameter $\bar{\lambda}_k$.

Optimistic Dual Averaging For $\bar{\lambda}_k = 1$:

$$\begin{aligned}
m^{k+1} &= (1 - \alpha_k)m^k + \alpha_k \nabla f(z^k, \xi_k) \\
\bar{m}^{k+1} &= (1 - \bar{\alpha}_k)m^{k+1} + \bar{\alpha}_k \nabla f(z^k, \xi_k) \\
z^{k+1} &\in \partial h^*(-\gamma_k \bar{m}^{k+1}) \\
x^{k+1} &= (1 - \lambda_k)x^k + \lambda_k z^{k+1}
\end{aligned} \quad (\text{ODA})$$

This is an optimistic version of the celebrated Dual Averaging scheme [Nesterov, 2005], also known as optimistic follow-the-regularized-leader (FTRL) in online learning [Rakhlin and Sridharan, 2013]. Notice that the output of the algorithm (x^k) can be different from where the gradient is evaluated (z^k) .

Modernized Optimistic Dual Averaging For $\bar{\lambda}_k = 0$:

$$\begin{aligned}
m^{k+1} &= (1 - \alpha_k)m^k + \alpha_k \nabla f(x^k, \xi_k) \\
\bar{m}^{k+1} &= (1 - \bar{\alpha}_k)m^{k+1} + \bar{\alpha}_k \nabla f(x^k, \xi_k) \\
x^{k+1} &= (1 - \lambda_k)x^k + \lambda_k \partial h_k^*(-\gamma_k \bar{m}^{k+1})
\end{aligned} \quad (\text{MODA})$$

This can be seen as an optimistic version of Double Averaging of Nesterov and Shikhman [2015]. We refer to this as “modernized” following Jelassi and Defazio [2020], which applied Double Averaging to deep learning. The output of the algorithm (x^k) is the same as where the gradient is evaluated (x^k) .

This recovers Stochastic Frank-Wolfe and Scion [Mokhtari et al., 2020, Pethick et al., 2025a] with $\bar{\alpha}_k = 0$ and $h_k(x) = \iota_{\mathcal{D}}(x)$, since then $\partial h_k^*(-\gamma_k d) = \rho \text{lmo}(\gamma_k d) = \rho \text{lmo}(d)$ for some constrained radius $\rho > 0$ where the first equality follows from scale invariance of the lmo.

More importantly, for $\bar{\alpha}_k \neq 0$, MODA captures NAdam Dozat [2016], Lion [Chen et al., 2023] and Muon [Jordan et al., 2024b] with weight decay through the choice of geometry h_k :

- Lion- $\mathcal{K}$: choose $h_k = \mathcal{K}^*$, so that $\partial h_k^* = \partial \mathcal{K}$. For Lion specifically, $\partial h_k^*(-u) = -\text{sign}(u)$.
- Muon: choose a spectral mirror map h_k such that $\partial h_k^*(-u) = -\text{msign}(u)$. The so-called Nesterov momentum corresponds to choosing the optimistic parameter as $\bar{\alpha}_k = \alpha_k$.
- NAdam: choose $h_k(x) = \frac{1}{2} \langle x, \text{Diag}(\sqrt{v^k} + \varepsilon)x \rangle$, where $v^k = \tau v^{k-1} + (1 - \tau) \nabla f(x^k, \xi_k) \odot \nabla f(x^k, \xi_k)$. Then $\nabla h_k^*(-\gamma_k \bar{m}^{k+1}) = -\gamma_k \bar{m}^{k+1} \oslash (\sqrt{v^k} + \varepsilon)$.

Algorithm 1 SODA Wrapper

Input: Horizon n , initialization $z^0 = x^0 \in \mathcal{X}$

- 1: **for** $k = 0, \dots, n - 1$ **do**
- 2: Sample $\xi_k \sim \mathcal{P}$ and compute the gradient $g^k = \nabla f(x^k, \xi_k)$
- 3: $z^{k+1} = z^0 + (k + 2) \text{BaseUpdate}(g^k)$
- 4: $x^{k+1} = (1 - \frac{1}{k+2})x^k + \frac{1}{k+2}z^{k+1}$

Return x^n

BaseUpdate refers to the update delta of the base optimizer *without weight decay*, i.e., $u^{k+1} = u^k + \text{BaseUpdate}(g^k)$.

In this light, all of the above methods can be interpreted as optimistic versions of Dual Averaging. We note that NAdam was also rediscovered as a simplification of AdEMAMix [Pagliardini et al., 2024] named Simplified-AdEMAMix from [Morwani et al., 2025]. See Table 1 for an overview.

Notice that λ_k plays the role of the stepsize in this case. This is in contrast with the following where we will instead let $\lambda_k = 1/(k + 2)$ and let η_k be the stepsize of the base optimizer (typically using a linear or cosine schedule).

SODA Wrapper In Algorithm 1, we provide a particularly practical instantiation of SODA, that wraps an existing base optimizer, based on hyperparameter choices from Theorem 4.6. Following the theory, this approach uses $\bar{\lambda}_k = 0$ (aka MODA), uniform iterate averaging ($\lambda_k = 1/(k+2)$), a stepsize $\gamma_k = (k + 2)\eta_k$ and defines the regularizer relative to a reference iterate z^0 as $h_k(x) = \psi_k(x - z^0)$ with $\psi_k(x) := \frac{1}{2}\|x\|_{H_k}^2$ where H_k is a positive-definite matrix. Since $\partial\psi_k^*$ is positively homogeneous, we have $\partial h_k^*(-\gamma_k \bar{m}^{k+1}) = z^0 + \partial\psi_k^*(-\gamma_k \bar{m}^{k+1}) = z^0 + \gamma_k \partial\psi_k^*(-\bar{m}^{k+1})$.

Any optimizer based on (optimistic) gradient momentum and dualization, such as Adam, NAdam, Scion, Muon, Signum, or Lion, can serve as the base optimizer. Notice that the BaseUpdate involves the stepsize η_k , while the wrapper introduces no new hyperparameters.

The resulting Algorithm 1 has a clear interpretation when simplifying the expression:

$$x^{k+1} = \underbrace{\frac{1}{k+2}z^0}_{\text{centering}} + \underbrace{(1 - \frac{1}{k+2})x^k}_{\text{scheduled weight decay}} + \underbrace{\text{BaseUpdate}(g^k)}_{\text{includes a stepsize schedule}} \quad (4)$$

Let us compare (4) with the original (*independent*) weight decay Hanson and Pratt [1988] formulation

$$x^{k+1} = (1 - \mu_k)x^k - \gamma_k \nabla f(x^k, \xi_k) \quad (5)$$

where $\mu_k \geq 0$. First the iterates in (4) are anchored in the initialization z^0 . Second, the weight decay is decaying as $\mu_k = 1/(k+2)$ and is *not* multiplied by the stepsize schedule as otherwise standard in e.g., decoupled weight decay [Loshchilov and Hutter, 2019], whereas the base optimizer is multiplied with the stepsize schedule (absorbed into BaseUpdate).

The weight decay plays a different role in SODA than typically. It does not act as a regularizer, but is rather related to the averaging of iterates, which improves optimization. Remarkably, as we shall see in Section 5, the SODA wrapper (Algorithm 1) consistently improves upon the wrapped base optimizer, even outperforming the baseline with tuned weight decay while the SODA wrapper requires no such tuning.

Remark 3.1. Algorithm 1 appears to require storing the initialization z^0 throughout training. Since z^0 is typically generated from a fixed seed, it can instead be reconstructed on demand at each iteration, trading a small amount of computation for a method with no additional memory.

3.2 Related Work

We organize related work through the lens of SODA, which separates (i) dual averaging and optimism, (ii) primal averaging and primal extrapolation, and (iii) dualization through geometry (mirror maps). This decomposition clarifies how several modern optimizers arise as special cases.

Gradient averaging. Several works for deep learning have highlighted the benefit of maintaining multiple dual sequences. AdEMAMix [Pagliardini et al., 2024] showed that keeping an additional

dual averaging sequence on top of Adam-style momentum can significantly improve performance. Simplified-AdEMAMix [Morwani et al., 2025] later demonstrated that explicitly adding back the current gradient is sufficient, yielding an update equivalent to NAdam [Dozat, 2016]. Similarly, Muon [Jordan et al., 2024b] uses the PyTorch implementation of Nesterov momentum, which can be captured by SODA with $\bar{\alpha}_k = \alpha_k$. The sign-based optimizer Lion [Chen et al., 2024] also moves beyond simple averaging. From the perspective of SODA, these gradient averaging schemes correspond precisely to forming the optimistic dual variable $\bar{m}^{k+1}$.

Iterate averaging. A complementary line of work in the deep learning literature focuses on averaging and extrapolation in the *primal* space. Lookahead [Zhang et al., 2019] performs iterate averaging by maintaining a slow sequence (x^k) and generating extrapolated points (z^{k+1}) via an inner optimization loop, corresponding to the special case $\bar{\lambda} = 0$. DiLoCo [Douillard et al., 2023] replaces simple averaging in the outer optimizer with PyTorch-style Nesterov momentum, demonstrating improvements in distributed training and, subsequently, even in single-node settings [Kallusky et al., 2025].

Generalized Primal Averaging (GPA) [Defazio et al., 2025] further simplifies DiLoCo by showing that an explicit inner loop is unnecessary: it suffices to average the iterates (x^{k+1}) and extrapolate (y^{k+1}) . Specifically, GPA can be written as

$$\begin{aligned} z^{k+1} &= (1 - \eta_k \mu) z^k + \eta_k \text{BaseUpdate}(\nabla f(y^k, \xi_k)), \\ x^{k+1} &= (1 - \lambda) x^k + \lambda z^{k+1}, \\ y^{k+1} &= (1 - \bar{\lambda}) x^{k+1} + \bar{\lambda} z^{k+1}. \end{aligned} \tag{GPA}$$

where $\mu \geq 0$ and $\lambda, \bar{\lambda} \in [0, 1]$. GPA uses a stepsize schedule for the base optimizer's η_k and fixes the iterate-averaging parameters $(\lambda, \bar{\lambda})$. From the SODA viewpoint, GPA corresponds to constant primal averaging parameters $(\lambda, \bar{\lambda})$. Typical choices are $1 - \bar{\lambda} = 0.9$ and $1 - \lambda = (1 - \bar{\lambda})^{1/H} \approx 0.9967$ with $H = 32$, implying $\lambda < \bar{\lambda}$. This contrasts with the smooth SODA regime, which requires the sufficient condition $\bar{\lambda}_k \leq \lambda_k/10$ (Theorems B.6 and 4.6). Moreover, whereas GPA relies on a base optimizer *with* a tuned weight decay parameter μ , the SODA wrapper (Algorithm 1) wraps a base optimizer *without* weight decay and eliminates the need for any additional hyperparameters.

Weight decay can also be viewed as a form of primal averaging. Xiao [2024] observed a $1/d$ scaling with model size d and used it for hyperparameter transfer, while Qiu et al. [2025] adopted this rule for spectral methods such as Muon. In contrast, we separate model size and horizon effects: if the horizon is fixed and only model size varies, our framework does not predict a necessary $1/d$ scaling. Concurrently, Ferbach et al. [2026] considered the time-decaying rule $\lambda_k = \lambda \eta_k/k$. In contrast, the SODA wrapper uses the parameter-free schedule $\lambda_k = 1/(k+2)$. Our work focuses on removing hyperparameters, while Ferbach et al. [2026] introduces new hyperparameters.

Acceleration and universality. Primal extrapolation, corresponding to $\bar{\lambda}_k > 0$ in SODA, originates in accelerated gradient and proximal-gradient methods [Tseng, 2008, Lan, 2012]. Querying gradients at the averaged point, corresponding to $\bar{\lambda}_k = 0$, was later used concurrently by Cutkosky [2019], Kavis et al. [2019] to obtain universal methods, i.e., a single algorithm simultaneously attaining both the optimal smooth stochastic convex rate $O(L/n^2 + \sigma/\sqrt{n})$ and the nonsmooth rate $O(1/\sqrt{n})$. Joulani et al. [2020] combined this averaging mechanism with adaptive Optimistic Dual Averaging/FTRL [Rakhlin and Sridharan, 2013, Mohri and Yang, 2016]. Defazio et al. [2024] later extended this analysis to allow for the larger range $\bar{\lambda}_k \leq \lambda_k/10$ and used it to develop a optimization wrapper for deep learning with unknown training horizon.

Dualization and geometry. The choice of mirror map h determines the geometry of the update and plays a central role in modern deep learning. Recent work has emphasized that many deep learning optimizers are best understood through their induced norm [Bernstein and Newhouse, 2024]. Elementwise sign methods are the simplest example: the ℓ_∞ geometry gives rise to SignSGD [Bernstein et al., 2018] and Lion [Chen et al., 2023], and has been used to partially explain the effectiveness of the popular Adam optimizer [Kunstner et al., 2023]. For matrix parameters, spectral descent methods [Carlson et al., 2015a, 2016, 2015b] and their modern variants, such as Muon [Jordan et al., 2024b] and Scion [Pethick et al., 2025a], arise from spectral geometries. Beyond single-norm geometries, multi-norm constructions enforcing both row- and column-normalization (doubly stochastic structure) have also been explored [Scetbon et al., 2025, Xie et al., 2025]. Whenever the mirror map admits a tractable Fenchel conjugate, such geometries naturally fit within the SODA framework.

4 Analysis

We now derive convergence guarantees for SODA, in order to set the hyperparameters. The proof is based on an online regret argument, so we first let g^k denote an arbitrary gradient-feedback sequence. In the stochastic optimization setting of SODA, we take $g^k := \nabla f(y^k, \xi_k)$. We use the following assumptions, which are standard except for Assumption 4.4.

Assumption 4.1 (Convex). *For every sample ξ , the function $f(\cdot, \xi)$ is convex.*

Assumption 4.2 (L -smooth). *The function f is L -smooth with respect to $\|\cdot\|$.*

Assumption 4.3 (Unbiased). *Let $\mathcal{F}_k$ be the natural filtration. The gradients satisfy*

$$\mathbb{E}[g^k \mid \mathcal{F}_{k-1}] \in \partial f(y^k).$$

Assumption 4.4 (Gradient variation). *The gradients satisfy, for $k \geq 0$ and $\rho > 0$,*

$$\mathbb{E}[\|g^k - g^{k-1}\|_*^2] \leq \rho \mathbb{E}[\|\nabla f(y^k) - \nabla f(y^{k-1})\|_*^2] + \sigma^2.$$

Remark 4.5. Assumption 4.4 is satisfied under unbiasedness (Assumption 4.3) and bounded variance, $\mathbb{E}[\|g^k - \nabla f(y^k)\|_*^2] \leq v^2$, with $\rho = 3$ and $\sigma^2 = 6v^2$. The noise condition in Defazio et al. [2024, Cor. 2] is recovered in the Euclidean case with $\rho = 1$.

Our proof primarily builds on Defazio et al. [2024]; however, rather than combining primal extrapolation with an adaptive version of Optimistic Mirror Descent, we use Optimistic Dual Averaging Rakhlin and Sridharan [2013] as the underlying no-regret algorithm.

Corollary 4.6 (Convergence under L -smoothness). *Let $x^* \in \arg \min_{x \in \mathcal{X}} f(x)$ and let $R_* := h(x^*) - \inf h$. Consider SODA with a fixed regularizer $h_k \equiv h$. For every $k = 0, \dots, n-1$, choose*

$$\alpha_k = \frac{1}{k+1}, \quad \bar{\alpha}_k = \lambda_k = \frac{1}{k+2}, \quad \bar{\lambda}_k \leq \frac{\lambda_k}{10}, \quad \gamma_k = \eta(k+2), \quad \eta = \min \left\{ \frac{\mu}{6\rho L}, \frac{\sqrt{\mu R_*}}{\sigma\sqrt{n}} \right\}.$$

Suppose Assumptions 4.1 to 4.4 hold and that h is μ -strongly convex with respect to $\|\cdot\|$. Then, for every $n \geq 1$,

$$\mathbb{E}[f(x^{n-1}) - f(x^*)] = O\left(\frac{(\rho+1)LR_*}{\mu n} + \frac{\sigma\sqrt{R_*}}{\sqrt{\mu n}}\right).$$

Consequences for practice The SODA wrapper in Algorithm 1 directly uses the theoretically suggested choices of λ_k and γ_k . Taking the primal extrapolation constant $\bar{\lambda}_k$ small is used to exploit smoothness to cancel the gradient-variation term from Assumption 4.4. Since $\bar{\lambda}_k$ has no effect on the rate once it is small enough, we can conveniently set $\bar{\lambda}_k = 0$ in practice, matching the “modernized” parameterization in Section 3 and recovering Muon, Lion, and NAdam. Under the bounded-gradient analysis of Theorem B.4, the larger range $\lambda_k \in [0, 1]$ is also admissible.

The smooth analysis also requires the optimistic averaging parameter $\bar{\alpha}_k$ to be slightly smaller than α_k . This is consistent with common choices: Lion often uses $\alpha_k = 0.1$ with $\bar{\alpha}_k \in \{0.05, 0.01\}$, while Muon takes $\alpha_k = \bar{\alpha}_k$. Finally, the rate depends on the initial regularizer gap R_* . For $h(x) = \|x - z^0\|^2$, we have $R_* = \|x^* - z^0\|^2$, so choosing $z^0 = 0$ can be a poor anchor when the solution is far from the origin. This motivates the centered choice in Section 3.

Acceleration Theorem B.6 shows that SODA also admits an accelerated parameterization following Defazio et al. [2024, Cor. 1]. This is obtained by choosing $\alpha_k = 2/(k+2)$, $\bar{\alpha}_k = \lambda_k = 2/(k+3)$, and $\bar{\lambda}_k \leq \lambda_k/10$. Equivalently, this accelerated regime corresponds to using increasing weights $a_k = k+1$ for $k \geq 0$ and taking $\alpha_k = a_k / \sum_{i=0}^k a_i$ and $\lambda_k = a_{k+1} / \sum_{i=0}^{k+1} a_i$. We further comment in Section B.3.

Limitations Our analysis is convex. Although convex theory often remains empirically informative for deep learning, as observed by Defazio et al. [2024], Schaipp et al. [2025] and in our experiments, extending the guarantees to less restrictive assumptions is an important direction. A second limitation is the strong convexity requirement on the regularizer. For a regularizer h that is not strongly convex, one can instead use $h_\tau(x) := h(x) + \tau\psi(x)$, where ψ is 1-strongly convex with respect to the chosen norm and $\tau > 0$. Substituting h_τ for h and τ for μ preserves the same $O(n^{-1/2})$ dependence on n , but at the cost of a $1/\sqrt{\tau}$ factor in the constant.

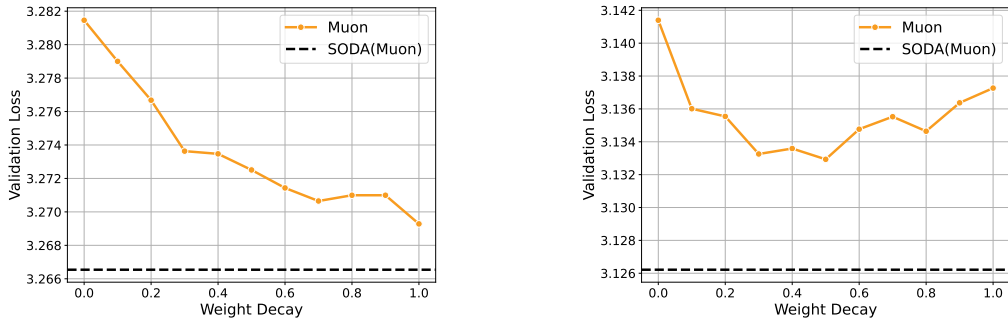


Figure 1: Muon with swept weight decay is outperformed by SODA(Muon), without any additional tuning, on 124M models trained for both $1\times$ Chinchilla steps (left) and $4\times$ Chinchilla steps (right).

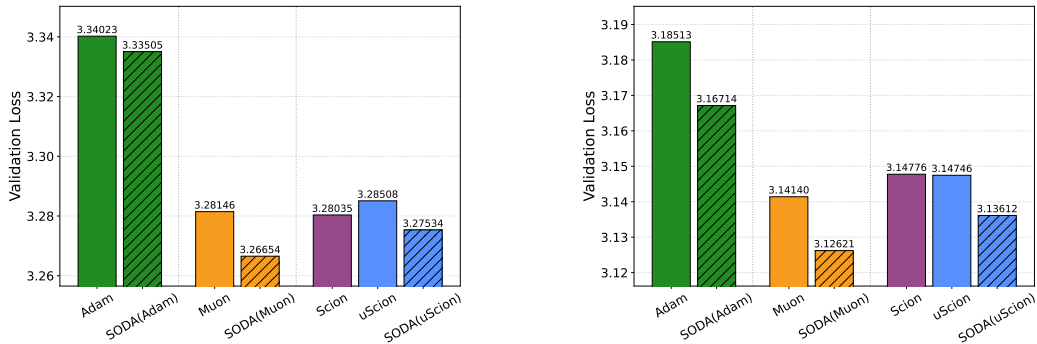


Figure 2: The SODA wrapper yields consistent improvement across various base optimizers without any additional tuning as illustrated on 124M model trained for both $1\times$ Chinchilla steps (left) and $4\times$ Chinchilla steps (right).

5 Experiments

Throughout the experiments, Muon refers to the official implementation, which uses Adam for the first and last layer and Nesterov momentum for hidden layers (corresponding to optimism in [SODA](#) with $\bar{\alpha}_k = \alpha_k$). The Scion optimizer, on the other hand, disables the Nesterov momentum ($\bar{\alpha}_k = 0$) and uses Signum instead of Adam for the first and last layer. Experiments are conducted on nanoGPT on FineWeb100 (see Table 5 for full details). In the experiments, the token budget is expressed in units of Chinchilla [[Hoffmann et al., 2022](#)], where $1\times$ Chinchilla corresponds to $20\times \#(\text{parameters})$.

Transfer across horizon Zero-shot hyperparameter transfer results, most notably μP , show that learning rates and related optimization hyperparameters can transfer reliably across width [[Yang et al., 2021](#)]. However, these transfer results are typically demonstrated at a fixed training horizon. This leaves open the more practically important question of how weight decay should transfer across horizon, since for longer runs the optimal weight decay typically changes.

To isolate the effect of the horizon, we keep the model width fixed and vary only the training horizon. We find that the optimal weight decay *decreases* with the horizon for Muon (*c.f.* Figure 1), thus demonstrating that the $1/\text{model_size}$ choice made in [Xiao \[2024\]](#), [Qiu et al. \[2025\]](#), which is constant in the horizon, would be suboptimal outside the Chinchilla scaling rule where the model size and horizon is scaled proportionally [[Hoffmann et al., 2022](#)].

Furthermore, we find that the theoretically motivated $1/(k+2)$ weight decay scaling used by the SODA wrapper (Algorithm 1) consistently leads to further improvement without requiring any additional tuning. In Figure 1, SODA outperforms the base optimizer (Muon) even when the latter is given its best-tuned weight decay, showing that the gain is not simply due to a favorable retuning of that hyperparameter. Taken together, these results suggest that SODA provides a principled

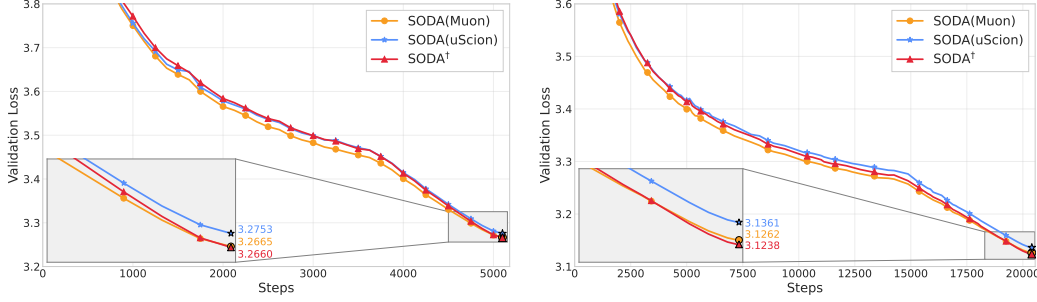


Figure 3: SODA with optimism (referred to as SODA[†]) is competitive with the best wrapped optimizer. In comparison with SODA(Muon), the configuration simplifies the method by replacing Adam with Lion and reusing the same hyperparameters for the momentum across all layers.

mechanism for transferring weight decay across horizon without the need for tuning the weight decay even of the smaller proxy model. The SODA wrapper relies on a non-zero center iterate z^0 , which we further ablate the importance of in Figure 6.

SODA Wrapper The benefit of the SODA Wrapper (Algorithm 1) is not exclusive to Muon. We additionally apply the wrapper across Adam and Scion and observe consistent improvements across training horizons in Figure 2, notably without introducing any additional tuning.

Optimism and SODA[†] Considering the benefit of optimism (Muon) in the overtrained regime of Figure 2 we systematically investigate the impact of optimism in SODA, reported in Table 4 of Section C. We use the ℓ_∞ -norm for the input and output layer and spectral norm for hidden layers following Pethick et al. [2025a]. SODA with optimism, which borrows the same optimized configuration as the Muon baseline ($\alpha_k = \bar{\alpha}_k = 0.05$), shows the best performance under both $1\times$ and $4\times$ Chinchilla. This SODA configuration notably removes the use of Adam in Muon and uses the same momentum hyperparameter across all layers in contrast, greatly simplifying tuning. We mark SODA with this specific optimistic setting as SODA[†]. Figure 3 shows validation loss compared with the best two settings found in Figure 2.

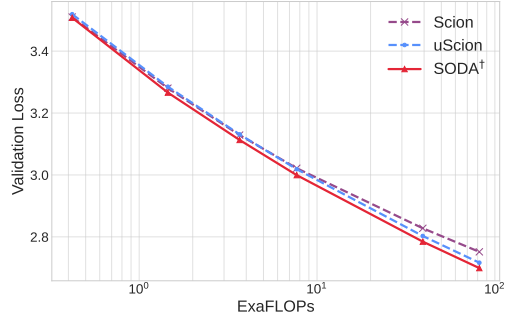


Figure 4: SODA is effective under $1\times$ Chinchilla scaling and the benefit increases with scale.

Transfer across horizon & width In Figure 4, we test SODA[†] on NanoGPT with between 64M and 1B parameters following Chinchilla-style scaling, where width and horizon grow proportionally. We choose (u)Scion as the base optimizer since its stepsize can be transferred along the width and horizon [Pethick et al., 2025a]. SODA[†] consistently outperforms Scion/uScion with different sizes of models and the gap becomes more apparent as the model grows larger. A similar conclusion holds for SODA(uScion) (c.f. Figure 5).

6 Conclusion

This work provides a new perspective on weight decay: beyond acting as a regularizer, it can be understood as a form of primal averaging. We show that carefully scheduling this averaging parameter (λ_k in SODA) yields acceleration in a precise theoretical sense and can lead to practical speedups without hyperparameter tuning.

Several directions open up. One is applying SODA to finetuning, where standard weight decay is often suboptimal. Since SODA regularizes with respect to the pretrained model z^0 rather than the origin, it may be better suited for this setting. Another promising direction is to develop practical accelerated instantiations of SODA.

7 Acknowledgments

This work was funded by the Swiss National Science Foundation (SNSF) under grant number 2000-1-240094. This work was supported by the Swiss AI Initiative (2025 Fellowship Program). This work was supported with project ID #37 as part of the Swiss AI Initiative, through a grant from the ETH Domain and computational resources provided by the Swiss National Supercomputing Centre (CSCS) under the Alps infrastructure.

References

- H Bauschke and Yves Lucet. What is a Fenchel conjugate. *Notices of the AMS*, 59(1):44–46, 2012.
- Jeremy Bernstein and Laker Newhouse. Old optimizer, new norm: An anthology. *arXiv:2409.20325*, 2024.
- Jeremy Bernstein, Yu-Xiang Wang, Kamyar Azizzadenesheli, and Animashree Anandkumar. signSGD: Compressed optimisation for non-convex problems. In *International Conference on Machine Learning*, pages 560–569. PMLR, 2018.
- David Carlson, Volkan Cevher, and Lawrence Carin. Stochastic spectral descent for restricted boltzmann machines. In *Artificial Intelligence and Statistics*, 2015a.
- David Carlson, Ya-Ping Hsieh, Edo Collins, Lawrence Carin, and Volkan Cevher. Stochastic spectral descent for discrete graphical models. *IEEE Journal of Selected Topics in Signal Processing*, 2016.
- David E Carlson, Edo Collins, Ya-Ping Hsieh, Lawrence Carin, and Volkan Cevher. Preconditioned spectral descent for deep learning. In *Proceedings of the 28th International Conference on Neural Information Processing Systems*, pages 2971–2979, 2015b.
- Lizhang Chen, Bo Liu, Kaizhao Liang, and Qiang Liu. Lion secretly solves a constrained optimization: As lyapunov predicts. In *International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=e4xS9ZarDr>.
- Xiangning Chen, Chen Liang, Da Huang, Esteban Real, Kaiyuan Wang, Hieu Pham, Xuanyi Dong, Thang Luong, Cho-Jui Hsieh, Yifeng Lu, and Quoc V Le. Symbolic discovery of optimization algorithms. In *Thirty-seventh Conference on Neural Information Processing Systems*, 2023. URL <https://openreview.net/forum?id=ne6zeqLFCZ>.
- Kenneth L. Clarkson. Coresets, sparse greedy approximation, and the Frank-Wolfe algorithm. *ACM Trans. Algorithms*, 2010.
- Michael Crawshaw, Chirag Modi, Mingrui Liu, and Robert M Gower. An exploration of non-euclidean gradient descent: Muon and its many variants. *arXiv preprint arXiv:2510.09827*, 2025.
- Ashok Cutkosky. Anytime online-to-batch, optimism and acceleration. In *International conference on machine learning*, pages 1446–1454. PMLR, 2019.
- Aaron Defazio, Xingyu Yang, Harsh Mehta, Konstantin Mishchenko, Ahmed Khaled, and Ashok Cutkosky. The road less scheduled. In *Advances in Neural Information Processing Systems*, volume 37, pages 9974–10007, 2024. doi: 10.52202/079017-0320. URL https://proceedings.neurips.cc/paper_files/paper/2024/file/136b9a13861308c8948cd308ccd02658-Paper-Conference.pdf.
- Aaron Defazio, Konstantin Mishchenko, Parameswaran Raman, Hao-Jun Michael Shi, and Lin Xiao. Smoothing DiLoCo with primal averaging for faster training of LLMs. *arXiv preprint arXiv:2512.17131*, 2025.
- Arthur Douillard, Qixuan Feng, Andrei A Rusu, Rachita Chhaparia, Yani Donchev, Adhiguna Kuncoro, Marc’Aurelio Ranzato, Arthur Szlam, and Jiajun Shen. Diloco: Distributed low-communication training of language models. *arXiv preprint arXiv:2311.08105*, 2023.
- Timothy Dozat. Incorporating Nesterov momentum into Adam. 2016.

- Damien Ferbach, Courtney Paquette, Gauthier Gidel, Katie Everett, and Elliot Paquette. Logarithmic-time schedules for scaling language models with momentum. *arXiv preprint arXiv:2602.05298*, 2026.
- Marguerite Frank and Philip Wolfe. An algorithm for quadratic programming. *Naval research logistics quarterly*, 1956.
- Vineet Gupta, Tomer Koren, and Yoram Singer. Shampoo: Preconditioned stochastic tensor optimization. In *International Conference on Machine Learning*, 2018.
- Stephen Hanson and Lorien Pratt. Comparing biases for minimal network construction with back-propagation. *Advances in neural information processing systems*, 1, 1988.
- Jordan Hoffmann, Sebastian Borgeaud, Arthur Mensch, Elena Buchatskaya, Trevor Cai, Eliza Rutherford, Diego de Las Casas, Lisa Anne Hendricks, Johannes Welbl, Aidan Clark, et al. Training compute-optimal large language models. In *Advances in Neural Information Processing Systems*, 2022.
- Martin Jaggi. Revisiting Frank-Wolfe: Projection-free sparse convex optimization. In *International Conference on Machine Learning*, 2013.
- Samy Jelassi and Aaron Defazio. Dual averaging is surprisingly effective for deep learning optimization. *arXiv preprint arXiv:2010.10502*, 2020.
- Keller Jordan, Jeremy Bernstein, Brendan Rappazzo, @fernbear.bsky.social, Boza Vlado, You Jiacheng, Franz Cesista, Braden Koszarsky, and @Grad62304977. modded-nanogpt: Speedrunning the nanogpt baseline, 2024a. URL <https://github.com/KellerJordan/modded-nanogpt>.
- Keller Jordan, Yuchen Jin, Vlado Boza, You Jiacheng, Franz Cecista, Laker Newhouse, and Jeremy Bernstein. Muon: An optimizer for hidden layers in neural networks, 2024b.
- Pooria Joulani, Anant Raj, Andras Gyorgy, and Csaba Szepesvári. A simpler approach to accelerated optimization: iterative averaging meets optimism. In *International conference on machine learning*, pages 4984–4993. PMLR, 2020.
- Dominik Kallusky, Vinay Rao, Vishal Nandavanam, and Hao-Jun Michael Shi. SNOO: Step-k Nesterov outer optimizer-the surprising effectiveness of Nesterov momentum applied to pseudo-gradients. *arXiv preprint arXiv:2510.15830*, 2025.
- Ali Kavis, Kfir Y Levy, Francis Bach, and Volkan Cevher. Unixgrad: A universal, adaptive algorithm with optimal guarantees for constrained optimization. *Advances In Neural Information Processing Systems 32 (Nips 2019)*, 32(CONF), 2019.
- DP Kingma and Jimmy Ba. Adam: A method for stochastic optimization. In *International Conference on Learning Representations*, 2014.
- Frederik Kunstner, Jacques Chen, Jonathan Wilder Lavington, and Mark Schmidt. Noise is not the main factor behind the gap between sgd and adam on transformers, but sign descent might be. *arXiv preprint arXiv:2304.13960*, 2023.
- Guanghui Lan. An optimal method for stochastic composite optimization. *Mathematical Programming*, 133(1):365–397, 2012.
- Ilya Loshchilov and Frank Hutter. Decoupled weight decay regularization. In *International Conference on Learning Representations*, 2019.
- Mehryar Mohri and Scott Yang. Accelerating online convex optimization via adaptive prediction. In *Artificial Intelligence and Statistics*, pages 848–856. PMLR, 2016.
- Aryan Mokhtari, Hamed Hassani, and Amin Karbasi. Stochastic conditional gradient methods: From convex minimization to submodular maximization. *Journal of Machine Learning Research*, 2020.
- Depen Morwani, Nikhil Vyas, Hanlin Zhang, and Sham Kakade. Connections between schedule-free optimizers, AdEMAMix, and accelerated sgd variants. *arXiv preprint arXiv:2502.02431*, 2025.

- Yu Nesterov. Smooth minimization of non-smooth functions. *Mathematical programming*, 103: 127–152, 2005.
- Yu Nesterov. Efficiency of coordinate descent methods on huge-scale optimization problems. *SIAM Journal on Optimization*, 22(2):341–362, 2012.
- Yu Nesterov and Vladimir Shikhman. Quasi-monotone subgradient methods for nonsmooth convex minimization. *Journal of Optimization Theory and Applications*, 165(3):917–940, 2015.
- Yurii Nesterov. Primal-dual subgradient methods for convex problems. *Mathematical programming*, 120(1):221–259, 2009.
- Francesco Orabona. A modern introduction to online learning. *CoRR*, abs/1912.13213, 2019. URL <http://arxiv.org/abs/1912.13213>.
- Matteo Pagliardini, Pierre Ablin, and David Grangier. The AdEMAMix optimizer: Better, faster, older. *arXiv preprint arXiv:2409.03137*, 2024.
- Thomas Pethick, Wanyun Xie, Kimon Antonakopoulos, Zhenyu Zhu, Antonio Silveti-Falls, and Volkan Cevher. Training deep learning models with norm-constrained LMOs. In *International Conference on Machine Learning*, 2025a.
- Thomas Pethick, Wanyun Xie, Mete Erdogan, Kimon Antonakopoulos, Tony Silveti-Falls, and Volkan Cevher. Generalized gradient norm clipping & non-euclidean (L_0, L_1) -smoothness. *arXiv preprint arXiv:2506.01913*, 2025b.
- Shikai Qiu, Zixi Chen, Hoang Phan, Qi Lei, and Andrew Gordon Wilson. Hyperparameter transfer enables consistent gains of matrix-preconditioned optimizers across scales. *arXiv preprint arXiv:2512.05620*, 2025.
- Alexander Rakhlin and Karthik Sridharan. Online learning with predictable sequences. In *Conference on Learning Theory*, pages 993–1019. PMLR, 2013.
- Meyer Scetbon, Chao Ma, Wenbo Gong, and Edward Meeds. Gradient multi-normalization for stateless and scalable LLM training. *arXiv preprint arXiv:2502.06742*, 2025.
- Fabian Schaipp, Alexander Hägele, Adrien Taylor, Umut Simsekli, and Francis Bach. The surprising agreement between convex optimization theory and learning-rate scheduling for large model training. *arXiv preprint arXiv:2501.18965*, 2025.
- Paul Tseng. On accelerated proximal gradient methods for convex-concave optimization. *submitted to SIAM Journal on Optimization*, 2(3), 2008.
- Lechao Xiao. Rethinking conventional wisdom in machine learning: From generalization to scaling. *arXiv preprint arXiv:2409.15156*, 2024.
- Shuo Xie and Zhiyuan Li. Implicit bias of AdamW: ℓ_∞ norm constrained optimization. *arXiv preprint arXiv:2404.04454*, 2024.
- Zhenda Xie, Yixuan Wei, Huanqi Cao, Chenggang Zhao, Chengqi Deng, Jiashi Li, Damai Dai, Huazuo Gao, Jiang Chang, Liang Zhao, et al. mHC: Manifold-constrained hyper-connections. *arXiv preprint arXiv:2512.24880*, 2025.
- Ge Yang, Edward Hu, Igor Babuschkin, Szymon Sidor, Xiaodong Liu, David Farhi, Nick Ryder, Jakub Pachocki, Weizhu Chen, and Jianfeng Gao. Tuning large neural networks via zero-shot hyperparameter transfer. In *Advances in Neural Information Processing Systems*, 2021.
- Michael R. Zhang, James Lucas, Geoffrey Hinton, and Jimmy Ba. Lookahead Optimizer: K steps forward, 1 step back. *arXiv*, December 2019.

Appendix

Table of Contents

A Preliminaries	14
B Proofs for Section 4 (Analysis)	14
C Experiments	19

A Preliminaries

Lemma A.1. *Let $\|\cdot\|$ be a norm with dual norm $\|\cdot\|_*$, and let $\mathcal{D} = \{x : \|x\| \leq 1\}$. Then*

$$s^\# = -\|s\|_* \operatorname{lmo}(s).$$

Proof. Let

$$u \in \arg \max_{\|v\| \leq 1} \langle s, v \rangle,$$

so that $\langle s, u \rangle = \|s\|_*$. Then

$$\operatorname{lmo}(s) \in \arg \min_{\|x\| \leq 1} \langle s, x \rangle = -u.$$

Also, writing $x = tv$ with $t \geq 0$ and $\|v\| = 1$,

$$s^\# \in \arg \max_{t \geq 0, \|v\|=1} \left\{ t \langle s, v \rangle - \frac{1}{2} t^2 \right\}.$$

For fixed t , the maximization over v is independent of t , hence uses the same u . Therefore

$$s^\# \in \arg \max_{t \geq 0} \left\{ t \|s\|_* - \frac{1}{2} t^2 \right\} = \|s\|_* u.$$

Combining the two identities gives

$$u = -\operatorname{lmo}(s),$$

and thus

$$s^\# = -\|s\|_* \operatorname{lmo}(s). \quad \square$$

B Proofs for Section 4 (Analysis)

We first state the regret guarantee for ODA, and then employ it to analyze SODA. The ODA analysis is based on a non-adaptive version of [Rakhlin and Sridharan \[2013\]](#), which is classical (see e.g., [Orabona, 2019](#), Sec. 7.12]). The smooth online-to-batch Lemma below builds on the argument of [Defazio et al. \[2024\]](#) and extends it to non-Euclidean norms and slightly relaxes the noise condition.

Lemma B.1 (ODA regret). *Consider the online-learning indexing of [ODA](#), with the gradient term $\nabla f(z^k, \xi_k)$ replaced by g^k . Choose positive weights $a_0, \dots, a_{n-1}$ and write*

$$A_k := \sum_{i=0}^k a_i, \quad A_{-1} := 0.$$

We use the initial-hint convention $g^{-1} = 0$ and set $z^0 \in \partial h^(0)$. For $k = 0, \dots, n-2$, choose*

$$\alpha_k = \frac{a_k}{A_k}, \quad \bar{\alpha}_k = \frac{a_{k+1}}{A_{k+1}}, \quad \gamma_k = \eta \frac{A_k}{1 - \bar{\alpha}_k}$$

for some $\eta > 0$. Let h be a proper closed μ -strongly convex regularizer on $\mathcal{X}$. Then, for every $x \in \mathcal{X}$,

$$\sum_{k=0}^{n-1} a_k \langle g^k, z^k - x \rangle \leq \frac{h(x) - \inf_{u \in \mathcal{X}} h(u)}{\eta} + \frac{\eta}{2\mu} \sum_{k=0}^{n-1} a_k^2 \|g^k - g^{k-1}\|_*^2. \quad (6)$$

Proof. By the choice of γ_k and $\bar{\alpha}_k$ we have, for $k = 0, \dots, n-2$,

$$\gamma_k(1 - \bar{\alpha}_k) = \eta A_k, \quad \text{and} \quad \gamma_k \bar{\alpha}_k = \eta a_{k+1}$$

Combined with the choice of α_k , the [ODA](#) update can then be written as

$$z^k \in \partial h^* \left(-\eta \sum_{i=0}^{k-1} a_i g^i - \eta a_k g^{k-1} \right), \quad k = 0, \dots, n-1,$$

where the sum is empty when $k = 0$ and the case $k = 0$ is exactly $z^0 \in \partial h^*(0)$ because $g^{-1} = 0$. Set

$$\theta_k := -\eta \sum_{i=0}^k a_i g^i, \quad \theta_{-1} := 0, \quad \hat{\theta}_k := \theta_{k-1} - \eta a_k g^{k-1}.$$

Thus $z^k \in \partial h^*(\hat{\theta}_k)$ and

$$\theta_k = \hat{\theta}_k - \eta a_k (g^k - g^{k-1}).$$

Since h is μ -strongly convex, h^* is $1/\mu$ -smooth, hence

$$h^*(\theta_k) \leq h^*(\hat{\theta}_k) - \eta a_k \langle g^k - g^{k-1}, z^k \rangle + \frac{\eta^2 a_k^2}{2\mu} \|g^k - g^{k-1}\|_*^2.$$

By Fenchel–Young,

$$\langle \hat{\theta}_k, z^k \rangle = h(z^k) + h^*(\hat{\theta}_k), \quad \langle \theta_k, x \rangle \leq h(x) + h^*(\theta_k).$$

Therefore

$$\begin{aligned} \eta a_k \langle g^k, z^k - x \rangle &= \eta a_k \langle g^k - g^{k-1}, z^k \rangle + \eta a_k \langle g^{k-1}, z^k \rangle - \eta a_k \langle g^k, x \rangle \\ &= \eta a_k \langle g^k - g^{k-1}, z^k \rangle + \langle \theta_{k-1} - \hat{\theta}_k, z^k \rangle + \langle \theta_k - \theta_{k-1}, x \rangle \\ &= \eta a_k \langle g^k - g^{k-1}, z^k \rangle + \langle \theta_{k-1}, z^k \rangle - \langle \hat{\theta}_k, z^k \rangle + \langle \theta_k - \theta_{k-1}, x \rangle \\ &= \eta a_k \langle g^k - g^{k-1}, z^k \rangle + \langle \theta_{k-1}, z^k \rangle - h(z^k) - h^*(\hat{\theta}_k) + \langle \theta_k - \theta_{k-1}, x \rangle \\ &\leq h^*(\theta_{k-1}) - h^*(\theta_k) + \frac{\eta^2 a_k^2}{2\mu} \|g^k - g^{k-1}\|_*^2 + \langle \theta_k - \theta_{k-1}, x \rangle. \end{aligned}$$

Summing over $k = 0, \dots, n-1$ yields

$$\eta \sum_{k=0}^{n-1} a_k \langle g^k, z^k - x \rangle \leq h^*(0) - h^*(\theta_{n-1}) + \langle \theta_{n-1}, x \rangle + \frac{\eta^2}{2\mu} \sum_{k=0}^{n-1} a_k^2 \|g^k - g^{k-1}\|_*^2.$$

Finally, $h^*(0) = -\inf_{u \in \mathcal{X}} h(u)$ and $\langle \theta_{n-1}, x \rangle - h^*(\theta_{n-1}) \leq h(x)$, so dividing by η proves the claim. $\square$

B.1 Bounded gradients

Under bounded gradient we rely on the following online-to-batch conversion which holds for any primal extrapolation parameter $\lambda_k \in [0, 1]$.

Lemma B.2 (SODA online-to-batch). *Consider [SODA](#) with positive weights $a_0, \dots, a_{n-1}$ and*

$$\lambda_{k-1} = \frac{a_k}{A_k}, \quad A_k := \sum_{i=0}^k a_i, \quad k = 1, \dots, n-1.$$

Suppose Assumptions [4.1](#) and [4.3](#) hold. Then, for every $x \in \mathcal{X}$,

$$A_{n-1} \mathbb{E}[f(x^{n-1}) - f(x)] \leq \mathbb{E} \left[\sum_{k=0}^{n-1} a_k \langle g^k, z^k - x \rangle \right]. \quad (7)$$

Proof. The result is obtained as an application of [Defazio et al. \[2024, Thm. 2\]](#) with

$$w_t = a_k, \quad z_{t+1} = z^k, \quad \beta_{t+1} = \bar{\lambda}_k$$

for which

$$x_{t+1} = x^k, \quad y_{t+1} = (1 - \bar{\lambda}_{k-1})x^k + \bar{\lambda}_{k-1}z^k = y^k.$$

$\square$

Assumption B.3 (Bounded gradients). *The gradients satisfies $\|g^k\|_* \leq G$ for all $k \geq 0$.*

Corollary B.4 (Convergence under bounded gradients). *Let $x^* \in \arg \min_{x \in \mathcal{X}} f(x)$ and let $R_* := h(x^*) - \inf h$. Consider [SODA](#) with a fixed regularizer $h_k \equiv h$. For every $k = 0, \dots, n-1$, choose*

$$\alpha_k = \frac{1}{k+1}, \quad \lambda_k = \frac{1}{k+2}, \quad \bar{\alpha}_k = \frac{1}{k+2}, \quad \bar{\lambda}_k \in [0, 1], \quad \gamma_k = \eta(k+2), \quad \eta = \frac{\sqrt{\mu R_*}}{\sqrt{2} G \sqrt{n}}.$$

Let h be μ -strongly convex with respect to $\|\cdot\|$. Suppose Assumptions [4.1](#), [4.3](#) and [B.3](#) hold. Then, for every $n \geq 1$,

$$\mathbb{E}[f(x^{n-1}) - f(x^*)] \leq \frac{2\sqrt{2} G \sqrt{R_*}}{\sqrt{\mu n}}.$$

Proof. Choose the weights $a_k \equiv 1$, so that $A_k = k+1$ for $k = 0, \dots, n-1$. Then

$$\begin{aligned} \alpha_k &= \frac{1}{k+1} = \frac{a_k}{A_k}, \quad \bar{\alpha}_k = \frac{1}{k+2} = \frac{a_{k+1}}{A_k + a_{k+1}}, \quad \gamma_k(1 - \bar{\alpha}_k) = \eta A_k, \\ \gamma_k \bar{\alpha}_k &= \eta(k+2) \frac{1}{k+2} = \eta = \eta a_{k+1}, \end{aligned}$$

for $k = 0, \dots, n-2$, while $\lambda_{k-1} = 1/(k+1) = a_k/A_k$ for $k = 1, \dots, n-1$. Therefore Theorem B.1 and Theorem B.2 yield

$$\mathbb{E}[f(x^{n-1}) - f(x^*)] \leq \frac{R_*}{\eta n} + \frac{\eta}{2\mu n} \sum_{k=0}^{n-1} \mathbb{E}[\|g^k - g^{k-1}\|_*^2].$$

Since $g^{-1} = 0$ by convention and $\|g^k\|_* \leq G$, the sum is at most $4nG^2$. Hence

$$\mathbb{E}[f(x^{n-1}) - f(x^*)] \leq \frac{R_*}{\eta n} + \frac{2\eta G^2}{\mu}.$$

Substituting the stated choice of η gives the claim. $\square$

B.2 Gradient Lipschitz

The following refinement of Theorem B.2 is used to exploit smoothness of f . It follows the argument in Defazio et al. [2024, Thm. 5] directly, but allows for a non-Euclidean norm.

For differentiable f , we write the objective Bregman divergence as

$$D_f(u, v) := f(u) - f(v) - \langle \nabla f(v), u - v \rangle.$$

Lemma B.5 (SODA online-to-batch smooth refinement [Defazio et al., 2024, Thm. 5]). *Suppose the assumptions of Theorem B.2 hold, and additionally that f is L -smooth with respect to $\|\cdot\|$ (Assumption 4.2). If*

$$\bar{\lambda}_{k-1} \leq \frac{a_k}{10A_k} \quad \text{for all } k = 1, \dots, n-1,$$

then, for every $x \in \mathcal{X}$, SODA satisfies

$$\begin{aligned} A_{n-1} \mathbb{E}[f(x^{n-1}) - f(x)] &\leq \mathbb{E} \left[\sum_{k=0}^{n-1} a_k \langle g^k, z^k - x \rangle \right] \\ &\quad - \frac{1}{6L} \sum_{k=0}^{n-1} A_{k-1} \mathbb{E}[\|\nabla f(y^k) - \nabla f(y^{k-1})\|_*^2], \end{aligned} \quad (8)$$

where $A_{-1} = 0$.

Proof. The choice $\lambda_{k-1} = a_k/A_k$ implies

$$x^k = \frac{1}{A_k} \sum_{i=0}^k a_i z^i, \quad k = 0, \dots, n-1.$$

For $k = 0, \dots, n-1$, following Defazio et al. [2024, Thm. 5], a direct expansion gives

$$\begin{aligned} A_k(f(x^k) - f(x)) - A_{k-1}(f(x^{k-1}) - f(x)) &= a_k \langle \nabla f(y^k), z^k - x \rangle \\ &\quad - \frac{a_k}{\lambda_{k-1}} D_f(y^k, x^k) - \frac{a_k(1-\bar{\lambda}_{k-1})}{\lambda_{k-1}} D_f(x^k, y^k) \\ &\quad - A_{k-1} D_f(x^{k-1}, x^k) - a_k D_f(x, y^k), \end{aligned}$$

with the convention that the terms involving A_{-1} vanish, and that the two terms involving $\bar{\lambda}_{k-1}^{-1}$ vanish when $k = 0$ or $\bar{\lambda}_{k-1} = 0$, since then $y^k = x^k$. Summing over $k = 0, \dots, n-1$, taking expectations, and using $\mathbb{E}[g^k | \mathcal{F}_{k-1}] = \nabla f(y^k)$ gives

$$\begin{aligned} A_{n-1} \mathbb{E}[f(x^{n-1}) - f(x)] &\leq \mathbb{E} \left[\sum_{k=0}^{n-1} a_k \langle g^k, z^k - x \rangle \right] \\ &\quad - \sum_{k=0}^{n-1} \left(\frac{a_k}{\lambda_{k-1}} \mathbb{E} D_f(y^k, x^k) + \frac{a_k(1-\bar{\lambda}_{k-1})}{\lambda_{k-1}} \mathbb{E} D_f(x^k, y^k) \right) \\ &\quad - \sum_{k=0}^{n-1} \left(A_{k-1} \mathbb{E} D_f(x^{k-1}, x^k) + a_k \mathbb{E} D_f(x, y^k) \right). \end{aligned} \quad (9)$$

For convex L -smooth f , co-coercivity gives $D_f(u, v) \geq \frac{1}{2L} \|\nabla f(u) - \nabla f(v)\|_*^2$ so

$$\frac{a_k}{\lambda_{k-1}} D_f(y^k, x^k) + \frac{a_k(1-\bar{\lambda}_{k-1})}{\lambda_{k-1}} D_f(x^k, y^k) \geq \frac{a_k(2-\bar{\lambda}_{k-1})}{2L\lambda_{k-1}} \|\nabla f(y^k) - \nabla f(x^k)\|_*^2 \quad (10)$$

$$A_{k-1} D_f(x^{k-1}, x^k) + a_k D_f(x, y^k) \geq \frac{A_{k-1}}{2L} \|\nabla f(x^{k-1}) - \nabla f(x^k)\|_*^2 \quad (11)$$

Developing (11) with Young's inequality, $-\|a+b+c\|_*^2 \leq -(1-2/\tau)\|a\|_*^2 + (2\tau-1)(\|b\|_*^2 + \|c\|_*^2)$ for $\tau = 3$, we have

$$\begin{aligned} \frac{A_{k-1}}{2L} \|\nabla f(x^{k-1}) - \nabla f(x^k)\|_*^2 &\geq \frac{A_{k-1}}{6L} \|\nabla f(y^k) - \nabla f(y^{k-1})\|_*^2 \\ &\quad - \frac{5A_{k-1}}{2L} (\|\nabla f(y^k) - \nabla f(x^k)\|_*^2 + \|\nabla f(y^{k-1}) - \nabla f(x^{k-1})\|_*^2) \end{aligned} \quad (12)$$

Summing (10), (11) and using (12) and that $\bar{\lambda}_{k-1} \leq a_k/(10A_k)$ we have,

$$\begin{aligned} &-\frac{a_k}{\bar{\lambda}_{k-1}} D_f(y^k, x^k) - \frac{a_k(1-\bar{\lambda}_{k-1})}{\bar{\lambda}_{k-1}} D_f(x^k, y^k) - A_{k-1} D_f(x^{k-1}, x^k) - a_k D_f(x, y^k) \\ &\leq -\frac{A_{k-1}}{6L} \|\nabla f(y^k) - \nabla f(y^{k-1})\|_*^2 - \frac{5A_k}{2L} \|\nabla f(y^k) - \nabla f(x^k)\|_*^2 \\ &\quad + \frac{5A_{k-1}}{2L} \|\nabla f(y^{k-1}) - \nabla f(x^{k-1})\|_*^2. \end{aligned}$$

Summing over $k = 0, \dots, n-1$ makes the final two terms telescope. Dropping the nonpositive telescoping remainder and combining with (9) gives (8). $\square$

Corollary 4.6 (Convergence under L -smoothness). *Let $x^* \in \arg \min_{x \in \mathcal{X}} f(x)$ and let $R_* := h(x^*) - \inf h$. Consider SODA with a fixed regularizer $h_k \equiv h$. For every $k = 0, \dots, n-1$, choose*

$$\alpha_k = \frac{1}{k+1}, \quad \bar{\alpha}_k = \lambda_k = \frac{1}{k+2}, \quad \bar{\lambda}_k \leq \frac{\lambda_k}{10}, \quad \gamma_k = \eta(k+2), \quad \eta = \min \left\{ \frac{\mu}{6\rho L}, \frac{\sqrt{\mu R_*}}{\sigma\sqrt{n}} \right\}.$$

Suppose Assumptions 4.1 to 4.4 hold and that h is μ -strongly convex with respect to $\|\cdot\|$. Then, for every $n \geq 1$,

$$\mathbb{E}[f(x^{n-1}) - f(x^*)] = O\left(\frac{(\rho+1)LR_*}{\mu n} + \frac{\sigma\sqrt{R_*}}{\sqrt{\mu n}}\right).$$

Proof. Choose the weights $a_k \equiv 1$, so that $A_k = k+1$ for $k = 0, \dots, n-1$. Then

$$\begin{aligned} \alpha_k &= \frac{1}{k+1} = \frac{a_k}{A_k}, \quad \bar{\alpha}_k = \frac{1}{k+2} = \frac{a_{k+1}}{A_{k+1}}, \quad \gamma_k(1 - \bar{\alpha}_k) = \eta A_k, \\ \gamma_k \bar{\alpha}_k &= \eta(k+2) \frac{1}{k+2} = \eta = \eta A_{k+1}, \end{aligned}$$

for $k = 0, \dots, n-2$, while $\lambda_{k-1} = 1/(k+1) = a_k/A_k$ for $k = 1, \dots, n-1$. Under L -smoothness, Theorem B.5 gives

$$\begin{aligned} n \mathbb{E}[f(x^{n-1}) - f(x^*)] &\leq \frac{R_*}{\eta} + \frac{\eta}{2\mu} \sum_{k=0}^{n-1} \mathbb{E}[\|g^k - g^{k-1}\|_*^2] \\ &\quad - \frac{1}{6L} \sum_{k=0}^{n-1} k \mathbb{E}[\|\nabla f(y^k) - \nabla f(y^{k-1})\|_*^2]. \end{aligned}$$

Using Assumption 4.4 with the boundary conventions $g^{-1} = 0$ and $\nabla f(y^{-1}) = \nabla f(x^*)$, the startup term satisfies

$$\mathbb{E}[\|g^0 - g^{-1}\|_*^2] \leq \rho \mathbb{E}[\|\nabla f(y^0) - \nabla f(x^*)\|_*^2] + \sigma^2.$$

For $k = 1, \dots, n-1$, the same assumption gives

$$\mathbb{E}[\|g^k - g^{k-1}\|_*^2] \leq \rho \mathbb{E}[\|\nabla f(y^k) - \nabla f(y^{k-1})\|_*^2] + \sigma^2.$$

Substituting this estimate into the previous bound gives

$$\begin{aligned} n \mathbb{E}[f(x^{n-1}) - f(x^*)] &\leq \frac{R_*}{\eta} + \frac{\eta n \sigma^2}{2\mu} + \frac{\eta \rho}{2\mu} \mathbb{E}[\|\nabla f(y^0) - \nabla f(x^*)\|_*^2] \\ &\quad + \sum_{k=1}^{n-1} \left(\frac{\eta \rho}{2\mu} - \frac{k}{6L} \right) \mathbb{E}[\|\nabla f(y^k) - \nabla f(y^{k-1})\|_*^2]. \end{aligned}$$

If $\eta \leq \mu/(6\rho L)$, then the coefficients in the final sum are nonpositive and the final sum can be dropped. Thus we obtain

$$\mathbb{E}[f(x^{n-1}) - f(x^*)] \leq \frac{R_*}{\eta n} + \frac{\eta \sigma^2}{2\mu} + \frac{\eta \rho}{2\mu n} \mathbb{E}[\|\nabla f(y^0) - \nabla f(x^*)\|_*^2].$$

The displayed initialization bound gives $\mathbb{E}[\|\nabla f(y^0) - \nabla f(x^*)\|_*^2] \leq 2L^2 R_*/\mu$. Since $\eta \leq \mu/(6\rho L)$, the startup term is $O(LR_*/(\mu n))$. The remaining two terms are optimized by the stated choice of η , yielding the claim. $\square$

B.3 Accelerated rate

Corollary B.6 (Accelerated parameterization). *Let $x^* \in \arg \min_{x \in \mathcal{X}} f(x)$ and let $R_* := h(x^*) - \inf h$. Consider SODA with a fixed regularizer $h_k \equiv h$. For every $k = 0, \dots, n-1$, choose*

$$\alpha_k = \frac{2}{k+2}, \quad \bar{\alpha}_k = \lambda_k = \frac{2}{k+3}, \quad \bar{\lambda}_k \leq \frac{\lambda_k}{10},$$

$$\gamma_k = \eta \frac{(k+2)(k+3)}{2}, \quad \eta = \min \left\{ \frac{\mu}{12\rho L}, \frac{\sqrt{\mu R_*}}{\sigma n^{3/2}} \right\}.$$

Assume Assumptions 4.1 to 4.4, and that h is μ -strongly convex with respect to $\|\cdot\|$. Then, for every $n \geq 1$,

$$\mathbb{E}[f(x^{n-1}) - f(x^*)] = O \left(\frac{(\rho+1)LR_*}{\mu n^2} + \frac{\sigma\sqrt{R_*}}{\sqrt{\mu n}} \right).$$

Remark B.7. Theorem B.6 suggests that optimism ($\bar{\alpha}_k$) and primal averaging (λ_k) should be scheduled in tandem to obtain acceleration. In the context of deep learning, this suggests that optimism, which is commonly referred to as Nesterov momentum, does not lead to acceleration on its own, but should be scheduled in combination with the weight decay (λ_k). We leave this as interesting future work.

Proof. Choose the weights $a_k = k+1$ for $k = 0, \dots, n-1$. Then

$$A_k = \sum_{i=0}^k a_i = \frac{(k+1)(k+2)}{2}, \quad \frac{a_k}{A_k} = \frac{2}{k+2}, \quad \frac{a_{k+1}}{A_{k+1}} = \frac{2}{k+3}.$$

For $k = 0, \dots, n-2$, the displayed parameter choices therefore satisfy

$$\alpha_k = \frac{a_k}{A_k}, \quad \lambda_k = \frac{a_{k+1}}{A_{k+1}}, \quad \bar{\lambda}_k \leq \frac{a_{k+1}}{10A_{k+1}}, \quad \bar{\alpha}_k = \frac{a_{k+1}}{A_{k+1}}, \quad \gamma_k = \eta \frac{A_k}{1-\bar{\alpha}_k},$$

Theorem B.1 and Theorem B.5 give

$$A_{n-1} \mathbb{E}[f(x^{n-1}) - f(x^*)] \leq \frac{R_*}{\eta} + \frac{\eta}{2\mu} \sum_{k=0}^{n-1} (k+1)^2 \mathbb{E}[\|g^k - g^{k-1}\|_*^2]$$

$$- \frac{1}{6L} \sum_{k=0}^{n-1} A_{k-1} \mathbb{E}[\|\nabla f(y^k) - \nabla f(y^{k-1})\|_*^2].$$

Using Assumption 4.4 with the boundary conventions $g^{-1} = 0$ and $\nabla f(y^{-1}) = \nabla f(x^*)$, the startup term satisfies

$$\mathbb{E}[\|g^0 - g^{-1}\|_*^2] \leq \rho \mathbb{E}[\|\nabla f(y^0) - \nabla f(x^*)\|_*^2] + \sigma^2.$$

For $k = 1, \dots, n-1$, the same assumption controls the gradient differences, and we obtain

$$A_{n-1} \mathbb{E}[f(x^{n-1}) - f(x^*)] \leq \frac{R_*}{\eta} + \frac{\eta\rho}{2\mu} \mathbb{E}[\|\nabla f(y^0) - \nabla f(x^*)\|_*^2] + \frac{\eta\sigma^2}{2\mu} \sum_{k=0}^{n-1} (k+1)^2$$

$$+ \sum_{k=1}^{n-1} \left(\frac{\eta\rho}{2\mu} (k+1)^2 - \frac{A_{k-1}}{6L} \right) \mathbb{E}[\|\nabla f(y^k) - \nabla f(y^{k-1})\|_*^2],$$

where we used $A_{k-1} = \frac{k(k+1)}{2} \geq \frac{(k+1)^2}{4}$ for $k \geq 1$. By the stated choice of η , the coefficient of the final term is nonpositive, so it can be dropped. Since

$$A_{n-1} = \Theta(n^2), \quad \sum_{k=1}^{n-1} (k+1)^2 = O(n^3),$$

it follows that

$$\mathbb{E}[f(x^{n-1}) - f(x^*)] = O \left(\frac{R_*}{\eta n^2} + \frac{\eta\sigma^2 n}{\mu} + \frac{\eta\rho}{\mu n^2} \mathbb{E}[\|\nabla f(y^0) - \nabla f(x^*)\|_*^2] \right).$$

Now set

$$\eta_1 := \frac{\mu}{12\rho L}, \quad \eta_2 := \frac{\sqrt{\mu R_*}}{\sigma n^{3/2}}, \quad \eta = \min\{\eta_1, \eta_2\}.$$

If $\eta = \eta_1$, then

$$\frac{R_*}{\eta n^2} = O \left(\frac{\rho L R_*}{\mu n^2} \right), \quad \frac{\eta\sigma^2 n}{\mu} = O \left(\frac{\sigma^2 n}{\rho L} \right) \leq \frac{\sigma\sqrt{R_*}}{\sqrt{\mu n}},$$

because $\eta_1 \leq \eta_2$ implies $\sigma n^{3/2} = O(\rho L \sqrt{R_*/\mu})$. The startup term is $\eta\rho \mathbb{E}[\|\nabla f(y^0) - \nabla f(x^*)\|_*^2]/(\mu n^2) = O(LR_*/(\mu n^2))$. If instead $\eta = \eta_2$, then

$$\frac{R_*}{\eta n^2} = \frac{\eta\sigma^2 n}{\mu} = \frac{\sigma\sqrt{R_*}}{\sqrt{\mu n}},$$

and the startup term is again $O(LR_*/(\mu n^2))$ since $\eta \leq \eta_1$. Combining the two cases gives the claim. $\square$

Table 2: The linear minimization oracle (lmo) for various norm choices. Define $\text{col}_j(A) := [A]_{:,j}$ and $\text{row}_i(A) := [A]_{i,:}$.

Weight matrix norm	W_1 (1-hot encoded)	W_1 (image domain)	$(W_\ell)_{\ell \in [2, \dots, L-1]}$	W_L
Spectral (RMS $\rightarrow$ RMS)	$-\sqrt{d_{\text{out}}}UV^\top$	$-\sqrt{d_{\text{out}}/d_{\text{in}}}UV^\top$		
ColNorm (1 $\rightarrow$ RMS)	$\text{col}_j(W_1) \mapsto -\sqrt{d_{\text{out}}} \frac{\text{col}_j(W_1)}{\ \text{col}_j(W_1)\ _2}$	$\text{col}_j(W_\ell) \mapsto -\frac{\sqrt{d_{\text{out}}}}{d_{\text{in}}} \frac{\text{col}_j(W_\ell)}{\ \text{col}_j(W_\ell)\ _2}$		
RowNorm (RMS $\rightarrow \infty$)	$\text{row}_i(W_1) \mapsto -\frac{\text{row}_i(W_1)}{\ \text{row}_i(W_1)\ _2}$	$\text{row}_i(W_\ell) \mapsto -\frac{\text{row}_i(W_\ell)}{\sqrt{d_{\text{in}}}\ \text{row}_i(W_\ell)\ _2}$		
Sign (1 $\rightarrow \infty$)	$-\text{sign}(W_1)$	$-\frac{1}{d_{\text{in}}} \text{sign}(W_\ell)$		

C Experiments

C.1 Implementation

Norm choice Consider a neural network parameterized by weight matrices $W_1, \dots, W_L$, where W_1 is the first layer and W_L is the last layer. Following Pethick et al. [2025a], we use the max-norm across layers

$$\|x\| = \max_l \frac{1}{\rho_l} \|W_l\|_{\alpha_l \rightarrow \beta_l}$$

where ρ_l is the layerwise radii and $\|\cdot\|_{\alpha \rightarrow \beta} := \sup_{x \neq 0} \|Ax\|_\beta / \|x\|_\alpha$ is an operator norm. Under the max-norm the lmo decomposes layerwise. Different layerwise operator norms can be found in Table 2. If not otherwise noted, we use the operator norm choice (Sign $\rightarrow$ Spectral $\rightarrow$ Sign) for both Scion and SODA, which refers to using Sign for the first layer, Spectral for intermediary layers and Sign for the last layer.

SODA Wrapper For ease of use, the provided implementation of the SODA Wrapper (Algorithm 1) can be used directly as a wrapper around any existing PyTorch optimizer. However, this ease of use comes at the cost of requiring additional memory since we need to recover the update delta $x^{k+1} - x^k$, which requires storing the previous iterate x^k . For production, we therefore recommend one of three options:

- (i) modify the base optimizer to directly return the update delta $x^{k+1} - x^k$,
- (ii) directly implement the simplified wrapper expression (4) inside the base optimizer,
- (iii) or use the SODA algorithm, which involves the dual momentum and the mirror map.

For Adam, which uses stepsize warmup the SODA wrapper is only applied after the warmup phase.

Layer choice For all SODA Wrapper experiments, we wrap only the hidden layers, keeping the first/last layers without weight decay, following the choice of modded-nanogpt, which only sets weight decay for hidden layers. We further test this layer choice in Table 3.

For SODA(Muon), wrapping only hidden layers is consistently better than wrapping all layers under both $1\times$ and $4\times$ Chinchilla. On the other hand, when using uScion with the norm choice (Sign $\rightarrow$ Spectral $\rightarrow$ Sign) as the base optimizer, wrapping all layers is competitive with wrapping only hidden layers. It appears that the $1/(k+2)$ weight decay introduced by the SODA Wrapper improves performance in hidden layers, which benefit from weight decay, while not harming the first and last layers, which are typically more sensitive to it. This suggests that also the non-wrapped version SODA with (Sign $\rightarrow$ Spectral $\rightarrow$ Sign) can safely be applied to all layers as done in all subsequent experiments.

SODA The implementation of SODA makes the choice $h_k(x) = \iota_{\mathcal{B}(z^0, \gamma_k)}(x)$ where $\mathcal{B}(z, \gamma) = \{x \in \mathcal{X} \mid \|x - z\| \leq \gamma\}$ which reduces the update to

$$\begin{aligned}
m^{k+1} &= (1 - \alpha_k)m^k + \alpha_k \nabla f(y^k, \xi_k) \\
\bar{m}^{k+1} &= (1 - \bar{\alpha}_k)m^{k+1} + \bar{\alpha}_k \nabla f(y^k, \xi_k) \\
z^{k+1} &\in z^0 + \gamma_k \text{lmo}_{\mathcal{B}(0,1)}(\bar{m}^{k+1}) \\
x^{k+1} &= (1 - \lambda_k)x^k + \lambda_k z^{k+1} \\
y^{k+1} &= (1 - \bar{\lambda}_k)x^{k+1} + \bar{\lambda}_k z^{k+1}
\end{aligned} \tag{13}$$

with $\alpha_k, \bar{\alpha}_k, \bar{\lambda}_k \in [0, 1]$, $\lambda_k = 1/(k+2)$ and $\gamma_k = \eta_k(k+2)$ similar to Algorithm 1. We initialize $m^0 = \nabla f(x^0, \xi_0)$ and $x^0 = y^0 = z^0$.

For simplicity, consider $\bar{\alpha}_k = 0$ and $\bar{\lambda}_k = 0$, which disable optimism and enables primal extrapolation. In the context of Frank-Wolfe based methods such as Scion [Pethick et al., 2025a], SODA then corresponds to i) centering the update around the initialization z^0 instead of the origin, and ii) setting the Frank-Wolfe stepsize $\lambda_k = 1/(k+2)$ while the radius $\gamma_k = \eta_k(k+2)$ is linearly increasing.

We initialize the momentum as $m^0 = \nabla f(x^0, \xi_0)$ following theory, which corresponds to using `torch.clone(p.grad)`. We observe that this performs slightly better than the typical $m^0 = 0$, i.e. `torch.zeros_like(p.grad)`, when it comes to SODA.

Setup We rely on the tuned baselines for **AdamW** and **Muon** from modded-nanogpt Jordan et al. [2024a] used in Pethick et al. [2025a]. For the baselines weight decay refers to setting $\mu_k = \mu\gamma_k$ in (5) for weight decay parameter $\mu \geq 0$ and (possibly scheduled) stepsize γ_k , as is the default in e.g., PyTorch. Training a 124M model on FineWeb100 for 5k steps (i.e., $1 \times$ Chinchilla) takes roughly 20-30min on 4 H200 NVIDIA GPUs.

Varied horizon In Figure 4, the learning rate of the baseline is tuned in addition to the weight decay parameter in a grid of powers of 2 to ensure optimality. We find that the optimal learning rate is the same across $1 \times$ Chinchilla and $4 \times$ Chinchilla.

Optimism Table 4 explores the role of optimism showing results for different choices of $\alpha_k, \bar{\alpha}_k$ in SODA. For the remaining hyperparameters we use the same default choices as for the SODA Wrapper, namely $\lambda_k = 1/(k+2)$ (uniform averaging) and $\bar{\lambda}_k = 0$ (primal extrapolation).

Table 3: NanoGPT Validation loss comparing wrapping hidden layers vs. wrapping all layers.

Steps	Muon	SODA(hidden)	SODA(all)	Scion	uScion	SODA(hidden)	SODA(all)
5k	3.28146	3.26654	3.27493	3.28035	3.28508	3.27534	3.27582
20k	3.14140	3.12621	3.12933	3.14776	3.14746	3.13622	3.13196

Table 4: NanoGPT validation loss comparing different values of the dual momentum parameters $\alpha_k, \bar{\alpha}_k$ for SODA.

	5k steps	20k steps
$\alpha_k = 0.05, \bar{\alpha}_k = 0$	3.27613	3.13250
$\alpha_k = 0.05, \bar{\alpha}_k = 0.05$	3.26596	3.12376
$\alpha_k = 0.05, \bar{\alpha}_k = 0.1$	3.27523	3.12543
$\alpha_k = 0.1, \bar{\alpha}_k = 0$	3.27582	3.13192
$\alpha_k = 0.1, \bar{\alpha}_k = 0.05$	3.27171	3.12981
$\alpha_k = 0.1, \bar{\alpha}_k = 0.1$	3.27903	3.13087

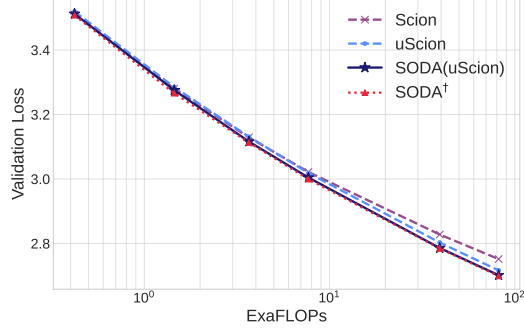


Figure 5: Both SODA[†] and SODA(uScion) are effective under $1 \times$ Chinchilla scaling and the benefit increases with scale.

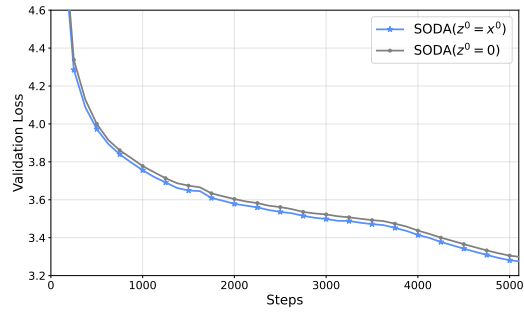


Figure 6: To illustrate the importance of the reference point z^0 being the initialization, we instantiate SODA with $z^0 = 0$, where we observe deterioration in performance. This is consistent with theory, since the rate in e.g., Theorem 4.6 depend on the distance to the anchor point, z^0 , rather than the initial point where the gradient is evaluated, x^0 .

Table 5: For NanoGPT we use the optimized hyperparameters for the 124M model from [Pethick et al., 2025a]. We use FineWeb100 to scale to the overtrained regime while avoiding data repetition. For ease of comparison Muon’s momentum parameter β is written in terms of $\alpha = \bar{\alpha}$ (where $\beta = 1 - \alpha$). SODA[†] uses $\bar{\lambda} = 0$ and $\lambda_k = 1/(k + 2)$ similar to the SODA Wrapper. Both SODA[†] and Scion use the same norm choice, Sign $\rightarrow$ Spectral $\rightarrow$ Sign (c.f. Table 2).

Hyperparameter	AdamW	Muon ¹	uScion	Scion	SODA [†]
Layers	12				
Head dim	128				
Activation function	ReLU ²		2 · ReLU ²		
Vocabulary size	50304				
Dataset	FineWeb100				
Batch size	512				
Block size	1024				
Iterations n	5100 (1× Chinchilla)				
Warmdown m	28.5% of n				
Stepsize schedule	$\gamma_k = \begin{cases} \gamma & \text{if } k < n - m \\ \gamma \cdot \left(\frac{n-k}{m}\right) & \text{if } k \geq n - m \end{cases}$				
Warmup	5%	0			
Adam momentum β_1 / β_2	0.9 / 0.95	0.9 / 0.95	-		-
Averaging parameter α	-	0.05	0.1		0.05
Optimism parameter $\bar{\alpha}$	-	0.05	-		0.05
Radius $\rho_1 / \rho_\ell / \rho_L$	-		- / 50 / 3000		
lr	2 ⁻⁹	2 ⁻¹¹	2 ⁻¹²	2 ⁻¹²	2 ⁻¹²

¹ Muon uses Adam for the first/last layer. The stepsize for the first/last layer is multiplied by 10.