


```
import seaborn as sns
import matplotlib.pyplot as plt
```


```
titanic = sns.load_dataset('titanic')
```

```
print(titanic.head())
```

	survived	pclass	sex	age	sibsp	parch	fare	embarked	class
0	0	3	male	22.0	1	0	7.2500	S	T
1	1	1	female	38.0	1	0	71.2833	C	F
2	1	3	female	26.0	0	0	7.9250	S	T
3	1	1	female	35.0	1	0	53.1000	S	F
4	0	3	male	35.0	0	0	8.0500	S	T


	who	adult_male	deck	embark_town	alive	alone
0	man	True	NaN	Southampton	no	False
1	woman	False	C	Cherbourg	yes	False
2	woman	False	NaN	Southampton	yes	True
3	woman	False	C	Southampton	yes	False
4	man	True	NaN	Southampton	no	True

```
sns.barplot(x='sex', y='survived', data=titanic)
plt.title('Survival Rate by Gender')
plt.show()
```

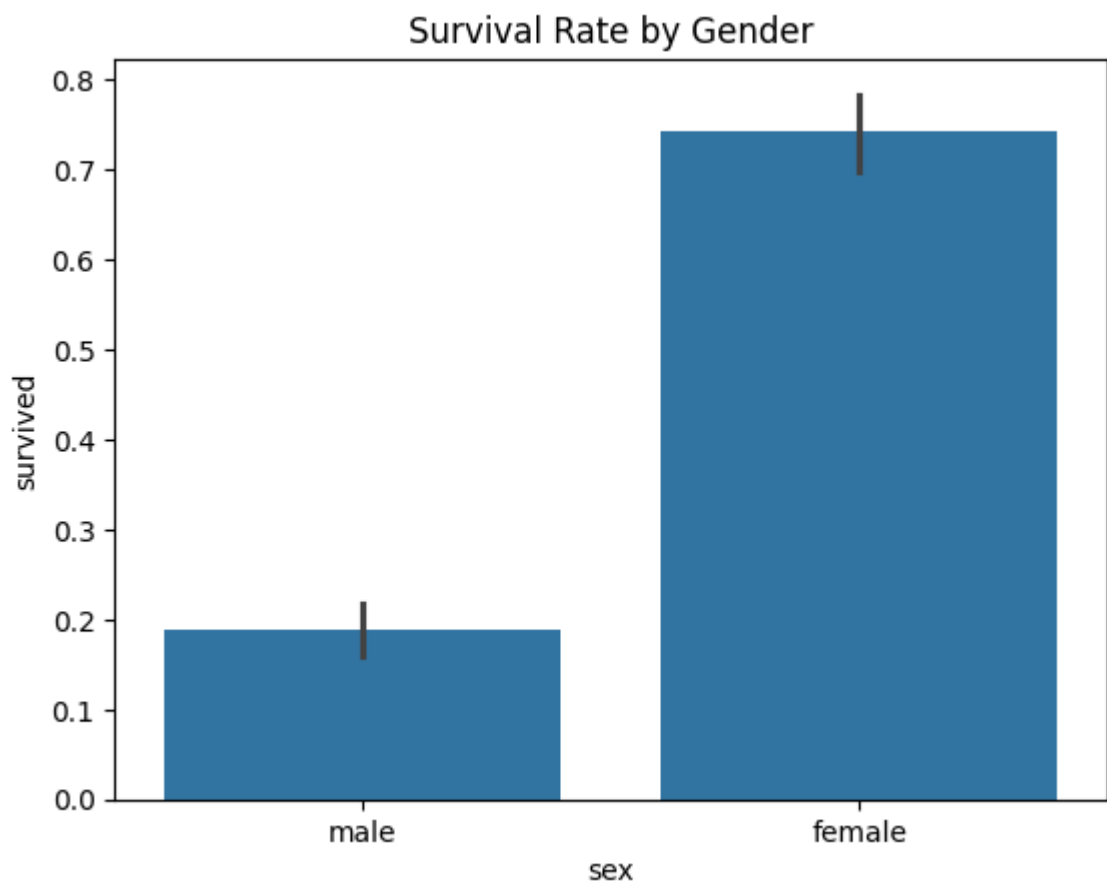

```
sns.countplot(x='embarked', hue='survived', data=titanic)
```

```
sns.countplot(x='pclass', hue='survived', data=titanic)
plt.title('Passenger Count by Class and Survival Status')
plt.show()
```

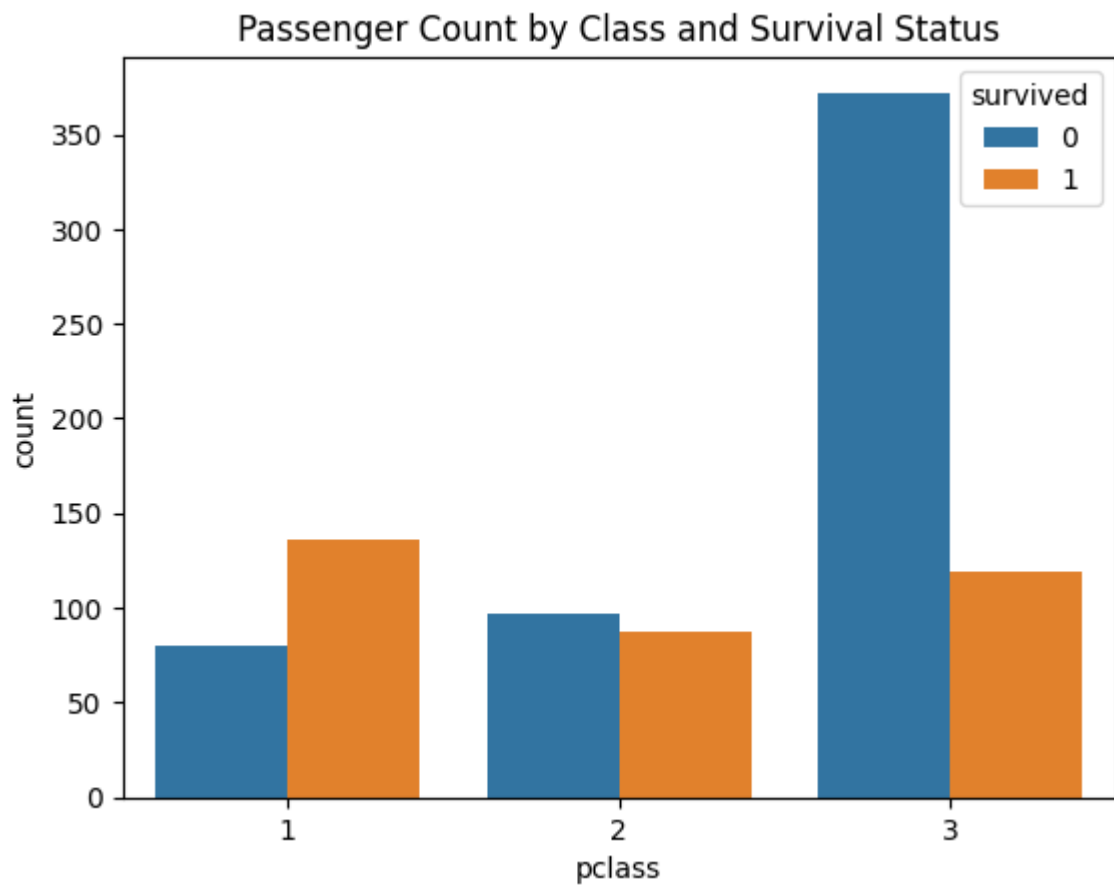



```
sns.set_theme(style="whitegrid")

plt.figure(figsize=(10, 6))
sns.histplot(titanic['fare'], bins=30, kde=True, color='teal')

plt.title('Distribution of Ticket Prices (Fare)')
plt.xlabel('Fare (Price)')
plt.ylabel('Number of Passengers')


plt.show()
```

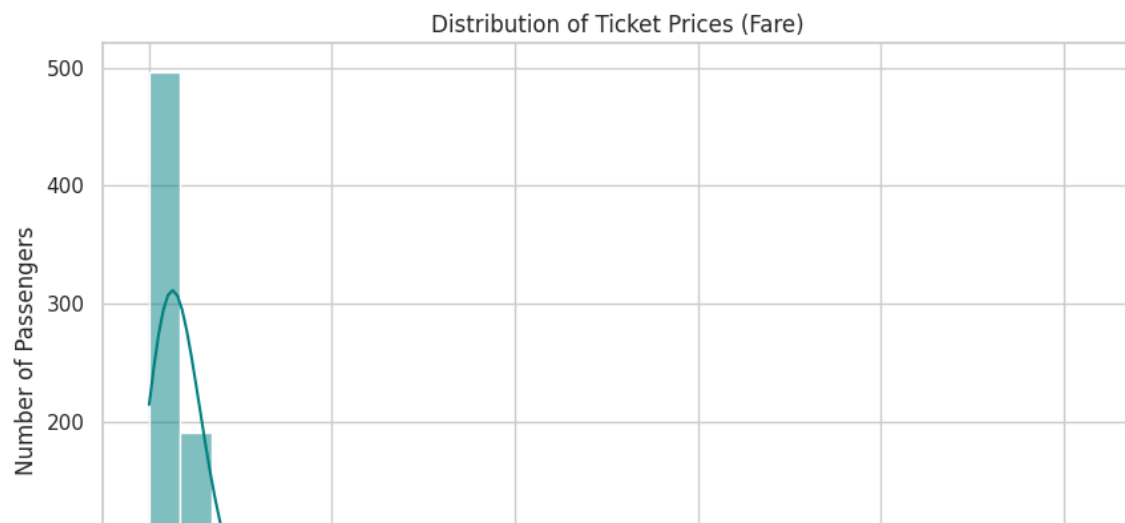

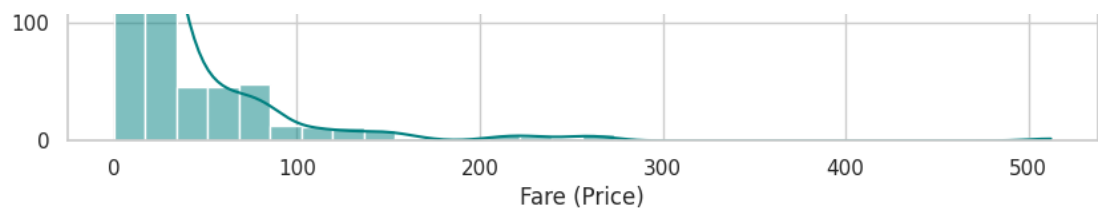


```
numeric_titanic = titanic.select_dtypes(include=['float64', 'int64'])


plt.figure(figsize=(10, 8))
sns.heatmap(numeric_titanic.corr(), annot=True, cmap='coolwarm', fmt:
plt.title('Correlation Heatmap of Titanic Variables')
plt.show()
```

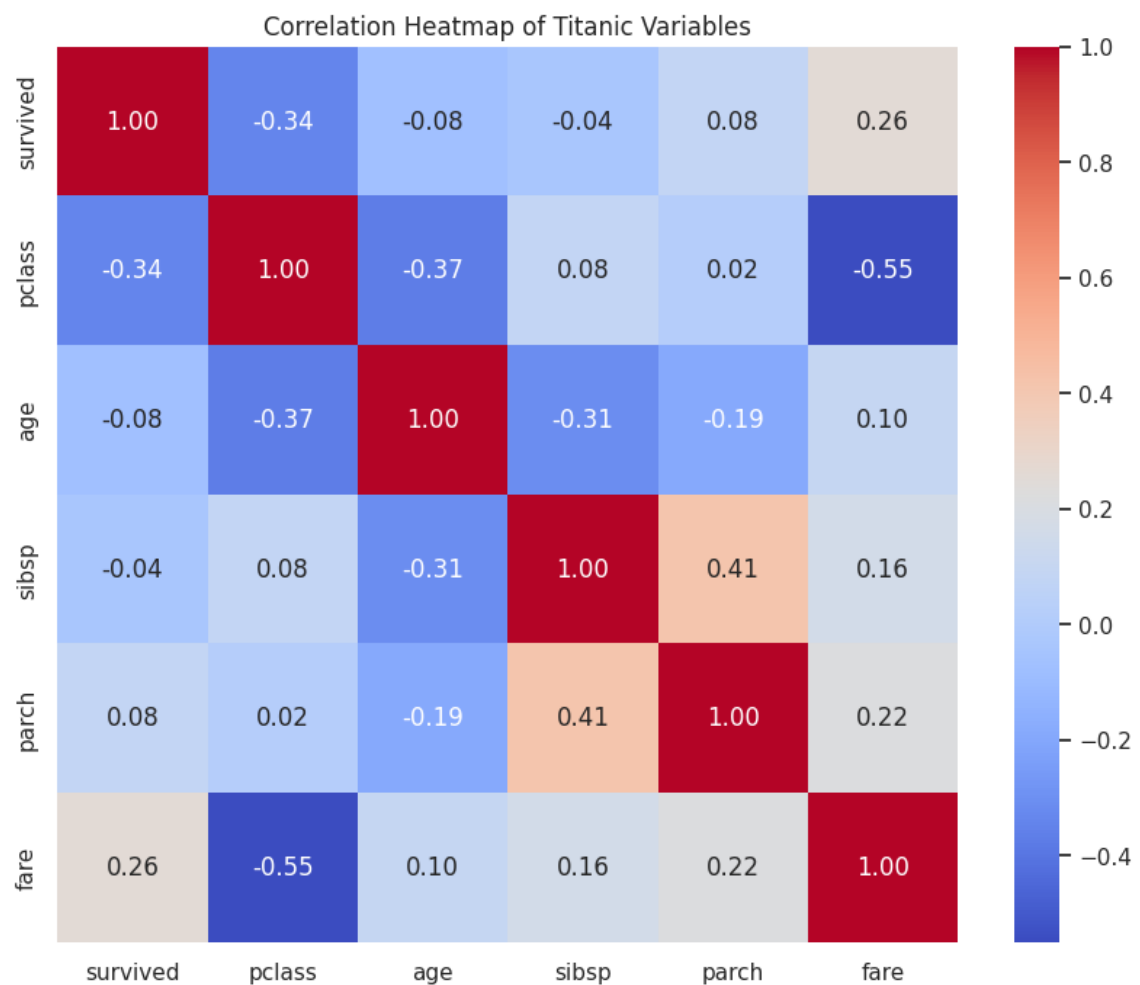


```
plt.figure(figsize=(12, 6))
sns.boxplot(x='pclass', y='fare', hue='survived', data=titanic)
plt.title('Fare Distribution by Class and Survival')
plt.ylim(0, 300)
plt.show()
```

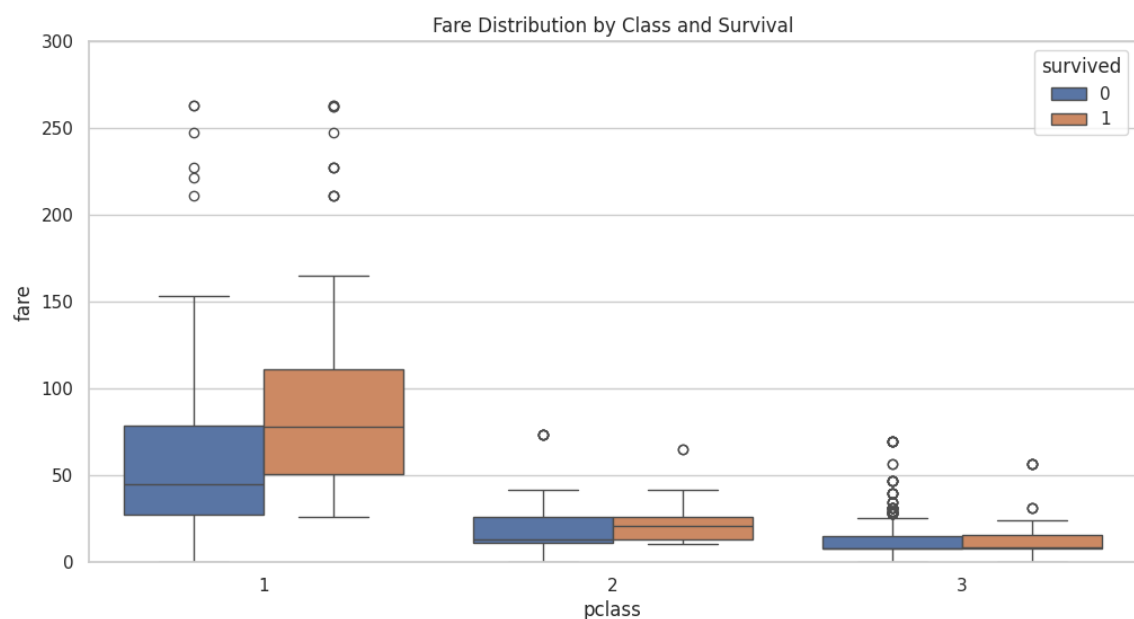

```
g = sns.FacetGrid(titanic, col='survived', row='sex', height=3, asp
g.map(sns.histplot, 'age', bins=20, kde=True)
plt.subplots_adjust(top=0.9)
g.fig.suptitle('Age Distribution by Gender and Survival Status')
plt.show()
```

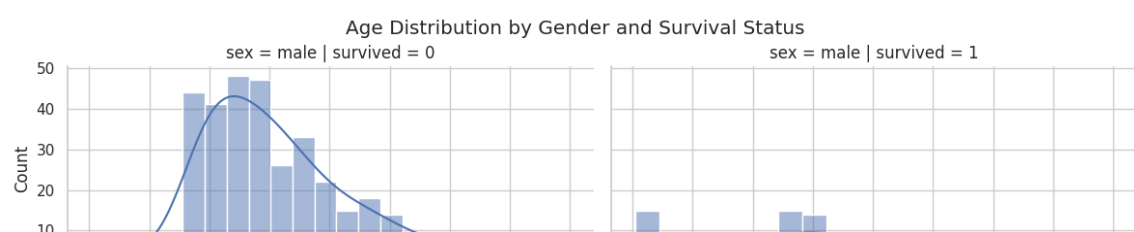

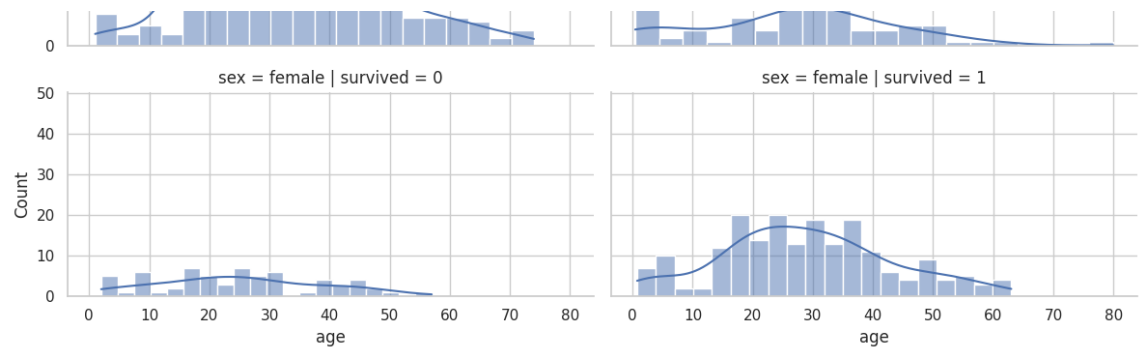

Start coding or [generate](#) with AI.