



The logo of the University of Bordeaux features the text "université de BORDEAUX" in a bold, sans-serif font. The word "université" is written in brown, with the "u" and "é" in blue. Below it, "de" is in brown, and "BORDEAUX" is in large, bold brown letters. The background is white with a blue diagonal band from top-left to middle-right.

université
de BORDEAUX

Bloc 1



Introduction

→ Système d'information sur Internet

- › Ensemble de machines interconnectées
- › Modèle client-serveur
 - Client : envoie des requêtes à des serveurs pour obtenir du contenu
 - Serveur : répond aux requêtes des clients et fournit du contenu

→ Régi par un consortium : W3C

- › Protocole : HTTP (*HyperText Transfer Protocol*)
- › Langages : HTML, CSS, JavaScript

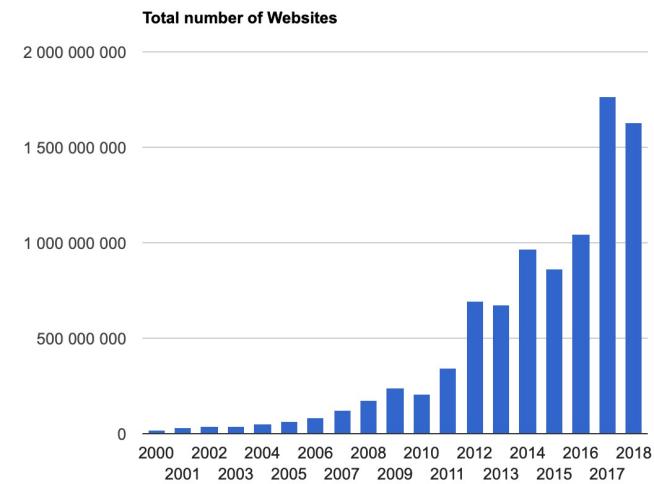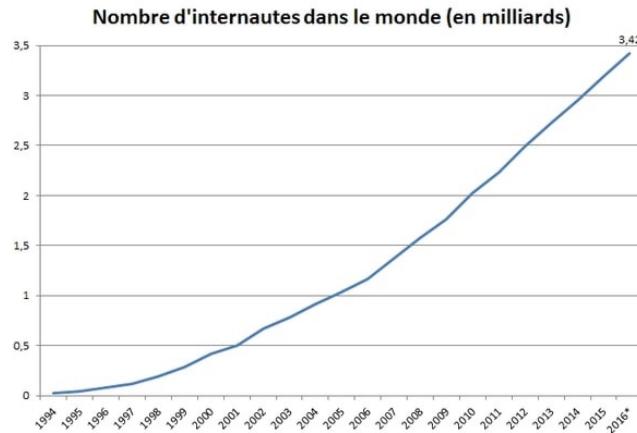

Premier site Internet (1990)


The screenshot shows a Mac OS X-style window titled "Non sécurisé — info.cern.ch". The main content area displays the "World Wide Web" homepage. The page has a dark background with white text. It starts with a brief introduction about the WorldWideWeb (W3) initiative. Below this, there's a section titled "What's out there?" followed by a list of links to various resources like "Subjects", "W3 servers", "Help" (which points to information about the browser), "Software Products", "Technical" (for protocols and internals), "Bibliography", "People", "History", "How can I help?", and "Getting code".

The screenshot shows a Mac OS X-style window titled "archive.org". The main content area displays the "Wayback Machine" interface. It features a search bar with the placeholder "enter URL or keywords". Below the search bar is a large icon of a classical building with four columns. The text "Internet Archive" is displayed, along with a description stating it is a non-profit library of millions of free books, movies, software, music, websites, and more. At the bottom, there are icons for different file types and sizes: 362B, 21M, 5.2M, 5.4M, 1.8M, 423K, 3.3M, 203K, and 449K. A search bar with the word "Search" and a "go" button are also visible.

Revoir certains sites archivés


Fonctionnement du Web (1/5)

1. Utilisation d'un logiciel client : **navigateur web**
2. Saisie d'une URL : **https://www.u-bordeaux.fr/**
(Uniform Resource Locator)

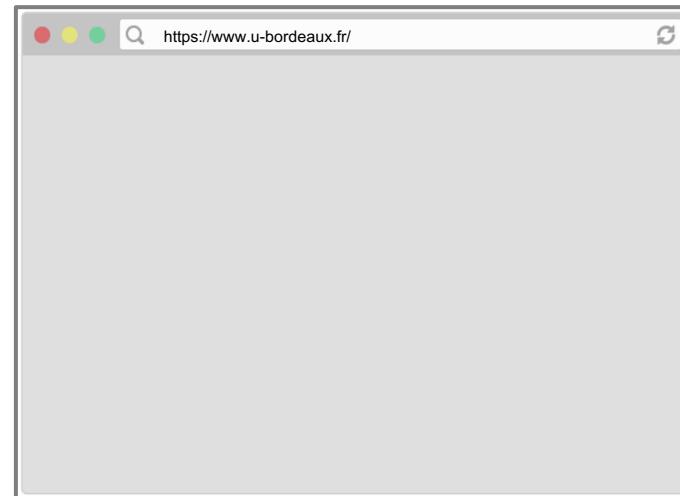


Fonctionnement du Web (2/5)

3. Envoie d'une requête avec le protocole HTTP

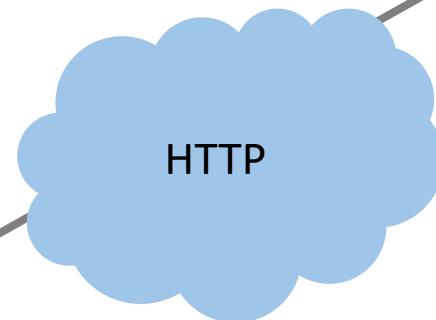


Serveur de UB

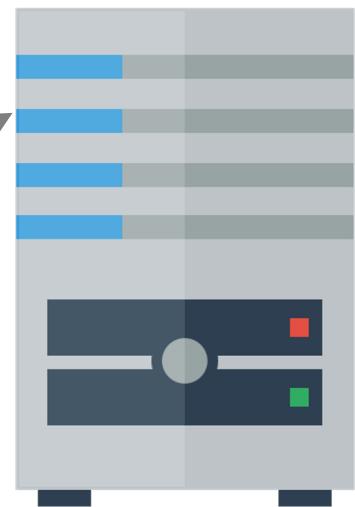

Fonctionnement du Web (3/5)


3. Envoie de la réponse HTTP (page HTML)

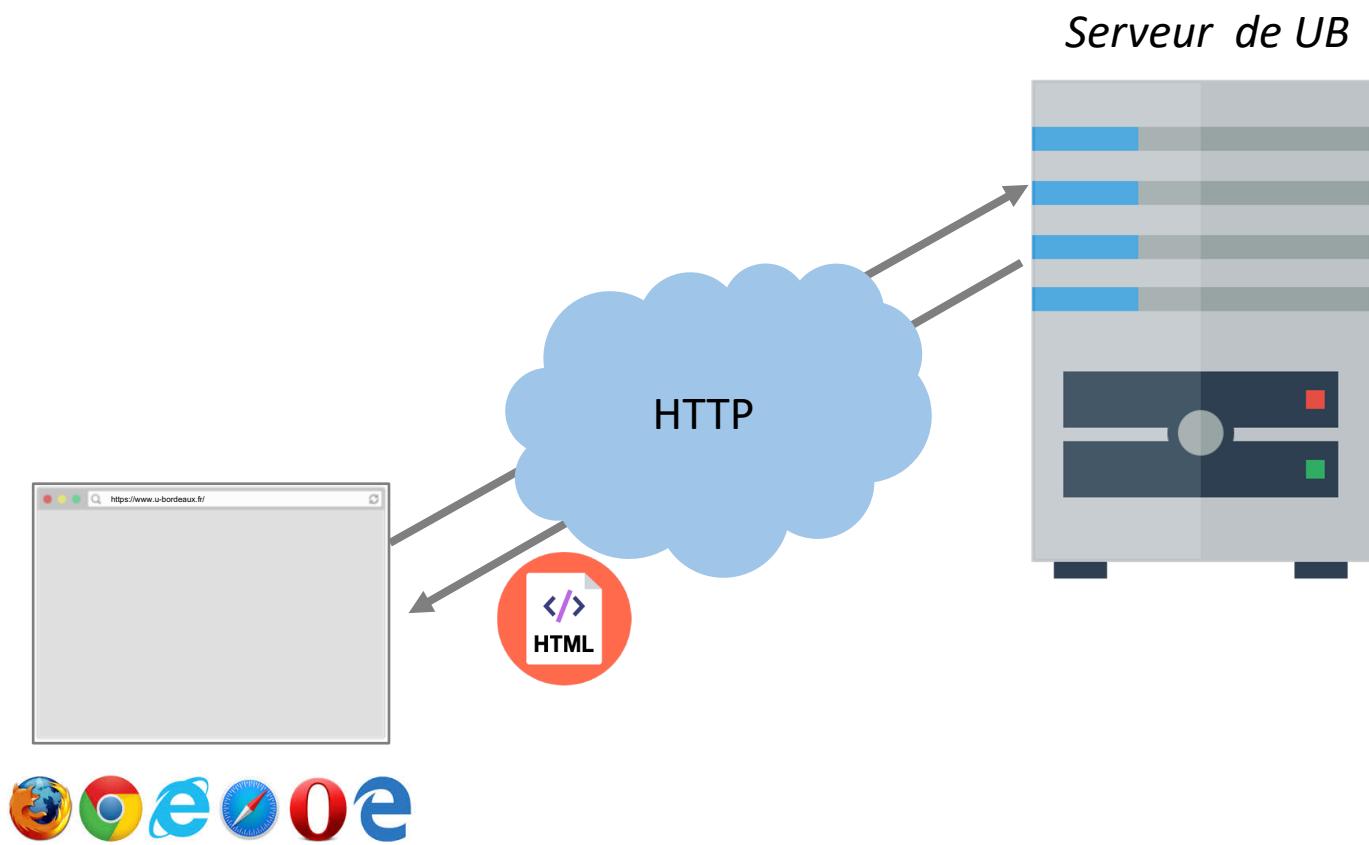

Fonctionnement du Web (4/5)

4. Analyse du fichier HTML

5. Demande des ressources complémentaires (images, feuilles de style...)

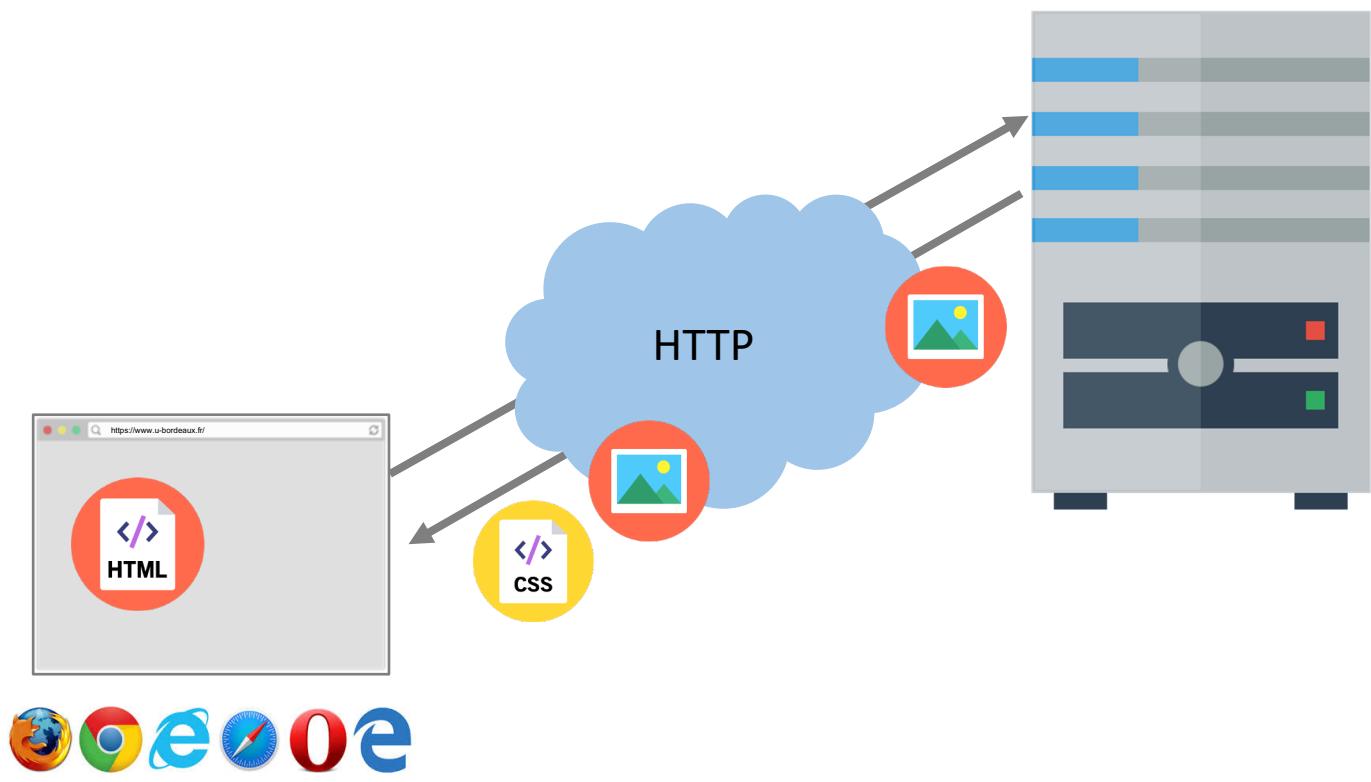

Fonctionnement du Web (5/5)


6. Rendu graphique du contenu



Protocole HTTP (Hyper Text Transfer Protocol)

→ Modèle client/serveur

- › **Client** : navigateur Web (Chrome, Firefox, Safari...)
- › **Serveur** : serveur Web (Apache, Nginx, IIS...)
- › Requêtes et réponses en mode **texte**
- › Protocole **sans état** : aucune information conservée entre 2 connexions

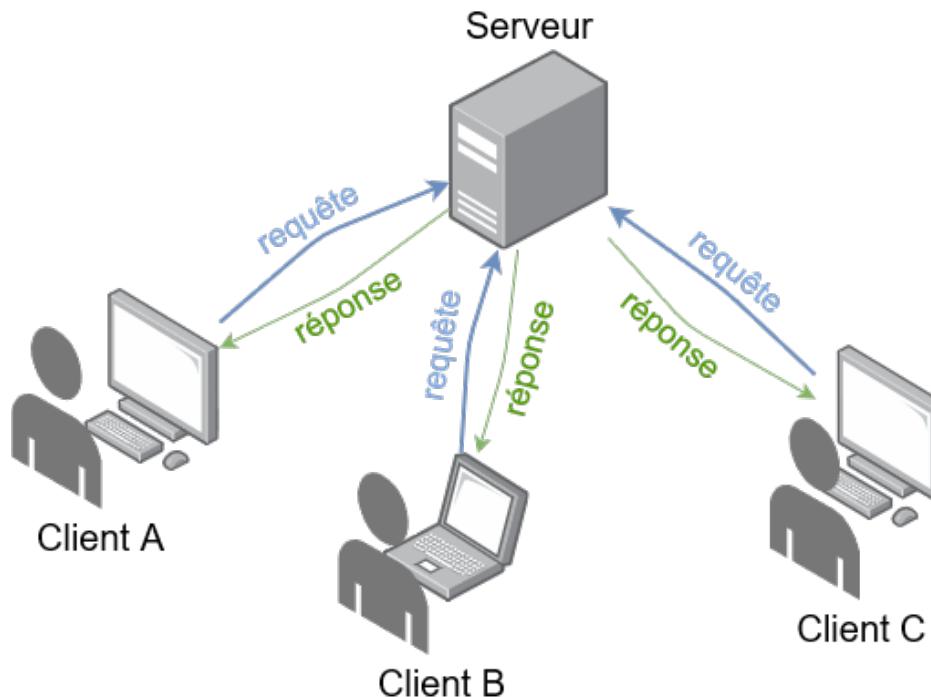

Protocole HTTP (Hyper Text Transfer Protocol)

→ Requêtes

- › **Commande** : type d'opération demandée (obtenir des données, envoyer des données, mettre à jour des données...)
- › URL identifiant la ressource sur le serveur Web
 - **GET** Récupérer une ressource (page HTML, image...)
 - **POST** Envoyer des données au serveur (formulaire)

→ Réponse

- › Code de réponse et contenu de la ressource demandée
 - **200** Succès
 - **302** Redirection
 - **404** Ressource introuvable
- › Plus d'infos : <http://www.codeshttp.com/>

Une transaction typique (1)

→ Requête du client : client → serveur

- › demande du document **test.html**

```
GET /test.html HTTP/1.1
```

- › envoi des informations d'en-tête :

- configuration du client
- documents acceptés

```
User-Agent: Mozilla/5.0
```

```
Accept: text/html
```

- › envoi d'une ligne vide (fin de l'en-tête)
- › envoi du contenu (vide dans cet exemple)

Une transaction typique (2)

→ Requête du client : serveur → client

- › code indiquant l'état de la requête

```
HTTP/1.1 200 OK
```

- › envoi des informations d'en-tête :

- configuration du serveur
- informations sur le document demandé

```
Date: Mon, 07 Jun 2021 08:04:18 GMT
Server: Apache/2.4.46 (Debian)
Content-Length: 3949
Content-Type: text/html; charset=UTF-8
```

- › envoi d'une ligne vide (fin de l'en-tête)
- › envoi du contenu si la requête a réussi

Inspection en mode développeur

The screenshot shows a web browser window for the Université de Bordeaux website (<https://www.u-bordeaux.fr>). The developer tools Network tab is open, displaying a list of resources loaded by the page. The resources listed include bootstrap.min.js, swiperspec.jquery.js, jquery.inview.js, accueil.js, style.css, and several font files (woff and woff2 formats). A preview of the 'Bordeaux Summer Schools' image is shown on the right side of the tools.

Name	Headers	Preview	Response
bootstrap.min.js			
swiperspec.jquery.js			
jquery.inview.js			
accueil.js			
style.css			
285E36_6_0.woff			
285E36_3_0.woff			
list.svg			
item.svg			
masque.png			
PIA_-C-FreePik_UNE_1600x1...			
Inscriptions_Masters_1600x1...			
Bx_Summer_School_1600x1...			
fleche_gauche_32x48px.png			
fleche_droite_32x48px.png			
plus_gris_78x78px.png			
fleche_gauche_16x25px.png			