



Conjunto de pruebas de Usuario Q.A
Sprint 2



INTEGRANTES:

Eugenia Albornoz

Jaime Agudelo

Sergio Albarracín

Cristian Zapata

Carolina Acevedo


CICLO 4

Grupo44




AGREGAR


Postman

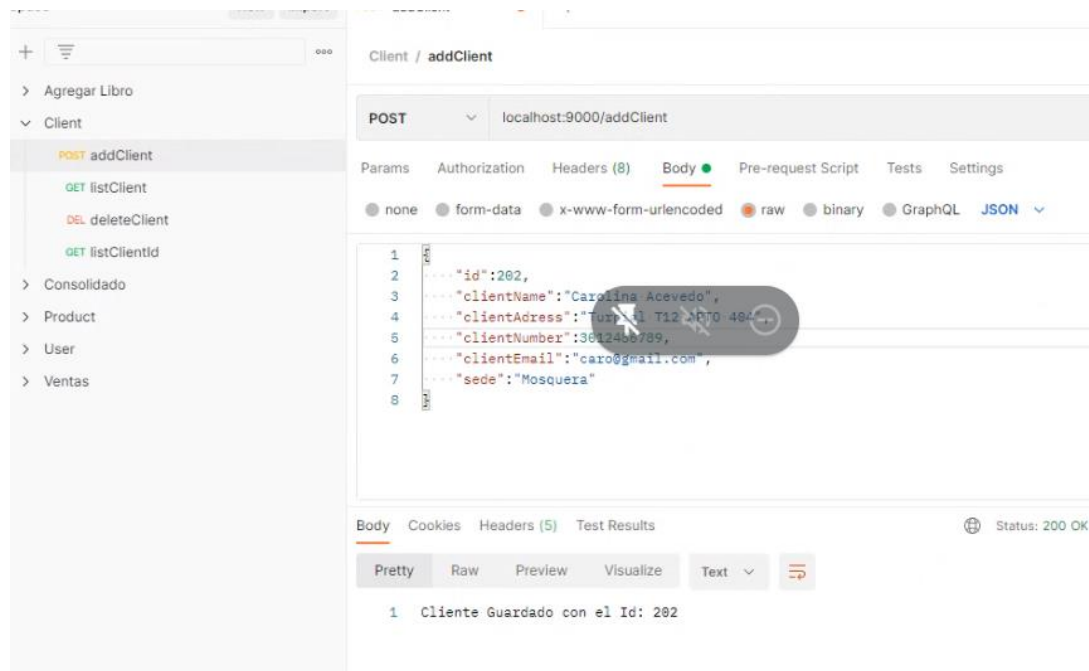

Mongo

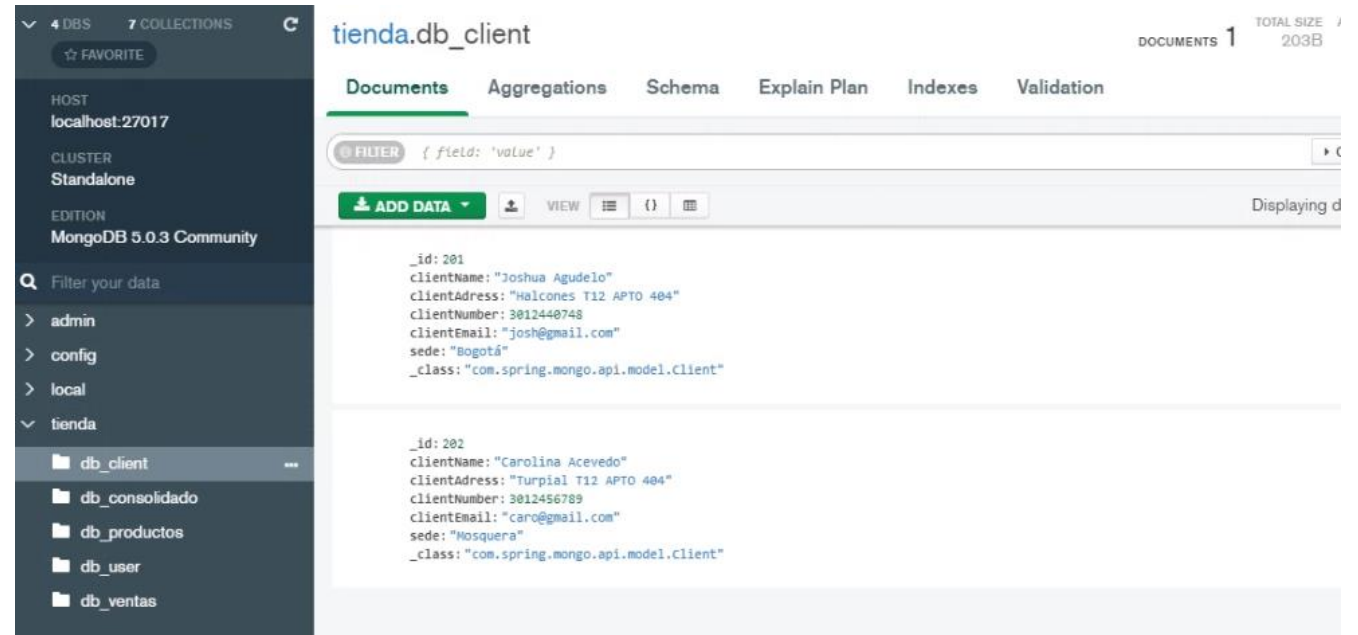

Postman

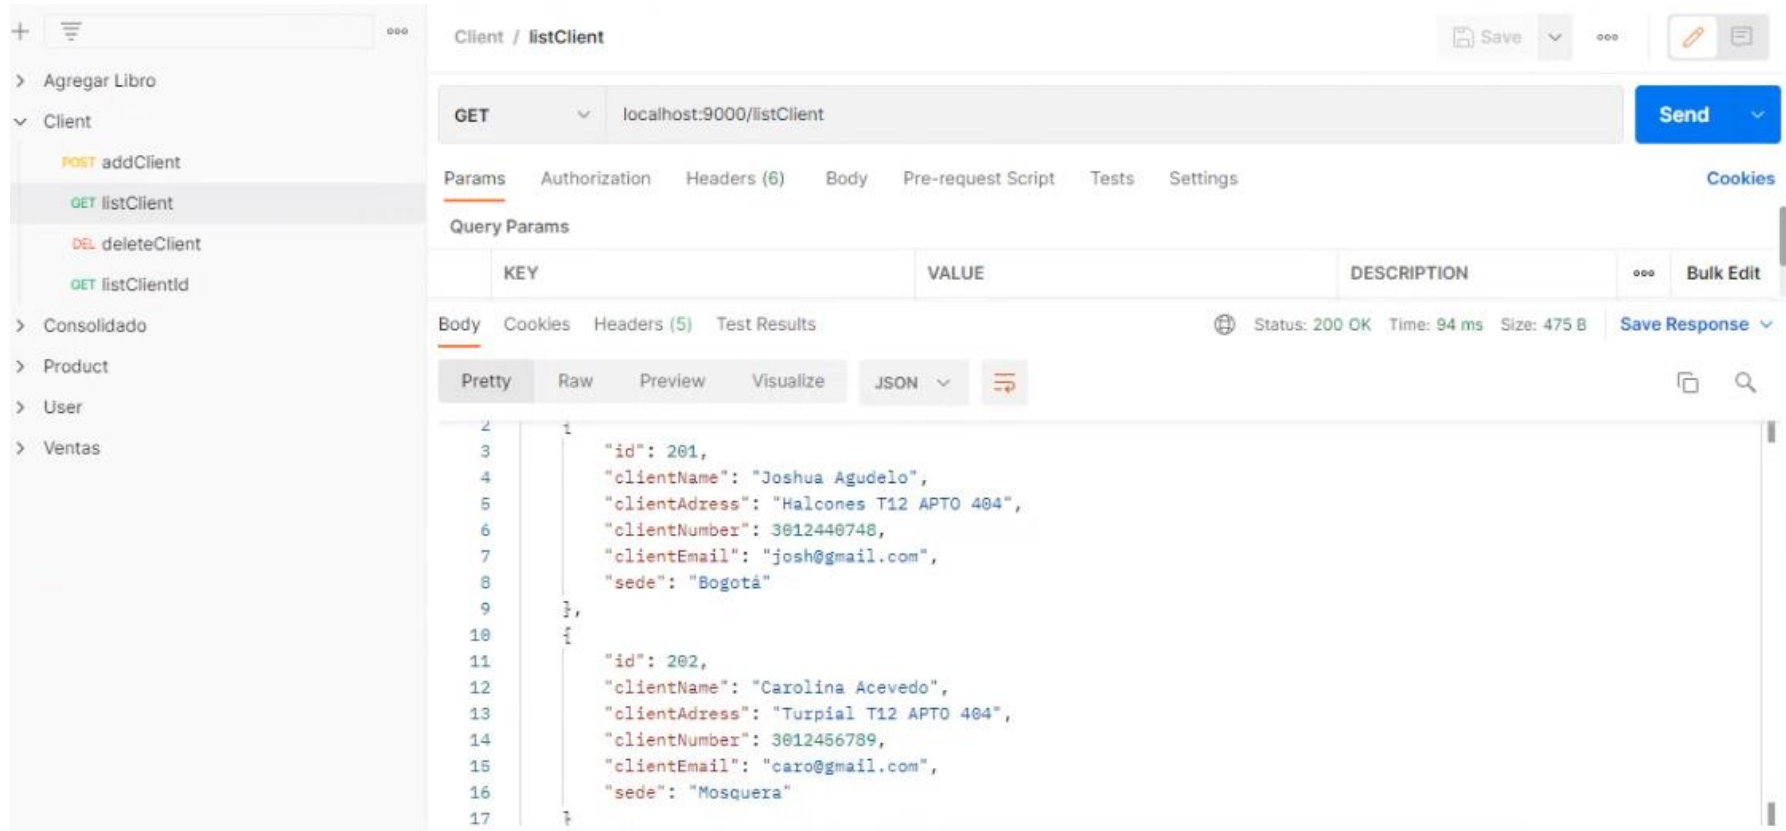

The screenshot shows the Postman interface with a GET request to `localhost:9000/listClient` successfully executed. The response is a JSON array of two client objects.

Client / listClient

GET `localhost:9000/listClient` **Send**

Params Authorization Headers (6) Body Pre-request Script Tests Settings Cookies

Query Params

KEY	VALUE	DESCRIPTION
-----	-------	-------------

Body Cookies Headers (5) Test Results **Status: 200 OK Time: 94 ms Size: 475 B Save Response**

Pretty Raw Preview Visualize JSON

```
[{"id": 201, "clientName": "Joshua Agudelo", "clientAddress": "Halcones T12 APTO 404", "clientNumber": 3012440748, "clientEmail": "josh@gmail.com", "sede": "Bogotá"}, {"id": 202, "clientName": "Carolina Acevedo", "clientAddress": "Turpial T12 APTO 404", "clientNumber": 3012456789, "clientEmail": "caro@gmail.com", "sede": "Mosquera"}]
```



ELIMINAR

Postman

Client / deleteClient

DELETE localhost:9000/deleteClient/201

Params Authorization Headers (6) Body Pre-request Script Tests Settings

Query Params

KEY	VALUE	DESCRIPTION
Key	Value	Description

Body Cookies Headers (5) Test Results

Status: 200 OK Time: 20 ms Size: 196 B

1 Cliente eliminado con el Id: 201

Mongo

MongoDB Compass - localhost:27017/tienda.db_client

Connect View Collection Help

Local

4 DBS 7 COLLECTIONS

☆ FAVORITE

HOST localhost:27017

CLUSTER Standalone

EDITION MongoDB 5.0.3 Community

Filter your data

admin config local tienda

db_client db_consolidado db_productos db_user db_ventas

tienda.db_client

Documents

DOCUMENTS 1 TOTAL SIZE 203B AVG. SIZE 203B INDEXES 1 TOTAL SIZE 24.0KB AVG. SIZE 24.0KB

Aggregations Schema Explain Plan Indexes Validation

FILTER { field: 'value' }

ADD DATA VIEW


Displaying documents 1 - 1 of 1

```
{
  "_id": 201,
  "clientName": "Carolina Acevedo",
  "clientAddress": "Turplal 112 APTD 404",
  "clientNumber": 3812456789,
  "clientEmail": "caro@gmail.com",
  "sede": "Nesquera",
  "_class": "com.spring.mongo.api.model.Client"
}
```



BUSCAR


Postman

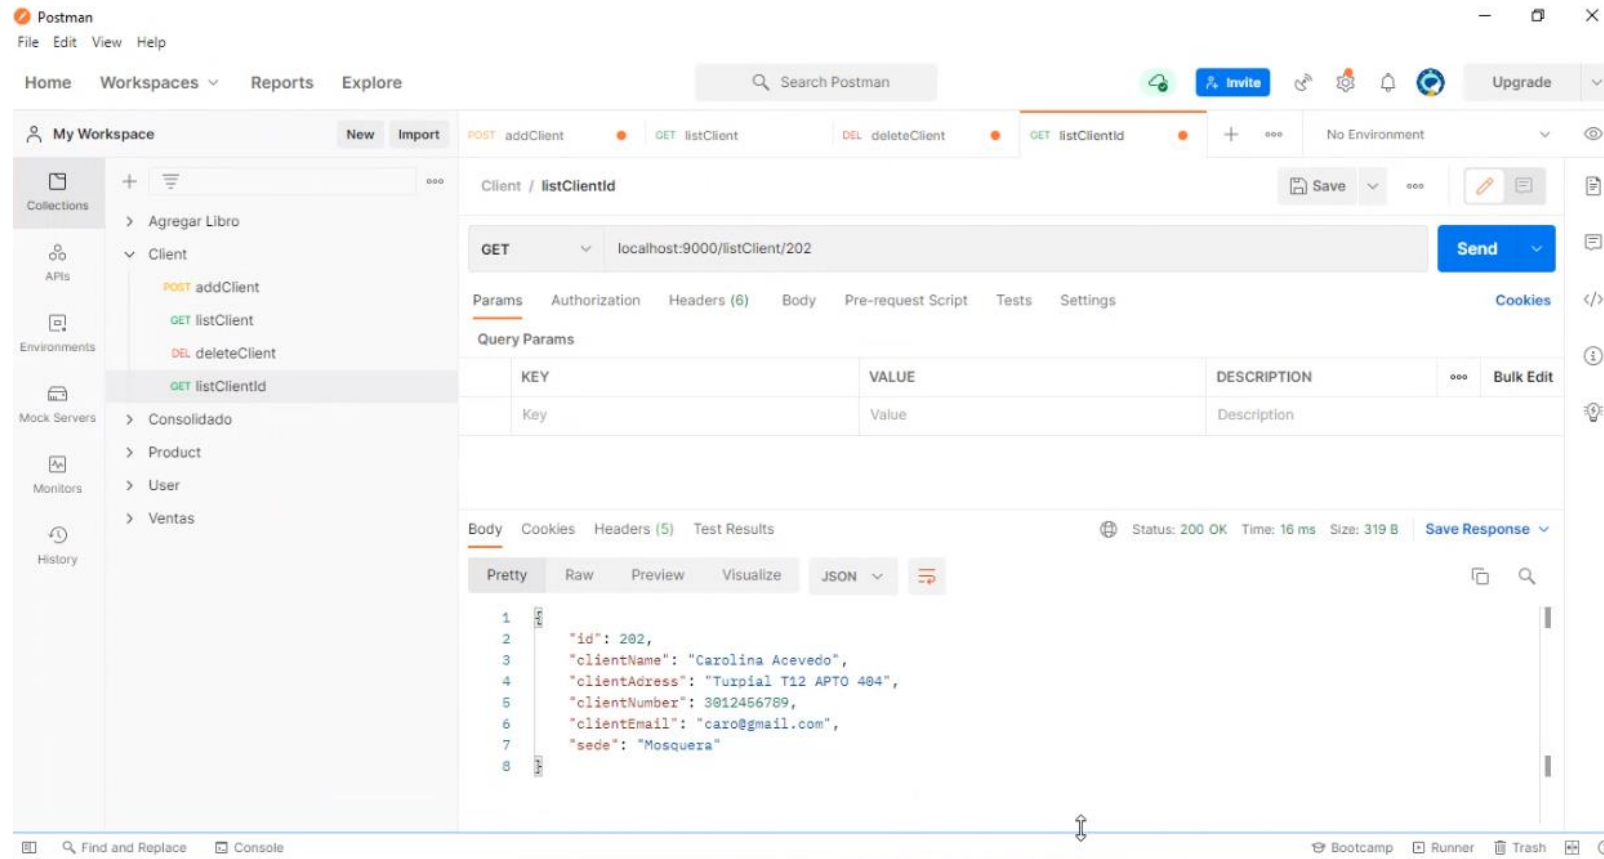




ACTUALIZAR

Postman

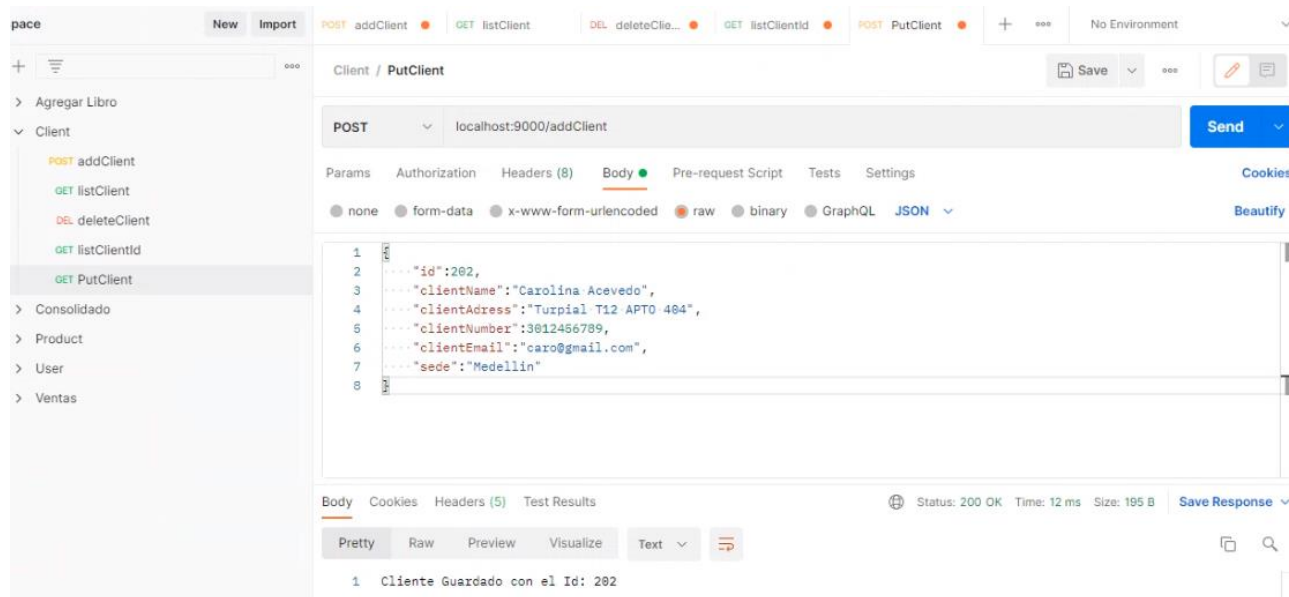

Mongo

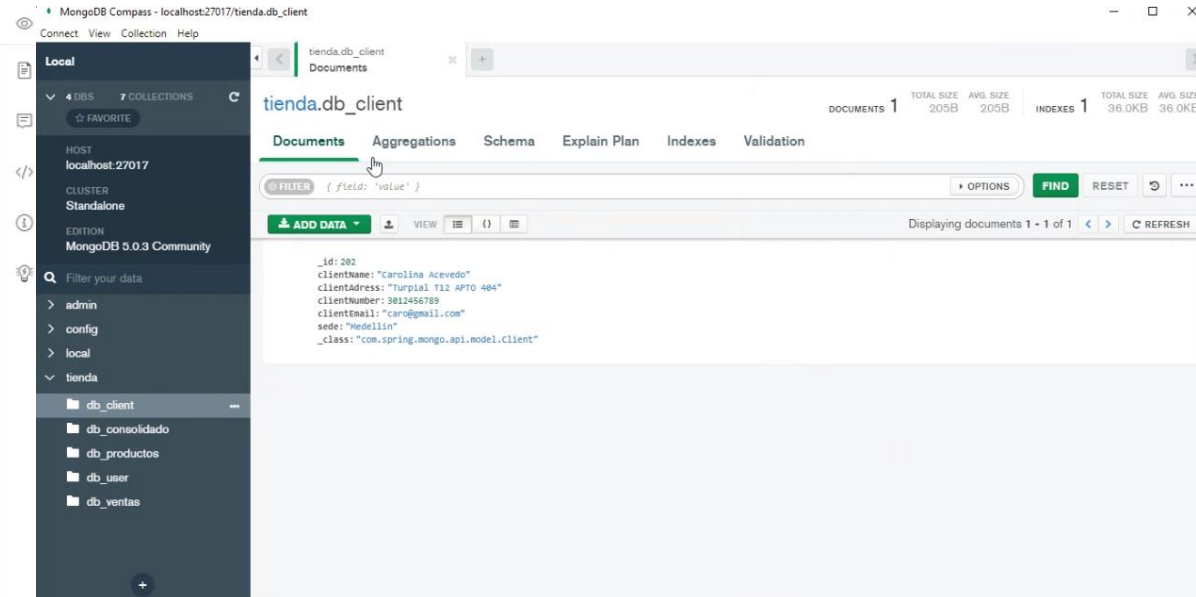



CONSOLIDADO

Postman

The Postman interface shows a GET request to `localhost:9000/listConsolidated`. The response status is 200 OK, and the body is a JSON object:

```
{
  "id": 1,
  "sede": "Cali",
  "totalVentas": 450000
}
```

Mongo


The MongoDB Compass interface shows the `tienda.db_consolidado` collection. The document displayed is:

```
{
  "_id": 1,
  "sede": "Cali",
  "totalVentas": 450000,
  "_class": "com.spring.mongo.api.model.Consolidated"
}
```





CONSOLIDADO- CREAR

Postman

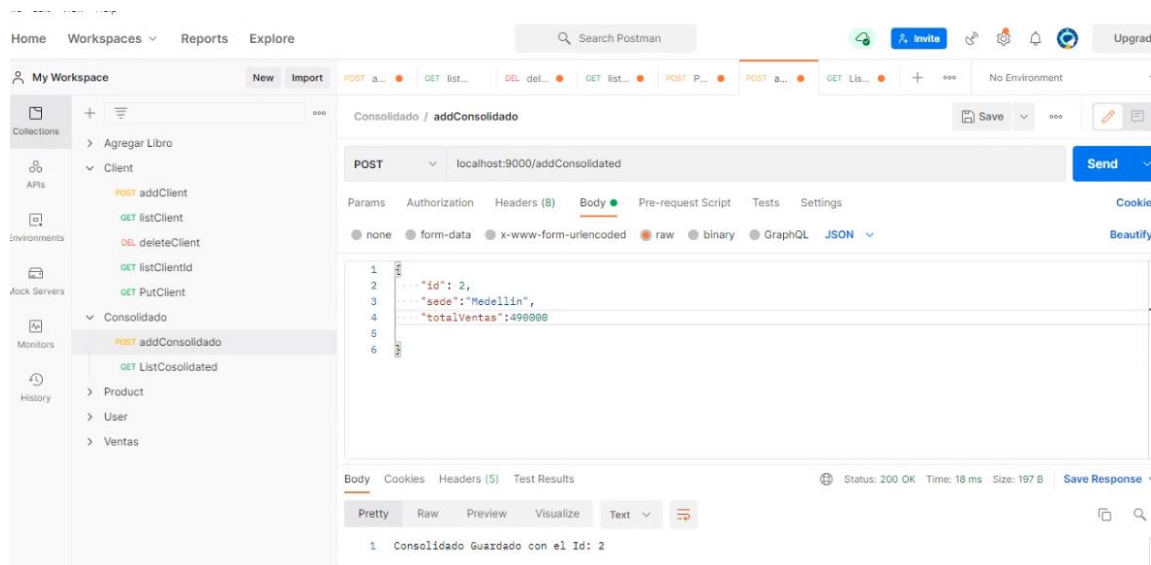


Mongo

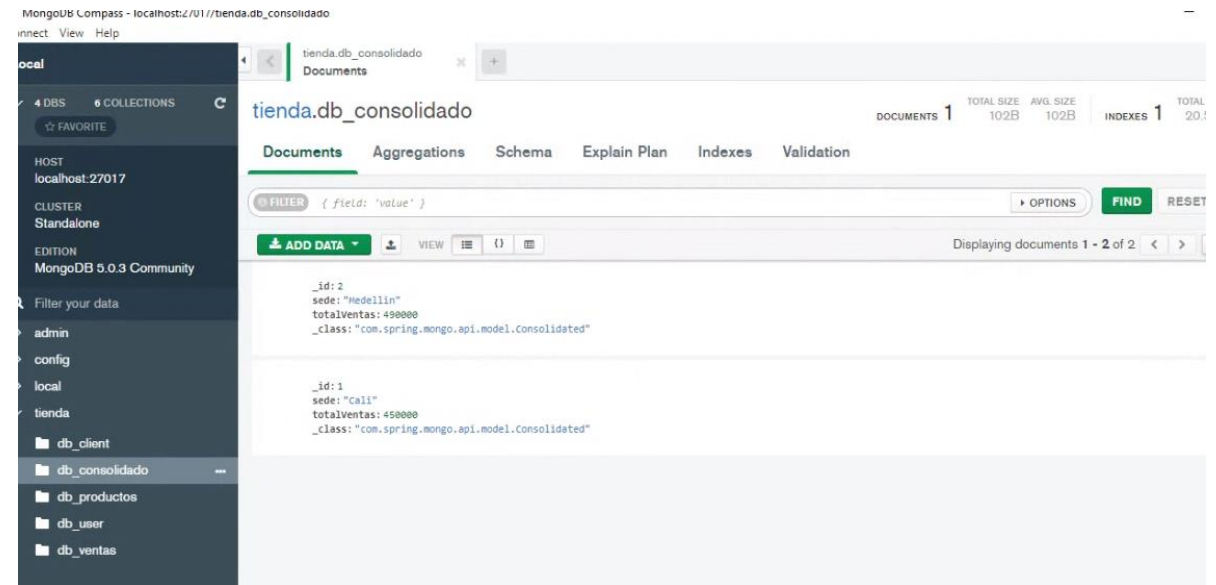




CONSOLIDADO- ELIMINAR

Postman

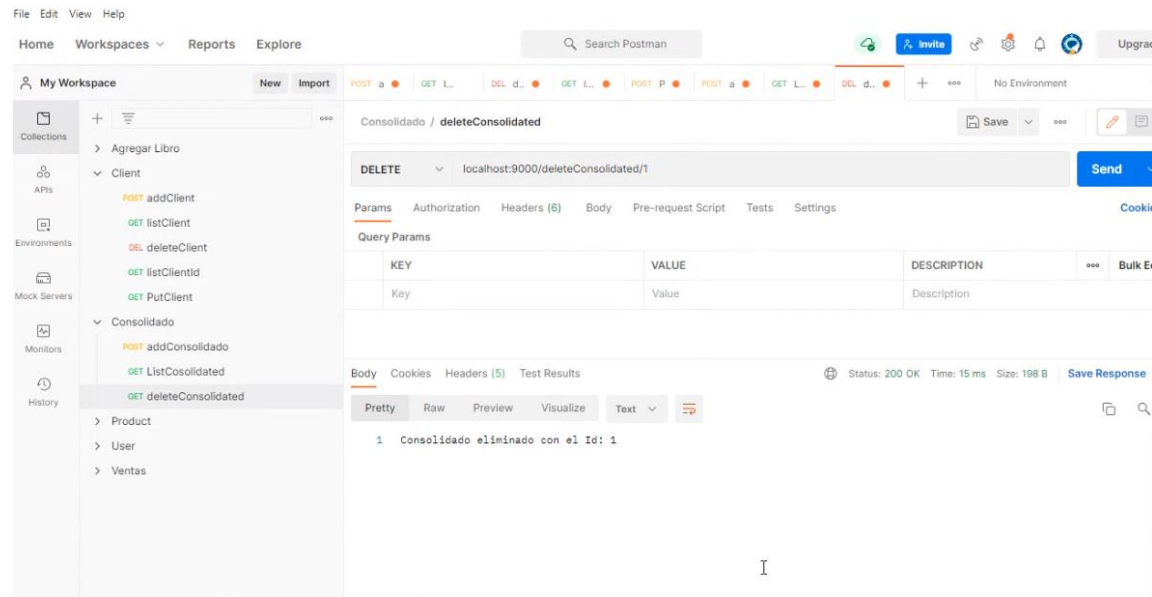


Mongo

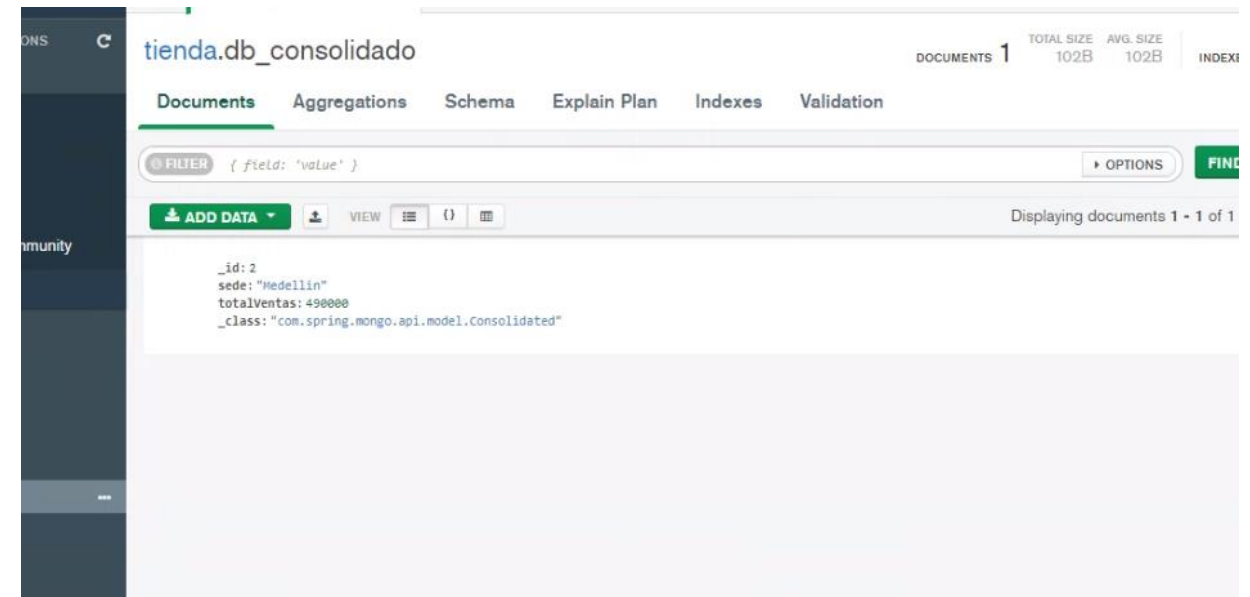




PRODUCTOS - CREAR

Postman

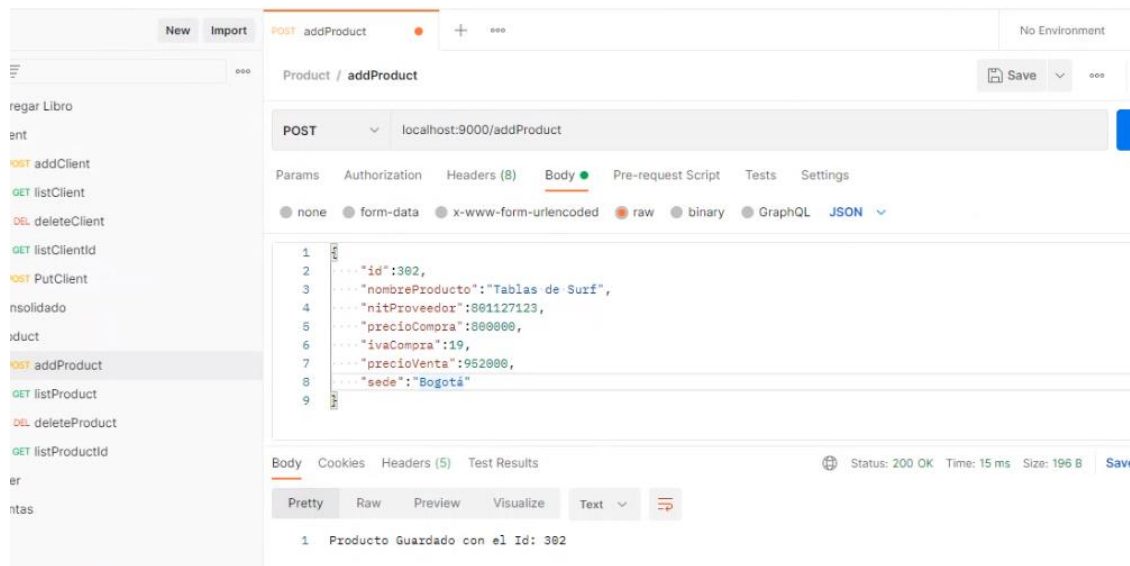

Mongo

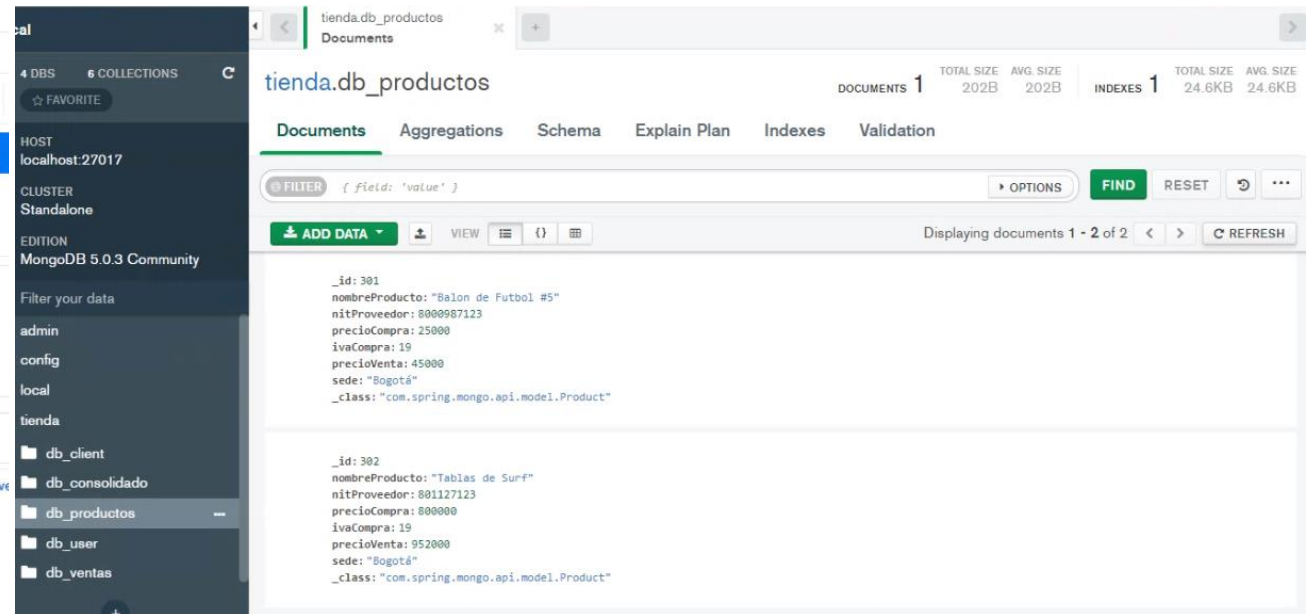



PRODUCTOS - LISTAR

Postman

The screenshot shows the Postman interface with a GET request to `localhost:9000/findAllProducts`. The response is a JSON array of two product objects, displayed in the 'Pretty' view.

Query Params

KEY	VALUE	DESCRIPTION
-----	-------	-------------

Body | Cookies | Headers (5) | Test Results

Status: 200 OK | Time: 13 ms | Size: 458 B | Save Response

Pretty | Raw | Preview | Visualize | JSON

```
3  {
4    "id": 301,
5    "nombreProducto": "Balon de Futbol #5",
6    "nitProveedor": 8000907123,
7    "precioCompra": 25000,
8    "ivaCompra": 19,
9    "precioVenta": 45000,
10   "sede": "Bogotá"
11 },
12 {
13   "id": 302,
14   "nombreProducto": "Tablas de Surf",
15   "nitProveedor": 801127123,
16   "precioCompra": 800000,
17   "ivaCompra": 19,
18   "precioVenta": 952000,
```



PRODUCTOS - ELIMINAR

Postman

Workspaces ▾ Reports Explore Search Postman

Workspace: **space** | New Import | POST addProduct | GET listProduct | **DEL deleteProduct** | + ... | No Environment

Product / deleteProduct | Save | ... | Edit

DELETE | localhost:9000/deleteProduct/301 | Send

Params | Authorization | Headers (6) | Body | Pre-request Script | Tests | Settings

Query Params

KEY	VALUE	DESCRIPTION
Key	Value	Description

Body | Cookies | Headers (5) | Test Results | Status: 200 OK | Time: 9 ms | Size: 197 B | Save Response

Pretty | Raw | Preview | Visualize | Text | ...

1 Producto eliminado con el Id: 301

Mongo

tienda.db_productos | DOCUMENTS 1 | TOTAL SIZE 202B | AVG. SIZE 202B | INDEXES

Documents | Aggregations | Schema | Explain Plan | Indexes | Validation

FILTER { field: 'value' } | OPTIONS | FIND

ADD DATA | VIEW | ... | Displaying documents 1 - 1 of 1

```
{
  "_id": 302,
  "nombreProducto": "Tablas de Surf",
  "nitProveedor": 801127123,
  "precioCompra": 800000,
  "ivaCompra": 19,
  "precioVenta": 952000,
  "sede": "Bogotá",
  "_class": "com.spring.mongo.api.model.Product"
}
```



LISTAR PRODUCTO

Postman

The screenshot shows the Postman application interface. The top bar includes navigation links for 'Collections', 'Reports', and 'Explore', along with a search bar and utility buttons like 'Invite', 'Upgrade', and 'Upgrade'. The left sidebar displays a list of collections, with 'Product / listProductId' selected. The main workspace shows a GET request to 'localhost:9000/findAllProduct/302'. The 'Params' tab is active, showing a table of query parameters. The 'Body' tab is also active, displaying the JSON response in 'Pretty' format.


KEY	VALUE	DESCRIPTION
Key	Value	Description

```
1 {
2   "id": 302,
3   "nombreProducto": "Tablas de Surf",
4   "nitProveedor": 801127123,
5   "precioCompra": 800000,
6   "ivaCompra": 19,
7   "precioVenta": 952000,
8   "sede": "Bogotá"
9 }
```




USUARIOS

Postman

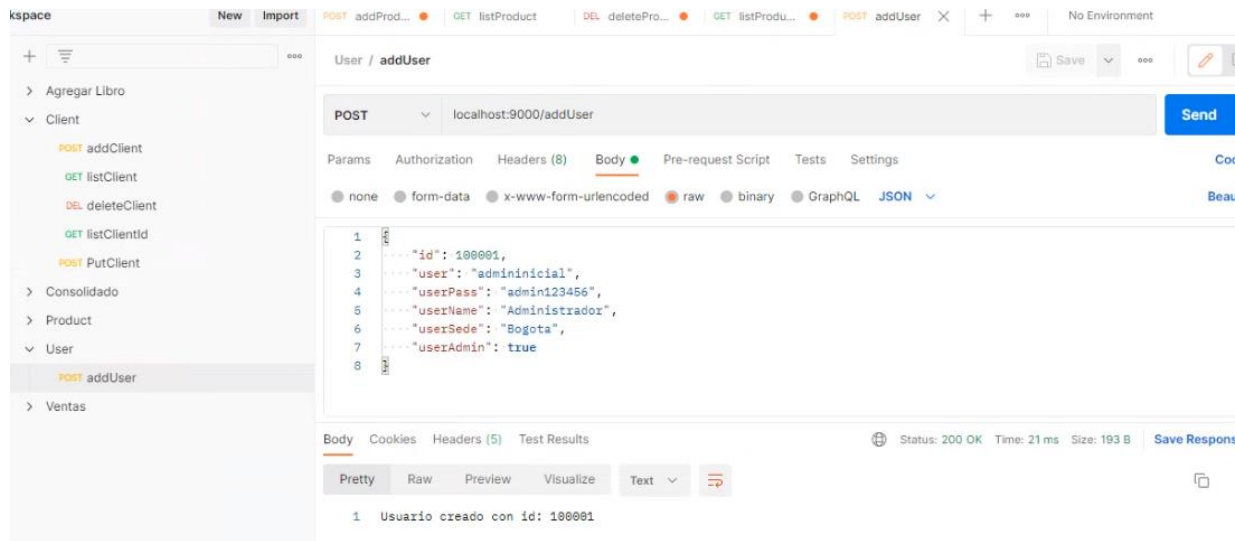


Mongo

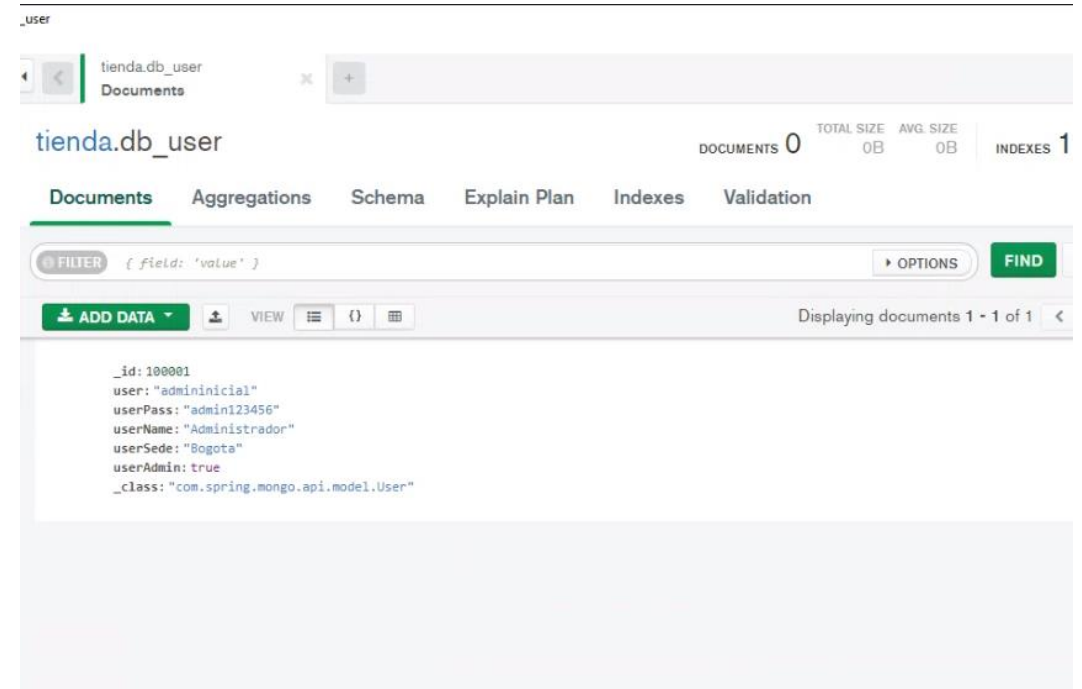




USUARIOS - CREAR

Postman

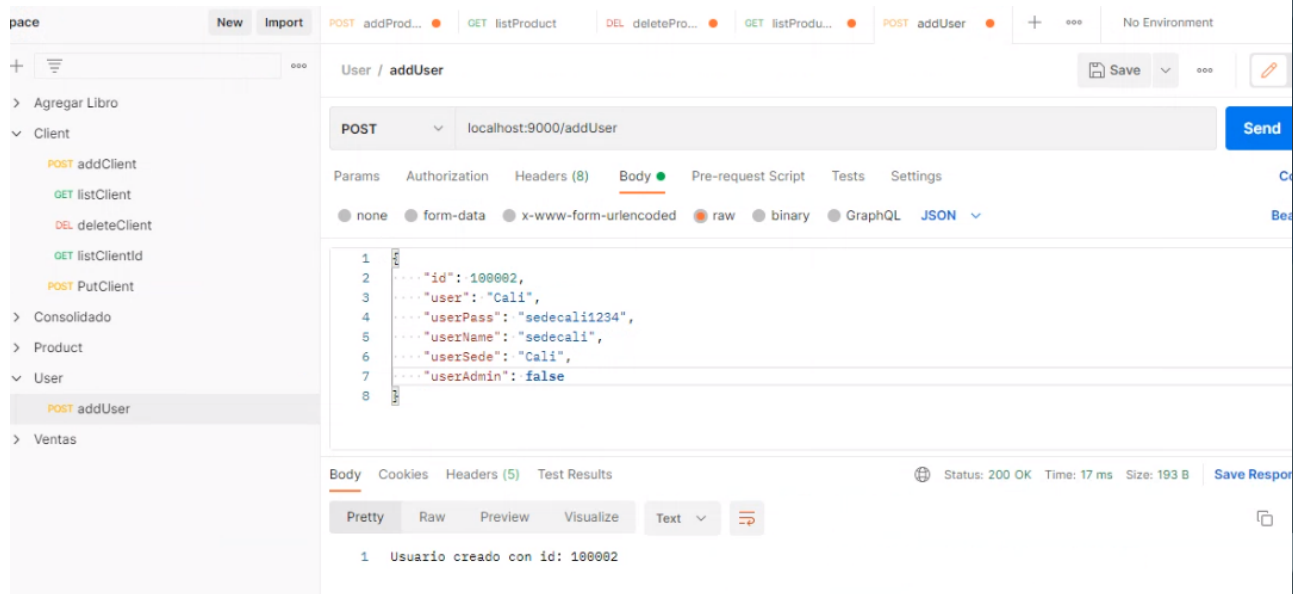


Mongo

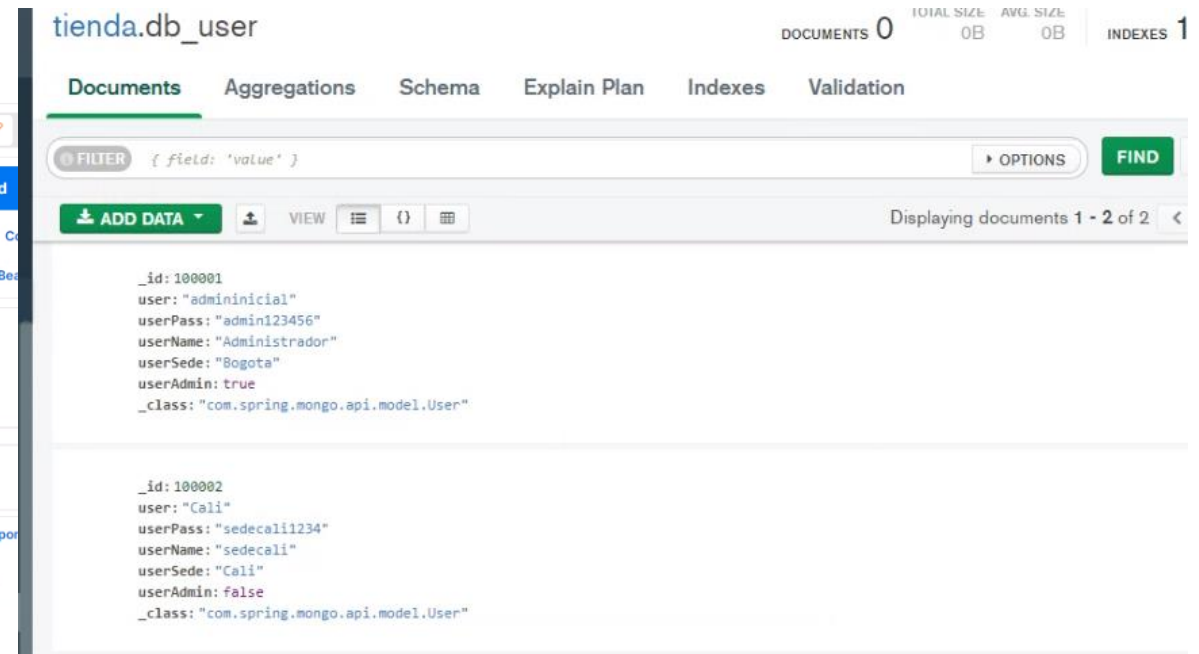




VENTAS

Postman

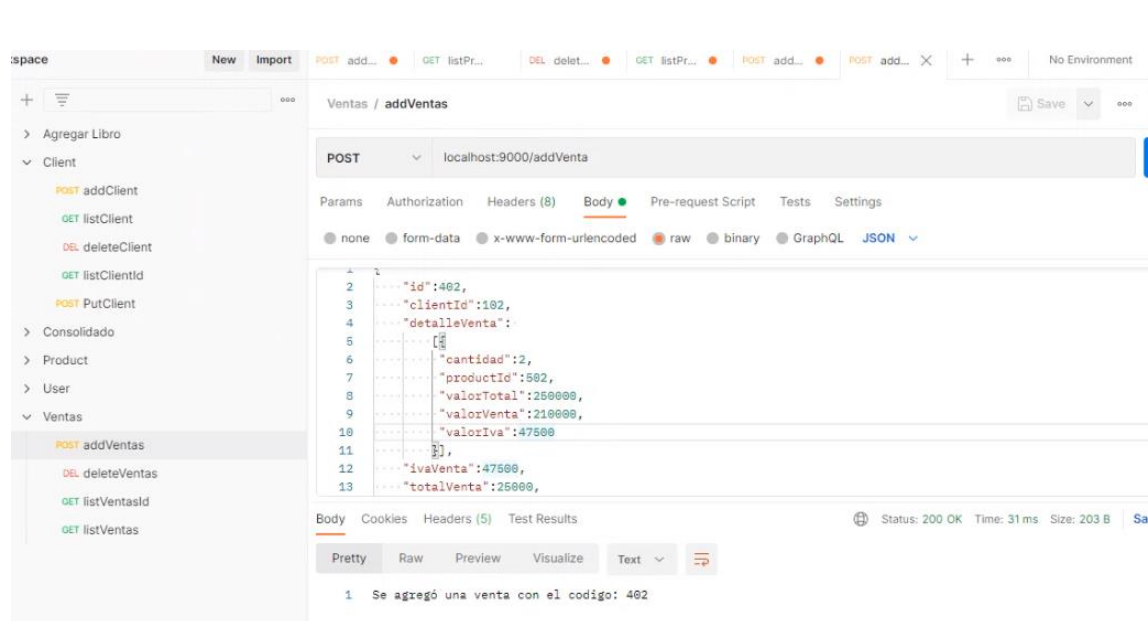

Mongo

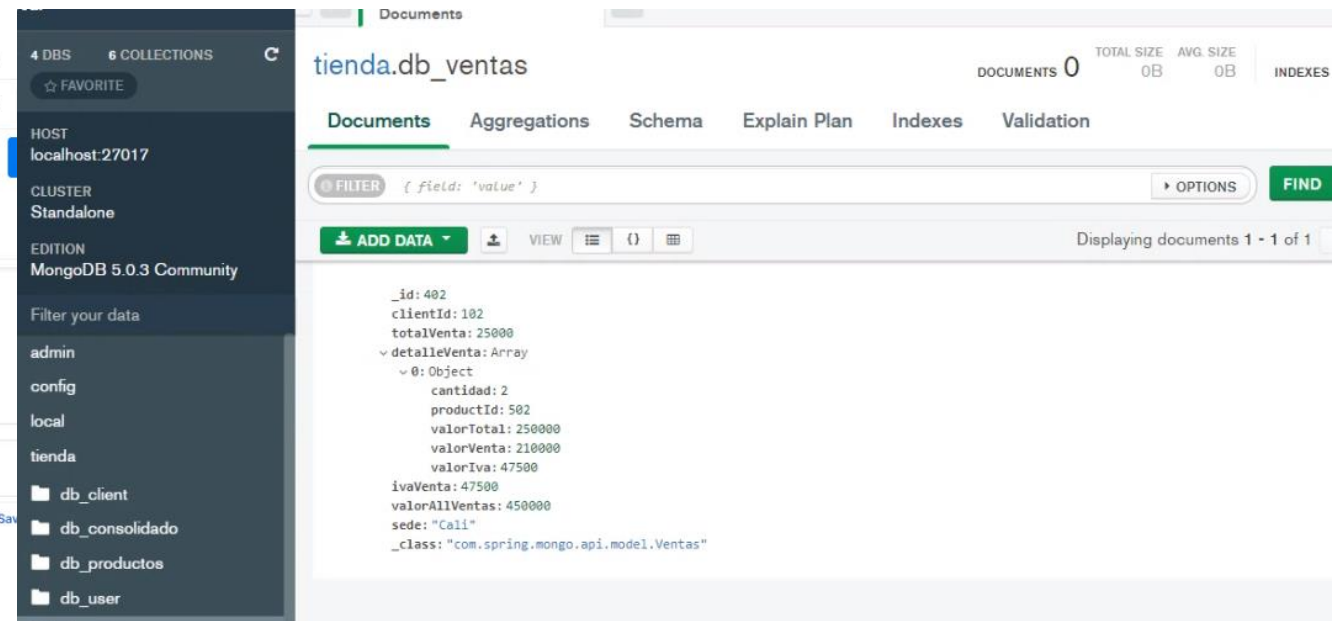



LISTAR VENTAS

Postman

space New Import POST a... GET list... DEL del... GET list... POST a... POST a... GET list... X + ... No Environment

Ventas / listVentas Save ...

GET localhost:9000/finAllVentas Send

Params Authorization Headers (6) Body Pre-request Script Tests Settings C

Query Params

KEY	VALUE	DESCRIPTION	...	Build
-----	-------	-------------	-----	-------

Body Cookies Headers (5) Test Results Status: 200 OK Time: 25 ms Size: 370 B Save Respo

Pretty Raw Preview Visualize JSON ...

```
3  {
4    "id": 402,
5    "clientId": 102,
6    "totalVenta": 25000,
7    "detalleVenta": [
8      {
9        "cantidad": 2,
10       "productId": 502,
11       "valorTotal": 250000,
12       "valorVenta": 210000,
13       "valorIva": 47500
14     }
15   ],
16   "ivaVenta": 47500,
17   "valorAllVentas": 450000,
18   "sede": "Cali"
19 }
```