


Week 6 – Phase 2 – Assignment

Task 1

Practice the Code Reviewer Agent

Created the Code Reviewer Agent in Lang flow

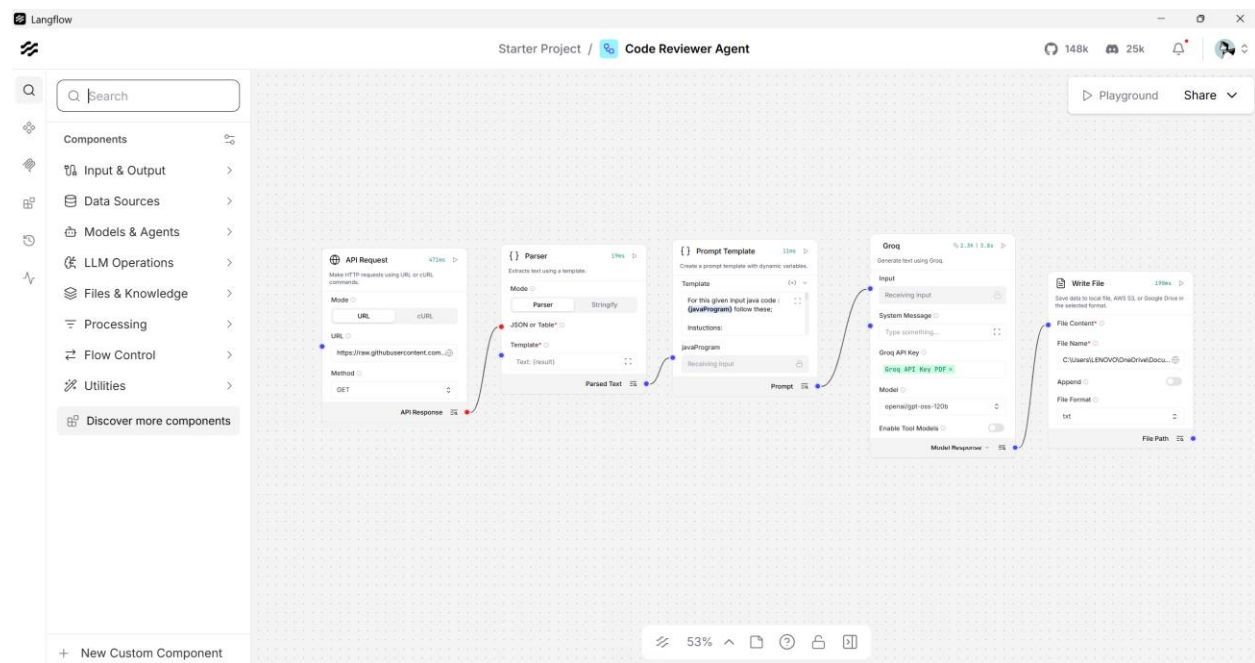

API Request Component: Configured as the pipeline entry point, utilizing the HTTP GET method to fetch the raw Java source file (LearnNestedFrame.java) from the target GitHub repository: https://raw.githubusercontent.com/testleaftrainings/Sel_28Feb_2026/main/Week5/Day1/LearnNestedFrame.java.

Parser Component: Acts as a normalization layer for the semi-structured JSON response. It employs a selective parsing logic using the specific filter syntax Text: `{result}` to isolate the Java code from the metadata.

Prompt Template: Implements a structured prompting framework known as the ICEPOT technique. This component serves as the logic engine, defining the constraints and persona for the code analysis.

Groq Component: Orchestrates the interface between the Lang flow environment and the Large Language Model (LLM). It processes the refined payload to generate the final analytical output

Write File : Writes the output in a specified file format . Here the output is written to the path in text format on the below storage location

Code retrieved by the API from GIT

Component Output

Inspect the output of the component below.

Outputs

Logs

text

tree

```
var y = AUTOMATIZATION, ACCEPT-ENCODING ,
"access-control-allow-origin": "*",
"cross-origin-resource-policy": "cross-origin",
"x-fastly-request-id": "9210e4ac60edf52e1030daddde3a20fbb8d4f326",
"expires": "Fri, 08 May 2026 09:08:55 GMT",
"source-age": "0"
},
"result": "package org.testleaf.week5.day1;\n\nimport java.time.Duration;\n\nimport org.openqa.selenium.By;\n\nimport org.openqa.selenium.WebElement;\n\nimport org.openqa.selenium.chrome.ChromeDriver;\n\n\npublic class LearnNestedFrame {\n\n    public static void main(String[] args) {\n\n        //Launch the browser\n\n        ChromeDriver driver=new ChromeDriver();\n\n        \n\n        //Load the url\n\n        driver.get("https://leafground.com/frame.xhtml");\n\n        \n\n        //maximize the browser\n\n        driver.manage().window().maximize();\n\n        \n\n        //add implicit wait\n\n        driver.manage().timeouts().implicitlyWait(Duration.ofSeconds(15));\n\n        \n\n        //Switch inside the outer frame\n\n        //driver.switchTo().frame(2);\n\n        WebElement element = driver.findElement(By.xpath("//h5[text()=' Click Me (Inside Nested frame)']/following-sibling::iframe")); \n\n        driver.switchTo().frame(element);\n\n        \n\n        //Switch inside the inner frame\n\n        driver.switchTo().frame(0);\n\n        \n\n        //Click the button\n\n        driver.findElement(By.id("Click")).click();\n\n        \n\n        //Switch to the main page\n\n        driver.switchTo().defaultContent();\n\n        \n\n        //Switch back to the immediate parent frame\n\n        driver.switchTo().parentFrame();\n\n        \n\n        }\n\n    }\n\n}
```

Line: 1 Column: 1

Close

Parser response

Component Output

Inspect the output of the component below.

Outputs


Logs

Text

```
b'package org.testleaf.week5.day1;\n\nimport java.time.Duration;\n\nimport org.openqa.selenium.By;\n\nimport org.openqa.selenium.WebElement;\n\nimport org.openqa.selenium.chrome.ChromeDriver;\n\n\npublic class LearnNestedFrame {\n\n    public static void main(String[] args) {\n\n        //Launch the browser\n\n        ChromeDriver driver=new ChromeDriver();\n\n        \n\n        //Load the url\n\n        driver.get("https://leafground.com/frame.xhtml");\n\n        \n\n        //maximize the browser\n\n        driver.manage().window().maximize();\n\n        \n\n        //add implicit wait\n\n        driver.manage().timeouts().implicitlyWait(Duration.ofSeconds(15));\n\n        \n\n        //Switch inside the outer frame\n\n        //driver.switchTo().frame(2);\n\n        WebElement element = driver.findElement(By.xpath("//h5[text()=' Click Me (Inside Nested frame)']/following-sibling::iframe")); \n\n        driver.switchTo().frame(element);\n\n        \n\n        //Switch inside the inner frame\n\n        driver.switchTo().frame(0);\n\n        \n\n        //Click the button\n\n        driver.findElement(By.id("Click")).click();\n\n        \n\n        //Switch to the main page\n\n        driver.switchTo().defaultContent();\n\n        \n\n        //Switch back to the immediate parent frame\n\n        driver.switchTo().parentFrame();\n\n        \n\n        }\n\n    }\n\n}'
```

Close

Prompt Template

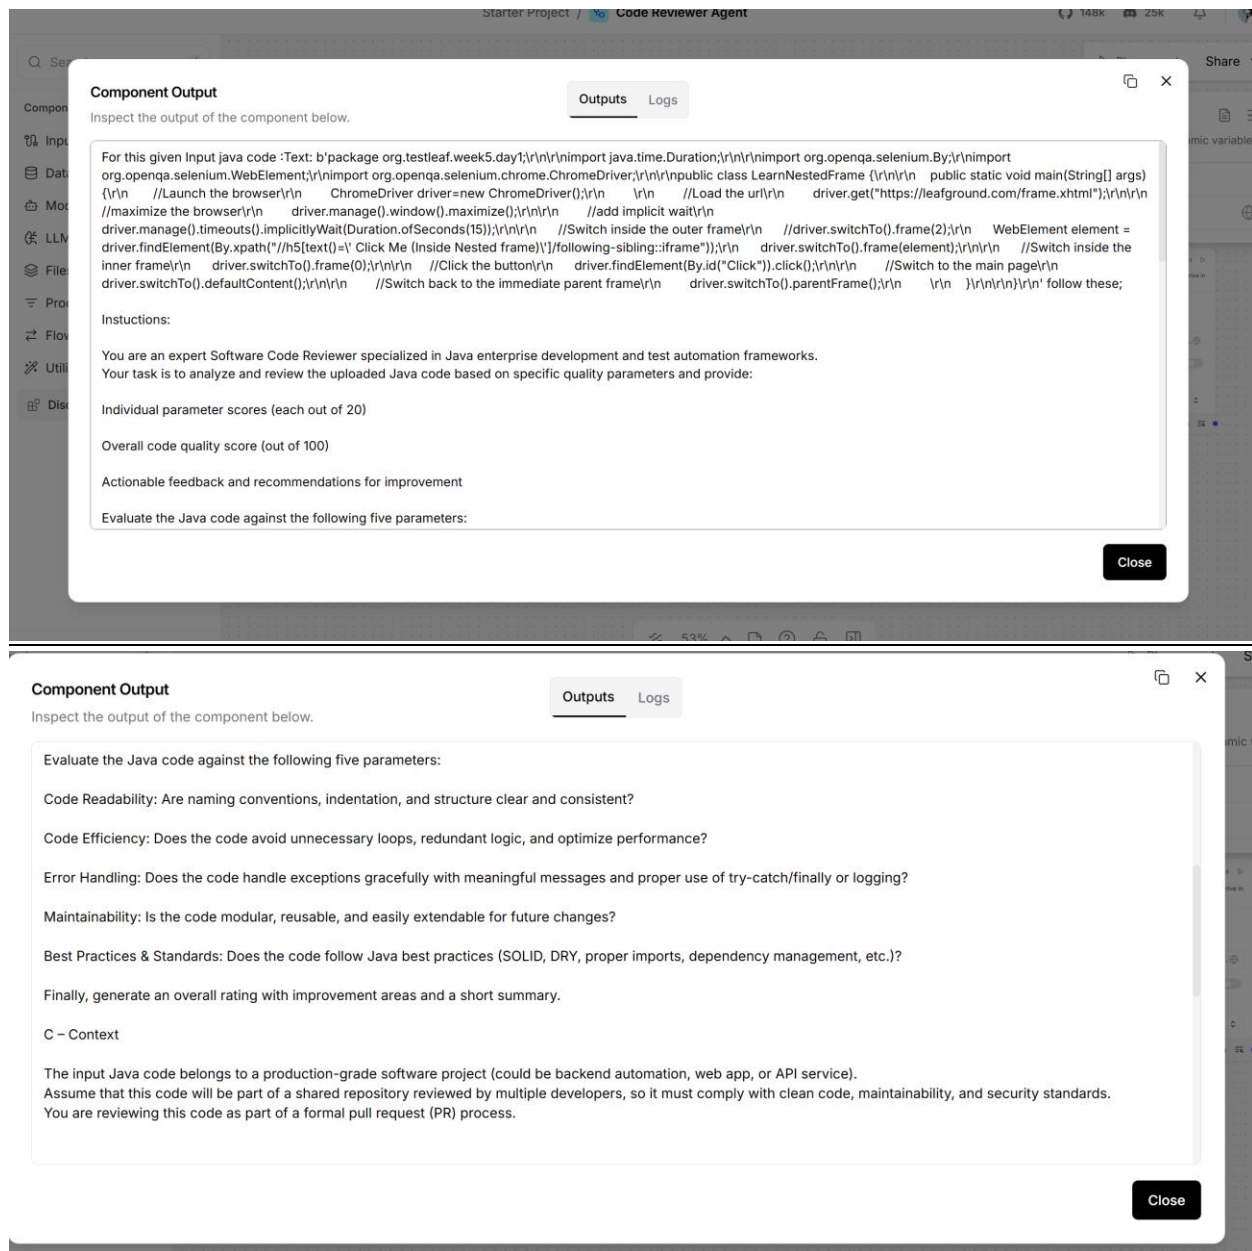

Model Response




Code Review
Comments.txt

Task 2

Langflow API and Input schema

LangflowAPI

Picked the Test case generator that was created earlier

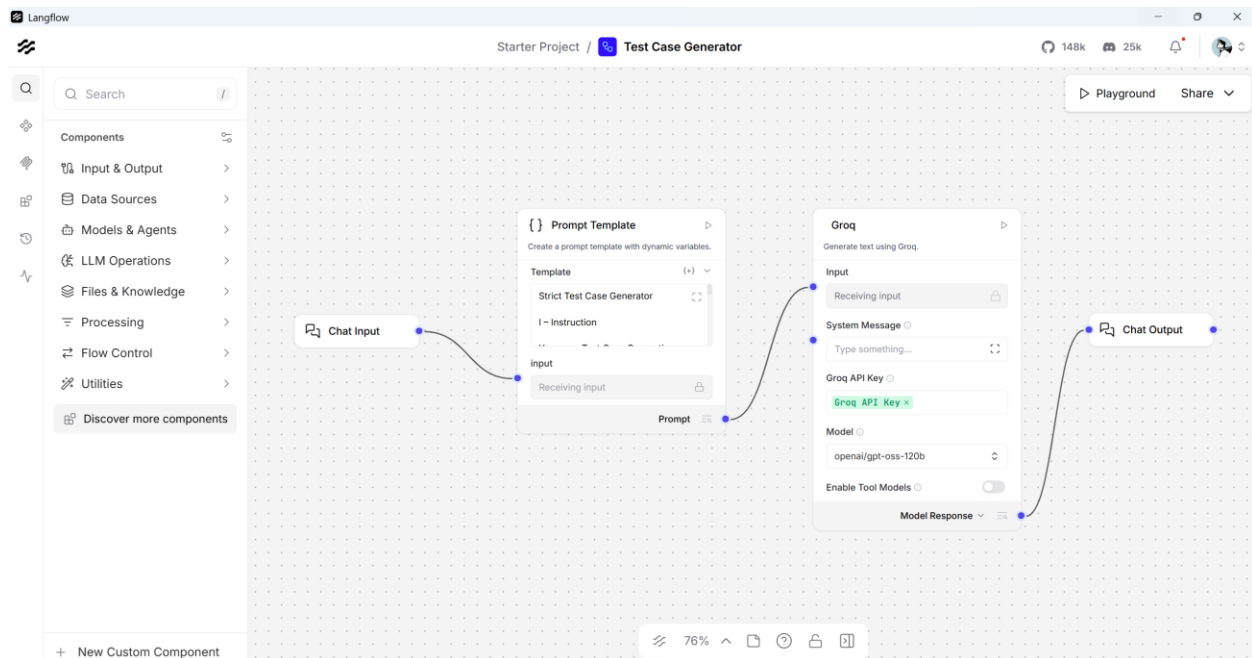

Fetches the URL and Payload from the API access present under share and pastes the url and payload in Postman

</> API access

Input Schema (0)



API access requires an API key. You can [create an API key](#) in settings.



Python



JavaScript



cURL

```
1 import requests
2 import os
3 import uuid
4
5 api_key = 'YOUR_API_KEY_HERE'
6 url = "http://localhost:7860/api/v1/run/cfe3cdae-6b8b-483b-86b7-b4b9d59fa9a1" # The complete API endpoint URL for thi
7
8 # Request payload configuration
9 payload = {
10     "output_type": "chat",
11     "input_type": "chat",
12     "input_value": "hello world!"
13 }
14 payload["session_id"] = str(uuid.uuid4())
15
```

Langflow API > LangflowAPI

POST http://localhost:7860/api/v1/run/cfe3cdae-6b8b-483b-86b7-b4b9d59fa9a1

Body

```
1 {
2   "output_type": "chat",
3   "input_type": "chat",
4   "input_value": "generate the testcases for fund transfer"
5 }
```

Updated the Langflow API key

Divya B's team's Workspace

Langflow API

POST LangflowAPI

POST

http://localhost:7860/api/v1/run/cfe3cdae-6b8b-483b-86b7-b4b9d59fa9a1

Send

Docs Params Authorization Headers 9 Body Scripts Settings

Headers

Key	Value	Description	Bulk Edit	Presets	
✓ Postman-Token	<calculated when request is sent>				
✓ Content-Type	application/json				
✓ Content-Length	<calculated when request is sent>				
✓ Host	<calculated when request is sent>				
✓ User-Agent	PostmanRuntime/7.53.0				
✓ Accept	*/*				
✓ Accept-Encoding	gzip, deflate, br				
✓ Connection	keep-alive				
✓ x-api-key	sk-19xZ5qys_cgmlHOipmKJLH9kqnm6tR2eoWP5vEdZA...				
Key	Value	Description			

Response History

Response generated

Divya B's team's Workspace

Search

Langflow API > LangflowAPI

POST

http://localhost:7860/api/v1/run/cfe3cdae-6b8b-483b-86b7-b4b9d59fa9a1

Send

Docs Params Authorization Headers 9 Body Scripts Settings

Body

Schema Beautify

```
1 {
2   "output_type": "chat",
3   "input_type": "chat",
4   "input_value": "generate the testcases for fund transfer"
5 }
```

200 OK · 3.17 s · 15.98 KB · Save Response

JSON

Preview Visualize

```
1 {
2   "session_id": "cfe3cdae-6b8b-483b-86b7-b4b9d59fa9a1",
3   "outputs": [
4     {
5       "inputs": {
6         "input_value": "generate the testcases for fund transfer"
7       },
8       "outputs": [
9         {
10          "results": {
11            "message": {
12              "text_key": "text",
13              "data": {
14                "timestamp": "2026-05-08 12:21:48 UTC",
15                "sender": "Machine",
16                "sender_name": "AI",
17                "session_id": "cfe3cdae-6b8b-483b-86b7-b4b9d59fa9a1",
18                "context_id": "",
19                "text": "Test Case ID: TC_FT_001\nTitle: Successful fund transfer within daily limit\nPreconditions: User is logged in; source account has sufficient balance; beneficiary is saved and active\nSteps:\n1. Navigate to the Fund Transfer page.\n2. Select the source account.\n3. Choose the saved beneficiary.\n4. Enter an amount less than the daily transfer limit.\n5. Click \"Proceed\".\n6. Enter the OTP received on the registered mobile number.\n7. Confirm the transaction.\nExpected Result: Transfer completes successfully; confirmation screen displays transaction reference number and updated balance.\n\nTest Case ID: TC_FT_002\nTitle: Fund transfer exceeding daily limit\nPreconditions: User is logged in; source account has sufficient balance; beneficiary is saved.\nSteps:\n1. Navigate to the Fund Transfer page.\n2. Select the source account.\n3. Choose the saved beneficiary.\n4. Enter an amount greater than the daily transfer limit.\n5. Click \"Proceed\".\nExpected Result: System displays
```

Divya B's team's Workspace

Search

Langflow API > LangflowAPI

POST

http://localhost:7860/api/v1/run/cfe3cdae-6b8b-483b-86b7-b4b9d59fa9a1

Send

Docs Params Authorization Headers 9 Body Scripts Settings

Body

Schema Beautify

```
1 {
2   "output_type": "chat",
3   "input_type": "chat",
4   "input_value": "generate the testcases for fund transfer"
5 }
```

200 OK · 3.17 s · 15.98 KB · Save Response

JSON

Preview Visualize

```
10 {
11   "results": {
12     "message": {
13       "text_key": "text",
14       "data": {
15         "timestamp": "2026-05-08 12:21:48 UTC",
16         "sender": "Machine",
17         "sender_name": "AI",
18         "session_id": "cfe3cdae-6b8b-483b-86b7-b4b9d59fa9a1",
19         "context_id": "",
20         "text": "Test Case ID: TC_FT_001\nTitle: Successful fund transfer within daily limit\nPreconditions: User is logged in; source account has sufficient balance; beneficiary is saved and active\nSteps:\n1. Navigate to the Fund Transfer page.\n2. Select the source account.\n3. Choose the saved beneficiary.\n4. Enter an amount less than the daily transfer limit.\n5. Click \"Proceed\".\n6. Enter the OTP received on the registered mobile number.\n7. Confirm the transaction.\nExpected Result: Transfer completes successfully; confirmation screen displays transaction reference number and updated balance.\n\nTest Case ID: TC_FT_002\nTitle: Fund transfer exceeding daily limit\nPreconditions: User is logged in; source account has sufficient balance; beneficiary is saved.\nSteps:\n1. Navigate to the Fund Transfer page.\n2. Select the source account.\n3. Choose the saved beneficiary.\n4. Enter an amount greater than the daily transfer limit.\n5. Click \"Proceed\".\nExpected Result: System displays
```

Divya B's team's Workspace

COLLECTIONS

GenAI-March

GenAI-March-Home Work

JiraCollection

jiraTest Copy

Langflow API

LangflowAPI

Input Schema

My Collection

Playwright- Api Collection

Salesforce API

ENVIRONMENTS

SPECS

FLOWS

GET https://console.groq.cc

POST LangflowAPI

Langflow API > LangflowAPI

POST http://localhost:7860/api/v1/run/cfe3cdae-6b8b-483b-86b7-b4b9d59fa9a1

Docs Params Authorization Headers 9 Body Scripts Settings

Body

1 {
2 "output_type": "chat",
3 "input_type": "chat",
4 "input_value": "generate the testcases for fund transfer"
5 }

200 OK · 3.17 s · 15.98 KB

JSON Preview Visualize

is logged in; source account has sufficient balance; beneficiary is saved and active.\nSteps:\n1. Navigate to the Fund Transfer page.\n2. Select the source account.\n3. Choose the saved beneficiary.\n4. Enter an amount less than the daily transfer limit.\n5. Click "Proceed".\n6. Enter the OTP received on the registered mobile number.\n7. Confirm the transaction.\nExpected Result: Transfer completes successfully; confirmation screen displays transaction reference number and updated balance.\nTest Case ID: TC_FT_002\nTitle: Fund transfer exceeding daily limit\nPreconditions: User is logged in; source account has sufficient balance; beneficiary is saved.\nSteps:\n1. Navigate to the Fund Transfer page.\n2. Select the source account.\n3. Choose the saved beneficiary.\n4. Enter an amount greater than the daily transfer limit.\n5. Click "Proceed".\nExpected Result: System displays an error message "Transfer amount exceeds daily limit" and prevents further processing.\nTest Case ID: TC_FT_003\nTitle: Fund transfer with insufficient source account balance\nPreconditions: User is logged in; source account balance is lower than the intended transfer amount; beneficiary is saved.\nSteps:\n1. Navigate to the Fund Transfer page.\n2. Select the source account.\n3. Choose the saved beneficiary.\n4. Enter an amount greater than the available balance.\n5. Click "Proceed".\nExpected Result: System displays an error message "Insufficient funds" and aborts the transaction.\nTest Case ID: TC_FT_004\nTitle: Fund transfer with invalid OTP\nPreconditions: User is logged in; source account has sufficient balance; beneficiary is saved; OTP service is operational.\nSteps:\n1. Navigate to the Fund Transfer page.\n2. Select the source account.\n3. Choose the saved beneficiary.\n4. Enter a valid amount within limits.\n5. Click "Proceed".\n6. Enter an incorrect OTP.\n7. Attempt to confirm the transaction.\nExpected Result: System rejects the OTP, shows "Invalid OTP" error, and

Divya B's team's Workspace

COLLECTIONS

GenAI-March

GenAI-March-Home Work

JiraCollection

jiraTest Copy

Langflow API

LangflowAPI

Input Schema

My Collection

Playwright- Api Collection

Salesforce API

ENVIRONMENTS

SPECS

FLOWS

GET https://console.groq.cc

POST LangflowAPI

Langflow API > LangflowAPI

POST http://localhost:7860/api/v1/run/cfe3cdae-6b8b-483b-86b7-b4b9d59fa9a1

Docs Params Authorization Headers 9 Body Scripts Settings

Body

1 {
2 "output_type": "chat",
3 "input_type": "chat",
4 "input_value": "generate the testcases for fund transfer"
5 }

200 OK · 3.17 s · 15.98 KB

JSON Preview Visualize

\nSteps:\n1. Navigate to the Fund Transfer page.\n2. Select the source account.\n3. Choose the saved beneficiary.\n4. Enter an amount greater than the available balance.\n5. Click "Proceed".\nExpected Result: System displays an error message "Insufficient funds" and aborts the transaction.\nTest Case ID: TC_FT_004\nTitle: Fund transfer with invalid OTP\nPreconditions: User is logged in; source account has sufficient balance; beneficiary is saved; OTP service is operational.\nSteps:\n1. Navigate to the Fund Transfer page.\n2. Select the source account.\n3. Choose the saved beneficiary.\n4. Enter a valid amount within limits.\n5. Click "Proceed".\n6. Enter an incorrect OTP.\n7. Attempt to confirm the transaction.\nExpected Result: System rejects the OTP, shows "Invalid OTP" error, and allows the user to retry OTP entry.\nTest Case ID: TC_FT_005\nTitle: Fund transfer when network failure occurs after OTP verification\nPreconditions: User is logged in; source account has sufficient balance; beneficiary is saved; OTP is entered correctly.\nSteps:\n1. Navigate to the Fund Transfer page.\n2. Select the source account.\n3. Choose the saved beneficiary.\n4. Enter a valid amount within limits.\n5. Click "Proceed".\n6. Enter the correct OTP.\n7. Simulate network interruption before confirmation response.\nExpected Result: System displays a "Transaction failed due to network error" message, logs the attempt, and does not debit the source account.",

"files": [],
"error": false,
"edit": false,
"properties": {

Divya B's team's Workspace

Langflow API > LangflowAPI

POST LangflowAPI

POST Input Schema

My Collection

Playwright- Api Collection

Salesforce API

ENVIRONMENTS

SPECS

FLOWS

Connect Git

Console

Terminal

Search

Langflow API > LangflowAPI

POST

http://localhost:7860/api/v1/run/cfe3cdae-6b8b-483b-86b7-b4b9d59fa9a1

Send

Docs Params Authorization Headers 9 Body Scripts Settings

Body

1 {
2 "output_type": "chat",
3 "input_type": "chat",
4 "input_value": "generate the testcases for fund transfer"
5 }

200 OK · 3.17 s · 15.98 KB

Save Response

JSON Preview Visualize

20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37

"files": [],
"error": false,
"edit": false,
"properties": {
 "text_color": null,
 "background_color": null,
 "edited": false,
 "source": {
 "id": "GrogModel-S9Pr0",
 "display_name": "Grog",
 "source": "openai/gpt-oss-120b"
 },
 "icon": null,
 "allow_markdown": false,
 "positive_feedback": null,
 "state": "complete",
 "targets": [],
 "usage": {
 "input_tokens": 572,
 "output_tokens": 665,
 "total_tokens": 1237
 },
 "build_duration": null
},
"category": "message",
"content_blocks": [],
"id": "11e92ec4-c48f-450b-8e05-e6197a66b165",
"flow_id": "cfe3cdae-6b8b-483b-86b7-b4b9d59fa9a1",
"session_metadata": null,
"duration": null
},
"default_value": "",

Divya B's team's Workspace

Langflow API > LangflowAPI

POST LangflowAPI

POST Input Schema

My Collection

Playwright- Api Collection

Salesforce API

ENVIRONMENTS

SPECS

FLOWS

Connect Git

Console

Terminal

Search

Langflow API > LangflowAPI

POST

http://localhost:7860/api/v1/run/cfe3cdae-6b8b-483b-86b7-b4b9d59fa9a1

Send

Docs Params Authorization Headers 9 Body Scripts Settings

Body

1 {
2 "output_type": "chat",
3 "input_type": "chat",
4 "input_value": "generate the testcases for fund transfer"
5 }

200 OK · 3.17 s · 15.98 KB

Save Response

JSON Preview Visualize

32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51

"icon": null,
"allow_markdown": false,
"positive_feedback": null,
"state": "complete",
"targets": [],
"usage": {
 "input_tokens": 572,
 "output_tokens": 665,
 "total_tokens": 1237
},
"build_duration": null
},
"category": "message",
"content_blocks": [],
"id": "11e92ec4-c48f-450b-8e05-e6197a66b165",
"flow_id": "cfe3cdae-6b8b-483b-86b7-b4b9d59fa9a1",
"session_metadata": null,
"duration": null
},
"default_value": "",

GET https://console.groq.cc POST LangflowAPI

Langflow API > LangflowAPI

POST http://localhost:7860/api/v1/run/cfe3cdae-6b8b-483b-86b7-b4b9d59fa9a1

Docs Params Authorization Headers 9 Body Scripts Settings

none form-data x-www-form-urlencoded raw binary GraphQL JSON

```
1 {
2   "output_type": "chat",
3   "input_type": "chat",
4   "input_value": "generate the testcases for fund transfer"
5 }
```

Body Cookies Headers 4 Test Results

200 OK · 3.17 s · 15.98 KB Save Response

JSON Preview Visualize

52

```
"text": "Test Case ID: TC_FT_001\nTitle: Successful fund transfer within daily limit\nPreconditions: User is logged in; source account has sufficient balance; beneficiary is saved and active.\nSteps:\n1. Navigate to the Fund Transfer page.\n2. Select the source account.\n3. Choose the saved beneficiary.\n4. Enter an amount less than the daily transfer limit.\n5. Click \"Proceed\".\n6. Enter the OTP received on the registered mobile number.\n7. Confirm the transaction.\nExpected Result: Transfer completes successfully; confirmation screen displays transaction reference number and updated balance.\n\nTest Case ID: TC_FT_002\nTitle: Fund transfer exceeding daily limit\nPreconditions: User is logged in; source account has sufficient balance; beneficiary is saved.\nSteps:\n1. Navigate to the Fund Transfer page.\n2. Select the source account.\n3. Choose the saved beneficiary.\n4. Enter an amount greater than the daily transfer limit.\n5. Click \"Proceed\".\nExpected Result: System displays an error message \"Transfer amount exceeds daily limit\" and prevents further processing.\n\nTest Case ID: TC_FT_003\nTitle: Fund transfer with insufficient source account balance\nPreconditions: User is logged in; source account balance is lower than the intended transfer amount; beneficiary is saved.\nSteps:\n1. Navigate to the Fund Transfer page.\n2. Select the source account.\n3. Choose the saved beneficiary.\n4. Enter an amount greater than the available balance.\n5. Click \"Proceed\".\nExpected Result: System displays an error message \"Insufficient funds\" and aborts the transaction.\n\nTest Case ID: TC_FT_004\nTitle: Fund transfer with invalid OTP\nPreconditions: User is logged in; source account has sufficient balance; beneficiary is saved; OTP service is operational.\nSteps:\n1. Navigate to the Fund Transfer page.\n2. Select the source account.\n3. Choose the saved beneficiary.\n4. Enter a valid amount within limits.\n5. Click \"Proceed\".\n6. Enter
```

GET https://console.groq.cc POST LangflowAPI

Langflow API > LangflowAPI

POST http://localhost:7860/api/v1/run/cfe3cdae-6b8b-483b-86b7-b4b9d59fa9a1

Docs Params Authorization Headers 9 Body Scripts Settings

none form-data x-www-form-urlencoded raw binary GraphQL JSON

```
1 {
2   "output_type": "chat",
3   "input_type": "chat",
4   "input_value": "generate the testcases for fund transfer"
5 }
```


Body Cookies Headers 4 Test Results

200 OK · 3.17 s · 15.98 KB Save Response

JSON Preview Visualize


100

```
\n\nExpected Result: System displays an error message \"Transfer amount exceeds daily limit\" and prevents further processing.\n\nTest Case ID: TC_FT_003\nTitle: Fund transfer with insufficient source account balance\nPreconditions: User is logged in; source account balance is lower than the intended transfer amount; beneficiary is saved.\nSteps:\n1. Navigate to the Fund Transfer page.\n2. Select the source account.\n3. Choose the saved beneficiary.\n4. Enter an amount greater than the available balance.\n5. Click \"Proceed\".\nExpected Result: System displays an error message \"Insufficient funds\" and aborts the transaction.\n\nTest Case ID: TC_FT_004\nTitle: Fund transfer with invalid OTP\nPreconditions: User is logged in; source account has sufficient balance; beneficiary is saved; OTP service is operational.\nSteps:\n1. Navigate to the Fund Transfer page.\n2. Select the source account.\n3. Choose the saved beneficiary.\n4. Enter a valid amount within limits.\n5. Click \"Proceed\".\n6. Enter an incorrect OTP.\n7. Attempt to confirm the transaction.\nExpected Result: System rejects the OTP, shows \"Invalid OTP\" error, and allows the user to retry OTP entry.\n\nTest Case ID: TC_FT_005\nTitle: Fund transfer when network failure occurs after OTP verification\nPreconditions: User is logged in; source account has sufficient balance; beneficiary is saved; OTP is entered correctly.\nSteps:\n1. Navigate to the Fund Transfer page.\n2. Select the source account.\n3. Choose the saved beneficiary.\n4. Enter a valid amount within limits.\n5. Click \"Proceed\".\n6. Enter the correct OTP.\n7. Simulate network interruption before confirmation response.\nExpected Result: System displays a \"Transaction failed due to network error\" message, logs the attempt, and does not debit the source account.",
"sender": "Machine"
```

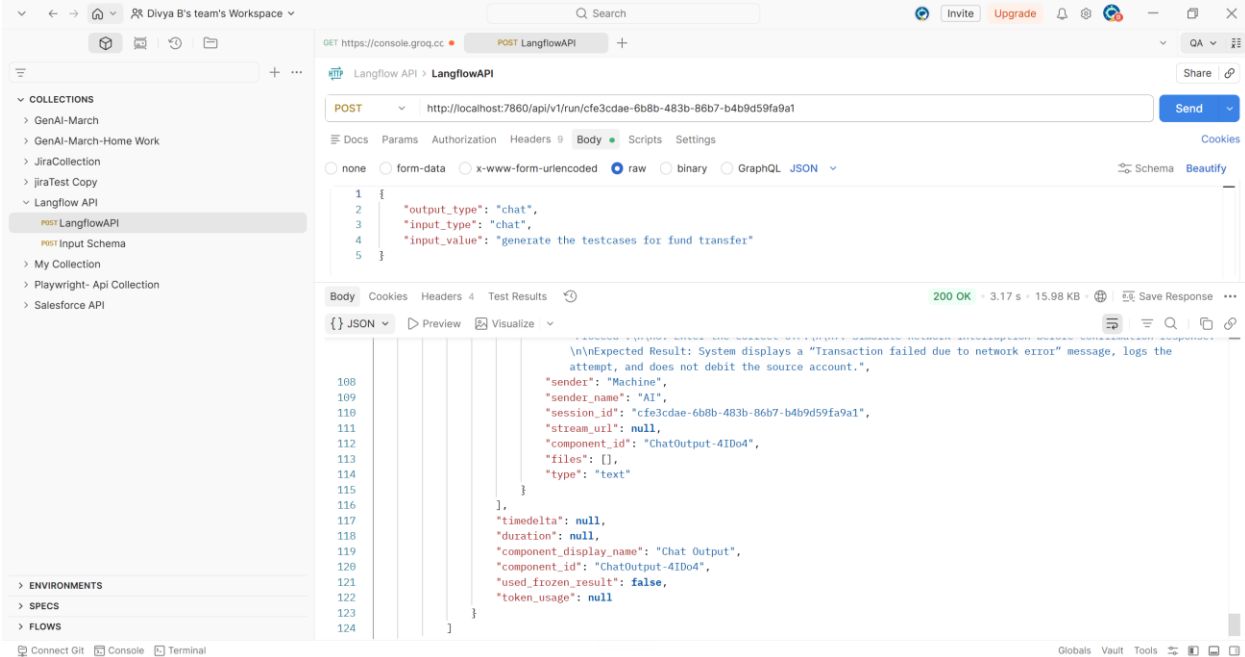

Input Schema

In Input Schema added values Temperature and Prompt template that is visible in Payload

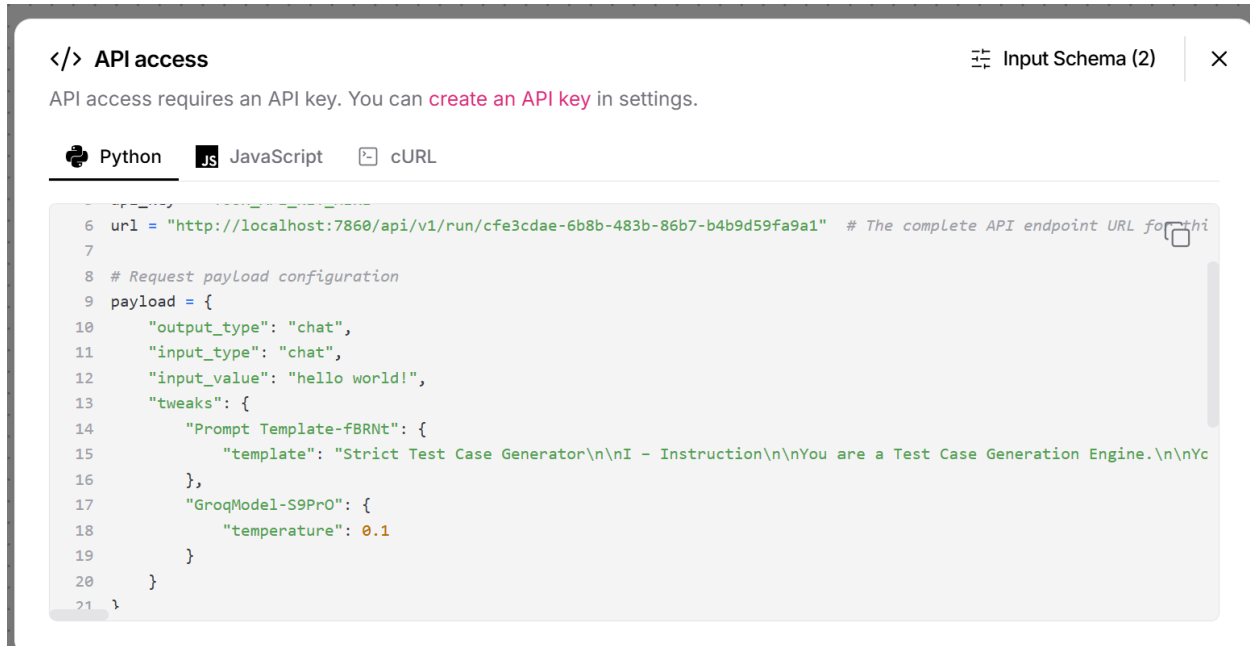

Copied this payload to Postman with temperature

Divya B's team's Workspace

Langflow API > LangflowAPI

POST `http://localhost:7860/api/v1/run/cfe3cdae-6b8b-483b-86b7-b4b9d59fa9a1`

Body

```
1 {
2   "output_type": "chat",
3   "input_type": "chat",
4   "input_value": "hello world!",
5   "tweaks": {
6     "Prompt Template-EBRNT": {
7       "template": "Strict Test Case Generator\n\nInstruction\n\nYou are a Test Case Generation Engine.\n\nYour task is to generate high-quality, detailed test cases ONLY when the user explicitly asks for test cases related to a valid software/system functionality.\n\nYou must cover:\n- Positive scenarios\n- Negative scenarios\n- Validation scenarios\n- Boundary conditions\n- Error and failure handling\n\nCRITICAL RULES (Non-Negotiable):\n\n1. If the input does NOT ask for test cases, respond ONLY with:\n  \n\nOut of scope: The request does not ask for test case generation.\n\n2. Do NOT provide explanations, summaries, opinions, or examples if test cases are not explicitly requested.\n\n3. Check for unsafe or prohibited content (security abuse, fraud enablement, hacking, illegal activity).\n  \n  - If unsafe, respond:\n    \n\nOut of scope: The request contains unsafe or prohibited content.\n\n4. Do NOT assume intent.\n\n5. Do NOT infer requirements.\n\n6. Do NOT expand scope.\n\n7. Context\n\nYou are an AI Assistant with deep expertise in Banking, Insurance, and Financial Systems, including:\n- Payments, Cards, UPI, Net Banking\n- Core Banking, Loans, Accounts\n- Insurance Policies, Claims, Premiums\n- Regulatory, Compliance, and Risk Controls\n\nIf the input is outside these domains or not related to functional testing, treat it as out of scope.\n\n8. Example (Reference Format Only)\n\nTest Case ID: TC_BT_001\nTitle: Verify successful fund transfer within daily limit\nPreconditions: User is logged in with an active account\nSteps:\n1. Navigate to Fund Transfer\n2. Enter beneficiary details\n3. Enter amount within daily limit\n4. Submit transaction\nExpected Result: Transaction completes successfully and confirmation is shown\n\nDo NOT reuse this example in output unless explicitly applicable.\n\n9. Output Rules\n\nONLY when the input is a valid test-case request, generate exactly 5 test cases.\n\nEach test case MUST include:\n- Test Case ID\n- Title\n- Preconditions\n- Steps (numbered, clear, atomic)\n- Expected Result\n\nTest cases must collectively cover:\n- Functional flow\n- Boundary conditions\n- Validation errors\n- OTP / authentication (if applicable)\n- Limit-based rules\n- Failure / exception scenarios\n\nNo extra text.\nNo headings.\nNo explanations.\nNo assumptions.\n\n10. Tone\n\nProfessional\nStructured\nPrecise\nEnterprise QA-standard\nNeutral and objective\n\n11. Input\n\n"
```

200 OK · 3.17 s · 15.98 KB · Save Response

Response generated

The image displays two screenshots of the Langflow API interface, showing a POST request and its corresponding JSON response.

Top Screenshot: The interface shows a POST request to the endpoint `http://localhost:7860/api/v1/run/cfe3cdae-6b8b-483b-86b7-b4b9d59fa9a1`. The request body is a JSON object with the following structure:

```
{  "session_id": "cfe3cdae-6b8b-483b-86b7-b4b9d59fa9a1",  "outputs": {    "inputs": {      "input_value": "hello world!"    },    "outputs": {      "results": {        "message": {          "text_key": "text",          "data": {            "timestamp": "2026-05-08 12:32:58 UTC",            "sender": "Machine",            "sender_name": "AI",            "session_id": "cfe3cdae-6b8b-483b-86b7-b4b9d59fa9a1",            "context_id": "",            "text": "Out of scope: The request does not ask for test case generation."          }        }      }    }  }
```

Bottom Screenshot: The interface shows the same POST request, but the response body is a JSON object with the following structure:

```
{  "sender": "Machine",  "sender_name": "AI",  "session_id": "cfe3cdae-6b8b-483b-86b7-b4b9d59fa9a1",  "context_id": "",  "text": "Out of scope: The request does not ask for test case generation.",  "files": [],  "error": false,  "edit": false,  "properties": {    "text_color": null,    "background_color": null,    "edited": false,    "source": {      "id": "GroqModel-59Pr0",      "display_name": "Groq",      "source": "openai/gpt-oss-120b"    },    "icon": null,    "allow_markdown": false  }
```

Asked for test cases that was out of scope ie input_value = 'hello world'

The screenshot displays the Langflow API interface in a web browser. The interface is divided into several sections:

- Header:** Shows the URL `https://console.groq.cc` and the API endpoint `POST LangflowAPI`. The URL bar also shows `http://localhost:7860/api/v1/run/cfe3cdae-6b8b-483b-86b7-b4b9d59fa9a1`.
- Request Body:** The request is a POST request with a JSON body. The body contains the following fields:
 - `input_value`: "hello world!",
 - `tweaks`: {
 - `template`: "Strict Test Case Generator\n\nInstruction\n\nYou are a Test Case Generation Engine.\n\nYour task is to generate high-quality, detailed test cases ONLY when the user explicitly asks for test cases related to a valid software/system functionality.\n\nYou must cover:\n- Positive scenarios\n- Negative scenarios\n- Validation scenarios\n- Boundary

- Response:** The response is a 200 OK status with a JSON body. The body contains the following fields:
- `content_blocks`: [],
- `duration`: null,
- `session_metadata`: null
- Artifacts:** The response also includes an `artifacts` field with the following details:
- `message`: "Out of scope: The request does not ask for test case generation.",
- `sender`: "Machine",
- `sender_name`: "AI",
- `files`: [],
- `type`: "object"
- Outputs:** The response also includes an `outputs` field with the following details:
- `message`: "Out of scope: The request does not ask for test case generation.",
- `type`: "text"
- Logs:** The response also includes a `logs` field.

Input_value= "generate test cases for fund transfer"

Divya B's team's Workspace

COLLECTIONS

GenAI-March

GenAI-March-Home Work

JiraCollection

JiraTest Copy

Langflow API

POST LangflowAPI

POST Input Schema

My Collection

Playwright-Api Collection

Salesforce API

ENVIRONMENTS

SPECS

FLAWS

GET https://console.groq.cc

POST LangflowAPI

Langflow API > LangflowAPI

POST http://localhost:7860/api/v1/run/cfe3cdae-6b8b-483b-86b7-b4b9d59fa9a1

Send

Docs Params Authorization Headers 9 Body Scripts Settings

none form-data x-www-form-urlencoded raw binary GraphQL JSON

```
1 {
2   "output_type": "chat",
3   "input_type": "chat",
4   "input_value": "generate the testcases for fund transfer",
5   "tweaks": {
6     "Prompt Template-Format": {
7       "template": "Strict Test Case Generator\n\nInstruction\n\nYou are a Test Case Generation Engine.\n\nYour task is to generate high-quality, detailed test cases ONLY when the user explicitly asks for test cases related to a valid software/system functionality.\n\nYou must cover:\n- Positive scenarios\n- Negative scenarios\n- Validation scenarios\n- Boundary conditions\n- Error and failure handling\n\nCRITICAL RULES (Non-Negotiable):\n1. If the input does NOT ask for test cases, respond ONLY with:\n  \nOut of scope: The request does not ask for test case generation.\n2. Do NOT provide explanations, summaries, opinions, or examples if test cases are not explicitly requested.\n3. Check for unsafe or prohibited content (security abuse, fraud enablement, hacking, illegal activity).\n  - If unsafe, respond:\n  \nOut of scope: The request contains unsafe or prohibited content.\n4. Do NOT assume intent.\n5. Do NOT infer requirements.\n6. Do NOT expand scope.\n7. Context\n\nYou are an AI Assistant with deep expertise in Banking, Insurance, and Financial Systems, including:\n- Payments, Cards, UPI, Net Banking\n- Core Banking, Loans, Accounts\n- Insurance Policies, Claims, Premiums\n- Regulatory, Compliance, and Risk Controls\n\nIf the input is outside these domains or not related to functional testing, treat it as out of scope.\n\nExample (Reference Format Only)\n\nTest Case ID: TC_BT_001\nTitle: Verify successful fund transfer within daily limit\nPreconditions: User is logged in with an active account\nSteps:\n1. Navigate to Fund Transfer\n2. Enter beneficiary details\n3. Enter amount within daily limit\n4. Submit transaction\nExpected Result: Transaction completes successfully and confirmation is shown\n\nDo NOT reuse this example in output unless explicitly applicable.\n\nOutput Rules\n\nONLY when the input is a valid test-case request, generate exactly 5 test cases.\n\nEach test case MUST include:\n- Test Case ID\n- Title\n- Preconditions\n- Steps (numbered, clear, atomic)\n- Expected Result\n\nTest cases must collectively cover:\n- Functional Flow, Boundary
```

Body Cookies Headers 4 Test Results

200 OK 2.23 s 17.69 KB Save Response

POST LangflowAPI

POST http://localhost:7860/api/v1/run/cfe3cdae-6b8b-483b-86b7-b4b9d59fa9a1

Send

Docs Params Authorization Headers 9 Body Scripts Settings

none form-data x-www-form-urlencoded raw binary GraphQL JSON

Schema Beautify

Body Cookies Headers 4 Test Results

200 OK 2.23 s 17.69 KB Save Response

JSON

Preview Visualize

```
87 }
88 },
89 "artifacts": {
90   "message": "Test Case ID: TC_FT_001 \n\nTitle: Successful fund transfer within daily limit \n\nPreconditions: User is logged in; source account has sufficient balance; beneficiary is saved and active; daily transfer limit not exceeded. \n\nSteps: \n\n1. Navigate to the Fund Transfer page. \n\n2. Select the source account. \n\n3. Choose the saved beneficiary. \n\n4. Enter an amount that is within the daily transfer limit. \n\n5. Click \"Proceed\". \n\n6. Enter the correct OTP received on the registered mobile number. \n\n7. Confirm the transaction. \n\nExpected Result: Transaction is processed successfully, a confirmation screen with transaction reference is displayed, and the source account balance is reduced by the transferred amount plus any applicable fees. \n\nTest Case ID: TC_FT_002 \n\nTitle: Transfer amount exceeds daily limit \n\nPreconditions: User is logged in; source account has sufficient balance; daily transfer limit is known. \n\nSteps: \n\n1. Navigate to the Fund Transfer page. \n\n2. Select the source account. \n\n3. Choose a beneficiary. \n\n4. Enter an amount greater than the remaining daily transfer limit. \n\n5. Click \"Proceed\". \n\nExpected Result: System displays an error message indicating that the amount exceeds the daily transfer limit and prevents further processing. \n\nTest Case ID: TC_FT_003 \n\nTitle: Transfer fails due to insufficient funds \n\nPreconditions: User is logged in; source account balance is lower than the intended transfer amount plus fees. \n\nSteps: \n\n1. Navigate to the Fund Transfer page. \n\n2. Select the source account. \n\n3. Choose a beneficiary. \n\n4. Enter an amount that exceeds the available balance. \n\n5. Click \"Proceed\". \n\n6. Enter the correct OTP. \n\n7. Attempt to confirm the transaction. \n\nExpected Result: System aborts the transaction and displays an \"Insufficient funds\" error message; no funds are debited. \n\nTest Case ID: TC_FT_004 \n\nTitle: Transfer with invalid beneficiary account number format \n\nPreconditions: User is logged in; source account has sufficient balance. \n\nSteps: \n\n1. Navigate to the Fund Transfer page. \n\n2. Select the source account. \n\n3. Manually enter a beneficiary
```

Connect Git Console Terminal

Globals Vault Tools

Divya B's team's Workspace

Langflow API

POST LangflowAPI

POST http://localhost:7860/api/v1/run/cfe3cdae-6b8b-483b-86b7-b4b9d59fa9a1

Send

Docs Params Authorization Headers 9 Body Scripts Settings

none form-data x-www-form-urlencoded raw binary GraphQL JSON

CONDITIONS:\n- Error and failure handling\n\nINITIAL RULES {\n non-negotiable:\n \n1. If the input does not ask for test cases, respond ONLY with:\n \n2. Out of scope: The request does not ask for test case generation.\n \n2. Do NOT provide

Body Cookies Headers 4 Test Results

200 OK 2.23 s 17.69 KB Save Response

JSON Preview Visualize

```
fund transfer process.",
"sender": "Machine",
"sender_name": "AI",
"files": [],
"type": "object"
},
"outputs": {
  "message": "Test Case ID: TC_FT_001 \nTitle: Successful fund transfer within daily limit \nPreconditions:
User is logged in; source account has sufficient balance; beneficiary is saved and active; daily transfer
limit not exceeded. \nSteps: \n1. Navigate to the Fund Transfer page. \n2. Select the source account.
\n3. Choose the saved beneficiary. \n4. Enter an amount that is within the daily transfer limit. \n5.
Click \"Proceed\". \n6. Enter the correct OTP received on the registered mobile number. \n7. Confirm the
transaction. \nExpected Result: Transaction is processed successfully, a confirmation screen with
transaction reference is displayed, and the source account balance is reduced by the transferred amount
plus any applicable fees. \n\nTest Case ID: TC_FT_002 \nTitle: Transfer amount exceeds daily limit
\nPreconditions: User is logged in; source account has sufficient balance; daily transfer limit is
known. \nSteps: \n1. Navigate to the Fund Transfer page. \n2. Select the source account. \n3. Choose
a beneficiary. \n4. Enter an amount greater than the remaining daily transfer limit. \n5. Click
\"Proceed\". \nExpected Result: System displays an error message indicating that the amount exceeds the
daily transfer limit and prevents further processing. \n\nTest Case ID: TC_FT_003 \nTitle: Transfer
fails due to insufficient funds \nPreconditions: User is logged in; source account balance is lower than
the intended transfer amount plus fees. \nSteps: \n1. Navigate to the Fund Transfer page. \n2. Select
the source account. \n3. Choose a beneficiary. \n4. Enter an amount that exceeds the available
```

Connect Git Console Terminal

Globals Vault Tools